

Room 902, Tower B, Van Metropolis Building,  
No.35 Tangyan Road, Xi'an, China

TEL: +86 029 8881 5624 FAX: +86 029 88815624  
E-mail: alex.autoway@gmail.com

**WANPU**

OCEANS APART

PURSuing TOGETHER

**2025**

Xi'an Wanpu Import And Export Trading Co., Ltd





### CS132-3.0KW

Model: Type 2  
 Power: 3.0KW  
 Voltage: 230V  
 Current: 13A  
 single-phase  
 Length: 5M  
 Wire: EVC  
 Wire gauge: AC cable 3x2.5mm<sup>2</sup>+2x0.5mm<sup>2</sup> Warm sensation,  
 Connector output cable 3x6mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: PC+ABS  
 Display screen size: 1.8 inch LCD display  
 RCD: AC 30mA+DC 6mA

**CE RoHS**

### CS132-3.5KW

Model: Type 2  
 Power: 3.5KW  
 Voltage: 230V  
 Current: 16A  
 single-phase  
 Length: 5M  
 Wire: EVC  
 Wire gauge: AC cable 3x2.5mm<sup>2</sup>+2x0.5mm<sup>2</sup> Warm sensation,  
 Connector output cable 3x6mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: PC+ABS  
 Display screen size: 1.8 inch LCD display  
 RCD: AC 30mA+DC 6mA

**CE RoHS**

### CS132-7KW

Model: Type 2  
 Power: 7KW  
 Voltage: 230V  
 Current: 32A  
 single-phase  
 Length: 5M  
 Wire: EVC  
 Wire gauge: AC Input cable 3x6mm<sup>2</sup>,  
 Connector output cable 3x6mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: PC+ABS  
 Display screen size: 1.8 inch LCD display  
 RCD: AC 30mA+DC 6mA

**CE RoHS**

### CS132-11KW

Model: Type 2  
 Power: 11KW  
 Voltage: 400V  
 Current: 16A  
 three-phase  
 Length: 5M  
 Wire: EVC  
 Wire gauge: AC Input cable 5x2.5mm<sup>2</sup>,  
 Connector output cable 5x2.5mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: PC+ABS  
 Display screen size: 1.8 inch LCD display  
 RCD: AC 30mA+DC 6mA

**CE RoHS**



### CS133-7KW

Model: Type 2  
 Power: 7KW  
 Voltage: 230V  
 Current: 32A  
 single-phase  
 Length: 5M  
 Wire: EVC  
 Wire gauge: AC Input cable 3x6mm<sup>2</sup>,  
 Connector output cable 3x6mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: PC+ABS  
 Display screen size: 1.8 inch LCD display  
 RCD: AC 30mA+DC 6mA

**CE RoHS**

### CS133-3.0KW

Model: Type 2  
 Power: 3.0KW  
 Voltage: 230V  
 Current: 13A  
 single-phase  
 Length: 5M  
 Wire: EVC  
 Wire gauge: AC cable 3x2.5mm<sup>2</sup>+2x0.5mm<sup>2</sup> Warm sensation,  
 Connector output cable 3x6mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: PC+ABS  
 Display screen size: 1.8 inch LCD display  
 RCD: AC 30mA+DC 6mA

**CE RoHS**

### CS133-3.5KW

Model: Type 2  
 Power: 3.5KW  
 Voltage: 230V  
 Current: 16A  
 single-phase  
 Length: 5M  
 Wire: EVC  
 Wire gauge: AC cable 3x2.5mm<sup>2</sup>+2x0.5mm<sup>2</sup> Warm sensation,  
 Connector output cable 3x6mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: PC+ABS  
 Display screen size: 1.8 inch LCD display  
 RCD: AC 30mA+DC 6mA

**CE RoHS**

### CS133-11KW

Model: Type 2  
 Power: 11KW  
 Voltage: 400V  
 Current: 16A  
 three-phase  
 Length: 5M  
 Wire: EVC  
 Wire gauge: AC Input cable 5x2.5mm<sup>2</sup>,  
 Connector output cable 5x2.5mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: PC+ABS  
 Display screen size: 1.8 inch LCD display  
 RCD: AC 30mA+DC 6mA

**CE RoHS**



### CS92-3.5KW

Model: Type 2  
 Power: 3.5KW  
 Voltage: 230V  
 Current: 16A  
 Single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x2.5mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: Silicon PC  
 Display: LED indicator  
 RCD: Type A

**CE RoHS** **UK CA**



### CS81--7KW

Model: Type 2  
 Power: 7KW  
 Voltage: 230V  
 Current: 32A  
 single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x6mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: Silicon PC  
 Display: 2.8 inch LCD display  
 RCD: Type A

**CE RoHS** **UK CA**



### CS81-9.6KW

Model: Tesla  
 Power: 9.6KW  
 Voltage: 240V  
 Current: 40A  
 Single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x9AWG+1x18AWG  
 Shell material: Silicon PC  
 Display screen size: 2.8 inch LCD display  
 RCD: Type A  
 Warranty period: 12 months  
 Certification: [UL Gunline Report](#)  
 Function: One button to open chargeport

**FC**





**CS71-3.6KW**

Model: Type 2  
 Power: 3.6KW  
 Voltage: 230V  
 Current: 16A  
 Single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x2.5mm<sup>2</sup>+0.5mm<sup>2</sup>  
 Shell material: PC  
 RCD: Type A RCD

**CE RoHS**



**CS71T**

Model: Type 1  
 Power: 9.6KW  
 Voltage: 240V  
 Current: 16A  
 Single-phase  
 Length: 5M  
 Wire: TPE  
 Wire gauge: 3x14AWG+18AWG  
 Shell material: PC  
 RCD: Type A RCD  
 Certification: [UL Gunline Report](#)  
 One click lid opening unlock dual function

**FC**



**CS73**

Model: Type 2  
 Power: 22KW  
 Voltage: 380V  
 Current: 32A  
 single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 5G6mm<sup>2</sup>+1x0.5mm<sup>2</sup>  
 Shell material: PC  
 Display: 2.1 inch LCD display  
 RCD: Type A RCD+DC 6mA

**CE RoHS**



**CS134**

Model: Type 2  
 Power: 11KW  
 Voltage: 400V  
 Current: 16A  
 three-phase  
 Length: 5M  
 Wire: EVC  
 Wire gauge: AC Input cable 5x2.5mm<sup>2</sup>,  
 Connector output cable 5x2.5mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: PC+ABS  
 Display screen size: 1.8 inch LCD display  
 RCD: AC 30mA+DC 6mA

**CE RoHS**



**CS20A**

Model: Type 2  
 Power: 7KW  
 Voltage: 230V  
 Current: 32A  
 Single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x6.0mm<sup>2</sup>+2x0.5mm<sup>2</sup>  
 Shell material: PC  
 Display: 0.96 inch LCD display  
 RCD: 30mA AC

**CE RoHS**



**CS20B**

Model: Type 2  
 Power: 3.5KW  
 Voltage: 230V  
 Current: 16A  
 Single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x2.5mm<sup>2</sup>+2x0.5mm<sup>2</sup>  
 Shell material: PC  
 Display: 0.96 inch LCD display  
 RCD: 30mA AC

**CE RoHS**



**CS93-7KW**

Model: Type 2  
 Power: 7KW  
 Voltage: 230V  
 Current: 32A  
 single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x6mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: Silicon PC  
 Display: 2.8 inch LCD display  
 RCD: Type A

**CE RoHS UK CA**



**CS81-9.6KW**

Model: Type 1  
 Power: 9.6KW  
 Voltage: 230V  
 Current: 40A  
 Single-phase  
 Length: 5M  
 Wire: TPE  
 Wire gauge: 2x8AWG+10AWG+16AWG  
 Shell material: PC  
 Display screen size: 2.8 inch LCD display  
 RCD: A +ccid20

**FC**



**CS70**

Model: Type 1  
 Power: 7KW  
 Voltage: 230V  
 Current: 32A  
 Single-phase  
 Length: 5M  
 Wire: TPE  
 Wire gauge: 3x10AWG+1x18AWG  
 Shell material: PC  
 Display: 2.8 inch LCD display  
 RCD: TypeA+6: 30mA for AC and 6mA for DC faults  
 Certification: ETL Gunline Report, UL Gunline Report



**CS78-7KW**

Model: Type 2  
 Power: 7KW  
 Voltage: 230V  
 Current: 32A  
 Single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x6mm<sup>2</sup>+1x0.5mm<sup>2</sup>  
 Shell material: PC  
 Display: 2.4 inch LCD display  
 RCD: TypeA+6: 30mA for AC and 6mA for DC faults  
 Certification: ETL Gunline Report, UL Gunline Report

**CE RoHS**



**CS72**

Model: Type 1  
 Power: 7KW  
 Voltage: 240V  
 Current: 32A  
 Single-phase  
 Length: 5M  
 Wire: TPE  
 Wire gauge: 3x10AWG+2x18AWG  
 Shell material: PC  
 RCD: Type A RCD  
 Certification: UL Gunline Report

**FC**



**CS26D**

Model: Type 2  
 Power: 22KW  
 Voltage: 380V  
 Current: 32A  
 Three-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 5x6mm<sup>2</sup>+1x0.5mm<sup>2</sup>

**CE RoHS**



**T02T**

Model: Tesla  
 Power: 11KW  
 Voltage: 240V  
 Current: 48A  
 single-phase  
 Length: 5M  
 Wire: TPE  
 Wire gauge: 2x8AWG+10AWG+2x18AWG  
 Certification: UL Gunline Report  
 One click lid opening unlock dual function



**T02C-3.5KW**

Connector 1: Type 2  
 Connector 2: Type 2 female  
 Power: 3.5KW  
 Voltage: 240V  
 Current: 16A  
 single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x2.5mm<sup>2</sup>+1x0.75mm<sup>2</sup> (3.5kw)  
 Shell material: Silicon PC

**CE RoHS UK CA FC**





### CS84T

Model: Tesla  
 Power: 11KW  
 Voltage: 240V  
 Current: 48A  
 single-phase  
 Length: 5M  
 Wire: TPE  
 Wire gauge: 2x8AWG+10AWG+2x18AWG  
 Certification: [UL Gunline Report](#)  
 One click lid opening unlock dual function



### CS84

Model: Type 2  
 Power: 22KW  
 Voltage: 380V  
 Current: 32A  
 Three-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 5x6mm<sup>2</sup>+1x0.5mm<sup>2</sup>

**CE RoHS**

### CS136

Model: Type 2  
 Power: 22kW (2x11KW, 22kW for one connector)  
 Voltage: 400V  
 Current: 50A  
 three-phase  
 Length: 5M  
 Wire: EVA  
 Wire gauge: AC Input cable 5x10mm<sup>2</sup>, Connector output cable 5x6mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: PC  
 Display: 3.8-inch LCD screen  
 Indicator Light: 4 LED lights  
 RCD: TypeA(30mA, external RCCB) + DC6mA built-in  
 Charging Control: APP,RFID,plug&play  
 Communication Interface: WiFi+BT, 4G, LAN  
 Communication Protocol: OCPP 1.6J  
 Certification: [ETL UL Gunline Report](#)

**CE RoHS FC**



### CS137

Model: Type 2  
 Power: 11kW  
 Voltage: 400V  
 Current: 16A  
 three-phase  
 Length: 5M  
 Wire: EVC  
 Wire gauge: AC Input cable 5x2.5mm<sup>2</sup>, Connector output cable 5x2.5mm<sup>2</sup>+1x0.75mm<sup>2</sup>  
 Shell material: PC  
 Display: 3.8-inch LCD screen  
 Indicator Light: 4 LED lights  
 RCD: TypeA(30mA, external RCCB) + DC6mA built-in  
 Charging Control: APP,RFID,plug&play  
 Communication Interface: WiFi+BT, 4G, LAN  
 Communication Protocol: OCPP 1.6J  
 Certification: [ETL UL Gunline Report](#)

**CE RoHS FC**



### CS74

Model: Type 1  
 Power: 9.6kW  
 Voltage: 240V  
 Current: 40A  
 Single-phase  
 Length: 7.5M  
 Wire: TPE  
 Wire gauge: 3 \* 9AWG+1 \* 18AWG  
 Shell material: PC  
 Indicator Light: LED lights  
 RCD: Type A + 6  
 Communication Interface: WIFI+Bluetooth,Phone APP  
 Communication Protocol: OCPP 1.6J (can chose)  
 Certification: [ETL](#)  
 Energy Star

**FC**





## CS79-7KW

Model: Type 2  
 Power: 7kW  
 Voltage: 230V  
 Current: 32A  
 Single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x6mm<sup>2</sup>+1x0.5mm<sup>2</sup>  
 Shell material: ABS+PC  
 Display: 4.3-inch LCD screen  
 Indicator Light: LED Indicator  
 RCD: 30mA for AC AND 6mA for DC faults (Type A + 6)  
 Charging Control: APP,RFID,plug&play  
 Communication Interface: WiFi+BT, 4G, LAN (can chose)  
 Communication Protocol: OCPP 1.6J (can chose)  
 Certification: [ETL Gunline Report](#),[UL Gunline Report](#)

**CE RoHS**

## CS21A



Model: Type 2  
 Power: 7kW  
 Voltage: 230V  
 Current: 32A  
 Single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x6mm<sup>2</sup>+1x0.5mm<sup>2</sup>  
 Shell material: ABS+PC  
 Display: 2.8 inch LCD screen  
 Indicator Light: LED Indicator  
 RCD: type A 30mA AC  
 Charging Control: RFID  
 Communication Interface: WiFi+BT, 4G, LAN (can chose)  
 Communication Protocol: OCPP 1.6J (can chose)

**CE RoHS**

## CS83-11.52KW



Model: Tesla  
 Power: 11.52kW  
 Voltage: 240V  
 Current: 50A  
 single-phase  
 Length: 5M  
 Wire: TPE  
 Wire gauge: 2x8AWG+1x10AWG+1x16AWG  
 Shell material: Silicon PC  
 Display: 4.3-inch LCD screen  
 RCD: Type A  
 Charging Control: APP,RFID  
 Communication Interface: WiFi+BT, 4G, LAN (optional)  
 Communication Protocol: OCPP 1.6J (optional)  
 Certification: [UL Gunline Report](#)

**CE RoHS**

## CS32

Model: Type 2  
 Power: 7kW  
 Voltage: 230V  
 Current: 32A  
 Single-phase  
 Length: 5M  
 Wire: TPU  
 Wire gauge: 3x6mm<sup>2</sup>+1x0.5mm<sup>2</sup>  
 Shell material: ABS+PC  
 Display: 4.3 inch LCD screen  
 Indicator Light: LED Indicator  
 RCD: 30mA for AC AND 6mA for DC faults (Type A + 6)  
 Charging Control: RFID  
 Communication Interface: WiFi+BT, 4G, LAN (can chose)  
 Communication Protocol: OCPP 1.6J (can chose)

**CE RoHS**



## CS33

Model: Tesla  
 Power: 7kW  
 Voltage: 250V  
 Current: 32A  
 single-phase  
 Length: 5M  
 Wire: TPE  
 Wire gauge: 3x10AWG  
 Shell material: Silicon PC  
 Display: 4.3-inch LCD screen  
 RCD: 30mA for AC AND 6mA for DC faults (Type A + 6)  
 Charging Control: RFID  
 Communication Interface: WiFi+BT, 4G, LAN (optional)  
 Communication Protocol: OCPP 1.6J (optional)

**FC**





NEW

## EP2041

Capacity: 8000mAh 29.60Wh  
 Starting current: 400A  
 Peak current 1000A  
 USB-A 1 output: 5V-3A, 9V-2A, 12V-1.5A(QC3.0)  
 USB-A 2 output: 5V-2A  
 USB-C input/output: 5V-2A, 9V-2A LED with 3 lighting modes

## EP2132

4 IN 1 Jump starter with air compressor  
 Capacity: 7200mAh  
 Type C Input: 5V/3A, 9V/2A, 12V/1.5A  
 USB Output 1: 5V/3A, 9V/2A, 12V/1.5A  
 USB Output 2: 5V/3A, 9V/2A, 12V/1.5A  
 Maximum Inflating Pressure: 150 PSI  
 Starter current: 300A  
 Peak current: 600A  
 Material: Plastic & ABS+pc  
 LED Flashlight: Solid/SOS/Strobe  
 Dimension (L\*W\*H): 184\*127\*55mm  
 Great for Engine: 4.0L Gas & 2.5L Diesel

Accessories: Jump starter  
 -Intelligent clamp  
 -Type C cable  
 -Valve connector \* 3  
 -Manual  
 -Canvas bag package

CE RoHS

## EP2132B

4 IN 1 Jump starter with air compressor  
 Capacity: 10000mAh  
 Type C Input: 5V/3A, 9V/2A, 12V/1.5A  
 USB Output 1: 5V/3A, 9V/2A, 12V/1.5A  
 USB Output 2: 5V/3A, 9V/2A, 12V/1.5A  
 Maximum Inflating Pressure: 150 PSI  
 Starter current: 400A  
 Peak current: 800A  
 Material: Plastic & ABS+pc  
 LED Flashlight: Solid/SOS/Strobe  
 Dimension (L\*W\*H): 184\*127\*55mm  
 Great for Engine: 6.0L Gas & 4.0L Diesel

Accessories: Jump starter  
 -Intelligent clamp  
 -Type C cable  
 -Valve connector \* 3  
 -Manual  
 -Canvas bag package

CE RoHS



HOT!



HOT!

HOT!



NEW



HOT!

## EP2022

\*Capacity: 3.7V/10000mAh(37Wh)  
 \*Type-C Input: QC18W  
 \*USB Output1: 5V/2.1A  
 \*USB Output2: QC18W  
 \*starting current :500A  
 \*peak current:1000A  
 \*LED lighting: Panel light/SOS/Strobe/Warning 100LM  
 \*Applicable to automobile battery voltage :12V  
 \*Less than 5.0L gasoline/3.5L diesel  
 \*The atmospheric pressure:150Psi  
 \*cylinder block specifications:19 cylinder (About 20L/MIN gas flow)  
 Jump starter/EC5 jumper cable/Storage bag/User manual/Charging cable/  
 Gas Needle/Gas Nozzle/Air tube

With EMC

FC RoHS

## EP2186

4 IN 1 Jump starter with air compressor  
 Capacity: 12000mAh  
 Type C Input: 5V/2A, 9V/2A, 12V/1.5A  
 USB Output 1: 5V/3A, 9V/2A, 12V/1.5A  
 USB Output 2: 5V/3A, 9V/2A, 12V/1.5A  
 DC Output: 15V/10A  
 Maximum Inflating Pressure: 150 PSI  
 Starter current: 500A  
 Peak current: 1000A  
 Material: Plastic & ABS+pc  
 LED Flashlight: White Solid/White Strobe/Red Strobe/White SOS  
 Dimension (L\*W\*H): 209\*112\*50mm  
 Great for Engine: 7.0L Gas & 5.0L Diesel

Accessories: -Jump starter  
 -Intelligent clamp  
 -Type C cable  
 -Valve connector \* 3  
 -Manual  
 -Canvas bag package

CE RoHS

## EP2023

OEM Jump Starter  
 \*Capacity: 3.7V/12000mAh(44.4Wh)  
 \*Type-C Input: QC18W  
 \*USB Output1: 5V/2.1A  
 \*USB Output2: QC18W  
 \*starting current :750A  
 \*peak current:1500A  
 \*LED lighting: Panel light/SOS/Strobe/Warning 100LM  
 \*Applicable to automobile battery voltage :12V  
 \*Less than 6.0L gasoline/4.5L diesel  
 \*The atmospheric pressure:150Psi  
 \*cylinder block specifications:25mm cylinder (>25L/MIN gas flow)  
 \*Product size:217.7\*120\*76.9mm  
 \*Weight/box:KGS  
 What's in the box:  
 Jump starter/EC5 jumper cable/Storage bag/User manual/Charging cable/  
 Gas needle/Gas Nozzle/Air tube/

CE RoHS



### EP2187

Ultra 4 IN 1 Jump starter with air compressor  
 Capacity: 16000mAh  
 Type C Input/Output: (PD65W)5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A  
 USB Output 1&2: (QC18W) 5V/3A, 9V/2A, 12V/1.5A  
 Maximum Inflating Pressure: 160 PSI  
 Starter current: 600A  
 Peak current: 1200A  
 Material: Plastic & ABS+pc  
 LED Flashlight: Solid/SOS/Strobe  
 Dimension (L\*W\*H):233\*124\*55mm  
 Great for Engine: 8.0L Gas & 6.0L Diesel

- Accessories: -Jump starter  
 -Intelligent clamp  
 -Type C cable  
 -Valve connector \* 3  
 -Manual  
 -Canvas bag package

**CE RoHS**



### EP2046

OEM Jump Starter  
 \*Capacity:40000mAh/148Wh  
 \*Input:18V/1A  
 \*Output:5V/2.1A  
 \*starting current :2000A  
 \*peak current:4000A  
 \*LED lighting: Light/SOS/Warning  
 \*Applicable to automobile battery voltage :24V  
 \*1L-8L -All Gasoline and diesel  
 \*Dimension:260.41\*120\*132.78mm



### EP2043

Capacity: 7200mAh 29.60Wh  
 Starting current: 300A  
 Peak current: 800A  
 USB-A output: 5V-3A,9V-2A, 12V-1.5A(QC3.0)  
 USB-C input: 5V-2A, 9V-2A  
 Three LED lighting modes



### EP2044

Capacity: 8000mAh 29.60Wh  
 Starting current: 400A  
 Peak current 1000A  
 USB-A output: 5V-3A,9V-2A, 12V-1.5A(QC3.0)  
 USB-C input: 5V-2A, 9V-2A  
 Three LED lighting modes



### EP2138

Capacity: 7200mAh  
 Type C Input: 5V/1.5A  
 Output: 5V/2.1A  
 Starter current: 300A  
 Peak current: 600A  
 Material: PC+ABS/V0  
 Dimension (L\*W\*H):158\*84.5\*33mm  
 Function: Auto 12V emergency starter, Powerful USB power bank, Built-in LED Flashlight  
 Great for Engine: 4.0L Gas & 2.5L Diesel

- Accessories: -Jump starter  
 -Intelligent clamp  
 -Micro cable  
 -Manual  
 -Paper box package

**CE RoHS**



### EP2195-8000

\*Capacity:3.7V/8000mAh(29.6Wh)  
 \*Type-C Input:QC18W  
 \*USB Output1:5V/2.1A  
 \*USB Output2:QC18W  
 \*starting current :400A  
 \*peak current:800A  
 \*LED lighting: Light/SOS/Strobe 100LM  
 \*Applicable to automobile battery voltage :12V  
 \*Less than 4.0L gasoline/2.5L diesel  
 \*Dimension:186.9\*86.6\*39.1mm  
 \*N.W:0.44KGS

- What's in the box:  
 Jump starter/EC5 jumper cable/Storage bag/User manual/  
 Charging cable  
 With EMC

**RoHS FC**



### EP2195-16000

\*Capacity:3.7V/16000mAh(59.2Wh)  
 \*Type-C Input:QC18W  
 \*USB Output1:5V/2.1A  
 \*USB Output2:QC18W  
 \*starting current :1000A  
 \*peak current:2000A  
 \*LED lighting: Light/SOS/Strobe 100LM  
 \*Applicable to automobile battery voltage :12V  
 \*Less than 7.0L gasoline/6.5L diesel  
 \*Dimension:208\*86\*43.6mm  
 \*N.W:0.65KGS

- What's in the box:  
 Jump starter/EC5 jumper cable/Storage bag/User manual/  
 Charging cable  
 With EMC

**RoHS FC**



### EP2195-24000

\*Capacity:3.7V/24000mAh(88.8Wh)  
 \*Type-C Input:QC18W  
 \*USB Output1:5V/2.1A  
 \*USB Output2:QC18W  
 \*starting current :2000A  
 \*peak current:4000A  
 \*LED lighting: Light/SOS/Strobe 100LM  
 \*Applicable to automobile battery voltage :12V  
 \*Less than 10.0L gasoline/10.0L diesel  
 \*Dimension:257\*90\*44mm  
 \*N.W:0.89KGS

- What's in the box:  
 Jump starter/EC5 jumper cable/Storage bag/User manual/  
 Charging cable

With EMC  
**RoHS FC**

### EP2185

Jump Starter with LCD display  
 Capacity: 10000mAh  
 Specifications: 3 USB ports + 1 DC port  
 Type C Input: 5V/2A, 9V/2A, 12V/1.5A  
 USB Output 1&2: (QC18W) 5V/3A, 9V/2A, 12V/1.5A  
 DC Output: 15V/10A  
 Start Current: 400A  
 Peak Current: 800A  
 Material: PC+ABS  
 LED Flashlight: White Solid/White Strobe/Orange Strobe/  
 White SOS  
 Working temperature: -20℃ -60℃  
 Great for Engine: 6.0L Gas & 4.0L Diesel

- Accessories: -Jump starter  
 -Intelligent clamp  
 -Type C cable  
 -Manual  
 -Canvas bag package

**CE RoHS**



### EP2025

\*Capacity:3.7V/10000mAh(37Wh)  
 \*Type-C Input:QC18W  
 \*USB Output1:5V/2.1A  
 \*USB Output2:QC18W  
 \*starting current :500A  
 \*peak current:1000A  
 \*LED lighting: Light/SOS/Strobe  
 \*Applicable to automobile battery voltage :12V  
 \*Less than 5.0L gasoline/3.5L diesel

- What's in the box:  
 Jump starter/EC5 jumper cable/Storage bag/User manual/  
 Charging cable  
 With EMC

**RoHS FC**

NEW



## EP2042

Capacity: 12000mAh 44.40Wh  
 Starting current: 600A  
 Peak current 2000A  
 USB-A output: 5V-3A, 9V-2A, 12V-1.5A(QC3.0)  
 USB-C input: 5V-2A, 9V-2A  
 Three LED lighting modes

## EP2007

Capacity: 12000mAh (500pcs can change color)  
 Output: 5V/2A  
 Input: 5V/2A\*2; 12V, 16V, 9V/3A  
 Full charging time: 4 hours  
 Start Current: 1000A  
 Peak Current: 2000A Size: 175 \* 90 \* 35 mm  
 Using temperature: -20°C ~ 60°C / -40°F ~ 120°F  
 Cycling Use life: >1000 Times  
 LED light (lighting, flash, SOS)  
 Accessories:  
 smart clamp x 1  
 USB cable x 1  
 Home charger x 1  
 Cigarette lighter x 1  
 Manual x 1

CE RoHS FC

## EP2133B

LCD Screen/Big Capacity/PD65W  
 Capacity: 16000mAh  
 Type C Input/Output:  
 (PD65W) 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A  
 USB Output 1: 5V/3A, 9V/2A, 12V/1.5A  
 USB Output 2: 5V/3A, 9V/2A, 12V/1.5A  
 DC Output: 15V/10A  
 Starter current: 600A  
 Peak current: 1200A  
 Material: Plastic & ABS+pc  
 Dimension (L\*W\*H): 243\*113\*66mm  
 Function: Auto 12V emergency starter, Powerful USB power bank,  
 Built-in LED Flashlight

CE RoHS

NEW



## EP2026

\*Capacity: 3.7V/16000mAh (59.2Wh)  
 \*Type-C Input: QC18W  
 \*USB Output1: 5V/2.1A  
 \*USB Output2: QC18W  
 \*DC5.5 Output: 12V/6A  
 \*starting current :1000A  
 \*peak current: 2000A  
 \*LED lighting: Light/SOS/Strobe 80LM  
 \*Applicable to automobile battery voltage :12V  
 \*Less than 7.0L gasoline/6.5L diesel  
 What's in the box:  
 Jump starter/EC5 jumper cable/Storage bag/User manual/  
 Charging cable/Cigarette lighter adapter

With EMC

RoHS FC

## EP2196

Capacity: 20000mAh (12V jump start)  
 Non-load current: 2.5A  
 Rated Power: 88.8W  
 Start Current: 2000A  
 Peak Current: 4000A  
 Output: 9V/2A (5-6hrs full recharged)  
 Input: 9V/2A  
 Starter Size: 238\*48\*103mm  
 Operation Temp: -10°C ~ 60°C  
 Life Time: >1000 times  
 Function: LED Light, Spark Proof, Digital screen, Inflator, Flashlight  
 Use: Passenger Car, Motorcycle, Inflator, Flashlight  
 Certificate: CE/FCC/ROHS (1000 sets are available free of charge)  
 Accessories:  
 Smart clamp x 1  
 USB cable x 1  
 Manual x 1

## EP2197

Capacity: 20000mAh (12V jump start)  
 Non-load current: 2.5A  
 Rated Power: 88.8W  
 Start Current: 2000A  
 Peak Current: 4000A  
 Output: 9V/2A (5-6hrs full recharged)  
 Input: 9V/2A  
 Starter Size: 238\*48\*103mm  
 Operation Temp: -10°C ~ 60°C  
 Life Time: >1000 times  
 Function: LED Light, Spark Proof, Digital screen, Inflator, Flashlight  
 Use: Passenger Car, Motorcycle, Inflator, Flashlight  
 Certificate: CE/FCC/ROHS (1000 sets are available free of charge)  
 Accessories:  
 Smart clamp x 1  
 USB cable x 1  
 Manual x 1

HOT!



NEW



NEW





## EP2133

LCD Screen/Big Capacity/PD65W  
 Capacity: 20000mAh  
 Type C Input/Output: (PD65W)5V/3A,9V/3A,12V/3A,15V/3A,20 V/3.25A  
 USB Output 1: 5V/3A, 9V/2A, 12V/1.5A  
 USB Output 2: 5V/3A, 9V/2A, 12V/1.5A  
 DC Output: 15V/10A  
 Starter current: 1000A  
 Peak current: 2000A  
 Material: Plastic & ABS+pc  
 Dimension (L\*W\*H):239.5\*100\*57.5mm  
 Function: Auto 12V emergency starter, Powerful USB power bank,  
 Built-in LED Flashlight  
 Great for Engine: 10.0L Gas & 8.0L Diesel

Accessories: -Jump starter  
 -Intelligent clamp  
 -C - C cable  
 -Type C cable  
 -Manual  
 -Canvas package

**CE RoHS**

## EP094

Applicable models: 12V&24V voltage starting vehicles  
 Current value: 6000A  
 Starting current: 12V (3000A), 24V (1500A)  
 USB output port: QC 18W  
 Type Output PD: 45W  
 DC Output:12-16.4V 10A MAX  
 Car charger output:12-16.4V 10A MAX  
 Charging voltage: DC19V 3A  
 LED lighting: 6W  
 Red and blue warning light: 0.5W  
 Charging time: 4 hours  
 Product size: 322.97x287.11x211.21mm  
 Product capacity: 3.7V 64000mAh  
 Suitable temperature: -40~60 °C  
 With MSDS

**FC**

## E2131

36400mah  
 (135Wh)  
 Size: 270.7x189x159.7mm  
 Weight: 2600±50g  
 Output: 5V/2.4A,5V1A、 12V /24V Jump Start  
 Input:29V/5A、 QC18W(USB-C)  
 Peak Current: 2500A  
 Operating Temp.: -40 C ~55 C

EMC

**RoHS FC**





## PO20

Battery Capacity:155Wh(42000mAh,3S7P 3.7V)  
 Input charging  
 Adapter:15V 2A about 7-8h  
 Photovoltaic panel:18-22v  
 AC output:Modified sine output 110V/220V 60Hz/50Hz  
 USB output:2xUSB 5V/2.1A Max,  
 1XUSB 5~9V/2A QC3.0  
 TYPE-C output: PD18W  
 AC power:100W/150W Max.  
 DC output:9 ~1 2.5V/10A(15A Max)  
 LED light:4W LEDlight/SOS/Blink mode  
 Working temperature:-10 C -40 C  
 Cycle life:>500times  
[PSE,UN38.3,MSDS](#)



## PO21

Battery Capacity:222Wh( 60000mAh, 3S8P 3.7V))  
 Input charging  
 Adapter:15V 3A about 7-8h  
 Photovoltaic panel:18-22v  
 AC Output: Modified sine output 110V/220V 60Hz/50Hz  
 USB Output: 1xUSB 5V/2.1A Max  
 1XUSB 5~9V/2A QC3.0  
 TYPE-C output:PD18W  
 AC Power:200W/320W Max  
 DC output:9~12.5V/10A(15A Max)  
 LED Light:4W LED light/SOS/Blink mode  
 Working temperature:-10 C -40 C  
 Cycle life:>500times  
[PSE,UN38.3,MSDS](#)



## PO110

Battery Capacity:155Wh(42000mAh,3S7P 3.7V)  
 Input charging  
 Adapter:15V 2A about 7-8h  
 Photovoltaic panel:18-22V  
 AC output:Modified sine output 110V/220V 60Hz/50Hz  
 USB output:1xUSB 5V/2.1A Max  
 1XUSB 5~9V/2A QC3.0  
 TYPE-C output: PD18W  
 AC power:100W/150W Max.  
 DC output:2x9 ~1 2.5V/10A(15A Max)  
 LED light:XP625W LEDlight/SOS/Blink mode  
 Working temperature:-10 C -40 C  
 Cycle life:>500times  
[PSE,UN38.3,MSDS](#)



## PO22

Battery capacity:296Wh (80000mAh,4S8P 3.7V)  
 Input charging  
 Adapter:19V 3A about 8h  
 Photovoltaic panel:18-22v  
 AC output:Sine wave output 110V/220V 60Hz/50Hz  
 USB output:3xUSB 5V/2.1A Max  
 2 xUSB5~9V/2A QC3.0  
 TYPE-C 1 (PD18W)  
 TYPE-C 2 (PD27W)  
 AC power:300W/450W Max  
 DC output:12~16.5/10A(15A Max)  
 LED light:4W LED light/SOS/Blink mode  
 Working temperature:-10 C -40 C  
 Cycle life:>500times  
[PSE,UN38.3,MSDS](#)



## PO23

Battery capacity:486Wh (135000mAh,6S9P 3.7V)  
 Input charging  
 Adapter:19V 3.75A about 8h  
 Photovoltaic panel:80W-120W 18-22v  
 AC output:Sine wave output 110V/220V 60Hz/50Hz  
 USB output:3xUSB 5V/2.4A Max  
 2 xUSB5~12V/2A QC3.0 18W)  
 TYPE-C 1 (60W)  
 TYPE-C 2(27W)  
 AC power:500W/750W Max  
 DC output:12V/10A MAX  
 LED light:7W LED light/SOS/Blink mode  
 Working temperature:-10 C -40 C  
 Cycle life:>500times  
[PSE,UN38.3,MSDS](#)



## PO161

Battery energy:537.6Wh  
 Number of cells:32700 lithium iron phosphate battery/6000 mAhx28/7S4P  
 Cell capacity:22.4Vx24Ah  
 Product specification:267x170x220mm  
 Color:black grey  
 AC adapter input:90W/19V/4.74A (DC5525)  
 Input DC5525:90W  
 Solar input:MPPT, 13V-22V/5A (MAX)  
 Output Type-C1:PD protocol: 5V/9V/12V/15V/20V ± 5%independent PD60W  
 Output Type-C2:PD protocol: 5V/9V/12V/15V/20V ± 5%independent PD60W  
 Output USB-A1:USB output 5~9V/2A (QC3.0) 18-24W  
 Output USB-A2:USB output 5~9V/2A (QC3.0) 18-24W  
 DC5521+cigarette lighter output:output 12.8V/10A (10.5A Max) X1  
 Output 12.8V/10A (10.5A Max) X2  
 AC outputx3:700W continuous power output





## PO162

Battery: 1210Wh (22.4V 54Ah 378000mAh)  
 Cycle life: 3500 times  
 USB output: 3x5V/2.4A 25W maximum  
 USB-C output: 1xPD&QC3.0 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A 60W maximum  
 Cigar lighter output: 1x12V 10A 120W maximum  
 AC output: 220-240V/50Hz 60Hz 1500W Peak power: 2500W  
 Input: municipal charging 27V8A 200W maximum (7909)/  
 vehicle charging/solar energy 15V-24V 8A  
 Lighting: 2W LED  
 Charging temperature: 0 °C - 40 °C  
 Discharge temperature: -10 °C - 40 °C

UL、PSE、METI、UN583、MSDS、REACH



## PO194

Battery capacity: 3456Wh  
 AC charging cable input: 2000W  
 AC output: 100V-120V 3600W (peak 6000W)  
 220V-240V 4000W (peak 6000W)  
 Solar input: 2000W Max 11-150V MPPT  
 AC charging line input+solar input: 3500W Max  
 DC output:  
 USB-A 12W (\* 2) USB-A QC (\* 2)  
 2 \* USB-C output: 100W  
 1 \* Car charging output: 12V10A  
 Weight: 45KG  
 Size: 540 \* 300 \* 490 mm  
 Function: Bluetooth APP with large capacity can stack multiple  
 UPS uninterruptible power supplies

PSE/UL2743/MSDS



## PO205

Output specifications  
 Communication output (4 AC ports): 120V~50Hz/60Hz  
 Rated power: 3.6kW  
 USB-A fast charging (x4 outputs): Supports BC1.2, APPLE, Samsung protocol, Qualcomm QC2.0/QC3.0, Huawei FCP fast charging protocol, AFC fast charging protocol, with a maximum power of 18W per channel  
 Anderson interface (x1 output): 12V/30A  
 TYPE-C fast charging (x 2 outputs): Supports PD3.0 and PPS protocols, unidirectional 100Wx1+unidirectional 60Wx1, voltage adaptive  
 DC5521 output (x2 outputs): parallel port, maximum 120W for both output ports simultaneously  
 Cigarette lighter output (x1 output): parallel with DC5521, maximum output of 120W at the same time

Battery cell specifications  
 Cell material: LiFePO4 (lithium iron phosphate) (square aluminum shell)  
 Cycle life: 4000 cycles

UL PSE



## PO78



Outer Shell Material: (ABS+PC) UL-94V0+Alloy  
 LCD display: Battery display/Time Display/Power Display/Frequency Display/Fan Status/ Output(AC/DC/USB/TYPE-C) Display  
 Capacity: 999Wh (45Ah 22.2V)  
 Cell type: Li-NiCoMn  
 Single cell capacity/mAh: 4500mAh  
 Lifecycle: 2000 cycles > 80%  
 AC output:  
 AC socket Qty: US\*4/JP\*4/EU\*2/AU\*2/UK\*2/ZA\*2/IL\*2/CN\*2  
 AC Output waveform type: Pure Sine Wave  
 Rated Output Power: 1200W  
 Peak Power: 2400W  
 Rated output voltage:  
 US/JP: 100V-120V  
 IL/EU/AU/UK/ZA/CN: 220V-240V

## PO204



Energy of lithium ion battery pack:45Ah/22.4V/1008Wh  
 Cell capacity:315000mAh/3.2V  
 DC input:12-30V=10A Max  
 AC output:220V/5.5A 50Hz/60Hz  
 DC output:12-8.3A  
 USB1 OUTPUT:5V-12V=1.5A/18W  
 Type C1 output:5V-20V 3.25A/65W  
 USB2 output:5V=2.4A  
 Type C2 output:5V-2.4A

## PO76



AC+Type C Dual Input  
 Battery type: Lithium ion battery  
 Battery energy: 288Wh  
 AC output power:300W  
 AC output voltage: 110/220V-50Hz/60Hz  
 USB1/USB2 output: 5V/2.1A  
 QC3.0 output: 5V/3A, 9V/2A, 12V/1.5A  
 DC output: 12V-13V/10A  
 DC input: 5V-20V/5A  
 Type C input/output: 5V/2.4A, 9V/3A,12V/3A,15V/3A,20V/5A (PD100W)  
 LED light: power 7W  
 Size: 225\*120\*215mm  
 UN38.3 MSDS





## PO63

Battery Type :LiFePO4  
 Battery:307Wh(12.8V 24Ah 96000mAh)  
 Cycle Life:2000 times  
 USB Output port:2\*QC3.0 5V/2.4A 9V/2A,12V/2A 24W Max .  
 Type-C PD45W&QC3.0 Output Port:1\*5V/3A, 9V/3A ,12V/3A, 15V/3A, 20V/2.25A ,45W Max.  
 CIG Output: 1\*12V/10A 120W Max.  
 AC Output:220V-240V/50Hz 60Hz or 100-120V/50Hz 60Hz Rated Power 300W  
 Peak Power: 450W  
 Input:Charger 15V/4A 60W(5525)/Car Cigar Port/Solar Panel 12V-24V 4A  
 Weight:5kgs/11lbs  
 Size:257 x 160x 165mm / 10.12X6.30X6.50inch  
 Charging temperature:0°C~40°C (32 - 104 °F)  
 Discharge temperature:-10- 40°C (14 - 104 °F)  
 UL PSE METI UN38.3 MSDS REACH

CE RoHS FC

## PO161

Capacity: 518Wh  
 Battery type: Lithium iron phosphate battery  
 Interface:  
 USB-C input/output\*1  
 DC input\*1  
 DC output\*1  
 Car charging port\*1  
 USB-A output\*2  
 AC output\*2

AC output: 800W  
 USB-C input/output: 100W (max)  
 USB-A output: 18W (max)  
 DC input: 240W  
 Solar input: 200W (MPPT)  
 Car charging+DC output: 12V 10A 120W (MAX)  
 Cycle life:>4000times  
 Display: LED screen display  
 Size: 34\*17.8\*23CM

EMC

RoHS

## PO64

Battery Type: LiFePO4  
 Battery: 518Wh (19.2V 27Ah 162000mAh)  
 Cycle life: 2000 times  
 USB Output Port: 5V/2.4A\*3(Max 12W)  
 Type-C PD&QC3.0 Input&Output: 5/9/12/15/20V Max 60W (Two-way)  
 Wireless Output: 10W\*2  
 CIG Output: 12V/10A  
 AC Output: 220V-240V/50Hz 60Hz or 110V-120V/50Hz 60Hz rated power 500W  
 Peak power: 700W  
 Input: TYPE-C 60W Max/Charger 27V4.5A 120W Max.(6514)/Car Cigar Port/Solar Panel 12V-24V 4.5A  
 LED Light & SOS: 2W LEDs  
 Weight: 7kgs/15.43lbs  
 Size: 287\*161\*230mm 11.29\*6.3\*9.06inch  
 Charging temperature:0°C~40°C (32 - 104 °F)  
 Discharge temperature:-10- 40°C (14 - 104 °F)  
 UL PSE METI UN38.3 MSDS REACH

CE RoHS FC



## PO210

Battery Type:LiFePO4  
 Battery:230.4Wh/3P4S  
 Cycle life: 2500+ Cycles to 80% Original Capacity  
 AC Output:1 x 240V/10A Outlets; 300W In Total (230V/50Hz)  
 1 x 120V/10A Outlets; 300W in total (120V/60Hz)  
 Surge Power:600W  
 USB-C Port:5V/3A  
 USB-A Port:3 x 5V/2.4A  
 DC Output:12V/10A  
 Wireless Charging:15W Max ( Optional )  
 AC Input:50W Max  
 Solar(MPPT) Input:12-28V/2.5A 40W Max  
 Car Input:12/24V 2.5A  
 Weight:≈ 7.72 lbs / 3.5kg  
 Dimensions (LxWxD):8.5×5.16×5.79 in / 217×131×147mm  
 Operating Temperature:14-104 °F (-10-40 °C)  
 Storage Temperature:32-104°F (0-40°C)  
 UL UN38.3

CE RoHS FC

## PO211

Battery Type:LiFePO4  
 Battery:403.2Wh / 3P7S; 537.6Wh/4P7S  
 Cycle life: 2500+ Cycles to 80% Original Capacity  
 AC Output:2 x 240V/10A Outlets; 600W In Total (230V/50Hz)  
 2 x 120V/10A Outlets; 600W in total (120V/60Hz)  
 Surge Power:1200W  
 USB-C1 Output:1 x 45W Max.  
 USB-C2 Output:1 x 100W Max.  
 USB-A1/A2 Output:QC 18W  
 DC Output:1 x 12V/10A (Car Output)  
 2 x 12V/10A DC 5521 (5.5mm Output)  
 AC Input:160W Max.  
 Solar Input:200W Max, VOC 12-28V, 8A  
 Car Input:12/24V from Cigarette Lighter Port  
 Maximum Input:350W, with AC and Solar Input Simultaneously  
 Weight:14.33 lbs / 6.5kg  
 Dimensions (LxWxD):10.94×8.13×7.93in / 278×206.6×201.3mm  
 Operating Temperature:14-104 °F (-10-40 °C)  
 Storage Temperature:14-113 °F (-10-45 °C)  
 UN38.3

CE RoHS FC

## PO214

Battery Type:LiFePO4  
 Battery:1024Wh  
 Cycle life:3500+ times  
 AC Output:230V/2000W (Rated) 16A Max\*4; Peak 4500W  
 DC 12V output(&cigarette lighter&DC5521):12V/10A  
 4\*USB-A output:5V/3A; 9V/2A; 12V/1.5A(18W Max)  
 2\*USB-C output:5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V5A; (PD 100W Max)  
 Car Charge Input:12-15Vd.c 8A  
 AC Charge Input:90-140V.a.c 12A 1400W Max  
 PV(Anderson) Input:12-80V.d.c MPPT:18V-75V 13A 800W Max  
 Size:15.1\*9.1\*11.6in (384\*232\*295mm)  
 Net Weight:27.8lb (12.6kg)  
 SAA UN38.3 MSDS

CE RoHS FC UK CA





## PO213

Battery Type:LiFePO4  
 Battery:2560Wh/1P16S  
 Cycle life: 2500+ Cycles to 80% Original Capacity  
 AC Output:3 x 240V/10A Outlets; 2400W In Total(230V/50Hz)  
 4 x 120V/20A Outlets ; 1 x 120V/30A TT-30 Outlets;  
 2400W in total(120V/60Hz)  
 Surge Power:4800W (230V/50Hz)&(120V/60Hz) 200ms  
 USB-C1/C2 Output:PD 100W  
 USB-A1/A2/A3/A4 Output:4 x 5V/3A  
 DC Output:1 x 12V/10A (Car Output)  
 2 x 12V/10A DC 5521 (5.5mm Output)  
 Wireless Charging Pad:2 x 15W Max ( Optional )  
 AC Input:1300W Max  
 Solar(MPPT) Input:12-60V/12A 600W Max  
 Car Input:12/24V 8.2A  
 Maximum Input:1800W, with AC and Solar Input Simultaneously  
 Weight:59 lbs / 26.8kg  
 Dimensions (LxWxD):15.63x11.65x12.36 in / 397x296x314mm  
 Operating Temperature:14-104 ℉ (-10-40 ℃)  
 Storage Temperature:14-113 ℉ (-10-45 ℃)

UN38.3

CE RoHS FC

## PO212

Battery Type:LiFePO4  
 Battery:1120Wh / 1P7S  
 Cycle life: 2500+ Cycles to 80% Original Capacity  
 AC Output:2x 240V/10A Outlets ; 1200W In Total (230V/50Hz)  
 2 x 120V/20A Outlets ; 1200W in total (120V/60Hz)  
 Surge Power:2400W  
 USB-C1 Output:1 x 100W Max.  
 USB-C2/C3 Output:2 x 30W Max.  
 USB-A1 Output:1 x 22.5W  
 USB-A2/A3 Output:2 x 5V/2.4A  
 DC Output:1 x 12V/10A (Car Output)  
 2 x 12V/10A DC 5521 (5.5mm Output)  
 AC Input:800W Max.  
 Solar Input:300W Max, VOC 11-50V, 8.5A  
 Car Input:12/24V,8.5A  
 Maximum Input:1000W, with AC and Solar Input Simultaneously  
 Weight:28.66 lbs / 13kg  
 Dimensions (LxWxD):13.82x9.96x10.24 in / 351x253x260mm  
 Operating Temperature:14-104 ℉ (-10-40 ℃)  
 Storage Temperature:14-113 ℉ (-10-45 ℃)

UN38.3

CE RoHS FC

## PO215

Battery Type:LiFePO4  
 Battery:5040Wh(48V,105Ah)  
 Cycle life:3600+ times  
 AC Output:220-240V/5000W(Rated);7000W(Peak)(\*5)  
 DC 12V output(&cigarette lighter&DC5521):12V/10A  
 Anderson Output:12V/13A  
 4\*USB-A output:5V/3A; 9V/2A; 12V/1.5A(18W Max); 5V/2A  
 2\*USB-C output:5V/3A; 9V/3A;12V/3A;15V/3A; 20V/3A;(PD 60W Max)  
 AC Charge Input:220-240Vac 16A Max 2500W Max  
 PV(Anderson) Input:12-150Vdc MPPT 18-140V 15A Max 2100W Max  
 Size:25.2\*11.9\*17.2in(641.5\*304.5\*437.5mm)  
 Net Weight:110.23lb(50kg)

SAA UN38.3 MSDS

CE RoHS UK CA



## PO216

Battery Type:LiFePO4  
 Battery:2048Wh  
 Cycle life:3500+ times  
 AC Output:220-240V/2500W(Rated)(\*4)  
 DC 12V output(&cigarette lighter&DC5521):12V/10A  
 Anderson Output:12V130A  
 4\*USB-A output:5V/3A;9V/2A;12V/1.5A( 18W Max)  
 2\*USB-C output:5V/3A;9V/3A; 12V/3A; 15V13A; 20V5A:( PD 100W Max )  
 AC Charge Input:220-240Va.c 16AMax 1600W Max  
 PV(Anderson) Input:12-150Vd.c MPPT:18V-140V15AMax 2100W Max  
 Size:460\*270\*305mm

SAA UN38.3 MSDS

CE RoHS UK CA





**EA01**

Model: Type 2 to GBT  
 Switch: support  
 Power: 5-11KW  
 Voltage: 220-250V  
 Current: 32A  
 Shell material: PC+ABS



**EA02**

Model: Type 2 to Type 1  
 Switch: support  
 Power: 5-11KW  
 Voltage: 220-250V  
 Current: 16-40A  
 Shell material: PC+ABS



**EA07**

Model: Type1 to Tesla  
 Switch: support  
 Voltage: 100-250V  
 Current: > 60A  
 Shell material: PC



**EA03**

Model: Tesla to CCS1 DC  
 Voltage: 500-1000V  
 Current: 300A  
 Shell material: PA66+Fiber glass



**EA04**

Model: CCS1-CCS2 DC  
 Power: 50KWH-250KWH  
 Voltage: 300V-1000V  
 Current: 50A-250A  
 Shell material: PC+ABS



**EA08**

Model: Type 2 to GBT  
 Switch: support  
 Voltage: 100-400V  
 Current: > 50A  
 Shell material: PC



**EA09**

Model: Tesla toType1  
 Switch: support  
 Voltage: 100-250V  
 Current: > 60A  
 Shell material: PC



**EA05**

Model: CCS2 to CCS1 AC+DC  
 Voltage: 1000V DC/250V AC  
 Current: 250A DC/80A AC  
 Shell material: thermoplastic plastic



**EA06**

Model: CCS1 to Tesla  
 Voltage: 500V DC  
 Current: 300A  
 Shell material: PA66+Glass Fiber



**EA11**

Model:Type 1 to GBT AC  
 Voltage:250V  
 Current:32A  
 Shell Material:PC+ABS



**EA12**

Model:CCS2 to Tesla DC  
 Voltage:500-1000V  
 Current:250A  
 Shell Material:PC+ABS



**EA13**

Model: CCS2 to Tesla DC+AC  
 Voltage: 500-1000V  
 Current: 250A  
 Shell Material: PC+ABS



**EA14**

Model: Type1 to Type2 AC  
 Voltage: 250V  
 Current: 32A  
 Shell Material: PC+ABS



**DG01**

Model: GB/T  
 Socket: EU 16A socket, 4 units  
 Power: 3.5KW  
 Voltage: 240V  
 Current: 16A  
 single-phase  
 Length: 4M  
 Wire: TPU  
 Wire gauge: 3x2.5mm<sup>2</sup>  
 Shell material: Silicon PC

**CE RoHS**



**DG02**

Model: Type 2  
 Socket: EU 16A socket, 4 units  
 Power: 3.5KW  
 Voltage: 240V  
 Current: 16A  
 single-phase  
 Length: 4M  
 Wire: TPU  
 Wire gauge: 3x2.5mm<sup>2</sup>  
 Shell material: Silicon PC

**CE RoHS**



**DG03**

Model: Type 2  
 Socket: Universal socket  
 Switch: support  
 Power: 3.84KW  
 Voltage: 240V  
 Current: 16A  
 single-phase  
 Shell material: Polyoxymethylene



## DG04

Model: GB/T  
Socket: Universal socket  
Switch: No  
Power: 3.84KW  
Voltage: 240V  
Current: 16A  
single-phase  
Shell material: Polyoxymethylene



## DG05

Model: Type1 V2L DISCHARGE  
Voltage: 110-250V  
Current: 16A  
Shell Material: PC+ABS



## DG06

Model: Type2 V2L DISCHARGE  
Voltage: 110-250V  
Current: 16A  
Shell Material: PC+ABS





### E838

Process: ETFE  
 Power: 36W  
 Unfolding size: 842x279x3.0mm  
 Interference size: 279x195x26.5mm  
 Output: 5V/3A, 9V/3A, 12Vx2.5A  
 Folds qty: 4pcs  
 Battery cell: Sunpower

CE RoHS

### E840

Process: ETFE  
 Power: 54W  
 Expand size: 1251x279x3.0mm  
 Interference size: 279x195x34mm  
 Output: 5V/3A, 9V/3A, 12V/2.6A, 20V/2.1A  
 Folds qty: 6pcs  
 Battery cell: Sunpower

CE RoHS

### E860-100W

Process: ETFE  
 Power: 100W  
 Expand size: 650x1050x3mm  
 Closing size: 350x525x30mm  
 Output: 20V/5A  
 How many discounts: 20% off  
 Cell Material: Monocrystalline Silicon

CE RoHS

### E860-150W

Process: ETFE  
 Power: 150W  
 Expand size: 770x1300x3mm  
 Closing size: 770x650x30mm  
 Output: 20V/7.5A  
 How many discounts: 20% off  
 Cell Material: Monocrystalline Silicon



### E841

Power: 12.5W (Monocrystalline)  
 Cell conversion efficiency: > 22.5%  
 Output voltage: dual 5V USB  
 Output current: 5v2A  
 MaxMaterial: 600D polyester  
 Expansion size: 185\*690mm  
 Folding size: 185\*120mm



### E842


Folding number: 3pcs  
 Energy source: solar power  
 Power: 21w



### E843

Single crystal  
 Folding number: 3pcs  
 Power: 30w



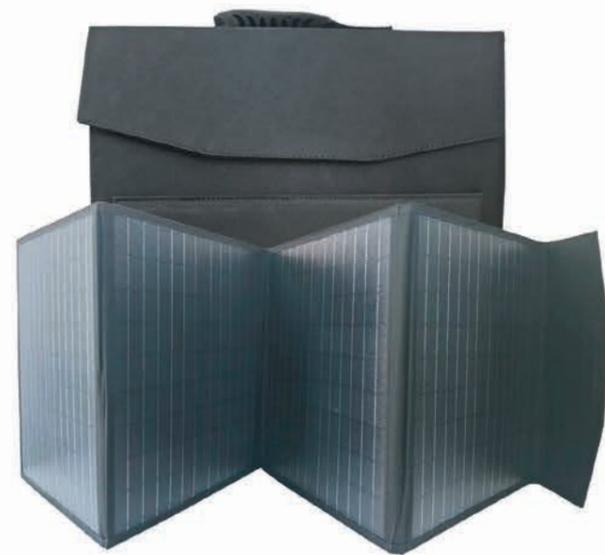

### E818-100W

Craftsmanship: Hand sewn  
 Power: 100W  
 Expand size: 360x2000x3mm  
 Closing size: 330x360x50MM  
 Output: 20V/5A  
 How many discounts: 60% off  
 Cell Material: Monocrystalline Silicon

**CE RoHS**

### E818-150W

Craftsmanship: Hand sewn  
 Power: 150W  
 Expand size: 420x2200x3mm  
 Closing size: 420x420x50MM  
 Output: 20v/7.5A  
 How many discounts: 50% off  
 Cell Material: Monocrystalline Silicon

**CE RoHS**



### E815

Battery voltage: 12V/24V/36V/48V automatic  
 Charging current: 100A  
 Maximum photovoltaic input power:  
 1200W Maximum solar input (Voc): 15-25V (12V battery)  
 Maximum photovoltaic input power:  
 2400W Maximum solar input (Voc): 30-50V (24V battery)  
 Maximum photovoltaic input power:  
 3600W Maximum solar input (Voc): 45-75V (36V battery)  
 Maximum photovoltaic input power:  
 4800W Maximum solar input (Voc): 60-100V (48V battery)  
 EMC

**RoHS FC**

### E816

Voltage: DC 12V/24V  
 Display: LCD screen  
 Self use: <10MA  
 Overcharge protection: 14.4V/28.8V  
 Overcharge float charging: 13.7V/27.4V  
 Charging recovery voltage: 12.6V/25.2V  
 Overdischarge protection: 10.7V/21.4V  
 Discharge recovery: 12.6V/25.2V  
 Dual USB output: 5V/2A (for charging phones, iPads, etc.)  
 12V suitable for 18V solar panels,  
 24V suitable for 36V solar panels  
 EMC

**RoHS FC**





CE

### C585A-3.5M/5.5M/7.5M

Mains version  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 Photovoltaic brush  
 Drive motor kit  
 Water control box (including 100W water pump)  
 220V power converter  
 8 m extension wire  
 1.3 m pumping pipe  
 Accessories: manual, Certificate, yellow water control valve, oil seal, elastic screw + screwdriver, plastic nut, hex, cable tie

### C585B-3.5M/5.5M/7.5M

Mains version  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 Photovoltaic brush  
 Drive motor kit  
 Water control box (including 100W water pump)  
 220V power converter  
 8 m extension wire  
 1.3 m pumping pipe  
 Accessories: manual, Certificate, yellow water control valve, oil seal, elastic screw + screwdriver, plastic nut, hex, cable tie  
 Brushless machine

### C585C-3.5M/5.5M/7.5M

Lithium battery  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 Photovoltaic brush  
 Drive motor kit  
 8 m water wire  
 Electric control spring wire  
 1pc lithium battery pack  
 1pc lithium battery charger  
 1pc backpack  
 Accessories: manual, Certificate, yellow water control valve, oil seal, elastic screw + screwdriver, plastic nut, hex, cable tie

### C585D-3.5M/5.5M/7.5M

Lithium battery  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 Photovoltaic brush  
 Drive motor kit  
 8 m water wire  
 Electric control spring wire  
 1pc lithium battery pack  
 1pc lithium battery charger  
 1pc backpack  
 Accessories: manual, Certificate, yellow water control valve, oil seal, elastic screw + screwdriver, plastic nut, hex, cable tie  
 Brushless machine

### C585E-3.5M/5.5M/7.5M

Mains version + lithium version  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 Photovoltaic brush  
 Drive motor kit  
 Water control box (including 100W water pump)  
 220V power converter  
 8 m extension wire  
 1.3 m pumping pipe  
 Power supply cable  
 Electric control spring wire  
 Lithium battery pack  
 Lithium battery charger  
 Backpack  
 Accessories: manual, Certificate, yellow water control valve, oil seal, elastic screw + screwdriver, plastic nut, hex, cable tie

### C585F-3.5M/5.5M/7.5M

Mains version + lithium version  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 Photovoltaic brush  
 Drive motor kit  
 Water control box (including 100W water pump)  
 220V power converter  
 8 m extension wire  
 1.3 m pumping pipe  
 Power supply cable  
 Electric control spring wire  
 Lithium battery pack  
 Lithium battery charger  
 Backpack  
 Accessories: manual, Certificate, yellow water control valve, oil seal, elastic screw + screwdriver, plastic nut, hex, cable tie  
 Brushless machine



### C586A-3.5M/5.5M/7.5M

Mains version  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 8 m water wire  
 2pcs photovoltaic brushes  
 2pcs drive motor kit  
 T-rod connection kit  
 220v power converter  
 8 m extension wire  
 Accessories: manual, Certificate, oil seal, elastic screw + screwdriver, water control valve connector, plastic nut, hex, cable tie

### C586B-3.5M/5.5M/7.5M

Mains version  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 8 m water wire  
 2pcs photovoltaic brushes  
 2pcs drive motor kit  
 T-rod connection kit  
 220v power converter  
 8 m extension wire  
 Accessories: manual, Certificate, oil seal, elastic screw + screwdriver, water control valve connector, plastic nut, hex, cable tie  
 Brushless machine

### C586C-3.5M/5.5M/7.5M

Lithium battery  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 8 m water wire  
 2pcs photovoltaic brushes  
 2pcs drive motor kit  
 T-rod connection kit  
 Electric control spring wire  
 1pc lithium battery pack  
 1pc lithium battery charger  
 1pc backpack  
 Accessories: manual, certificate, oil seal, water control valve connector, elastic screw + screwdriver, plastic nut, hex, cable tie

### C586D-3.5M/5.5M/7.5M

Lithium battery  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 8 m water wire  
 2pcs photovoltaic brushes  
 2pcs drive motor kit  
 T-rod connection kit  
 Electric control spring wire  
 1pc lithium battery pack  
 1pc lithium battery charger  
 1pc backpack  
 Accessories: manual, certificate, oil seal, water control valve connector, elastic screw + screwdriver, plastic nut, hex, cable tie  
 Brushless machine



### C586E-3.5M/5.5M/7.5M

Mains version + lithium version  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 8 meters water wire,  
 2pcs photovoltaic brushes  
 2pcs drive motor kit  
 T-rod connection kit  
 Electric control spring wire  
 1pc lithium battery pack  
 1pc lithium battery charger  
 1pc backpack  
 220v power converter  
 8 m extension wire  
 Accessories: manual, Certificate, oil seal, elastic screw + screwdriver, plastic nut, hex, cable tie

### C586F-3.5M/5.5M/7.5M

Mains version + lithium version  
 3.5m/5.5m/7.5m aluminum alloy telescopic rod  
 8 meters water wire,  
 2pcs photovoltaic brushes  
 2pcs drive motor kit  
 T-rod connection kit  
 Electric control spring wire  
 1pc lithium battery pack  
 1pc lithium battery charger  
 1pc backpack  
 220v power converter  
 8 m extension wire  
 Accessories: manual, Certificate, oil seal, elastic screw + screwdriver, plastic nut, hex, cable tie  
 Brushless machine



CE

### C581A-3.5M/5.5M/7.5M

Mains version  
 3.5m/3.5m/7.5m aluminum alloy telescopic rod  
 1pc photovoltaic special rolling brush head  
 Drive motor kit  
 220V power converter  
 8 m extension wire  
 Accessories: manual, Certificate,  
 yellow water control valve, oil seal,  
 elastic screw + screwdriver, plastic nut, hex, cable tie

### C581B-3.5M/5.5M/7.5M

Mains version  
 3.5m/3.5m/7.5m aluminum alloy telescopic rod  
 1pc photovoltaic special rolling brush head  
 Drive motor kit  
 220V power converter  
 8 m extension wire  
 Accessories: manual, Certificate,  
 yellow water control valve, oil seal,  
 elastic screw + screwdriver, plastic nut, hex, cable tie  
 Brushless machine

### C581C-3.5M/5.5M/7.5M

Lithium battery  
 3.5m/3.5m/7.5m aluminum alloy telescopic rod  
 1pc photovoltaic special rolling brush head  
 Drive motor kit  
 8 m water wire  
 Electric control spring wire  
 1pc lithium battery pack  
 1pc lithium battery charger  
 1pc backpack  
 Accessories: manual, Certificate,  
 yellow water control valve, oil seal,  
 elastic screw + screwdriver, plastic nut, hex, cable tie

### C581D-3.5M/5.5M/7.5M

Lithium battery  
 3.5m/3.5m/7.5m aluminum alloy telescopic rod  
 1pc photovoltaic special rolling brush head  
 Drive motor kit  
 8 m water wire  
 Electric control spring wire  
 1pc lithium battery pack  
 1pc lithium battery charger  
 1pc backpack  
 Accessories: manual, Certificate,  
 yellow water control valve, oil seal,  
 elastic screw + screwdriver, plastic nut, hex, cable tie  
 Brushless machine

### C581E-3.5M/5.5M/7.5M

Mains version + lithium version  
 3.5m/3.5m/7.5m aluminum alloy telescopic rod  
 1pc photovoltaic special rolling brush head  
 Drive motor kit  
 220V power converter  
 8 m extension wire  
 Power supply cable  
 Electric control spring wire  
 1pc lithium battery pack  
 Lithium battery charger  
 1pc backpack  
 Accessories: manual, Certificate,  
 yellow water control valve, oil seal,  
 elastic screw + screwdriver, plastic nut, hex, cable tie

### C581E-3.5M/5.5M/7.5M

Mains version + lithium version  
 3.5m/3.5m/7.5m aluminum alloy telescopic rod  
 1pc photovoltaic special rolling brush head  
 Drive motor kit  
 220V power converter  
 8 m extension wire  
 Power supply cable  
 Electric control spring wire  
 1pc lithium battery pack  
 Lithium battery charger  
 1pc backpack  
 Accessories: manual, Certificate,  
 yellow water control valve, oil seal,  
 elastic screw + screwdriver, plastic nut, hex, cable tie  
 Brushless machine

