


OGJG LIGHTING

LED LIGHTING

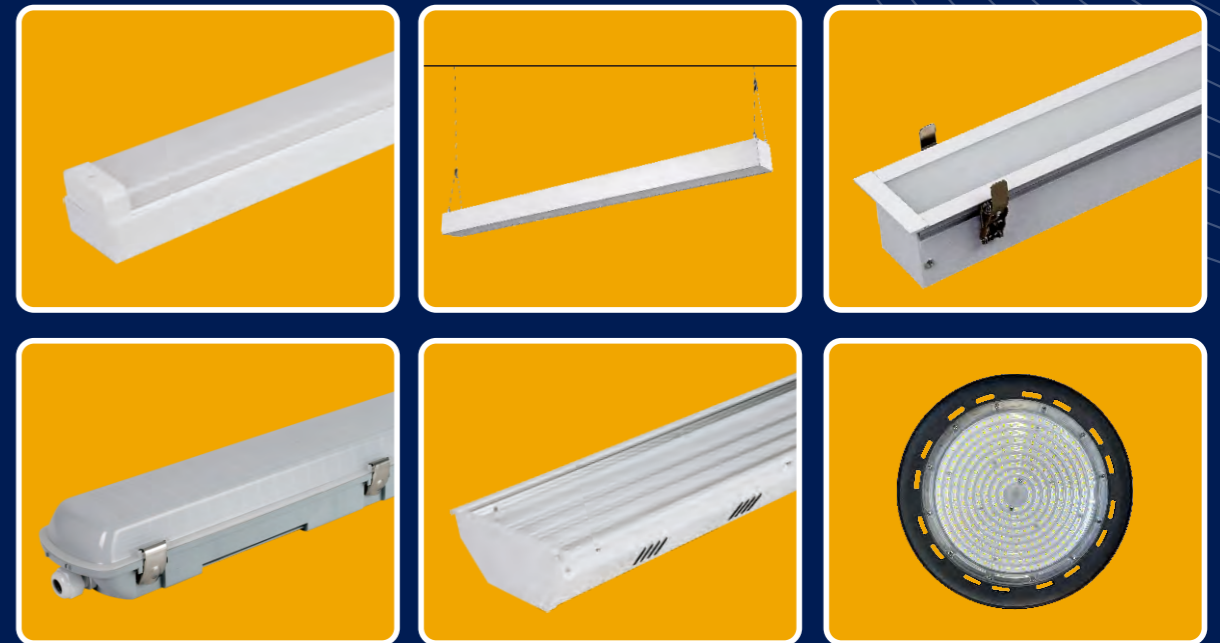

OGJG LIGHTING

Jiangmen OGJG Lighting and Electronic Co., Ltd.

Add.: Plant A, No. 4-5, xincun 2nd Road, Sanya, Hetang Town, Jiangmen City, Guangdong, China

Tel:86-750-3715535,3131535 Fax:86-750-3266099

Website:www.oglighting.com

Email:sales@oglighting.com.cn

Jiangmen OGJG Lighting and Electronic Co., Ltd.



About us

Established in 2006, OGJG Lighting is a professional manufacturer specialized in the research, development and production of LED linear Light Fixture for different kinds of commercial and industrial application.

We located in Jiangmen City, Guangdong Province, with convenient transportation access. All of our products comply with international quality standards such as cETLus, DLC, TUV-CE, CB, SAA, RoHs etc, and are greatly appreciated in a variety of different markets throughout the world.

Our well-equipped facilities and excellent quality control throughout all stages of production enables us to guarantee total customer satisfaction.

As a result of our high quality products and outstanding customer service, we have gained a global sales network reaching North America, Oceania, Europe;

OGJG lighting will become your first choice because of the most excellent quality, the most favorable price, and the perfect after-sale service.

Contents

Steel Housing Surface Mounted Series	01-07
Aluminum Housing Surface Mounted Series	08-20
Wall Mounted Series(Under-cabinet, Mirror light, Over bed light)	21-28
Suspended Mounted Series	29-45
Recessed Mounted Series	46
Waterproof Light Series	47-56
Industrial High Bay Series	57-60



OGJG LIGHTING

Steel Housing Surface Mounted Series
铁底吸顶式安装支架系列




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

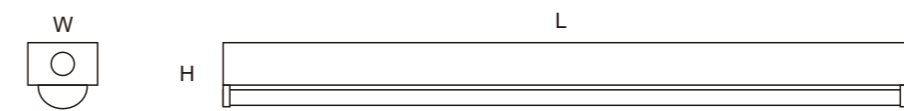

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED10-SS	10W	605x71x58	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED20-SS-2	20W	605x71x58						
OG-LED20-SS	20W	1215x71x58	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
OG-LED30-SS	30W	1215x71x58						
OG-LED40-SS	40W	1215x71x58	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
OG-LED50-SS	50W	1501x71x58						
OG-LED60-SS	60W	1501x71x58						




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

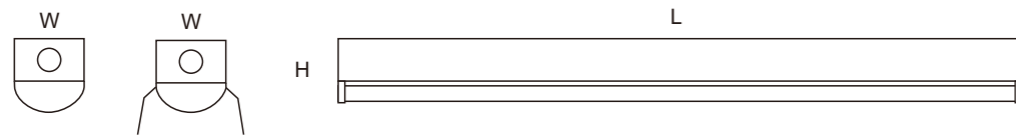

MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-HYPC	20W	577x71x83 / 577x128x112	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-HYPC	40W	1187x71x83 / 1187x128x112	120-347V	4000K				
OG-LED230-HYPC	60W	1501x71x83 / 1501x128x112	220-240V	5000K				
				6500K	CRI>90	140Lm/W		




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

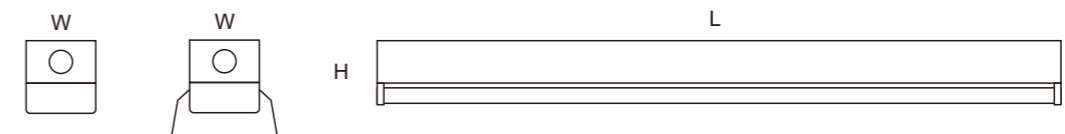

MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-HFPC	20W	605x71x92 / 605x128x112	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-HFPC	40W	1215x71x92 / 1215x128x112	120-347V	4000K				
OG-LED230-HFPC	60W	1501x71x92 / 1501x128x112	220-240V	5000K				
				6500K	CRI>90	140Lm/W		




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate cover.
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-SPC	20W	612x111x62	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-SPC-2	40W	612x111x62						
OG-LED220-SPC	40W	1222x111x62	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
OG-LED230-SPC	60W	1222x111x62						
OG-LED230-SPC-5	60W	1508x111x62	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
OG-LED240-SPC	80W	1508x111x62						




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover.
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-NWPC	20W	612x111x78	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-NWPC-2	40W	612x111x78						
OG-LED220-NWPC	40W	1222x111x78	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
OG-LED320-NWPC	60W	1222x111x78						
OG-LED240-NWPC	80W	1222x111x78	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
OG-LED330-NWPC	90W	1222x111x78						
OG-LED225-NWPC	50W	1508x111x78	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
OG-LED230-NWPC	60W	1508x111x78						
OG-LED250-NWPC	100W	1508x111x78	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
OG-LED260-NWPC	120W	1508x111x78						




FEATURES:

- Aluminum Body,
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-NBPC(2)	20W	580x133x60	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-NBPC-2(2)	40W	580x133x60						
OG-LED220-NBPC(2)	40W	1190x133x60						
OG-LED230-NBPC-4(2)	60W	1190x133x60						
OG-LED225-NBPC(2)	50W	1470x133x60						
OG-LED230-NBPC(2)	60W	1470x133x60						
OG-LED245-NBPC(2)	90W	1470x133x60						
OG-LED250-NBPC(2)	100W	1470x133x60						
OG-LED240-NBPC(2)	80W	2370x133x60						
OG-LED260-NBPC(2)	120W	2370x133x60						




FEATURES:

- Cold rolled steel housing
- Aluminum heatsink
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED220-WB	40W	1225x175x73	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED320-WB	60W	1225x175x73						
OG-LED240-WB	80W	1225x175x73						
OG-LED330-WB	90W	1225x175x73						
OG-LED340-WB	120W	1225x175x73						
OG-LED225-WB	50W	1511x175x73						
OG-LED230-WB	60W	1511x175x73						
OG-LED250-WB	100W	1511x175x73						
OG-LED260-WB	120W	1511x175x73						
OG-LED330-WB-5	90W	1511x175x73						
OG-LED350-WB	150W	1511x175x73						
OG-LED360-WB	180W	1511x175x73						



OGJG LIGHTING

Aluminum Housing Surface Mounted Series
铝壳吸顶式安装支架系列




FEATURES:

- Aluminum Body, Polycarbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED10-JL	10W	584x32x40	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED15-JL	15W	584x32x40		4000K				
OG-LED20-JL	20W	1194x32x40	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
OG-LED30-JL	30W	1194x32x40		6500K				
OG-LED25-JL	25W	1480x32x40	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
OG-LED30-JL	30W	1480x32x40						
OG-LED40-JL	40W	2370x32x40						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED10-JLZ	10W	584x81x43	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED15-JLZ	15W	584x81x43						
OG-LED20-JLZ	20W	1194x81x43	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
OG-LED30-JLZ	30W	1194x81x43						
OG-LED25-JLZ	25W	1480x81x43	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
OG-LED30-JLZ	30W	1480x81x43						
OG-LED40-JLZ	40W	2370x81x43		6500K				




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-JLPC	20W	594x86x65	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-JLPC	40W	1204x86x65						
OG-LED320-JLPC	60W	1204x86x65	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
OG-LED224-JLPC	50W	1490x86x65						
OG-LED230-JLPC	60W	1490x86x65	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
OG-LED240-JLPC	80W	2374x86x65						
OG-LED245-JLPC	90W	1490x86x65		6500K				
OG-LED250-JLPC	100W	1490x86x65						
OG-LED260-JLPC	120W	2374x86x65						




FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-JLPC(2)	20W	574x66x75	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-JLPC(2)	40W	1184x66x75						
OG-LED320-JLPC(2)	60W	1184x66x75						
OG-LED224-JLPC(2)	50W	1470x66x75						
OG-LED230-JLPC(2)	60W	1470x66x75						
OG-LED240-JLPC(2)	80W	2364x66x75						
OG-LED245-JLPC(2)	90W	1470x66x75						
OG-LED250-JLPC(2)	100W	1470x66x75						
OG-LED260-JLPC(2)	120W	2364x66x75						




FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-JLPC(3)	20W	578x66x83	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-JLPC(3)	40W	1188x66x83						
OG-LED320-JLPC(3)	60W	1188x66x83						
OG-LED224-JLPC(3)	50W	1474x66x83						
OG-LED230-JLPC(3)	60W	1474x66x83						
OG-LED240-JLPC(3)	80W	2369x66x83						
OG-LED245-JLPC(3)	90W	1474x66x83						
OG-LED250-JLPC(3)	100W	1474x66x83						
OG-LED260-JLPC(3)	120W	2369x66x83						



FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED10-UDPC	10W	615x99x50	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED20-UDPC	20W	1225x99x50		4000K				
OG-LED30-UDPC	30W	1225x99x50	120-347V	5000K	CRI>90	140Lm/W	120°	5 years
OG-LED25-UDPC	25W	1511x99x50		6500K				
OG-LED30-UDPC	30W	1511x99x50	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
OG-LED40-UDPC	40W	2394x99x50						
OG-LED230-UDPC	60W	2394x99x50						




FEATURES:


- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-BUD	20W	610x130x59	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-BUD	40W	610x130x59						
OG-LED220-BUD	40W	1220x130x59	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
OG-LED230-BUD	60W	1220x130x59						
OG-LED225-BUD	50W	1506x130x59	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
OG-LED230-BUD-5	60W	1506x130x59						
OG-LED240-BUD	80W	1506x130x59						
OG-LED250-BUD	100W	1506x130x59						
OG-LED420-BUD	80W	2394x130x59						
OG-LED430-BUD	120W	2394x130x59						
OG-LED440-BUD	160W	2394x130x59						

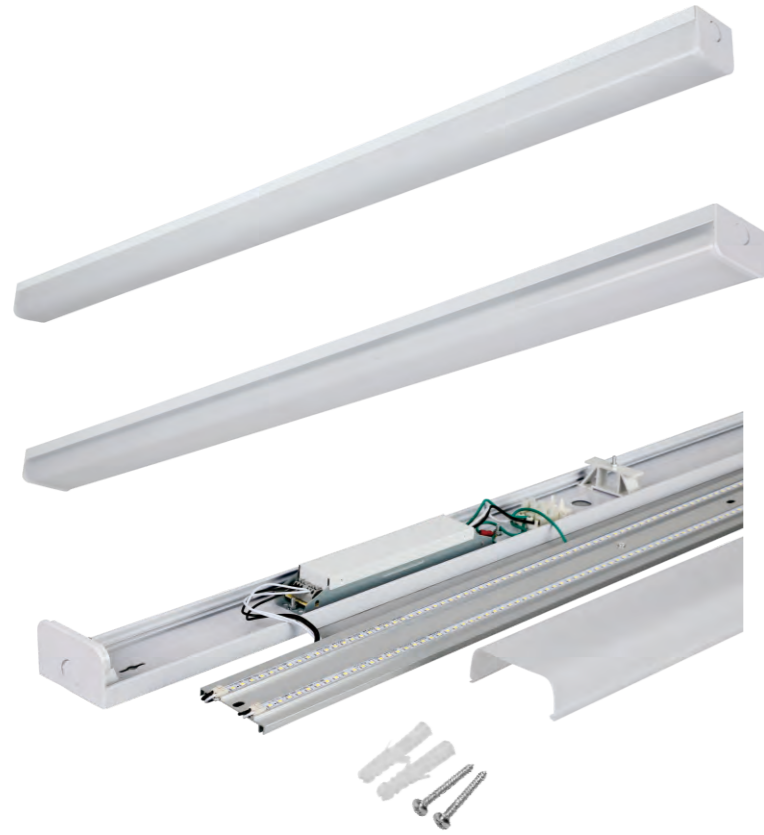


FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-FPC	20W	579x80x48	100-277V 120-347V 220-240V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-FPC	40W	1189x80x48		4000K				
OG-LED225-FPC	50W	1481x80x48		5000K				
OG-LED230-FPC	60W	1481x80x48		6500K				




FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-WPC	20W	626x99x75	100-277V 120-347V 220-240V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-WPC-2	40W	626x99x75						
OG-LED220-WPC	40W	1236x99x75						
OG-LED320-WPC	60W	1236x99x75						
OG-LED240-WPC	80W	1236x99x75		4000K				
OG-LED340-WPC	120W	1236x99x75						
OG-LED225-WPC	50W	1522x99x75		5000K				
OG-LED230-WPC	60W	1522x99x75						
OG-LED250-WPC	100W	1522x99x75		6500K				
OG-LED260-WPC	120W	1522x99x75						
OG-LED350-WPC	150W	1522x99x75						
OG-LED360-WPC	180W	1522x99x75						
OG-LED240-WPC-8	80W	2406x99x75						
OG-LED340-WPC-8	120W	2406x99x75						
OG-LED440-WPC	160W	2406x99x75						
OG-LED640-WPC	240W	2406x99x75						




FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED10-SOPC(F)	10W	579x51x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED20-SOPC(F)	20W	1189x51x65						
OG-LED30-SOPC(F)	30W	1189x51x65						
OG-LED40-SOPC(F)	40W	1189x51x65						
OG-LED25-SOPC(F)	25W	1475x51x65						
OG-LED30-SOPC(F)	30W	1475x51x65						
OG-LED50-SOPC(F)	50W	1475x51x65						
OG-LED60-SOPC(F)	60W	1475x51x65						
OG-LED40-SOPC(F)	40W	2369x51x65						
OG-LED80-SOPC(F)	80W	2369x51x65						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-RPC(2)	20W	578x63x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED20-RPC(2)	40W	1188x63x65						
OG-LED220-RPC(2)	40W	1188x63x65						
OG-LED224-RPC(2)	48W	1188x63x65						
OG-LED230-RPC(2)	60W	1474x63x65						
OG-LED230-RPC(2)	60W	1799x63x65						
OG-LED240-RPC(2)	80W	1799x63x65						
OG-LED240-RPC(2)	80W	2369x63x65						
OG-LED248-RPC(2)	96W	2369x63x65						
OG-LED260-RPC(2)	120W	2369x63x65						



FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-NBPC	20W	615x120x40	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-NBPC-2	40W	615x120x40						
OG-LED220-NBPC	40W	1225x120x40						
OG-LED 230-NBPC-4	60W	1225x120x40						
OG-LED225-NBPC	50W	1511x120x40						
OG-LED230-NBPC	60W	1511x120x40						
OG-LED245-NBPC	90W	1511x120x40						
OG-LED250-NBPC	100W	1511x120x40						
OG-LED 240-NBPC	80W	2394x120x40						
OG-LED260-NBPC	120W	2394x120x40						



FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-YPC	20W	697x125x40	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-YPC-2	40W	697x125x40						
OG-LED220-YPC	40W	1307x125x40						
OG-LED230-YPC-4	60W	1307x125x40						
OG-LED224-YPC	50W	1593x125x40						
OG-LED230-YPC	60W	1593x125x40						



OGJG LIGHTING

Wall mounted Series
(Under-cabinet, Mirror light, Over bed light)
壁灯系列(衣柜灯, 镜前灯, 床头灯)




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED6-BPC	6W	304x30x61	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED10-BPC	10W	570x30x61		4000K				
OG-LED15-BPC	15W	894x30x61	120-347V	5000K	CRI>90	140Lm/W		
OG-LED24-BPC	25W	1466x30x61	220-240V	6500K				
OG-LED30-BPC	30W	1466x30x61						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- USB socket
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED6-BPC(2)	6W	348x69x92	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED10-BPC(2)	10W	614x69x92						
OG-LED15-BPC(2)	15W	939x69x92						
OG-LED20-BPC(2)	20W	1224x69x92						
OG-LED24-BPC(2)	25W	1510x69x92						
OG-LED30-BPC(2)	30W	1510x69x92						
OG-LED0606-BPC(2)	6W+6W	348x69x92						
OG-LED1010-BPC(2)	10W+10W	614x69x92						
OG-LED1515-BPC(2)	15W+15W	939x69x92						
OG-LED2020-BPC(2)	20W+20W	1224x69x92						
OG-LED2424-BPC(2)	25W+25W	1510x69x92						
OG-LED3030-BPC(2)	30W+30W	1510x69x92						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- Color: White, Silver, Black

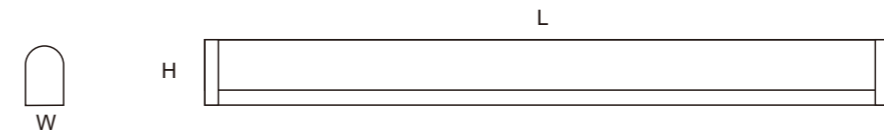

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED6-BPC(3)	6W	349x52x89	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED10-BPC(3)	10W	697x52x89						
OG-LED15-BPC(3)	15W	940x52x89						
OG-LED20-BPC(3)	20W	1225x52x89						
OG-LED24-BPC(3)	25W	1511x52x89						
OG-LED30-BPC(3)	30W	1511x52x89						

OGJG LIGHTING

Wall mounted Series
(Under-cabinet, Mirror light, Over bed light)
壁灯系列(衣柜灯, 镜前灯, 床头灯)




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Emergency battery back up
- ON/OFF Switch / Pull chain switch
- Outlet socket
- USB socket
- Color: White, Silver, Black

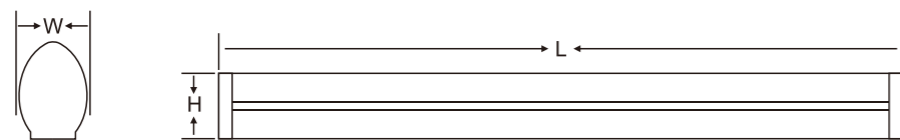

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-HB	10W+10W	591x89x131	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED215-HB	15W+15W	916x89x131	120-347V	4000K				
OG-LED220-HB	20W+20W	1201x89x131	220-240V	5000K 6500K				

OGJG LIGHTING

Wall mounted Series
(Under-cabinet, Mirror light, Over bed light)
壁灯系列(衣柜灯, 镜前灯, 床头灯)




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Emergency battery back up
- ON/OFF Switch / Pull chain switch
- Outlet socket
- USB socket
- Color: White, Silver, Black

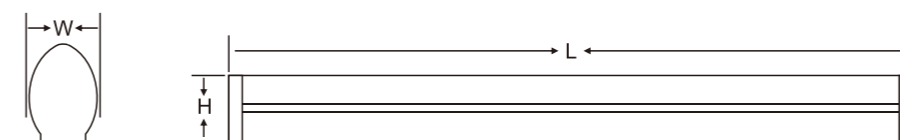

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-HB(2)	10W+10W	591x89x131	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED215-HB(2)	15W+15W	916x89x131	120-347V	4000K				
OG-LED220-HB(2)	20W+20W	1201x89x131	220-240V	5000K 6500K				




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- USB socket
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-RPC(2)	20W	578x63x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED20-RPC(2)	20W	1188x63x65						
OG-LED220-RPC(2)	40W	1188x63x65						
OG-LED224-RPC(2)	48W	1188x63x65						
OG-LED230-RPC(2)	60W	1474x63x65						
OG-LED230-RPC(2)	60W	1799x63x65						
OG-LED240-RPC(2)	80W	1799x63x65						
OG-LED240-RPC(2)	80W	2369x63x65						
OG-LED248-RPC(2)	96W	2369x63x65						
OG-LED260-RPC(2)	120W	2369x63x65						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- USB socket
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED20-LPC	20W	578x86x75	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-LPC	40W	1188x86x75						
OG-LED230-LPC	60W	1188x86x75						
OG-LED225-LPC	50W	1474x86x75						
OG-LED230-LPC	60W	1474x86x75						
OG-LED240-LPC	80W	2369x86x75						
OG-LED260-LPC	120W	2369x86x75						
OG-LED20/20-LUPC	UP:20W DOWN:20W	578x86x75						
OG-LED10/20-LUPC	UP:10W DOWN:20W	578x86x75						
OG-LED10/30-LUPC	UP:10W DOWN:30W	1188x86x75						
OG-LED20/40-LUPC	UP:20W DOWN:40W	1188x86x75						
OG-LED40/40-LUPC	UP:40W DOWN:40W	1188x86x75						
OG-LED25/50-LUPC	UP:25W DOWN:50W	1474x86x75						
OG-LED50/50-LUPC	UP:50W DOWN:50W	1474x86x75						
OG-LED40/60-LUPC	UP:40W DOWN:60W	1474x86x75						
OG-LED60/60-LUPC	UP:60W DOWN:60W	1474x86x75						
OG-LED40/80-LUPC	UP:40W DOWN:80W	2369x86x75						
OG-LED80/80-LUPC	UP:80W DOWN:80W	2369x86x75						
OG-LED60/120-LUPC	UP:60W DOWN:120W	2369x86x75						

OGJG LIGHTING

Wall mounted Series
(Under-cabinet, Mirror light, Over bed light)
壁灯系列(衣柜灯, 镜前灯, 床头灯)




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED20/20-LUPC-2	UP:20W DOWN:20W	579x52x90	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED10/20-LUPC-2	UP:10W DOWN:20W	579x52x90						
OG-LED15/15-LUPC-2	UP:15W DOWN:15W	904x52x90	120-347V	4000K	CRI>90	140Lm/W		
OG-LED15/25-LUPC-2	UP:15W DOWN:25W	904x52x90						
OG-LED30/30-LUPC-2	UP:30W DOWN:30W	904x52x90	220-240V	6500K				
OG-LED10/30-LUPC-2	UP:10W DOWN:30W	1189x52x90						
OG-LED20/40-LUPC-2	UP:20W DOWN:40W	1189x52x90						
OG-LED40/40-LUPC-2	UP:40W DOWN:40W	1189x52x90						
OG-LED25/50-LUPC-2	UP:25W DOWN:50W	1475x52x90						
OG-LED50/50-LUPC-2	UP:50W DOWN:50W	1475x52x90						
OG-LED40/60-LUPC-2	UP:40W DOWN:60W	1475x52x90						
OG-LED60/60-LUPC-2	UP:60W DOWN:60W	1475x52x90						



OGJG LIGHTING

Suspended Mounted Series
吊装式办公照明支架系列




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED10-SOPC	10W	579x51x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED20-SOPC	20W	1189x51x65						
OG-LED30-SOPC	30W	1189x51x65						
OG-LED40-SOPC	40W	1189x51x65						
OG-LED25-SOPC	25W	1474x51x65						
OG-LED30-SOPC	30W	1474x51x65						
OG-LED50-SOPC	50W	1474x51x65						
OG-LED60-SOPC	60W	1474x51x65						
OG-LED40-SOPC	40W	2369x51x65						
OG-LED80-SOPC	80W	2369x51x65						

OGJG LIGHTING

Suspended Mounted Series
吊装式办公照明支架系列




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED10-SOPC(F)	10W	579x51x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED20-SOPC(F)	20W	1189x51x65						
OG-LED30-SOPC(F)	30W	1189x51x65						
OG-LED40-SOPC(F)	40W	1189x51x65						
OG-LED25-SOPC(F)	25W	1475x51x65						
OG-LED30-SOPC(F)	30W	1475x51x65						
OG-LED50-SOPC(F)	50W	1475x51x65						
OG-LED60-SOPC(F)	60W	1475x51x65						
OG-LED40-SOPC(F)	40W	2369x51x65						
OG-LED80-SOPC(F)	80W	2369x51x65						

OGJG LIGHTING

Suspended Mounted Series
吊装式办公照明支架系列




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-UDPC	20W	615x99x50	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED20-UDPC	20W	1225x99x50						
OG-LED220-UDPC	40W	1225x99x50						
OG-LED25-UDPC	25W	1511x99x50						
OG-LED30-UDPC	30W	1511x99x50						
OG-LED225-UDPC	50W	1511x99x50						
OG-LED230-UDPC	60W	1511x99x50						
OG-LED40-UDPC	40W	2394x99x50						
OG-LED240-UDPC	80W	2394x99x50						
OG-LED10/30-UDPC	UP:10W DOWN:30W	1225x99x50						
OG-LED10/40-UDPC	UP:10W DOWN:40W	1225x99x50						

OGJG LIGHTING

Suspended Mounted Series
吊装式办公照明支架系列




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- Linkable

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-BUD	20W	610x130x59	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-BUD	40W	610x130x59						
OG-LED10/20BUD	UP: 10W DOWN: 20W	610x130x59						
OG-LED20/40-BUD-2	UP: 20W DOWN: 40W	610x130x59						
OG-LED220-BUD	40W	1220x130x59						
OG-LED230-BUD	60W	1220x130x59						
OG-LED10/30-BUD	UP: 10W DOWN: 30W	1220x130x59						
OG-LED20/40-BUD	UP: 20W DOWN: 40W	1220x130x59						
OG-LED225-BUD	50W	1506x130x59						
OG-LED230-BUD-5	60W	1506x130x59						
OG-LED240-BUD	80W	1506x130x59						
OG-LED250-BUD	100W	1506x130x59						
OG-LED25/50-BUD	UP: 25W DOWN: 50W	1506x130x59						
OG-LED30/60-BUD	UP: 30W DOWN: 60W	1506x130x59						
OG-LED420-BUD	80W	2394x130x59						
OG-LED430-BUD	120W	2394x130x59						
OG-LED440-BUD	160W	2394x130x59						
OG-LED40/80-BUD	UP: 40W DOWN: 80W	2394x130x59						
OG-LED60/120-BUD	UP: 60W DOWN: 120W	2394x130x59						

OGJG LIGHTING

Suspended Mounted Series
 吊装式办公照明支架系列




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-JLPC	20W	594x86x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-JLPC	40W	1204x86x65						
OG-LED230-JLPC	60W	1204x86x65						
OG-LED224-JLPC	50W	1490x86x65						
OG-LED230-JLPC	60W	1490x86x65						
OG-LED245-JLPC	90W	1490x86x65						
OG-LED250-JLPC	100W	1490x86x65						
OG-LED240-JLPC	80W	2374x86x65						
OG-LED260-JLPC	120W	2374x86x65						

OGJG LIGHTING

Suspended Mounted Series
 吊装式办公照明支架系列




FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- 120° beam angle
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-JLPC (2)	20W	574x66x75	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-JLPC(2)	40W	1184x66x75						
OG-LED230-JLPC(2)	60W	1184x66x75						
OG-LED224-JLPC(2)	50W	1470x66x75						
OG-LED230-JLPC(2)	60W	1470x66x75						
OG-LED245-JLPC(2)	90W	1470x66x75						
OG-LED250-JLPC(2)	100W	1470x66x75						
OG-LED240-JLPC(2)	80W	2364x66x75						
OG-LED260-JLPC(2)	120W	2364x66x75						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED10-JLZ	10W	584x81x43	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED15-JLZ	15W	584x81x43		4000K				
OG-LED20-JLZ	20W	1194x81x43	120-347V	5000K	CRI>90	140Lm/W	120°	5 years
OG-LED30-JLZ	30W	1194x81x43		6500K				
OG-LED25-JLZ	25W	1480x81x43	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
OG-LED30-JLZ	30W	1480x81x43						
OG-LED40-JLZ	40W	2370x81x43						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED220-SOPC	40W	1188x83x92	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED320-SOPC	60W	1188x83x92		4000K				
OG-LED225-SOPC	50W	1474x83x92	120-347V	5000K	CRI>90	140Lm/W	120°	5 years
OG-LED230-SOPC	60W	1474x83x92		6500K				
OG-LED245-SOPC	90W	1474x83x92	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
OG-LED250-SOPC	100W	1474x83x92						
OG-LED240-SOPC	80W	2372x83x92						
OG-LED260-SOPC	120W	2372x83x92						
OG-LED440-SOPC	160W	2372x83x92						

OGJG LIGHTING

Suspended Mounted Series 吊装式办公照明支架系列




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- 5 years warranty
- 100-277V/120-347V/220-240V 50-60Hz
- Easy maintenance
- CRI > 83, CRI > 90

OPTIONS:

- 2FT/3FT/4FT/5FT/6FT/8FT
- CCT 3000K/4000K/5000K/6500K
- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED20-LPC	20W	578x86x75	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-LPC	40W	1188x86x75						
OG-LED230-LPC	60W	1188x86x75						
OG-LED225-LPC	50W	1474x86x75						
OG-LED230-LPC	60W	1474x86x75						
OG-LED240-LPC	80W	2369x86x75						
OG-LED260-LPC	120W	2369x86x75						
OG-LED20/20-LUPC	UP:20W DOWN:20W	578x86x75						
OG-LED10/20-LUPC	UP:10W DOWN:20W	578x86x75						
OG-LED10/30-LUPC	UP:10W DOWN:30W	1188x86x75						
OG-LED20/40-LUPC	UP:20W DOWN:40W	1188x86x75						
OG-LED40/40-LUPC	UP:40W DOWN:40W	1188x86x75						
OG-LED25/50-LUPC	UP:25W DOWN:50W	1474x86x75						
OG-LED50/50-LUPC	UP:50W DOWN:50W	1474x86x75						
OG-LED40/60-LUPC	UP:40W DOWN:60W	1474x86x75						
OG-LED60/60-LUPC	UP:60W DOWN:60W	1474x86x75						
OG-LED40/80-LUPC	UP:40W DOWN:80W	2339x86x75						
OG-LED80/80-LUPC	UP:80W DOWN:80W	2369x86x75						
OG-LED60/120-LUPC	UP:60W DOWN:120W	2369x86x75						

OGJG LIGHTING

Suspended Mounted Series 吊装式办公照明支架系列




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- 5 years warranty
- 100-277V/120-347V/220-240V 50-60Hz
- Easy maintenance
- CRI > 83, CRI > 90

OPTIONS:

- 2FT/3FT/4FT/5FT/6FT/8FT
- CCT 3000K/4000K/5000K/6500K
- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-RPC(2)	20W	578x63x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-RPC(2)	40W	1188x63x65						
OG-LED224-RPC(2)	48W	1188x63x65						
OG-LED230-RPC(2)	60W	1474x63x65						
OG-LED230-RPC(2)	60W	1799x63x65						
OG-LED240-RPC(2)	80W	1799x63x65						
OG-LED240-RPC(2)	80W	2369x63x65						
OG-LED248-RPC(2)	96W	2369x63x65						
OG-LED260-RPC(2)	120W	2369x63x65						

OGJG LIGHTING

Suspended Mounted Series
 吊装式办公照明支架系列




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Emergency battery back up
- ON/OFF Switch / Pull chain switch
- Outlet socket
- USB socket
- Color:White,Silver,Black

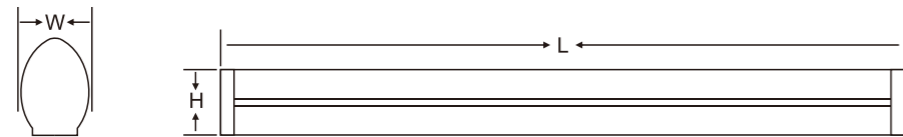

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-HB(2)	10W+10W	591x89x131	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED215-HB(2)	15W+15W	916x89x131						
OG-LED220-HB(2)	20W+20W	1201x89x131						
OG-LED230-HB(2)	30W+30W	1487x89x131						
OG-LED240-HB(2)	40W+40W	1807x89x131						
OG-LED250-HB(2)	50W+50W	2375x89x131						

OGJG LIGHTING

Suspended Mounted Series
 吊装式办公照明支架系列




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-NBPC	20W	615x120x40	100-277V 120-347V 220-240V	3000K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-NBPC-2	40W	615x120x40						
OG-LED220-NBPC	40W	1225x120x40						
OG-LED 230-NBPC-4	60W	1225x120x40						
OG-LED225-NBPC	50W	1511x120x40						
OG-LED230-NBPC	60W	1511x120x40						
OG-LED245-NBPC	90W	1511x120x40						
OG-LED250-NBPC	100W	1511x120x40						
OG-LED 240-NBPC	80W	2394x120x40						
OG-LED260-NBPC	120W	2394x120x40						

OGJG LIGHTING

Suspended Mounted Series
 吊装式办公照明支架系列




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

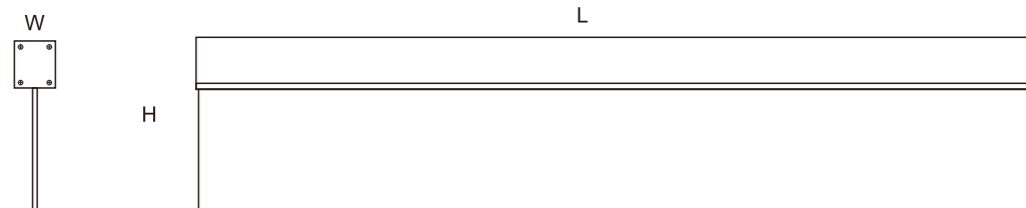

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED20-EPC	20W	574x49x250	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED30-EPC	30W	1184x49x250	120-347V	4000K				
OG-LED40-EPC	40W	1470x49x250	220-240V	5000K				
				6500K	CRI>90	140Lm/W		

OGJG LIGHTING

Suspended Mounted Series
 吊装式办公照明支架系列




FEATURES:

- Aluminum Body Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-NYPC	20W	672x124x63	100-277V 120-347V 220-240V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-NYPC-2	40W	672x124x63						
OG-LED220-NYPC	40W	1282x124x63						
OG-LED320-NYPC	60W	1282x124x63		4000K				
OG-LED330-NYPC	90W	1282x124x63						
OG-LED225-NYPC	50W	1568x124x63		5000K	CRI>90	140Lm/W		
OG-LED230-NYPC	60W	1568x124x63						
OG-LED245-NYPC	90W	1568x124x63		6500K				
OG-LED250-NYPC	100W	1568x124x63						
OG-LED420-NYPC	80W	2452x124x63						
OG-LED620-NYPC	120W	2452x124x63						

OGJG LIGHTING

Suspended Mounted Series 吊装式办公照明支架系列




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-WPC	20W	626x99x75	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-WPC-2	40W	626x99x75						
OG-LED220-WPC	40W	1236x99x75						
OG-LED320-WPC	60W	1236x99x75						
OG-LED240-WPC	80W	1236x99x75						
OG-LED340-WPC	120W	1236x99x75						
OG-LED225-WPC	50W	1522x99x75						
OG-LED230-WPC	60W	1522x99x75						
OG-LED250-WPC	100W	1522x99x75						
OG-LED260-WPC	120W	1522x99x75						
OG-LED350-WPC	150W	1522x99x75						
OG-LED360-WPC	180W	1522x99x75						
OG-LED240-WPC-8	80W	2406x99x75						
OG-LED340-WPC-8	120W	2406x99x75						
OG-LED440-WPC	160W	2406x99x75						
OG-LED640-WPC	240W	2406x99x75						

OGJG LIGHTING

Suspended Mounted Series 吊装式办公照明支架系列




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color:White,Silver,Black

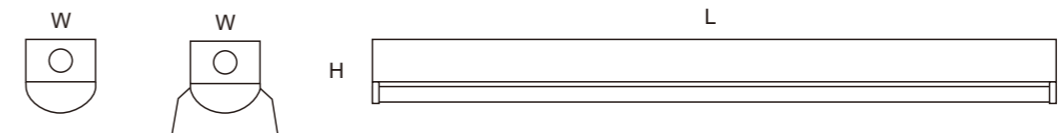

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-HYPC	20W	577x71x83 / 577x128x112	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-HYPC	40W	1187x71x83 / 1187x128x112	120-347V	4000K		140Lm/W		
OG-LED230-HYPC	60W	1501x71x83 / 1501x128x112	220-240V	5000K 6500K		140Lm/W		

OGJG LIGHTING

Suspended Mounted Series 吊装式办公照明支架系列




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

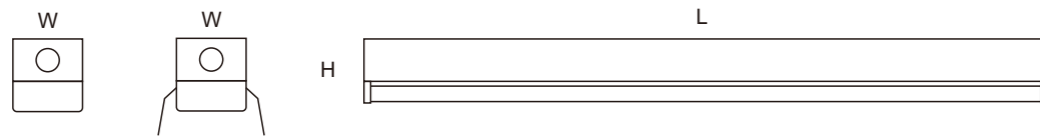

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-HFPC	20W	605x71x92 / 605x128x112	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-HFPC	40W	1215x71x92 / 1215x128x112	120-347V	4000K				
OG-LED230-HFPC	60W	1501x71x92 / 1501x128x112	220-240V	5000K 6500K	CRI>90	140Lm/W		






FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

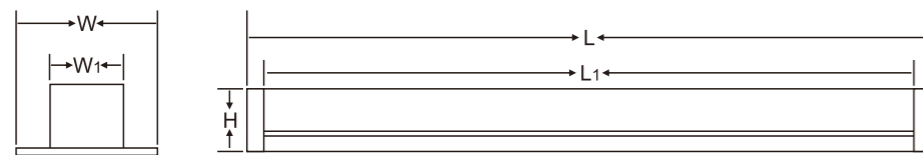

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-RPC	20W	599x86x66	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED20-RPC	20W	1209x86x66						
OG-LED220-RPC	40W	1209x86x66						
OG-LED224-RPC	48W	1209x86x66						
OG-LED230-RPC	60W	1495x86x66						
OG-LED230-RPC	60W	1820x86x66						
OG-LED240-RPC	80W	1820x86x66						
OG-LED240-RPC	80W	2390x86x66						
OG-LED248-RPC	96W	2390x86x66						
OG-LED260-RPC	120W	2390x86x66						






FEATURES:

- PC housing and cover
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP66

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor

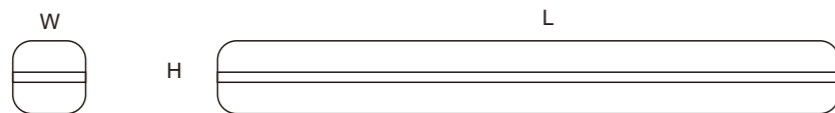

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED10-SF	10W	618x81x74	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED20-SF	20W	1215x81x74	120-347V	4000K	CRI>90	140Lm/W		
OG-LED30-SF	30W	1515x81x74	220-240V	5000K 6500K				




FEATURES:

- PC housing and PC cover
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP66

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up

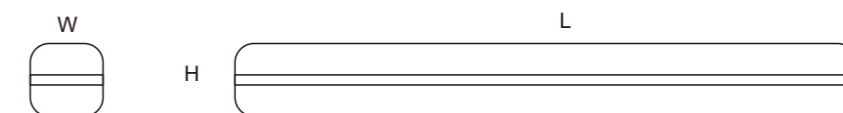

MODEL NO.	WATTAGE	DIMENSION WIDE VERSION L * W * H(mm)	DIMENSION SLIM VERSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-SF	20W	618x116x74	618x81x74	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-SF-2	40W	618x116x74	618x81x74						
OG-LED220-SF	40W	1215x116x74	1215x81x74						
OG-LED230-SF	60W	1215x116x74	1215x81x74						
OG-LED225-SF	50W	1515x116x74	1515x81x74						
OG-LED230-SF-5	60W	1515x116x74	1515x81x74						




FEATURES:


- PC housing and PC cover
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP66

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up

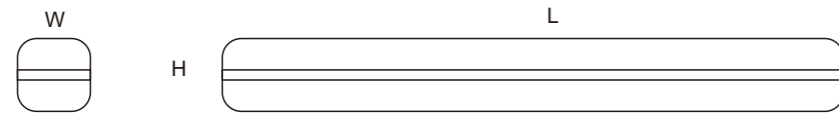

MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED410-SF	40W	664x140x90	100-277V 120-347V 220-240V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED415-SF	60W	664x140x90		4000K				
OG-LED420-SF	80W	1274x140x90		5000K				
OG-LED430-SF	100W	1574x140x90		6500K				

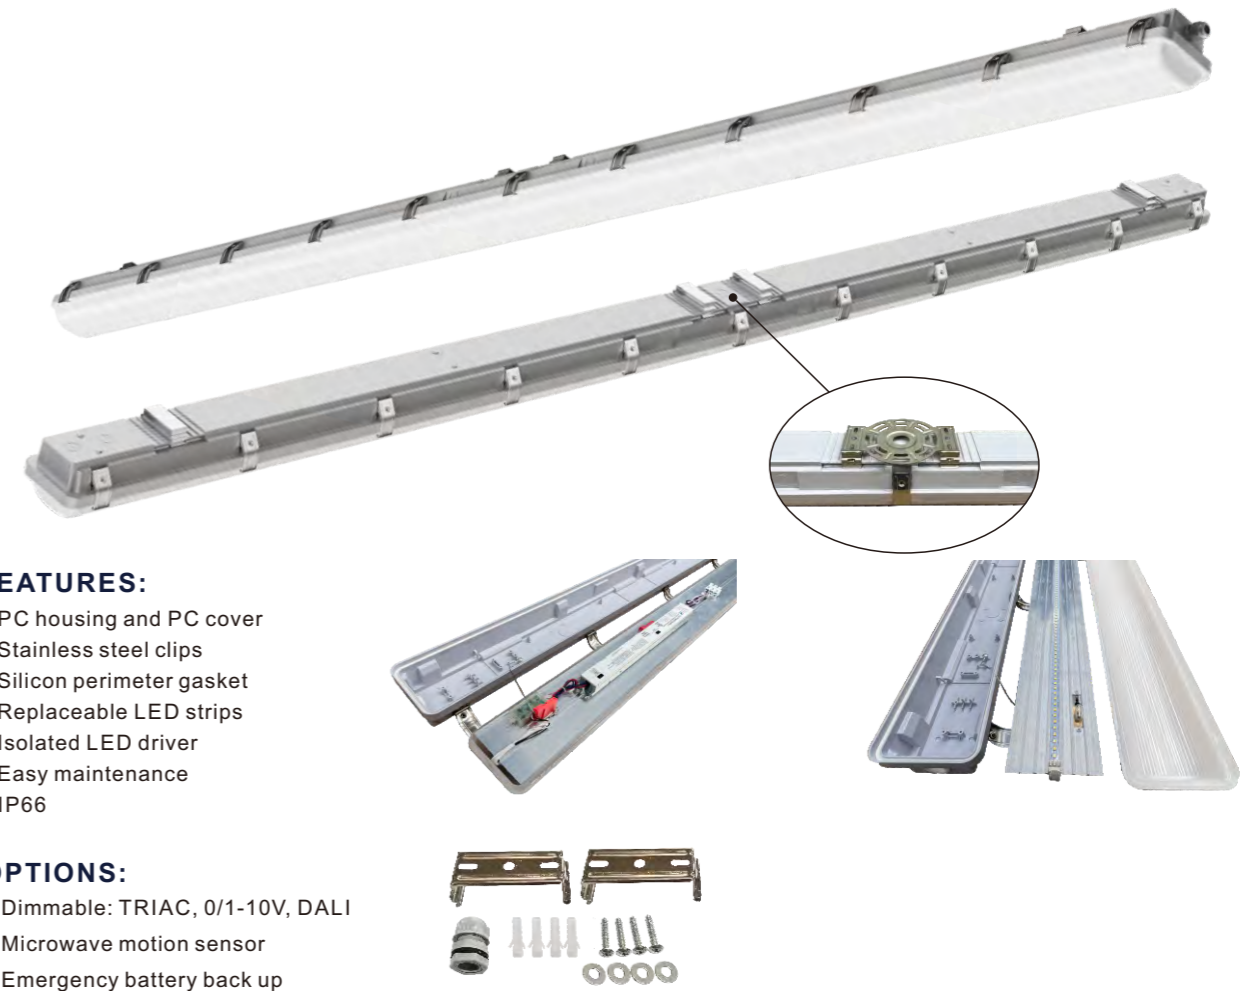


FEATURES:

- PC housing and PC cover
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP66

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up

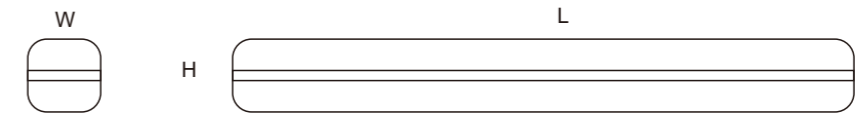

MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-SF(L)	20W	650x120x95	100-277V 120-347V 220-240V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-SF(L)	40W	1250x120x95		4000K				
OG-LED430-SF(L)	80~120W	2450x120x95		5000K 6500K				




FEATURES:

- PC housing and PC cover
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP66

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up

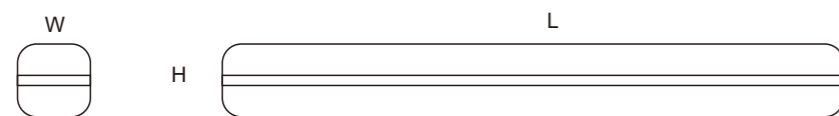

MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-SF(S)	20W	660x100x90	100-277V 120-347V 220-240V	3000K	CRI>83	115Lm/W	120°	5 years
OG-LED220-SF(S)	40W	1260x100x90		4000K				
OG-LED225-SF(S)	50W	1560x100x90		5000K				
OG-LED420-SF(S)	80~100W	2450x100x90		6500K				




FEATURES:

- Stretching Aluminum Body
- Tempered Glass Lens
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP67

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up

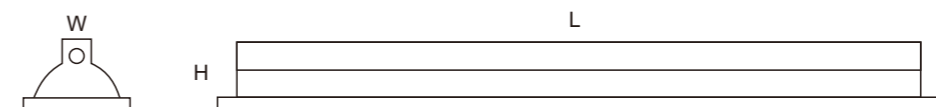

MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-X	20W	630x115x79	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83	115Lm/W	120°	5 years
OG-LED220-X	40W	1230x115x79						
OG-LED230-X	60W	1230x115x79						
OG-LED225-X	50W	1530x115x79						
OG-LED230-X-5	60W	1530x115x79						




FEATURES:

- Stainless steel housing
- Tempered Glass Lens
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP65

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up

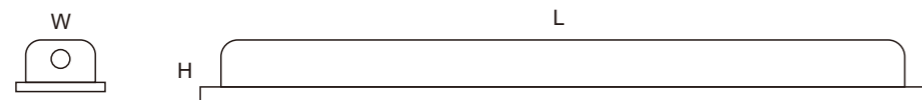

MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED210-GSF	20W	710x140x97	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED220-GSF	40W	1310x140x97						
OG-LED230-GSF	60W	1310x140x97						
OG-LED225-GSF	50W	1610x140x97						
OG-LED230-GSF	60W	1610x140x97						




FEATURES:

- Cold rolled steel housing
- Stainless steel frame
- Aluminum heat sink
- Acrylic cover
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED220-J	10W	618x81x74	100-277V 120-347V	3000K 4000K	CRI>83	115Lm/W	120°	5 years
OG-LED230-J	20W	1215x81x74	220-240V	5000K 6500K	CRI>90	140Lm/W		



- FEATURES:**
- PC body, PC cover
 - Isolated LED driver
 - Epistar 2835 LED chips
 - Easy maintenance
 - IP65

- OPTIONS:**
- Dimmable: TRIAC, 0/1-10V, DALI
 - Microwave motion sensor
 - Emergency battery back up




MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-SC20	20W	320x320x65	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-SC30	30W	320x320x65	120-347V	4000K	CRI>90	140Lm/W		
OG-SC40	40W	320x320x65	220-240V	5000K	6500K	140Lm/W		



- FEATURES:**
- PC body, PC cover
 - Isolated LED driver
 - Epistar 2835 LED chips
 - Easy maintenance
 - IP65

- OPTIONS:**
- Dimmable: TRIAC, 0/1-10V, DALI
 - Microwave motion sensor
 - Emergency battery back up

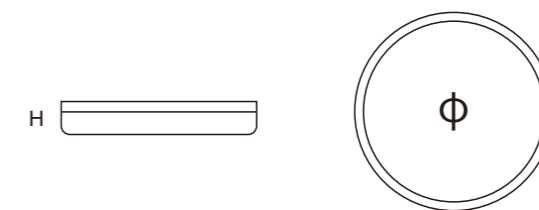

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-CC20	20W	φ320x64	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
OG-CC30	30W	φ320x64	120-347V	4000K	CRI>90	140Lm/W		
OG-CC40	40W	φ320x64	220-240V	5000K	6500K	140Lm/W		



OGJG LIGHTING

Industrial High Bay Series
工业照明灯盘系列




FEATURES:

- 0.8mm steel housing
- 1.2mm aluminum heatsink
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black

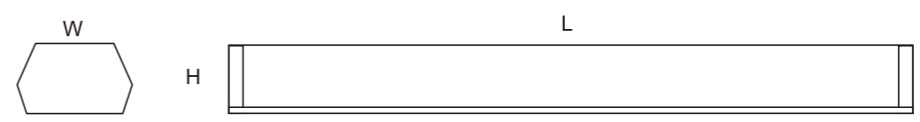

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-PLD-420	80W	615x285x100	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-PLD-620	120W	615x410x100						
OG-PLD-420	80W	1225x285x100						
OG-PLD-430	120W	1225x285x100						
OG-PLD-440	160W	1225x285x100						
OG-PLD-450	200W	1505x285x100						
OG-PLD-620	120W	1225x410x100						
OG-PLD-630	180W	1225x410x100						
OG-PLD-640	240W	1225x410x100						
OG-PLD-650	300W	1505x410x100						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black

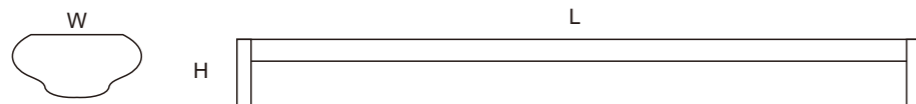

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED220-BG	40W	1210x253x85	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED320-BG	60W	1210x253x85						
OG-LED420-BG	80W	1210x253x85						
OG-LED340-BG	120W	1210x253x85						
OG-LED440-BG	160W	1210x253x85						
OG-LED540-BG	200W	1210x253x85						
OG-LED225-BG	50W	1496x253x85						
OG-LED230-BG	60W	1496x253x85						
OG-LED425-BG	100W	1496x253x85						
OG-LED430-BG	120W	1496x253x85						
OG-LED540-BG	200W	1496x253x85						
OG-LED640-BG	240W	1496x253x85						
OG-LED240-BG	80W	2380x253x85						
OG-LED260-BG	120W	2380x253x85						
OG-LED360-BG	180W	2380x253x85						
OG-LED460-BG	240W	2380x253x85						




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black




MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
OG-LED220-WB	40W	1225x175x73	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
OG-LED320-WB	60W	1225x175x73						
OG-LED240-WB	80W	1225x175x73						
OG-LED330-WB	90W	1225x175x73						
OG-LED340-WB	120W	1225x175x73						
OG-LED225-WB	50W	1511x175x73						
OG-LED230-WB	60W	1511x175x73						
OG-LED250-WB	100W	1511x175x73						
OG-LED260-WB	120W	1511x175x73						
OG-LED330-WB-5	90W	1511x175x73						
OG-LED350-WB	150W	1511x175x73						
OG-LED360-WB	180W	1511x175x73						



FEATURES:

- Flicker-free, flicker coefficient < 1%
- Both non-dimmable version (YB) and dimmable version(YA) are available, the YA is of 0/1-10V, PWM and resistance dimming and the dimming range is 0-100%; The light can be dimmed off without cutting of the AC power.
- Efficiency 95%
- The 12V cable is reserved for connecting the sensors, zigbee module, DALI module, etc. to realize the smart control.
- Potentiometer is equipped on top of the LEDdriver to adjust the output current/power of the finished high bay;
- Surge protection: L-N 4KV, L/N-GND 4KV;

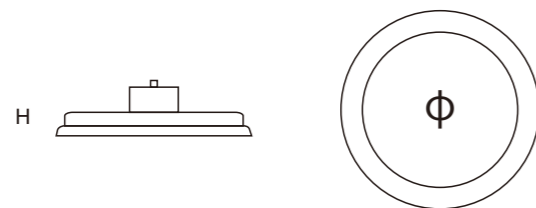

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	MATERIAL	WARRANTY
OG-UFO-120	50-120W	φ270x114	220-240V	3000K	CRI>73	140Lm/W	120°	Aluminum Die Casting	5 years
OG-UFO-150	80-150W	φ310x119		4000K	CRI>83	180Lm/W			
OG-UFO-200	130-200W	φ360x131		5000K 6500K	CRI>90	180Lm/W			