



Interactive Flat Panel

Android 14.0

Interactive Panel is an all-in-one smart board supporting Android and Windows operating system, widely used in education and business to enhance learning and collaboration, allowing for more dynamic and engaging presentations.

With popular sizes 65"75"86"98"110", it adopts infrared touch and zero-gap bonding technology , enhance the writing accuracy and faster respond that make a better user experience.



Official Website

4K

4K Original Panel

Zero-bonding makes writing more accurate, with A grade 4K touch panel.



Super Operation

Android 14.0, Cortex- A73*4+ A53*4, Octa-core, 2.2GHz



Wireless Screen Share

Wireless screen share up to 9 devices(IOS,Android, Windows).



OTA Update

Providing OTA firmware and software feature updates.



Slide Lock Design

Slide lockable design to protect I/O ports, dust-proof and waterproof.



Multiple User Logins

It supports 1 manage user and 4 ordinary users, to easily enter to different subject user space when the system is on.

Multi Users & Convenient Presentation

Smart writing interactive whiteboard supports 20/50 points finger touch, with easy annotation and gesture eraser.




0.5 mm
Accuracy



0.006 S
Response speed



Gesture
Eraser


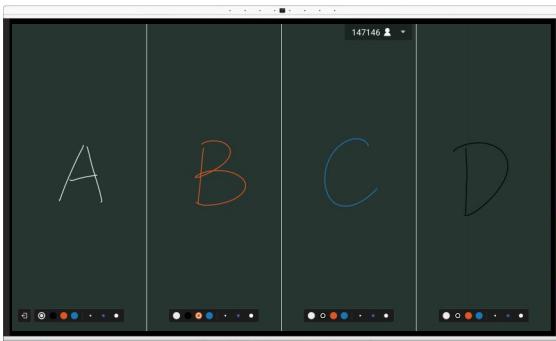


Multi Screen Writing

It supports split screen writing, two screen, three screen and four screen options for writing in different color simultaneously.

Multi Tools

Multifunctional and popular tools included in the whiteboard software, eg. insert pictures, chart,math tool, mind map, vote etc...

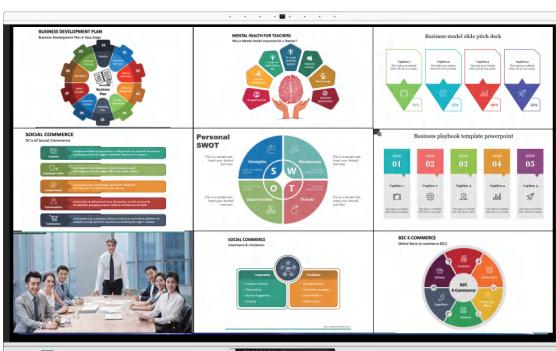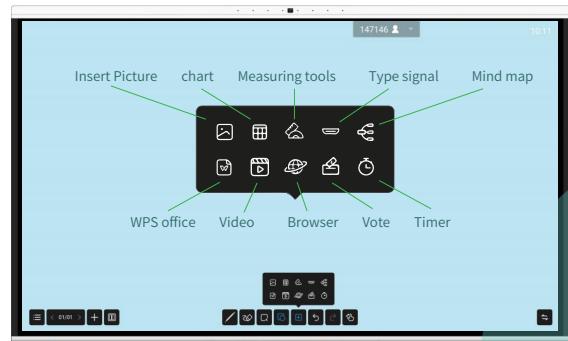

Wireless Screen Share

9 users screen share simultaneously supported. It supports to share local screen to selected members in group, also supports reverse control of local screen and annotation.



General Technical Parameters

| | | | |
|------------------------|---|---|--|
| LCD Panel | Screen Size | 65" | |
| | Screen Type | DLED | |
| | Resolution | 3840(H)×2160(V) (UHD) | |
| | Color | 10 bit 1.07B | |
| | Active Size | 1428.48*803.52mm | |
| | Brightness | 350cd/m2 | |
| | Contrast | 4000:1 (according to panel brand) | |
| | Viewing Angle | 178° | |
| | AG Glass | Tempered explosion-proof glass | |
| Electrical performance | Backlight Lifetime | >60000 hours | |
| | Max Power | ≤250W | |
| | Standby Power | ≤0.5W | |
| Touch | Voltage | 110-240V(AC), 50/60Hz | |
| | Touch Technology | IR touch; 20 points for Android and 40 points for Windows; HIB Free drive | |
| | Touch Items | Finger, Pen, any opaque objects | |
| | Response Speed | ≤ 5ms | |
| System | Operation System | Support Windows, Android, Mac OS, Linux | |
| | Processor | Android 14.0; Lango RK3576 Chips | |
| Processor | CPU: Cortex-A73+Cortex-A53, Octa-core, 2.2GHz ; GPU:Arm Mali-G52 MP8 (8EE) | | |
| Storage | RAM 8GB, ROM 128G | | |
| Connection | LAN/WiFi 2.4G+5G,WIFI 6 , BT5.2 | | |
| Speakers | Power | 20W*2 / 8Ω | |
| Working Environment | Working Temperature | 0°C ~ 40°C | |
| | Storage Temperature | - 20°C ~ 60°C | |
| | Working Humidity | 10%-90% non-condensing | |
| Accessories | Power cable; Remote control; Touch pen; QC&Warranty card;Wall brackets; HDMI cable,USB Touch cable, mobile stand | | |
| Camera | In-built camera, 48M pixels; 4K resolution supported; 8-array microphone; AI function with auto voice tracking | | |
| I/O Interfaces | Input Ports: HDMI IN,RS232,USB2.0,Touch USB, RJ45,DP,Type-C,TF,OPS Slot Output Ports: COAX, HDMI- Out,RJ45-out Front Ports : HDMI-in,USB-C, Touch USB, USB 3.0 | | |
| Featured Apps | 4K Whiteboard, Screen Share, Split Screen, Browser, PlayStore, Screen Lock, Annotation, FileTransfer, FileBrowser, Calender, Welcome Page, ScreenShot, Screen Record, Vote, AI Tool ... | | |
| Applications | Bundle with interactive teaching application with AI calculation & convert tool | | |

OPS for Windows System (Optional)

| | |
|------------------|---|
| OPS Type | OPS-C ; 80-Pin |
| Dimension | 195*180*42mm |
| CPU | Intel I5-12450H |
| Memory | 8GB DDR4 |
| Storage | 128GB SSD + 1 TB HDD |
| Operating System | Windows 11 pro 64-bit License(Factory Loaded) |

Product Dimension

| | |
|-------------------|--------------------|
| Items / Model No. | SC-65LED |
| Packing dimension | 1600* 200*1014mm |
| Product dimension | 1494.3* 86*903.5mm |
| Wall mount VESA | 500*400mm |
| Weight(N.W/G.W) | 35.6kg/44kg |