



IRON - Adjustable Focus LED Module Track Spotlight-Adj355°/Tilt90°




※ Features:

- ◆ IP Rate: IP20;
- ◆ Working Temp: -20°C~+45°C;
- ◆ Lumens: Depends on the chip CRI, decorative cup color, etc..
- ◆ Lifetime: 50,000Hrs;
- ◆ Light source : Bridgelux;
- ◆ Materials: Aluminum;
- ◆ With CE, RoHs;
- ◆ 5 years' warranty;
- ◆ Function: ON/OFF /DALI /Traic/ 0-10V...

※ Application:

Featuring a modular design and multiple optical configurations, this track light delivers precise direct illumination and high brightness, perfectly covering diverse scenarios such as commercial spaces, offices, and exhibition areas.

- ◆ Clothing Store, Hotel, Lobby, Exclusive shop, Exhibition hall;
- ◆ Restaurant, Executive lounge, Living room, Museum;
- ◆ Meeting room, Multi-function hall;
- ◆ Villa, Luxury, Boutique, shop, Luxury Office areas;

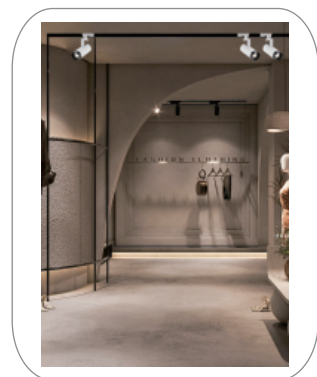


✧ Drawing


unit:mm




Z010101-30




Z010101-35




Z010102-30




Z010102A-35




Z010102B-35




Z010103A-35



Z010103B-35




Z010104A-35

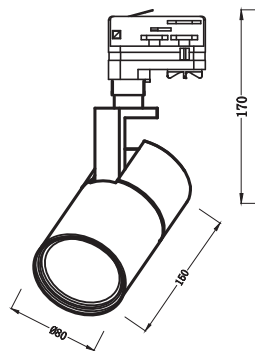





Z010104B-35

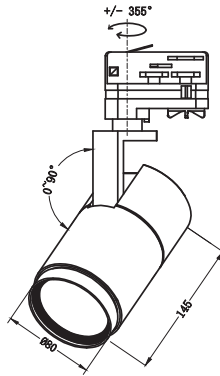


Z010105-30

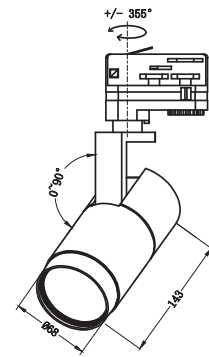

Z010106-30

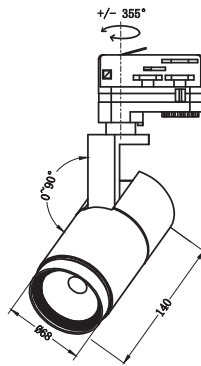

Z010107-20



※Parameters

CCT: 3000K-4000K-5000K-6000K



COB

CRI
>90

CRI
>95

Item No	Dimension (mm)	Power	Lumen $\pm 10\%$	Beam Angle
Z010101-30	Φ68*246	30W	2400lm	15-60°
Z010101-35	Φ80*246	35W	2800lm	15-60°
Z010102-30	Φ68*150	30W	2400lm	15-60°
Z010102A-35	Φ80*156	35W	2800lm	15-60°
Z010102B-35	Φ80*156	35W	2800lm	15-60°
Z010103A-35	Φ80*145	35W	5250lm	15/24/36/50°
Z010103B-35	Φ80*145	35W	5250lm	15/24/36/50°
Z010104A-35	Φ80*150	35W	5250lm	15/24/36/50°

Item No	Dimension (mm)	Power	Lumen $\pm 10\%$	Beam Angle
Z010104B-35	Φ80*145	35W	5250lm	15/24/36/50°
Z010105-30	Φ68*143	30W	4500lm	15/24/36/50°
Z010106-30	Φ68*140	30W	4500lm	15/24/36/50°
Z010107-20	Φ62*102	20W	1600lm	15/24/36/50°

※Color Option

Body color:Black/White...

※Package

Part No.	QTY/ Carton	Master Box(cm)	N.W.(KG)	G.W.(KG).
Z010101-30	16	L45*W45*H45	15.8	17.3
Z010101-35	16	L45*W45*H45	15.6	17.1
Z010102-30	16	L42*W42*H42	15.5	17
Z010102A-35	16	L42*W42*H42	15	16.8
Z010102B-35	20	L52*W39*H39	13.6	15
Z010103A-35	16	L42*W42*H42	12.8	14
Z010103B-35	16	L42*W42*H42	13	14.1
Z010104A-35	16	L42*W42*H42	14.5	15.5
Z010104B-35	16	L42*W42*H42	14	15
Z010105-30	20	L52*W39*H39	13.6	15
Z010106-30	20	L52*W39*H39	13.6	15
Z010107-20	20	L52*W39*H39	11.8	12.8

※Application scenario



※installation information

Installation Instruction	
FLG-1	FLG-2
1. Before installation: Ensure the power is turned off. Secure the track to the ceiling, then connect the lamp wires to the pre-wired cables.	2. Install the junction box.
FLG-3	FLG-4
3. Clip the lamp body onto the track tightly, then fasten the buckle switch.	4. Installation completed. Then turn on the switch to test.