



TRACK 24V SYSTEM

5mm ULTRA-THIN TRACK

Wide product collection. One system,
multiple lighting solutions.




5mm ULTRA-THIN TRACK

- ※ The product is a low voltage 24V mini system provides impressive lighting performance and meets all complex display lighting requirements.
- ※ The perfect solution for illuminating in gallery exhibition and residential. In addition, various accessories are available on the track system for easier installation.
- ※ Mini spot light with tiny dimension aim to innovate the display lighting. Available in mini track system, recessed mounting and surface mounting.
- ※ Spot light optics with narrow, medium and wide options. Zoom 12-50° to provides a balanced and attractive light. Linear light available in different length from 300mm up to 600mm.



Low Voltage miniature spot

The smallest track has higher optical power
and the same ultra compact size.




LED  24V IP20 OSRAM >Ra90 >50.000 h 20° 30°

Z060301-1

Power	1W
Material	Aluminum
Dimension (mm)	57*12.5*38.5mm
Voltage	DC24V
Finishing	White/ Black
CCT	3000K/4000K

 WIFI Dimmer Control 1~10V 1~10V Dimmer Control DALI DALI Dimmer Control




LED  24V IP20 OSRAM >Ra90 >50.000 h 15° 22° 36°

Z060301-2

Power	2W
Material	Aluminum
Dimension (mm)	57*25.4*72.3mm
Voltage	DC24V
Finishing	White/Black
CCT	3000K/4000K

 WIFI Dimmer Control 1~10V 1~10V Dimmer Control DALI DALI Dimmer Control




LED  24V IP20 OSRAM >Ra90 >50.000 h 15° 22° 36°

Z060301-5

Power	5W
Material	Aluminum
Dimension (mm)	57*35*81.3mm
Voltage	DC24V
Finishing	White/Black
CCT	3000K/4000K

 WIFI Dimmer Control 1~10V 1~10V Dimmer Control DALI DALI Dimmer Control




LED  24V IP20 OSRAM >Ra90 >50.000 h 20°-45° (zoom)

Z060302-7

Power	7W
Material	Aluminum
Dimension (mm)	D40.4*145mm
Voltage	DC24V
Finishing	White/Black
CCT	3000K/4000K

 WIFI Dimmer Control 1~10V 1~10V Dimmer Control DALI DALI Dimmer Control




Z060303-7

Power	7W
Material	Aluminum+opal glass
Dimension (mm)	D80*H91mm
Voltage	DC24V
Finishing	White/ Black
CCT	3000K/4000K

LED  24V IP20 OSRAM >Ra90 >50,000 h 

 WIFI Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control




Z060304-10

Power	10W
Material	Silicone
Dimension (mm)	Diameter 16mm, Customized 1000mm The length can be customized to 3000mm
Voltage	DC24V
Finishing	White
CCT	3000K/4000K

LED  24V IP20 OSRAM >Ra90 >50,000 h 


 WIFI Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control



LED  24V IP20 OSRAM >Ra90 >50.000 h 24° 30°



LED  24V IP20 OSRAM >Ra90 >50.000 h 24° 30°



Z060305-5

Z060305-5


Power	5W
Material	Aluminum
Dimension (mm)	100*10.8*16.8mm
Voltage	DC24V
Finishing	White/ Black
CCT	3000K/4000K

 WIFI Dimmer Control 1~10V  1~10V Dimmer Control  DALI Dimmer Control

Z060305-10

Power	10W
Material	Aluminum
Dimension (mm)	192*10.8*25.7mm
Voltage	DC24V
Finishing	White/Black
CCT	3000K/4000K

 WIFI Dimmer Control 1~10V  1~10V Dimmer Control  DALI Dimmer Control




Z060305-10



LED  24V IP20 OSRAM >Ra90 >50.000 h 



LED  24V IP20 OSRAM >Ra90 >50.000 h 



Z060306-10

Z060306-10


Power	10W
Material	Aluminum
Dimension (mm)	300*10.8*16.8mm
Voltage	DC24V
Finishing	White/ Black
CCT	3000K/4000K

 WiFi Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control

Z060306-20

Power	20W
Material	Aluminum
Dimension (mm)	600*10.8*16.8mm
Voltage	DC24V
Finishing	White/Black
CCT	3000K/4000K

 WiFi Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control



Z060306-20



There is an optical angle on the led beads without passing through the secondary optics, reducing the loss of light efficiency and achieving high light efficiency lamps.




LED

24V

IP20

OSRAM >Ra90

>50,000 h




LED

24V

IP20

OSRAM >Ra90

>50,000 h



Z060307-10

Z060307-10

Power	10W
Material	Aluminum
Dimension (mm)	D105*H35mm
Voltage	DC24V
Finishing	White/ Black
CCT	3000K/4000K

WiFi Dimmer Control

1~10V Dimmer Control

DALI Dimmer Control


Z060308-15

Power	15W
Material	Aluminum
Dimension (mm)	D121*H30mm
Voltage	DC24V
Finishing	White/Black
CCT	3000K/4000K


WiFi Dimmer Control

1~10V Dimmer Control

DALI Dimmer Control

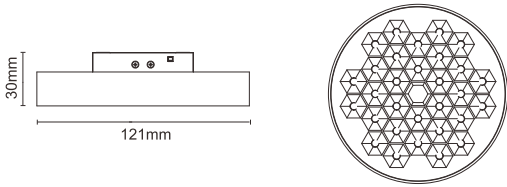


Z060308-15




LED  24V IP20 OSRAM >Ra90 >50.000 h 



LED  24V IP20 OSRAM >Ra90 >50.000 h 



Z060309-4



Z060309-8

Z060309-4

Power	4W
Material	Aluminum
Dimension (mm)	366.8*6.6*10.2mm
Voltage	DC24V
Finishing	White/ Black
CCT	3000K/4000K

 WIFI Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control

Z060309-8

Power	8W
Material	Aluminum
Dimension (mm)	666.8*6.6*10.2mm
Voltage	DC24V
Finishing	White/Black
CCT	3000K/4000K

 WIFI Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control



LED 24V IP20 OSRAM >Ra90 >50.000 h 110°



LED 24V IP20 OSRAM >Ra90 >50.000 h 110°



Z060310-6

Z060310-6

Power	6W
Material	Silicone
Dimension (mm)	10*10*500mm
Voltage	DC24V
Finishing	White
CCT	3000K/4000K

WIFI Dimmer Control 1~10V 1~10V Dimmer Control DALI DALI Dimmer Control

Z060310-12

Power	12W
Material	Silicone
Dimension (mm)	10*10*1000mm
Voltage	DC24V
Finishing	White
CCT	3000K/4000K

WIFI Dimmer Control 1~10V 1~10V Dimmer Control DALI DALI Dimmer Control



Z060310-12



LED  24V IP20 OSRAM >Ra90 >50.000 h 

Z060311-7

Power	7W
Material	Aluminum+opal glass
Dimension (mm)	D80*H108mm
Voltage	DC24V
Finishing	White/ Black
CCT	3000K/4000K

 WIFI Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control




LED  24V IP20 OSRAM >Ra90 >50.000 h 


Z060312-7

Power	7W
Material	Aluminum
Dimension (mm)	D300*H48.5mm
Voltage	DC24V
Finishing	White/Black
CCT	3000K/4000K

 WIFI Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control




Z060311-7




Z060321-7


24V MINI Track- surface

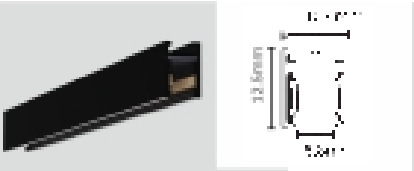

Track rail-A
Material: Aluminum profile+copper conductor
Color : Black
With cover and end cap.

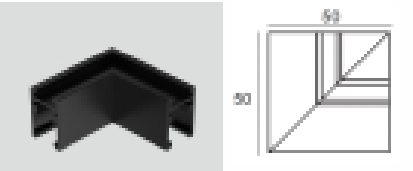

Connector-A-1Horizontal Angle Inner Corner Connector

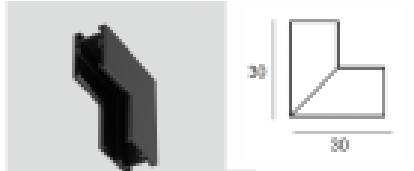


Connector-A-1Horizontal Angle 90° Corner Connector

24V MINI Track- double side/ suspended




Track rail-C(Up and down track)
Material: Aluminum profile+copper conductor
Color: Black
With cover and end cap.

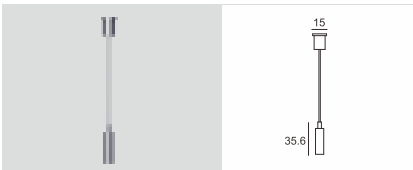


Pendant wire
Suspension kit for 24V MINI track double side, 1 pair 2pcs


24V MINI Track- recessed

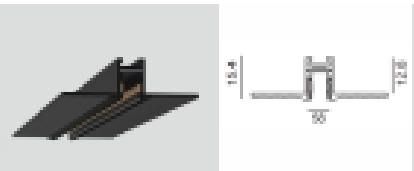


Track rail-B
Material : Aluminum profile+Copper conductor
Color : Black
With cover and end cap.

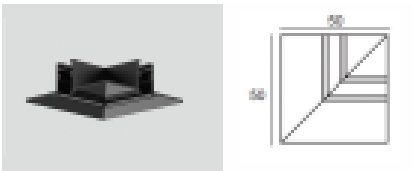

Connector-B-1Horizontal Angle Inner Corner Connector

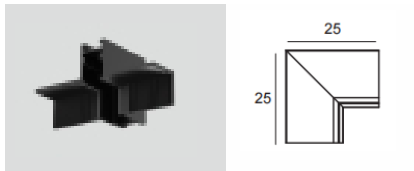


Connector-B-2Vertical Angle 90° Corner Connector

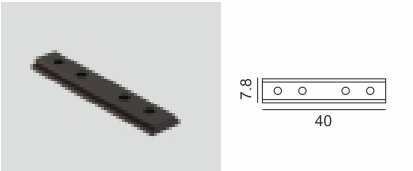


Connecting piece
Size : L: 40mm
W: 7.8mm



“I” connector
Size : L: 50mm
W: 10.2mm
H: 5.9mm

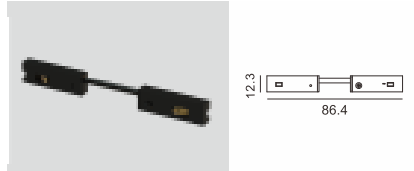

“U”connector
Size : L: 86.4mm
W: 10mm
H: 12.3mm

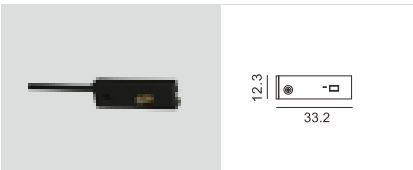


End feed-A
Size : L: 33.2mm
W: 10mm
H: 12.3mm
Cable: 20cm



End feed-C
Size : L: 33.2mm
W: 10mm
H: 12.3mm
Cable: 200cm



Track rail-D1
Material : Aluminum profile+Copper conductor
Color : Black
With cover and end cap
(included suspension kit)

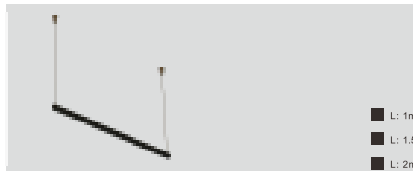

Track rail-D2
Material : Aluminum profile+Copper conductor
Color : Black
With cover and end cap
(included suspension kit)

Curve Track- surface



Track rail-E1
Material : Aluminum profile+Copper conductor
Color : Black
Size : R200, with 180°(half circle)




Track rail-E2
Material : Aluminum profile+Copper conductor
Color : Black
Size : R600, with 180°(half circle)




Track rail-E3
Material : Aluminum profile+Copper conductor
Color : Black
Size : R800, with 180°(half circle)

INSTALLATION


1

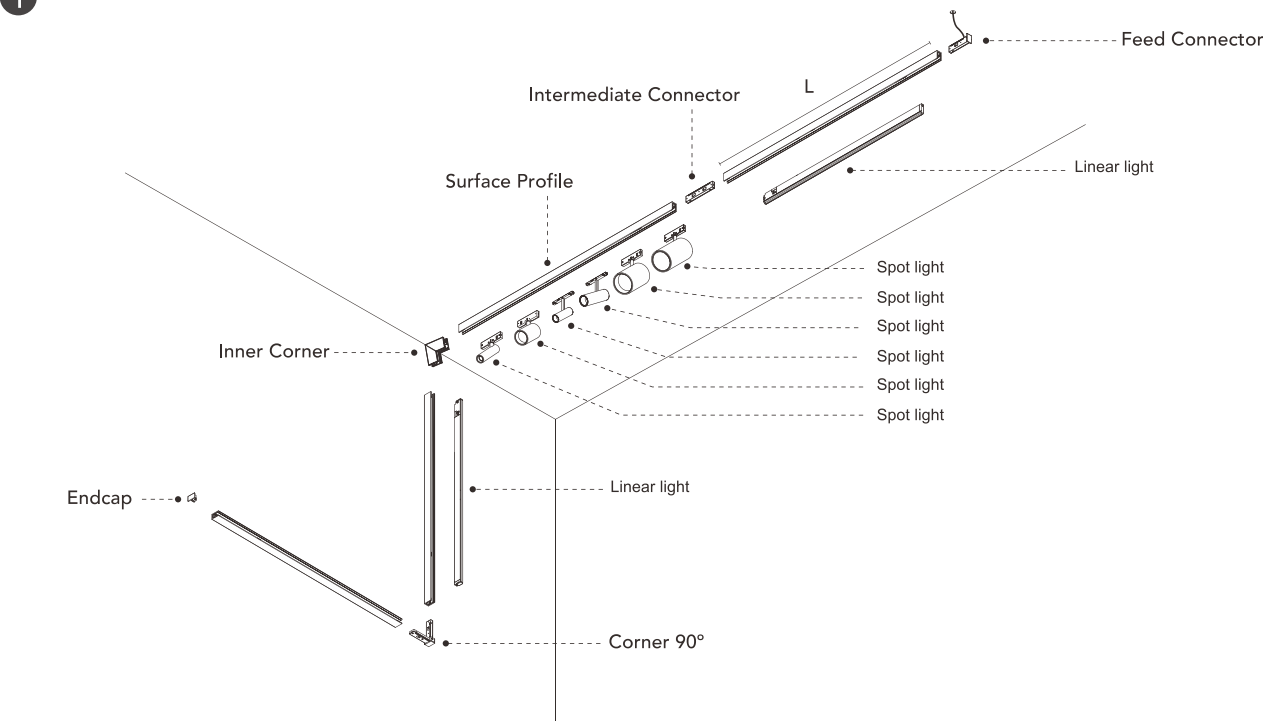

3

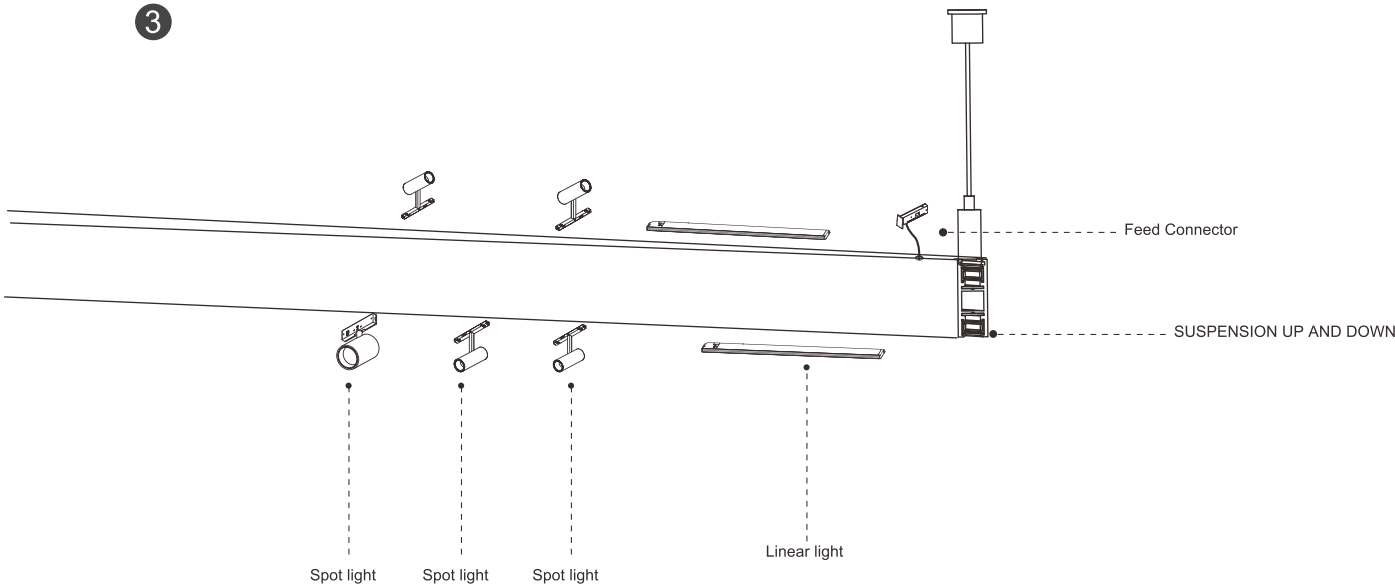

2

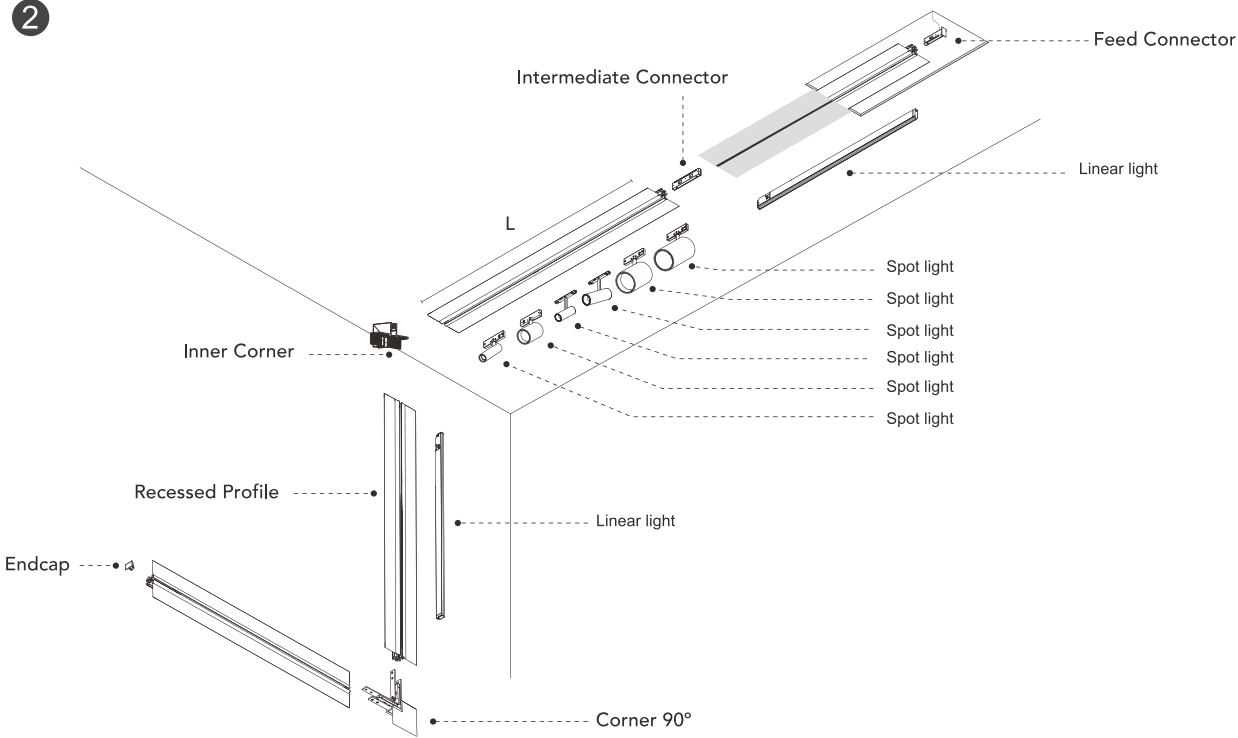

Luminaires cannot be located on Corners and Connectors

Design one of your own Light world

Smart Life with one click



天猫智能



小米智能



涂鸦智能



可控硅调光



智能调光调色



DALI智能



华为智能