



TRACK 48V SYSTEM

20mm ULTRA-THIN TRACK

Wide product collection. One system,
multiple lighting solutions.



BREAKING BOUNDARIES WITH ' THINNESS

Letting light become the invisible artist of space.

20mm Track lighting system.




LED 48V IP20 OSRAM >Ra90 >50.000 h 120°



LED 48V IP20 OSRAM >Ra90 >50.000 h 120°



LED 48V IP20 OSRAM >Ra90 >50.000 h 120°



Z060101-10

Power	10W
Material	Aluminum
Dimension (mm)	300*23*43mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

WIFI Dimmer Control 1~10V 1~10V Dimmer Control DALI DALI Dimmer Control

Z060101-15


Power	15W
Material	Aluminum
Dimension (mm)	450*23*43mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

WIFI Dimmer Control 1~10V 1~10V Dimmer Control DALI DALI Dimmer Control

Z060101-20


Power	20W
Material	Aluminum
Dimension (mm)	600*23*43mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

WIFI Dimmer Control 1~10V 1~10V Dimmer Control DALI DALI Dimmer Control



Strong Magnetic Fixation

Built-in powerful magnets with safety locks to prevent falling,
double protection




LED  48V IP20 OSRAM >Ra90 >50.000 h 15° 24° 36°

Z060102-6

Power	6W
Material	Aluminum
Dimension (mm)	136*23*43mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

 WiFi Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control




LED  48V IP20 OSRAM >Ra90 >50.000 h 15° 24° 36°

Z060102-12

Power	12W
Material	Aluminum
Dimension (mm)	220*23*43mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

 WiFi Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control




LED  48V IP20 OSRAM >Ra90 >50.000 h 15° 24° 36°

Z060102-18

Power	18W
Material	Aluminum
Dimension (mm)	330*23*43mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

 WiFi Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control



LED  48V IP20 SANAN >Ra90 >50.000 h 15° 24° 36°

Z060102-24

Power	24W
Material	Aluminum
Dimension (mm)	436*23*43mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

 WiFi Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control



LED  48V IP20 OSRAM>Ra90 >50.000 h 15° 24° 36°



LED  48V IP20 OSRAM>Ra90 >50.000 h 15° 24° 36°



LED  48V IP20 OSRAM >Ra90 >50.000 h 15° 24° 36°

Z060103-6

Power	6W
Material	Aluminum
Dimension (mm)	146*23*43mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

 WIFI Dimmer Control  1~10V 1~10V Dimmer Control  DALI DALI Dimmer Control

Z060103-12




Power	12W
Material	Aluminum
Dimension (mm)	220*23*43mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K


 WIFI Dimmer Control  1~10V 1~10V Dimmer Control  DALI DALI Dimmer Control

Z060103-18

Power	18W
Material	Aluminum
Dimension (mm)	330*23*43mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

 WIFI Dimmer Control  1~10V 1~10V Dimmer Control  DALI DALI Dimmer Control

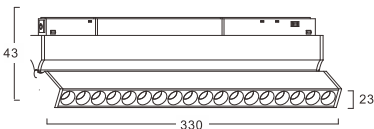




LED  48V IP20 BRIDGELUX> Ra90 >50.000 h 15° 24° 36°

Z060104-3

Power	3W
Material	Aluminum
Dimension (mm)	φ35*H80mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

 WiFi Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control




LED  48V IP20 BRIDGELUX> Ra90 >50.000 h 15° 24° 36°

Z060104-7

Power	7W
Material	Aluminum
Dimension (mm)	φ45*H100mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

 WiFi Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control




LED  48V IP20 BRIDGELUX> Ra90 >50.000 h 15° 24° 36°

Z060104-12

Power	12W
Material	Aluminum
Dimension (mm)	φ55*H115mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

 WiFi Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control



LED  48V IP20 BRIDGELUX> Ra90 >50.000 h 15° 24° 36°

Z060104-18

Power	18W
Material	Aluminum
Dimension (mm)	φ65*H135mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

 WiFi Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control



Z060105-10

Power	10W
Material	Aluminum
Dimension (mm)	φ45*H260mm
Voltage	DC48V
Finishing	Sandy Black/Sandy White
CCT	2700K/3000K/4000K/6000K

LED  48V IP20 BRIDGELUX> Ra90 >50.000 h 15° 24° 36°

 WIFI Dimmer Control  1~10V Dimmer Control  DALI Dimmer Control

Inside driver/End feed



Inside driver

Color: Black
Size : 225*22*38mm



Inside driver


Color: Black
Size : 305*22*38mm



End feed

Color: Black

Connector



"I"connector

Color: Black



"U"connector

Color: Black

48V Track rail-A



Track rail-A

Color: Black
Size : W27.5*H52.1*T2.0
1000mm



Connector-A-1
(Horizontal Angle)

Color: Black
Size : 100*100mm



Connector-A-2
(Vertical Angle)

Color: Black
Size : 100*100mm

48V Track rail-B



Track rail-B

Color: Black
Size : W64.3*H46.9*T2.0



connector-B-1
(Horizontal Angle)

Color: Black
Size : 100*100mm



connector-B-2
(Vertical Angle)

Color: Black
Size : 100*100mm

48V Track rail-D



Track rail-D

Color: Black
Size : W65*H46.9*T2.0



Connector-D-1
(Horizontal Angle)

Color: Black
Size : 100*100mm



ConnectorD-2
(Vertical Angle)


Color: Black
Size : 100*100mm

Accessory



Pendant wire

Color: Black
Size : 2m
2pcs



Pendant pole

Color: Black
Size : 500mm to 1000mm
1pcs

Design one of your ownLight world

Smart Life with one click



天猫智能



小米智能



涂鸦智能



可控硅调光



智能调光调色



DALI智能



华为智能