

2024 NEW PRODUCTS

Jiangmen Zerund Lighting Co.,Ltd.

Tel.: +86 750)3700 980

E-mail: info@zerundlighting.com

Add: No.43, Nange Xi Rd.,Hetang,
PengJiang, Jiangmen City,
Guangdong, P.R.C

www.zerundlighting.com



WhatsApp

LED
COMMERCIAL Lighting
Manufacturer

DESIGN THINKING


beauty. by press




Glamorous

Glamorous is specially tailored for jewelry shop, showcase cabinet, museum display cabinet etc. Through the adjustment combination of the lamp base and the magnetic track, you can easily display your products.




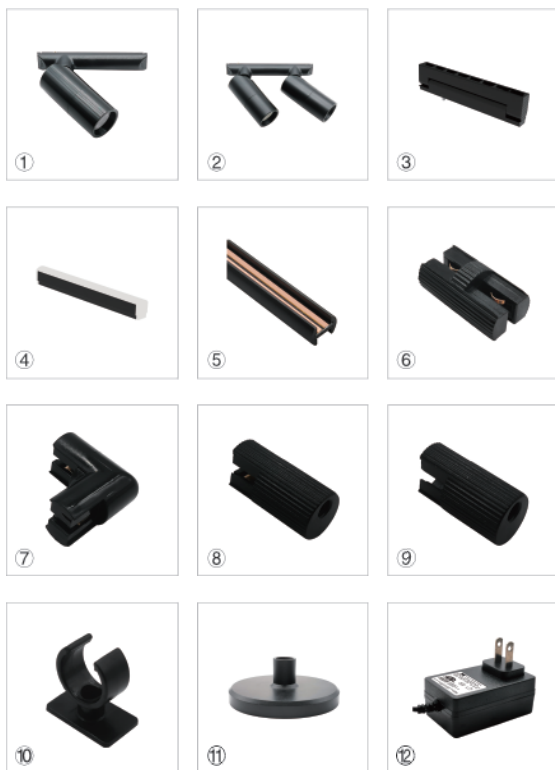

- ①. Z41001-1 ②. Z41001-2*1 ③. Z41002-1 ④. Z41003-1
 ⑤. Two-side track rail ⑥. □□ connector ⑦. □L□ connect
 ⑧. End feed ⑨. End cover ⑩. Fixed holder
 ⑪. Base ⑫. Adapter

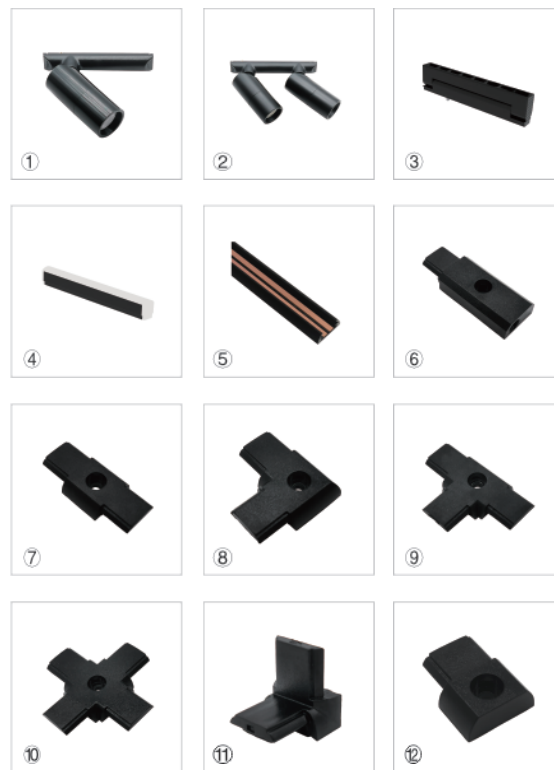

- ①. Z42001-1 ②. Z41001-2*1 ③. Z41002-1 ④. Z41003-1
 ⑤. TRACK RAIL SURFACE MOUNTED ⑥. End feed
 ⑦. □□ connector ⑧. □L□connector ⑨. □T□connectc
 ⑩. □X□connector ⑪. □7□connector ⑫. End cover

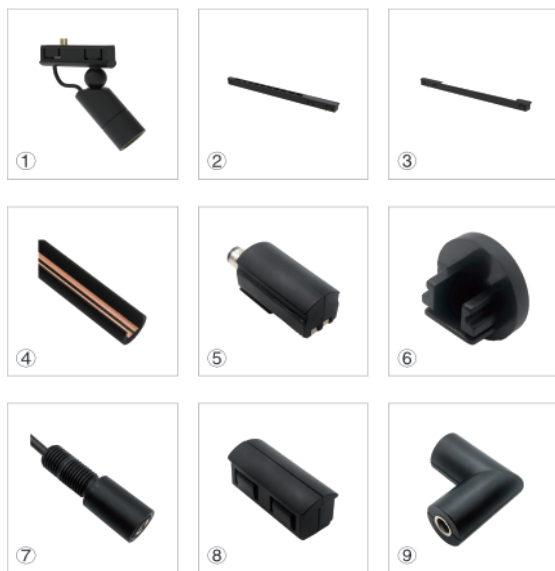


①. Z43001-1.5 ②. Z43002-1 ③. Z43003-1 ④. Roundness track rail
 ⑤. End feed ⑥. End cover ⑦. Power connector
 ⑧. □I□connector ⑨. □L□connector






Parameter

OSRAM3030,24V,1W
2700K,4000K,CRI > 90
IP20,Beam Angle24°




Parameter

OSRAM3030,24V,2W
2700K,4000K,CRI > 90
IP20,Beam Angle24°




Parameter

EPistar,24V,1.5W
2700K,4000K,CRI > 90
IP20,Beam Angle24°



Parameter

OSRAM2835,24V,1W
2700K,4000K,CRI > 90
IP20,Beam Angle24°



Parameter

OSRAM2835,24V,1W
2700K,4000K,CRI > 90
IP20,Beam Angle110°



Parameter


OSRAM2835,24V,1W/2W/3W
2700K,4000K,CRI > 90
IP20,Beam Angle24°



Parameter


EPistar,24V,1W/2W/3W
2700K,4000K,CRI > 90
IP20,Beam Angle110°



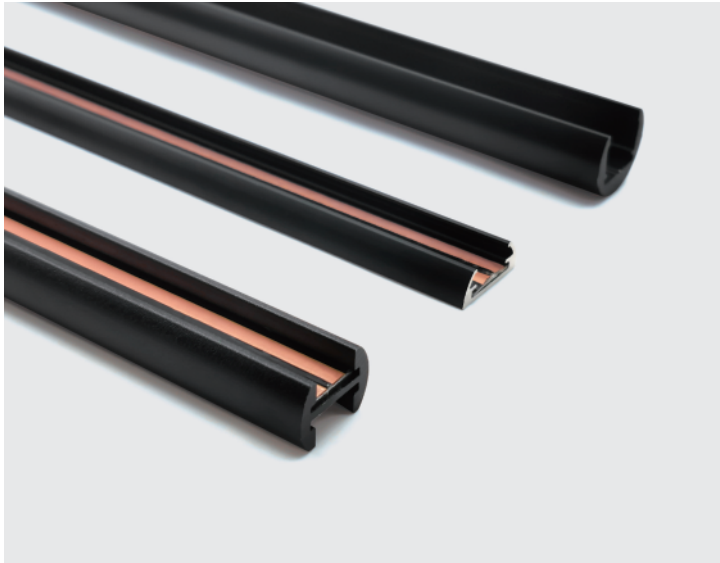



Freedom connector





I, L, T, X, 7 Connectors Provide absolute freedom of design in lighting planning-Geometric shapes and the fulfilment of different spatial requirements are easy to implement, The individual luminaires can also be seamlessly connected to each other and thus also provide with different functional areas with the ideal lighting concept.



Parameter

Alu.+Iron+Copper
24V, IP20

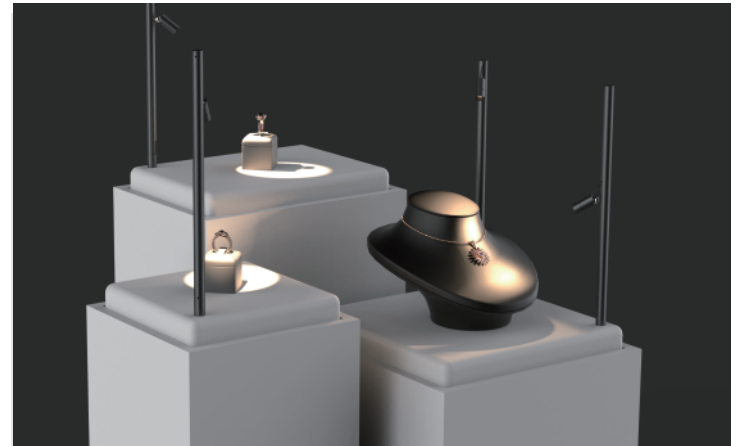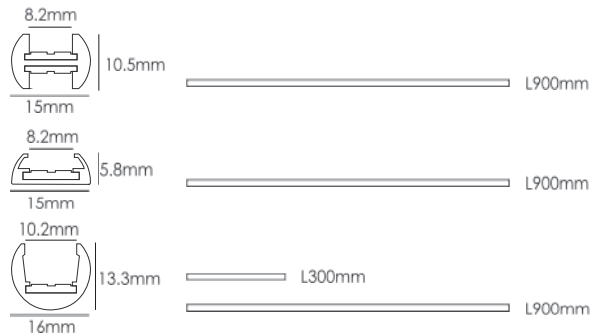



Lighting without limit

Second-generation system allows quick installation by connecting individual elements connectors and electrical in just a few steps.

More creativity Functional

The generation of third is a subtraction on the basis of the previous two, Hidden mounted in installation make sure the base invisible, The surface is treated with anodic oxidation to prevent rust. horizontal and vertical make it stand to more useful more convenient and efficient

