


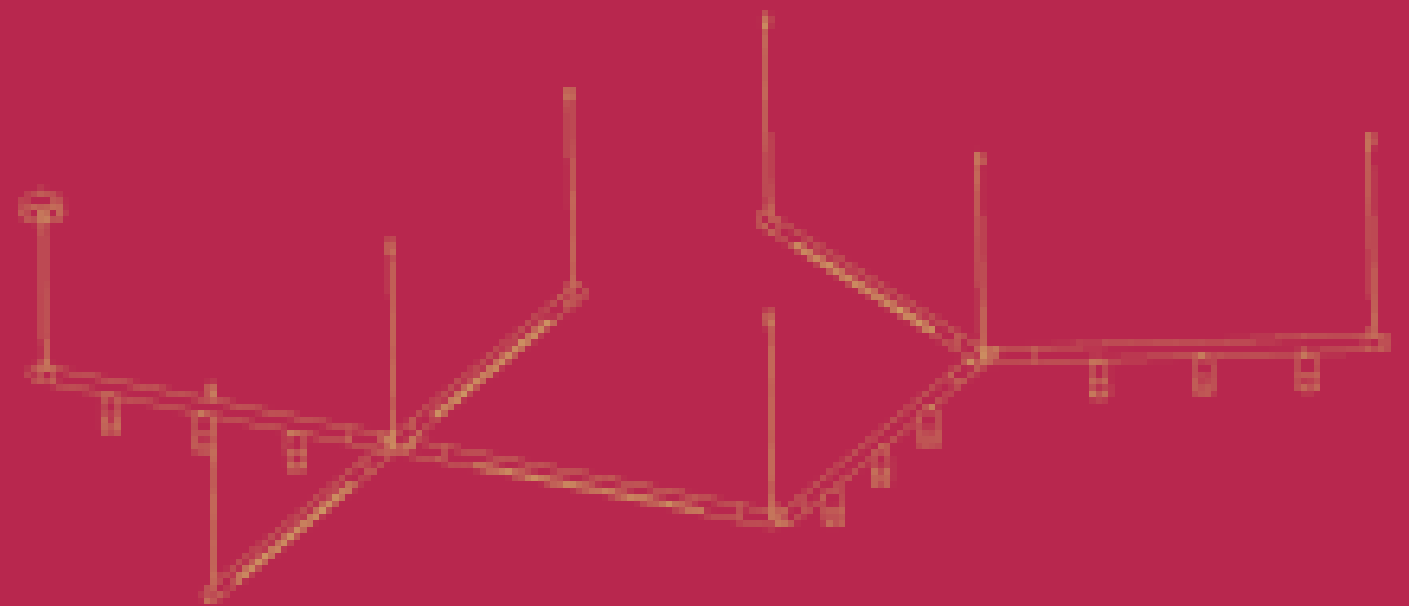

WhatsApp

2026

**Jiangmen Zerund Lighting Co.,Ltd.**

📍 Factory Add.:No.43 Nange West Road, Hetang town  
Pengjiang district,Jiangmen City, Guangdong, China

✉ Email:info@zerundlighting.com

☎ Tel.:(+86 750)3700 980

[www.zerundlighting.com](http://www.zerundlighting.com)





# Lunar


## **Freedom of design in lighting planning**

Wand series features modular free splicing with multiple connection methods, delivering a strong mechanical aesthetic. It supports flexible rotation to adjust light direction, enabling customized lighting solutions for any space.






- ①. Z060401-8/16/24/32W      ②. Z060402/Z060403-8/16/24/32W
- ③. Z060404-5/10/15W      ④. Ring Light
- ⑤. end cap      ⑥. “I”Connector
- ⑦. “V” Connector      ⑧. “Y” Connector
- ⑨. “X” Connector

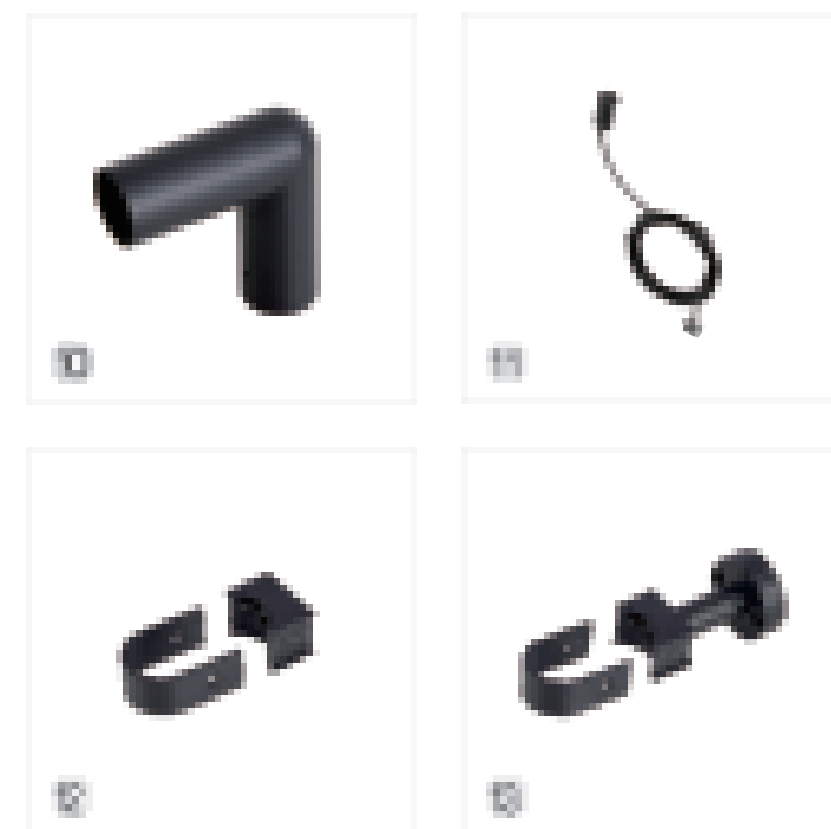

- ⑩. “L” Connector      ⑪. suspension wire
- ⑫. pedestal A      ⑬. pedestal B

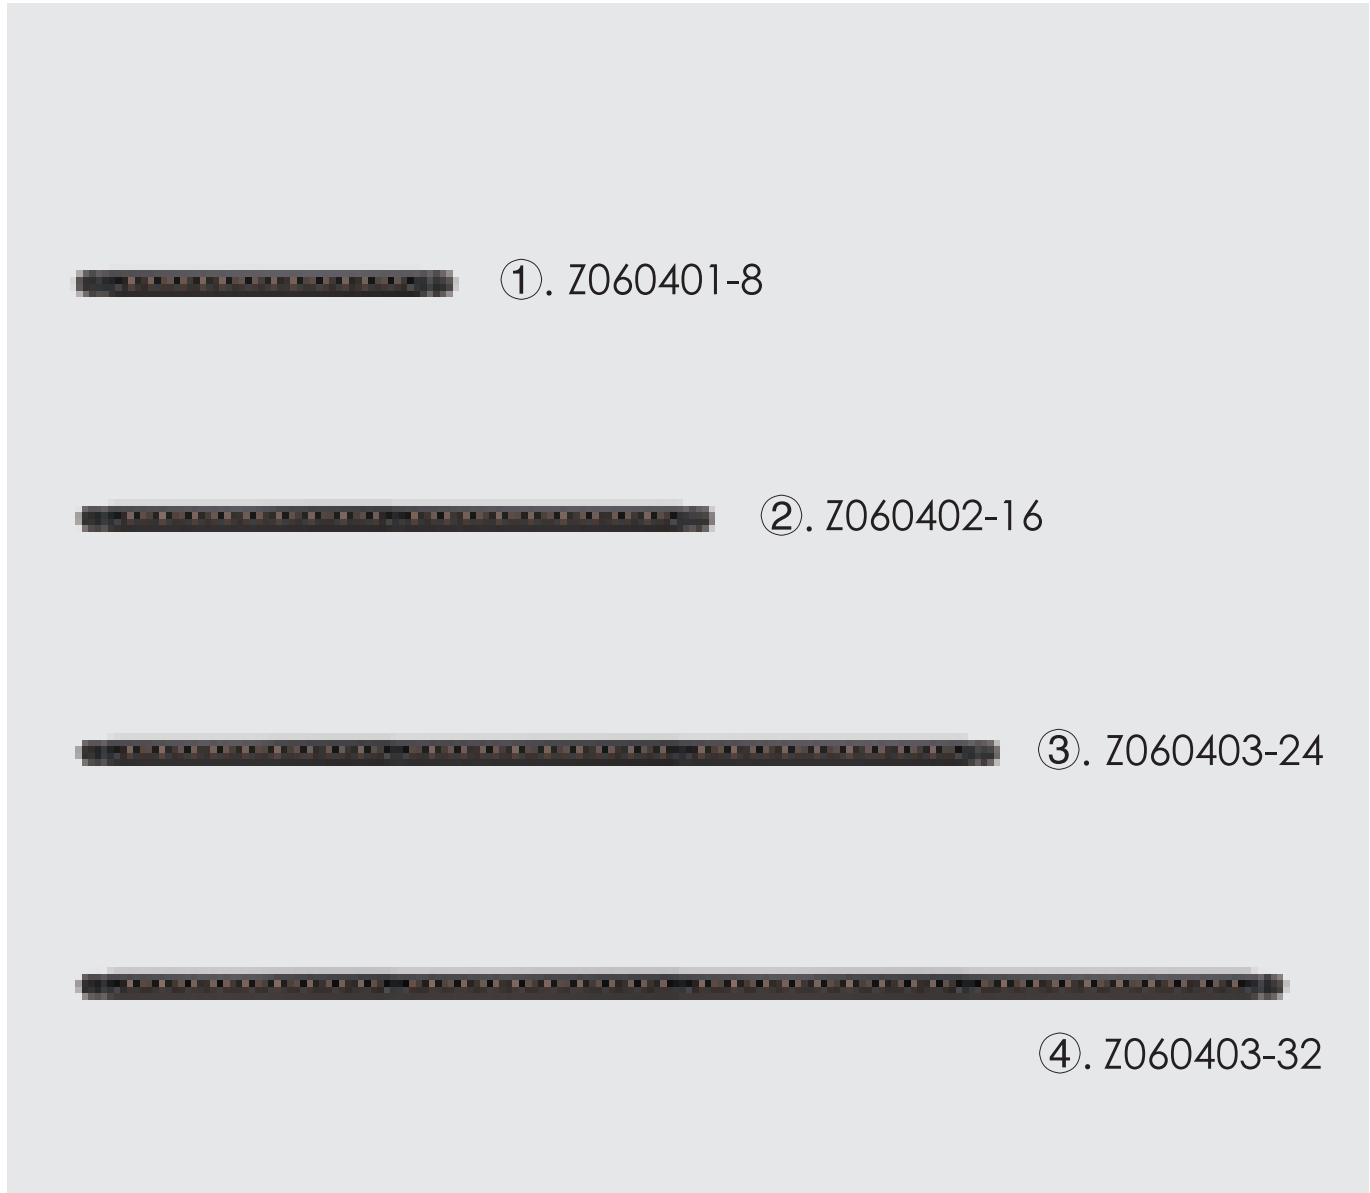

①. Z060401-8


②. Z060402-16


③. Z060403-24

④. Z060403-32

**Parameter**

Grille light 8W/16W/24W/32W  
DC48V,CRI:80/90  
3000K,4000K,5000K  
Beam Angle 24°  
IP20,

-  Black
-  Glod
-  White

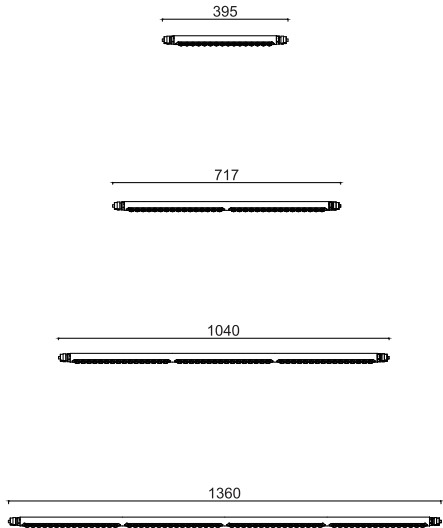



①. Z060402-8



②. Z060402-16



③. Z060402-24



④. Z060402-32

## Parameter

Flood light 8W/16W/24W/32W

DC48V,CRI:80/90

3000K,4000K,5000K

Beam Angle 110°


IP20,




Black




Glod




White




395



717




1040



1360





①. Z060403-8



②. Z060403-16



③. Z060403-24



Z060403-32

## Parameter

Flood light 8W/16W/24W/32W

DC48V,CRI:80/90

3000K,4000K,5000K

Beam Angle 360°


IP20,







Black



Glod




White





## Parameter

Flood light 5W/10W/15W  
 DC48V,CRI:80/90  
 3000K,4000K,5000K  
 Beam Angle 24°/36°  
 IP20,

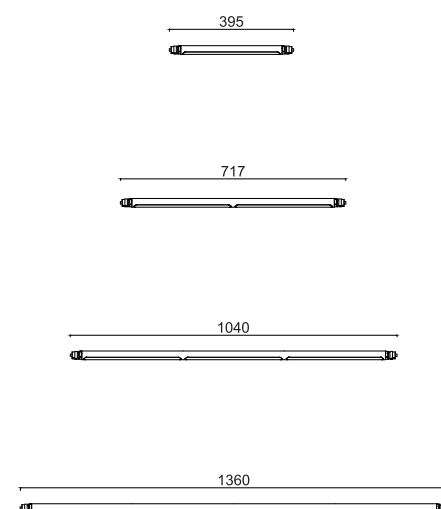



Z160001-15

Z160001-22

Z160001-32

Z160001-42

## Parameter


Flood light 15W/22W/32W/42W

AC220-240V,CRI:80/90

3000K,4000K,5000K

Beam Angle 40°


IP20,

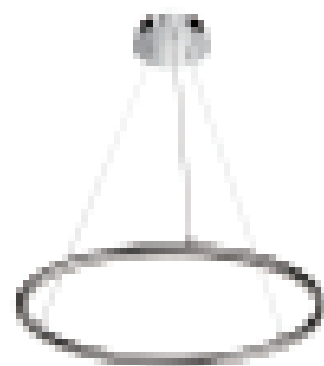


353mm



463mm



673mm





888mm



## Super Connector

Thanks to the wide range of mechanical and electrical connecting elements in two ways connector, three ways connector, and four ways connector, there is the greatest possible design freedom. Geometric shapes, fascinating light sculptures, and the fulfilment of different spatial requirements are easy to implement thanks to the Lunar connection system.

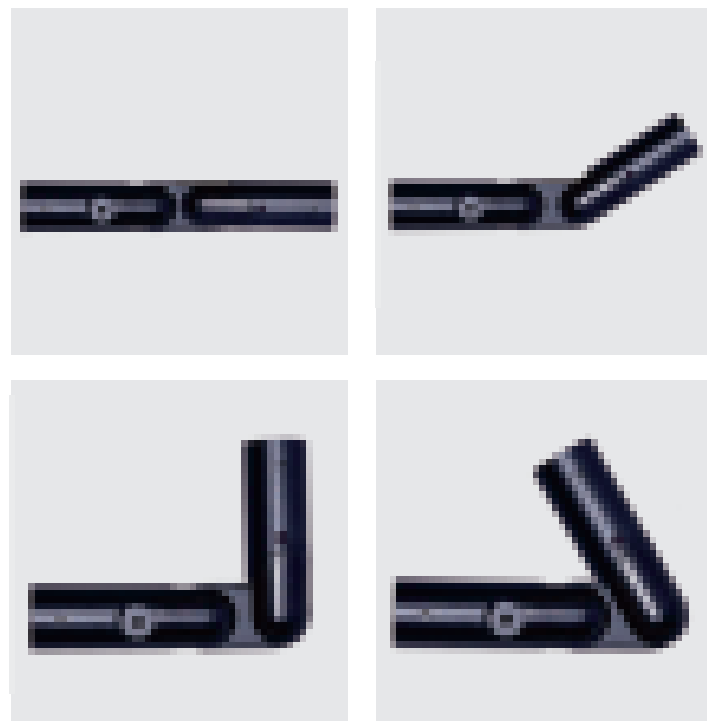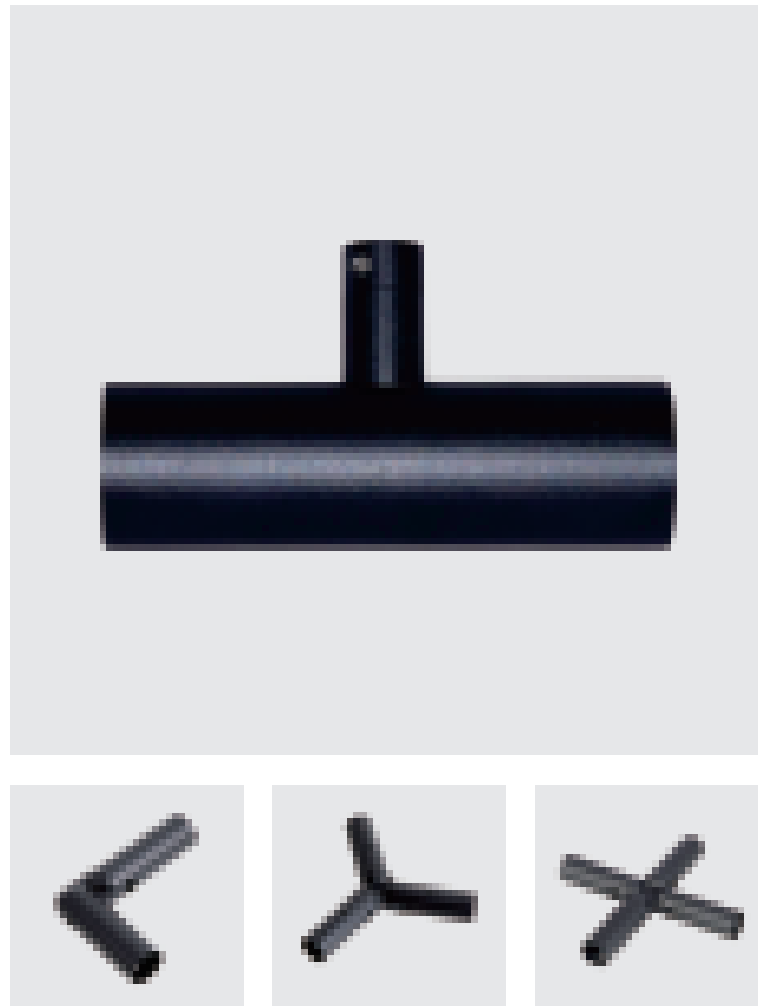

## Freedom adjustable

The super connector can be swiveled at any angle, the innovative lighting solution is a symbol of aesthetics, makes room for creativity, and is also highly functional.

## 360° adjustable

Thanks to the 360° adjustable, the luminaires can be suspended not only horizontally but also at an angle at different heights. The resulting creative freedom allows rooms to shine with individual patterns and unusual light formations.

