



Sichuan Jingguda Fastener Co., Ltd.



ANCHOR BOLT



Perry

TEL:+86 15102895219

Wechat/WhatsApp:+86 15102895219

Email:perry@jingguda.ltd

Irving

TEL:+86 15184374052

Wechat/WhatsApp:+86 15184374052

Email:irving@jgdfastener.com

CONTENTS


ABOUT US	1
CERTIFICATE	1
Wedge Anchor	2
Hook Anchor	2
Hook and Eye Anchor Bolt	3
Hollow Wall Anchor	3
Galvanized Steel Sleeve Anchor	4
Anti-Vibration Ceiling Anchor	4
Hammer Drive Anchor	5
Sleeve Anchor Hook	5
Sleeve Anchor	6
Sleeve Anchor with Wing Nut	6
Triangular Lifting Anchor Set	7
Plastic Anchor	7
Internal Sleeve Anchor	8
Heavy-Duty Sleeve Anchor	8
Eye Anchor Bolt	9
External Hex Head Sleeve Anchor1	9
External Hex Head Sleeve Anchor2	10
Drop-in Anchor	10
Long Sleeve Anchor	11

Expansion Anchor		11
(HDG) Sleeve Anchor		12
Undercut Anchor		12
Screw Eye Anchor		13
Hammer-in Anchor		13
Serrated Sleeve Anchor		14
Four-Segment Fish-Scale Expansion Anchor		14
Countersunk Head Expansion Bolt		15
Plastic Anchor		15
Anchor for Core-Drilled Holes		16


ABOUT US:

Sichuan Jingguda Fastener Co., Ltd. is a leading fastener manufacturer with 20+ years of industry expertise, integrating R&D, production, and global sales. Equipped with cutting-edge technology and precision craftsmanship, we specialize in high-performance anchoring solutions for diverse specifications. Our advanced production facilities, mature logistics network, and 24/7 customer support ensure reliable service worldwide.

CERTIFICATE:

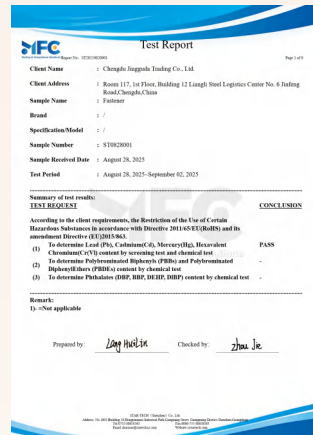

Wedge Anchor

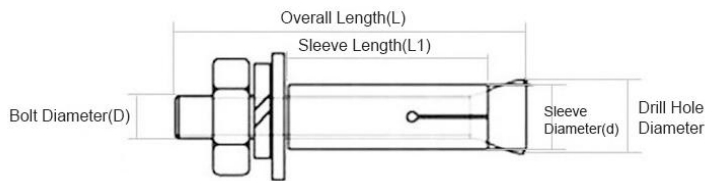


unit:mm

Standard model	Overall Length (L)mm	Sleeve Length(l)mm	Bolt Diameter(D)mm	Sleeve Diameter(d)mm	Drill Hole Size
M6*50	50	35	6	8	8mm drilling a hole
M6*60	60	40	6	8	
M6*70	70	50	6	8	
M8*60	60	40	8	10	10mm drilling a hole
M8*70	70	50	8	10	
M8*80	80	55	8	10	
M10*60	60	40	10	12	12mm drilling a hole
M10*70	70	50	10	12	
M10*80	80	55	10	12	
M12*100	100	70	12	14	14mm drilling a hole
M12*120	120	90	12	14	
M14*100	100	60	14	18	18mm drilling a hole
M14*120	120	80	14	18	
M16*100	100	60	16	20	20mm drilling a hole
M16*120	120	80	16	20	

Surface Treatment	Plain,Iridescent zinc plating,Blue/White zinc plating
Material	304 Stainless Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Hook Anchor

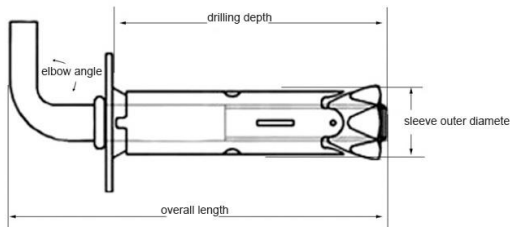


unit:mm

Specification	Diameter	Overall length	Sleeve OD Drill Bit Diameter	Drilling Depth	Elbow Angle	Maximum Load Capacity
M10*95	10	95	16	70	90°	100L
M10*100	10	95		70	120°	
M10*120	10	95		100		

Surface Treatment	Color Zinc
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Hook and Eye Anchor Bolt

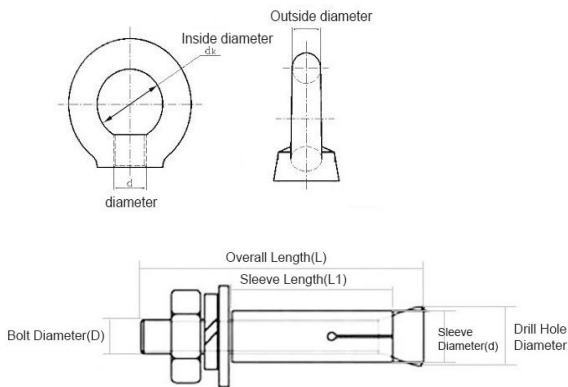


unit:mm

Specification	Diameter	Inside Diameter	Outside Diameter	pc. ≈ g
M6	6	17.38	5.2	19.5
M8	8	20.23	7.85	37.5
M10	10	24.12	8.49	64.0
M12	12	29.63	9.36	102.5
M14	14	31.74	11.99	147.0
M16	16	33.56	12.63	178.0

Surface Treatment	Plain,Iridescent zinc plating,Blue/White zinc plating
Material	304 Stainless Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Hollow Wall Anchor

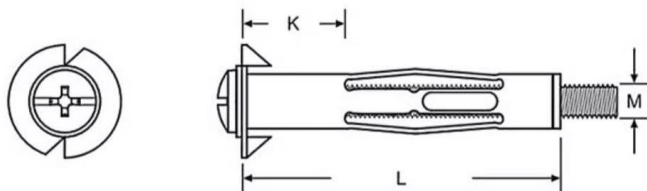


unit:mm

model Standard	Sleeve Length(L)	Screw Length	Drill Diameter(D)	Applicable substrate thickness(K)
4*21	21	27	Drill bit required:7-8	2-5
4*32	32	38		3-12
4*38	38	45		9-16
4*46	46	53		17-24
5*37	37	45	Drill bit required:9-10	6-13
5*52	52	60		5-20
5*65	65	72		14-33
5*80	80	88		28-50
6*37	37	45	Drill bit required:10-12	3-13
6*52	52	60		3-20
6*65	65	72		15-35
6*80	80	88		30-50
8*37	37	45	Drill bit required:12	3-13
8*52	52	60		3-20
8*65	65	72		15-33

Surface Treatment	Blue Zinc
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Galvanized Steel Sleeve Anchor




unit:mm

Standard Models	Overall Length (L)mm	Sleeve Length (l)mm	Screw Diameter (D)mm	Sleeve Length (d)mm	Hole Size(mm)
M6*50	50	35	6	8	Drill with an 8mm drill bit
M6*60	60	40	6	8	
M6*70	70	50	6	8	
M6*80	80	55	6	8	
M8*60	60	40	8	10	Drill with an 10mm drill bit
M8*70	70	50	8	10	
M8*80	80	55	10	10	
M8*100	100	70	8	10	
M10*60	60	40	10	12	Drill with an 12mm drill bit
M10*70	70	50	10	12	
M10*80	80	55	10	12	
M10*100	100	70	10	12	
M12*80	80	55	12	14	Drill with an 14mm drill bit
M12*100	100	70	12	15	
M12*120	120	90	12	15	
M14*100	100	60	14	16	Drill with an 16mm drill bit
M14*120	120	90	14	16	
M16*100	100	60	14	20	Drill with an 20mm drill bit
M16*100	120	80	14	20	



Surface Treatment	Plain
Material	304Stainless Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Anti-Vibration Ceiling Anchor

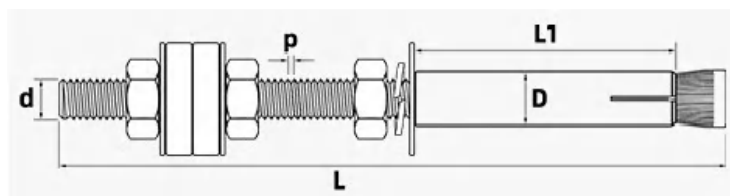


unit:mm

Nominal Diameter(d)	Pitch(p)	Sleeve Length(L1)	Sleeve Diameter(D)	Hole Diameter
M6	1	50	10	10
M8	1.25	50	12	12
M10	1.5	50	14	14
M12	1.75	50	16	16



Surface Treatment	Stainless Steel with Coating
Material	304Stainless Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

Hammer Drive Anchor




unit:mm

Specification	Drill Hole Diameter(D)	Drill Hole Depth(dp1)	Embedment Depth(dp2)
M8*70	8	55	50
M8*80	8	65	60
M8*100	8	85	80
M10*80	10	65	60
M10*100	10	85	80
M10*120	10	105	100
M12*80	12	65	60
M12*100	12	80	70
M12*120	12	100	90

Surface Treatment	Iridescent Chromated Steel
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Sleeve Anchor Hook

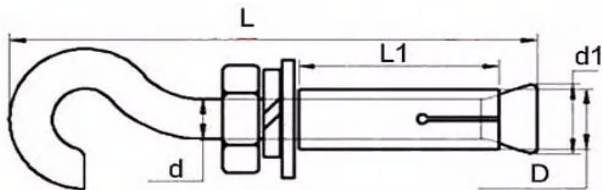


unit:mm

Screw Diameter(d)	M6	M8	M10	M12
Thread Length(mm)	45	50	54	76
Sleeve Diameter(D)	8	10	12	14
Sleeve Length(L1)	35	36	37	45
Total Length(L)	88	100	110	124
Drill Bit Size(mm)	8	10	12	14

Surface Treatment	Iridescent Chromated
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

Sleeve Anchor

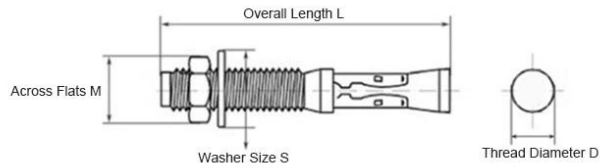


unit:mm

Specs and Models	Overall Length(L)	Thread Diameter(D)	Washer Size(S)	Across Flats Diameter(M)	Hole Drill
M6*50	50	6	M6*12*1.6	10	6
M6*60	60	6	M6*12*1.6	10	6
M6*75	75	6	M6*12*1.6	10	6
M6*100	100	6	M6*12*1.6	10	6
M8*60	60	8	M8*16*1.6	13	8
M8*70	70	8	M8*16*1.6	13	8
M8*75	75	8	M8*16*1.6	13	8
M8*80	80	8	M8*16*1.6	13	8
M10*70	70	10	M10*20*2	17	10
M10*75	75	10	M10*20*2	17	10
M10*80	80	10	M10*20*2	17	10
M10*90	90	10	M10*20*2	17	10
M12*75	75	12	M12*24*2.5	19	12
M12*100	100	12	M12*24*2.5	19	12
M12*110	110	12	M12*24*2.5	19	12
M12*115	115	12	M12*24*2.5	19	12
M16*100	100	16	M16*30*3	24	16
M16*120	120	16	M16*30*3	24	16
M16*140	140	16	M16*30*3	24	16

Surface Treatment	Zinc Plated
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Sleeve Anchor with Wing Nut





unit:mm

Specification	Nut Size(D)	Sleeve Head Thickness (K)	Nut Length(L)	Sleeve Diameter(d1)
M4*20	8	12	20	8
M4*25	8	12	25	8
M5*25	10	14	25	10
M6*25	12	16	25	12

Surface Treatment	Blue-Bright Zinc
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Triangular Lifting Anchor Set

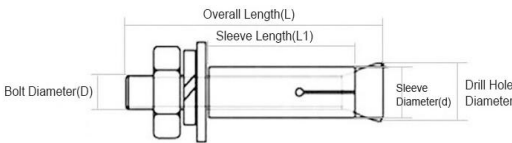

unit:mm


Triangle Eye Nut	B	C	D	F	E
M8	6.3	49.8	36.8	18.1	10
M10	7.2	54.4	42.4	18.1	12.3
M12	9.1	64.4	50.8	21.6	15
M14	9.6	64.2	50.3	22.8	14.7
M16	10.4	72	54.9	25	15.2
M20	10.5	79	64	27	17.6

unit:mm

Specification	Screw Diameter(mm)	Head Diameter(mm)
M8	8	12
M10	10	14
M12	12	16
M14	14	18
M16	16	20
M20	20	26

Surface Treatment	Plain
Material	304Stainless Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Plastic Anchor

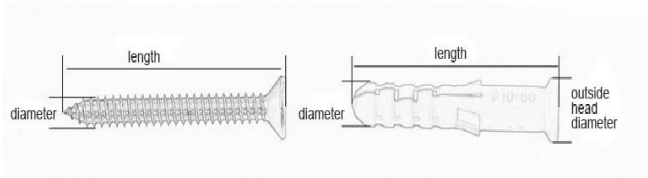


unit:mm

Specs and Models	Tube Outer Diameter	Tube Inner Diameter	Tube Length	Screw Diameter	Screw Length	Engagement Length
M6*30	6	4.5	30	4	30	6
M6*40			40		40	
M6*60			60		60	
M8*40	8	6	40	5	40	8
M8*60			60		60	
M8*100			100		100	
M10*50	10	8	50	6	50	10
M10*60			60		60	
M10*80			80		80	
M10*100			100		100	

Surface Treatment	None
Material	Plastic
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Internal Sleeve Anchor

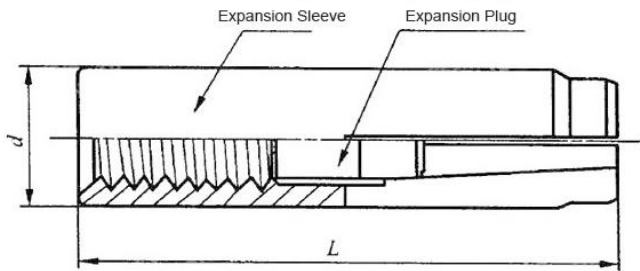


unit:mm

Specification	Inner Diameter	Outer Diameter(≈)	Length(≈)	Recommended Drill Bit(mm)	Single Piece ≈ g(mm)
M6	6	8	25	8	5.0
M8	8	10	30	10	10.2
M10	10	12	40	12	19.4
M12	12	16	150	16	47.6

Surface Treatment	No Finish
Material	304Stainless Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Heavy-Duty Sleeve Anchor

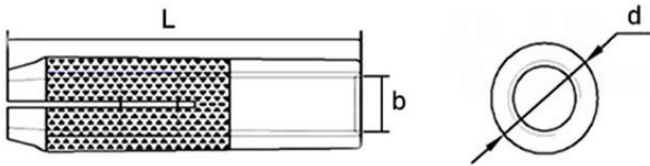

unit:mm

Specification(Inner Diameter)	M6	M8	M10	M12	M16
Total Length	25	30	40	50	8
Sleeve Diameter(d1)	8	10	12	16	8
Drill Bit Size(L)	8	10	12	16	10

Surface Treatment	Plain
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Eye Anchor Bolt



unit:mm

Specification	Thread diameter	Maximum Opening	Overall Length	Drill Hole Diameter	Recommended Drilling Depth
M6	6	23	86	8	35
M8	8	22	98	10	35
M10	10	36	123	12	50
M12	12	34	147	14	55

Surface Treatment	Color Zinc
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

External Hex Head Sleeve Anchor1



unit:mm

Specifications and Models	Thread diameter	Thread diameter	Drill Bit Size	Wrench Size	Head thickness
M6	6.0	8.0	8	10	4.0
M8	6.9	9.5	10	14	3.9
M10	8.9	11.5	12	17	4.9
M12	11.9	15.8	16	19	5.9
M16	16.0	20.0	20	24	

Surface Treatment	Plain,Iridescent zinc plating,Blue/White zinc plating
Material	304 Black Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

External Hex Head Sleeve Anchor2

unit:mm

Specification	Sleeve Length (L)	Sleeve (l)	Sleeve Diameter (D)	Across Flats	Washer Specification	Drill Bit
M6*50	50	40	8	10	6*18*1.5	8
M6*60	60	50	8			8
M6*70	70	60	8			8
M6*80	80	70	8			8
M8*60	60	45	10	13	8*20*1.5	10
M8*70	70	55	10			10
M8*80	80	65	10			10
M8*100	100	85	10			10
M10*60	60	45	12	17	10*25*2	12
M10*70	70	55	12			12
M10*80	80	65	12			12
M10*100	100	85	12			12
M12*80	80	60	15	19	12*28*2	16
M12*100	100	85	15			16
M12*120	120	105	15			16
M12*150	150	135	15			16



Surface Treatment	Plain
Material	304 Stainless Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Drop-in Anchor

unit:mm

Specification	Screw Diameter(mm)	Head Diameter(mm)
M6	6	10
M8	8	12
M10	10	14
M12	12	16
M14	14	18
M16	16	20
M18	18	24
M20	20	26



Surface Treatment	Plain
Material	201/304 Black Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

Long Sleeve Anchor



unit:mm

Specification	Total Length	Sleeve Length	Sleeve Diameter	Screw Length	Drill Bit	Across Flats
M6*L	L	50	7.5	M6	8	10
M8*L		65	9.8	M8	10	13
M10*L			12.5	M10	13	16
M12*L			14.6	M12	15	18

Surface Treatment	Plain
Material	304 Stainless Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB
Applicable industries	Construction industry, general

Expansion Anchor



unit:mm

Specification	Screw Diameter(mm)	Head Diameter(mm)
M6	6	10
M8	8	12
M10	10	14
M12	12	16
M14	14	18
M16	16	20
M18	18	22
M20	20	25

Surface Treatment	Iridescent Chromated
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

(HDG) Sleeve Anchor



unit:mm

Specification	Screw Diameter(mm)	Head Diameter(mm)
M8	8	12
M10	10	14
M12	12	16
M14	14	18
M16	16	20
M18	18	24
M20	20	26

Surface Treatment	Hot-Dip Galvanized
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

Undercut Anchor



unit:mm

Specs and Models	Nominal Length(mm)	Thread nominal(mm)	Sleeve Length(mm)	Pitch(mm)
M10*100	100	M10	60	1.5
M10*120	120	M10	70	1.5
M10*130	130	M10	80	1.5
M12*100	100	M12	60	1.75
M12*120	120	M12	60	1.75
M12*130	130	M12	80	1.75
M16*130	130	M16	80	2
M16*150	150	M16	100	2

Surface Treatment	No Finish
Material	304 Stainless Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

Screw Eye Anchor



unit:mm

Model	Overall Length	Diameter	Sleeve Length	Drill Hole
M6	78	10	31	10
M8	96	12	42	12
M10	102	14	41	14
M12	114	16	44	16

Surface Treatment	Blue-Bright Zinc
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

Hammer-in Anchor

unit:mm

Specification	Diameter	Shank Length	Head Diameter	Drill
M6*30	6mm	≈27mm	≈15mm	6mm
M6*40	6mm	≈37mm	≈15mm	6mm
M6*50	6mm	≈47mm	≈15mm	6mm
M6*60	6mm	≈57mm	≈15mm	6mm
M6*70	6mm	≈67mm	≈15mm	6mm
M6*80	6mm	≈77mm	≈15mm	6mm
M8*50	8mm	≈47mm	≈17mm	8mm
M8*60	8mm	≈57mm	≈17mm	8mm
M8*70	8mm	≈67mm	≈17mm	8mm
M8*80	8mm	≈87mm	≈17mm	8mm
M8*90	8mm	≈97mm	≈17mm	8mm



Surface Treatment	Zinc Plated
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

Serrated Sleeve Anchor



unit:mm

Specification (mm)	Depth of Hole (mm)	Diameter of Hole (mm)	Diameter of Expansion Sleeve(mm)	Length of Expansion Sleeve(mm)
5*30	≥ 40	6	5	30
6*32	≥ 40	8	6	32
8*38	≥ 50	10	8	38
8*60	≥ 70	10	8	60
10*60	≥ 70	12	10	60

Surface Treatment	Blue-Bright Zinc
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

Four-Segment Fish-Scale Expansion Anchor



unit:mm

Specification	Drill Diameter	Overall Sleeve Length	Tensile Load (kN)
M6	10	40	2.80
M8	14	50	4.49
M10	16	60	5.63
M12	20	80	7.24

Surface Treatment	Zinc Plated
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

Countersunk Head Expansion Bolt

unit:mm

Model / Specs	Overall(L)	Thread Diameter(d)	Sleeve Length	Sleeve Diameter	Drill Bit
M6*50	50	6	40	8	8
M6*60	60	6	50	8	8
M6*70	70	6	60	8	8
M6*80	80	6	70	8	8
M6*100	100	6	90	8	8
M8*60	60	8	45	10	10
M8*70	70	8	55	10	10
M8*80	80	8	65	10	10
M8*100	100	8	85	10	10
M10*80	80	10	65	12	12
M10*100	100	10	85	12	12



Surface Treatment	Blue-Bright Zinc
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

Plastic Anchor

unit:mm

Specification	M6	M8	M10	M12
Inner Diameter	4.9	5.3	5.8	6.3
Outer Diameter	6	8	10	12
Overall Length	25	27	35	40



Surface Treatment	Blue-Bright Zinc
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general

Anchor for Core-Drilled Holes



unit:mm

Specification	Overall	Sleeve Length	Diameter	Washer Thickness	Nut Diameter	Thread Diameter
Splay-Type Anchor	170cm	75cm	16cm	5cm	19cm	12cm
Conventional Type	170cm	70cm	16cm	5cm	19cm	12cm
Three-Wing Anchor	170cm	70cm	16cm	5cm	19cm	12cm
Two-Wing Anchor	175cm	70cm	16cm	5cm	19cm	12cm

Surface Treatment	Blackening
Material	Carbon Steel
Standard	DIN,ASTM,ISO,JIS,BS,AS,GB22795
Applicable industries	Construction industry, general