



Aolijie 澳利铝业
澳利杰 AOLI ALUMINIUM

Aluminum Profiles for Windows & Doors

PROFESSIONAL MANUFACTURER • GLOBAL SERVICE

CONTENTS

 01. About Us (P3-5)

 02. Production Strength (P6-7)

 03. Quality Control (P8)

 04. Product Index (P9-81)

 05. Surface treatment (P82-84)

 06. Export & Service (P85-86)

 07. Cooperation Cases & Partners (P87-88)

 08. Why Choose Us (P89)

 10. Contact Us (P90)

About Us

Aoli Aluminum was established in 2009 and is a manufacturer that integrates research and development, production, and sales. We specialize in manufacturing of aluminum profiles for construction, decoration, and industry.

Our brand is "Aolijie", which owns 4 production bases and is equipped with advanced production lines, including extrusion equipment ranging from 900 tons to 2000 tons, surface treatment production lines for power coating, Anodizing, Electrophoretic Coating, PVDF coating, wood grain, die production and CNC deep processing equipment. Our headquarters are located in Sihui, Guangdong, with branch offices in Foshan, Guangdong, and a comprehensive ISO quality management system has been established.

Our annual production capacity is 100000 tons and we have over 100000 sets of our own molds. With rich experience in engineering projects, our products cover over 100 series and more than 1000 specifications. The project covers countries and regions such as the Middle East, South America, Africa, and Southeast Asia.



Company Overview



ESTABLISHED

Founded in 2009



FACTORY SIZE

60000 Square Meters



ANNUAL CAPACITY

100000 Tons



CORE FOCUS & GLOBAL REACH

Aluminum profiles

Export experience to 60+ countries



Our mission

Building sustainable cities for the world.



Our vision

Be the aluminum profile production enterprise with the highest customer satisfaction.

Be the Chinese aluminum profile enterprise with the strongest sense of employee happiness.

Be the most influential Chinese aluminum profile export brand.



Production Strength



Extrusion Lines

Multiple extrusion lines with various tonnages to meet diverse production requirements.



Surface Treatment


Advanced lines including Anodizing, Powder Coating, PVDF, and Wood Grain Transfer.

One-Stop Solution



Die Manufacturing

7 days for new die development,
Capable of designing and optimizing
complex profiles to meet specific client
requirements.

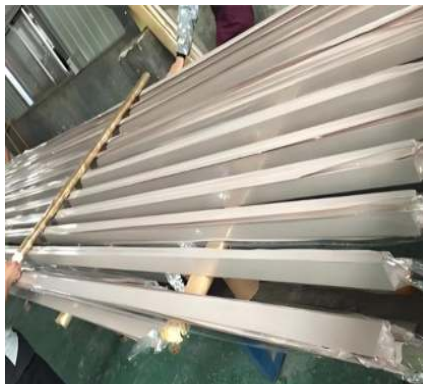

Professional Packaging


Moisture-proof and scratch-resistant
Professional export packaging for
long-distance shipment.

Quality Control



Quality Inspection

- *Incoming material inspection
 - *Production inspection
 - *Color consistency
 - *Final inspection
- Ensure zero defects.

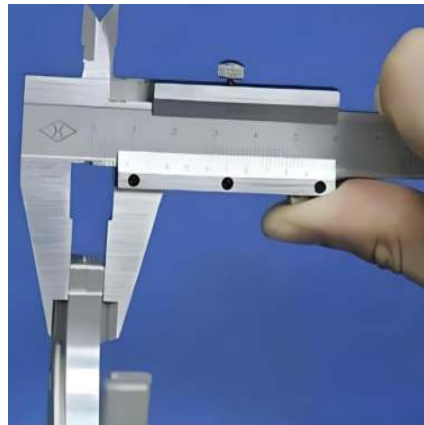

Key Indicator Control

- Precise monitoring of critical parameters.
- *Wall thickness
 - *Surface treatment control
 - *Coating thickness test
 - *Dimensional verification

Product Index

01. Casetment window series-----P10-19

02. Casement door series-----P20-22

03. Sliding window series-----P23-39

04. Sliding door series-----P40-42

05. Thermal break casement window series--P43-65

06. Thermal break casement door series-----P66-73

07. Thermal break sliding window series--P74-76



08. Thermal break sliding door series-----P77

09. Pivot door series-----P78


10. Thermal break pivot door series-----P79

11. Curtain wall series-----P80-81

AL-PKC50 Outward Casement Window

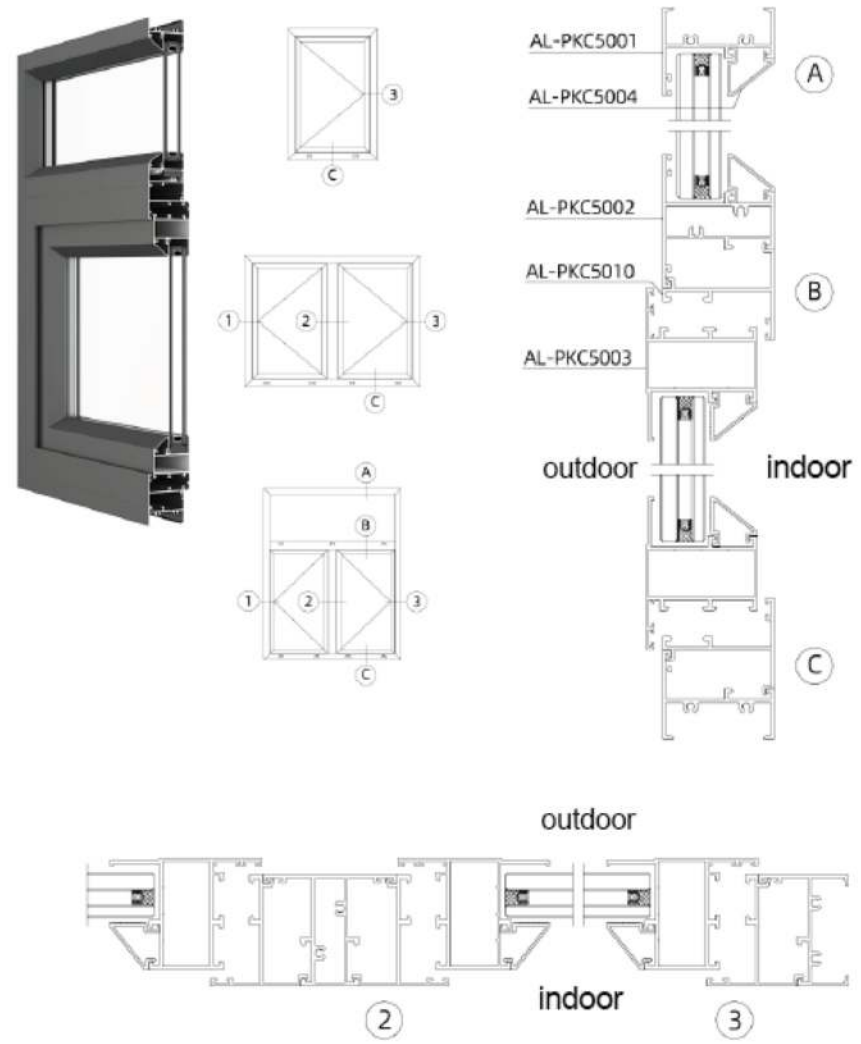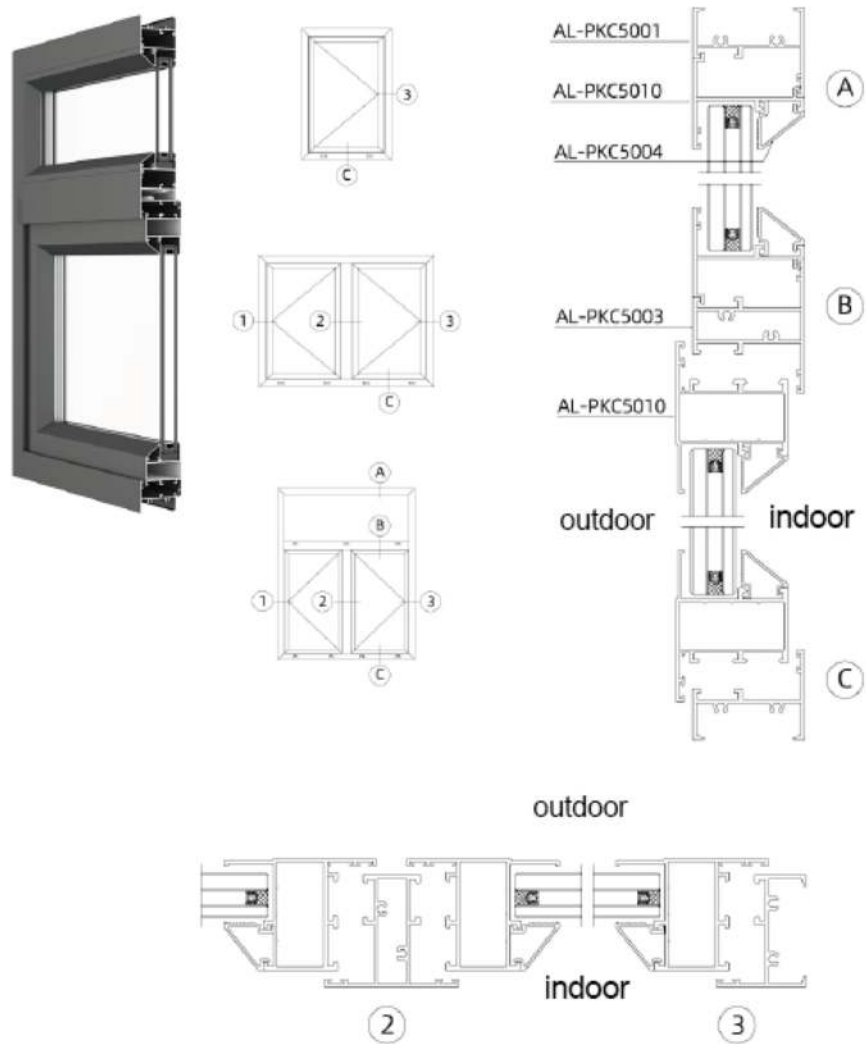


AL-PKC50 Outward Casement Window

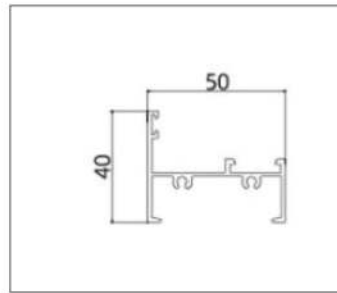


AL-PKC5001 (Frame)

Thickness:1.4mm Weight: 0.589kg/m

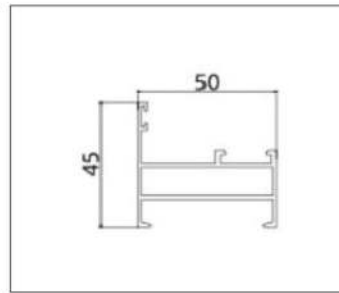


AL-PKC5001A (Frame)

Thickness:1.4mm Weight: 0.73kg/m

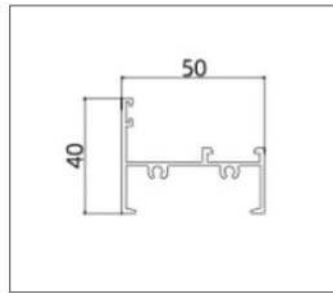


AL-PKC5002 (Mullion)

Thickness:1.4mm Weight: 0.898kg/m

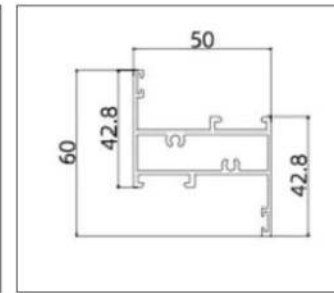


AL-PKC5002A (Z Mullion)

Thickness:1.4mm Weight: 0.898kg/m

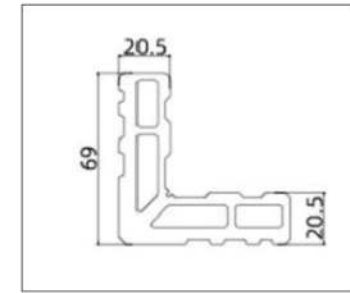


AL-PKC5012 (Corner Connector)

Thickness Weight: 3.819kg/m

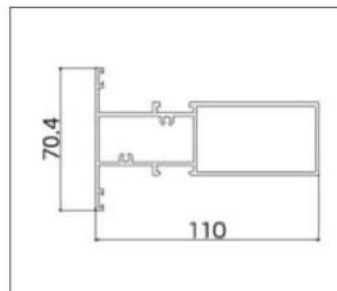


AL-PKC5002B (Mullion)

Thickness:1.6mm Weight: 1.728kg/m

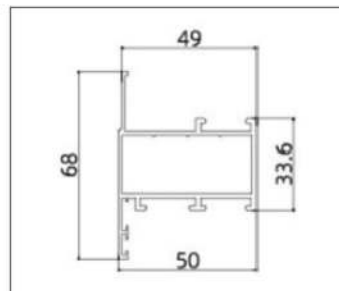


AL-PKC5003 (vent)

Thickness:1.4mm Weight: 0.915kg/m

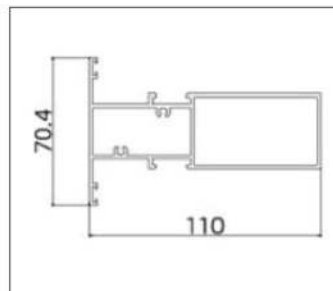


AL-PKC5010 (Frame)

Thickness:1.4 mm Weight: 0.471kg/m

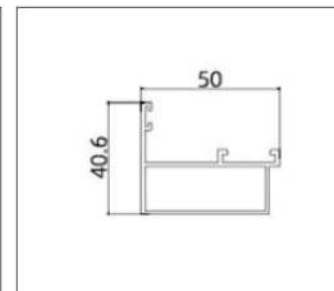


AL-PKC5011 (Frame)

Thickness:1.4mm Weight: 0.624kg/m

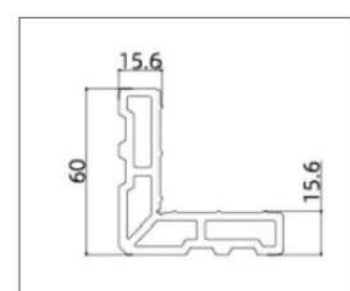


AL-PKC5013 (Corner Connector)

Thickness:3.0mm Weight: 2.173kg/m

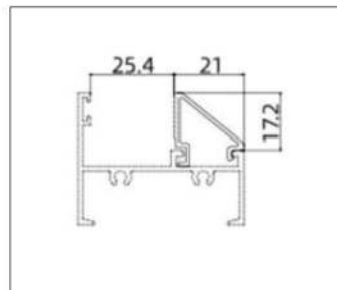


AL-PKC5004 (Glazing Bead 25.4)

Thickness:1.1mm Weight: 0.188kg/m

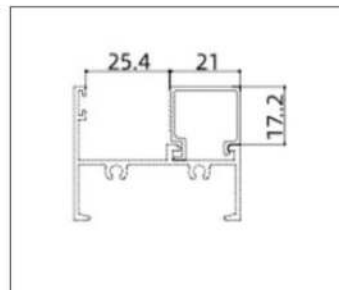


AL-PKC5005 (Glazing Bead 25.4)

Thickness:1.1mm Weight: 0.216kg/m

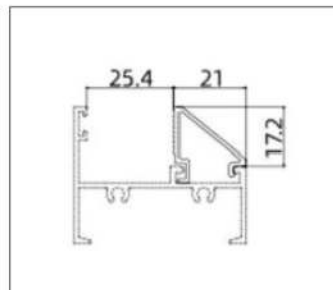


AL-PKC5007 (Glazing Bead 23)

Thickness:1.0mm Weight: 0.233kg/m

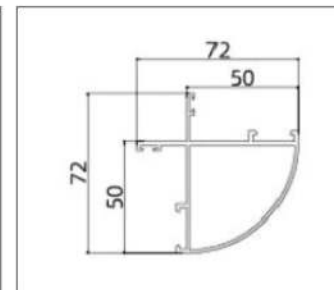

AL-PKC5009 (90° corner)







Thickness:1.4mm Weight: 1.0kg/m

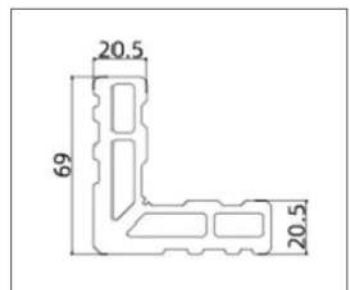


AL-PKC5014 (Corner Connector)

Thickness:1.4mm Weight: 1.639kg/m

LB-PK50 Outward Casement Window

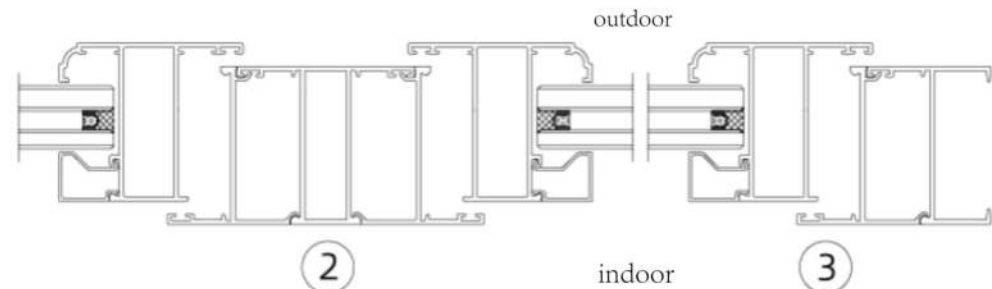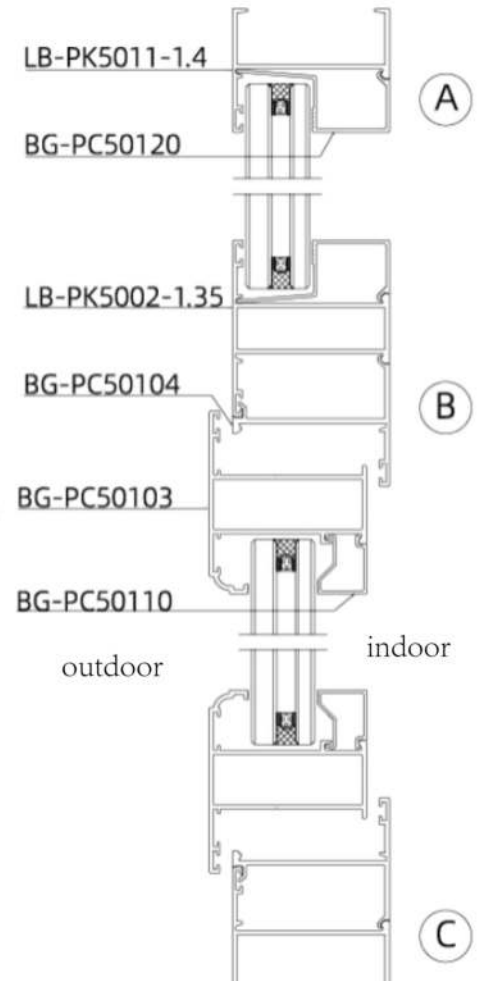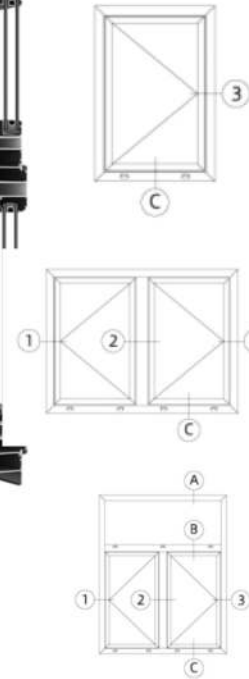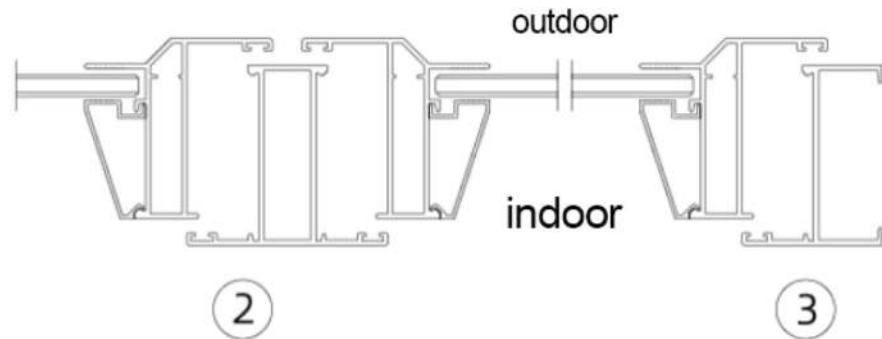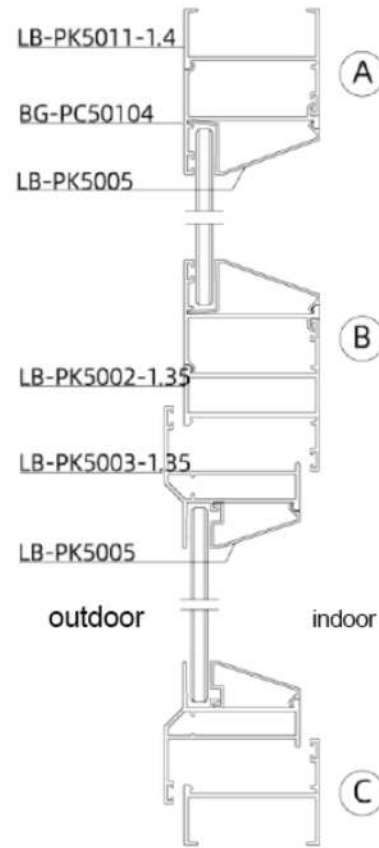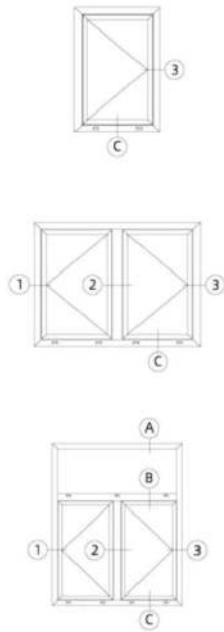


LB-PK50 Outward Casement Window

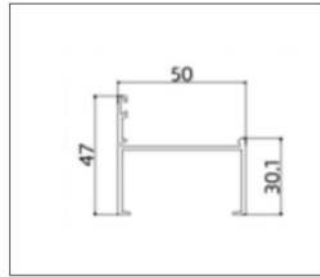


LB-PK5001-1.35 (Frame)

Thickness:1.45mm Weight: 0.533kg/m

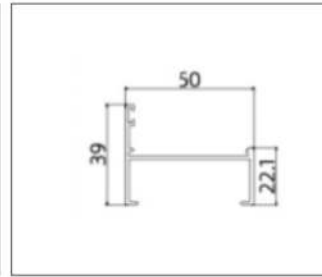


LB-PK5011-1.4 (Frame)

Thickness:1.45mm Weight: 0.74kg/m

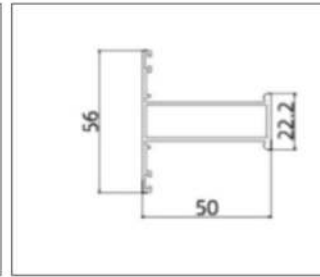


LB-PK5002-1.35 (Mullion)

Thickness:1.45mm Weight: 0.731kg/m

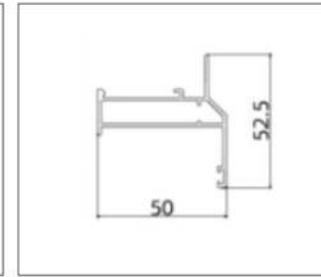


LB-PK5003-1.35 (Sash)

Thickness:1.35mm Weight: 0.641kg/m

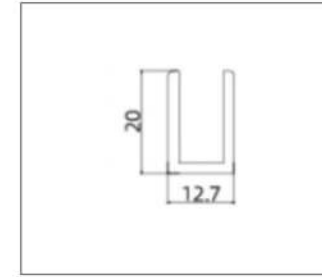


C20X12.7X20-2.0 (Corner Connector)

Thickness: 2.0mm Weight: 0.263kg/m

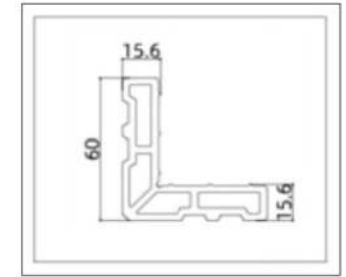


BG-PC50103 (Corner Connector)

Thickness: 3.0mm Weight: 2.173kg/m

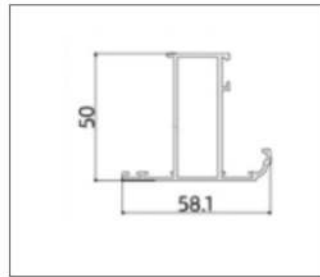


BG-PC50103 (Sash)

Thickness:1.45mm Weight: 0.765kg/m

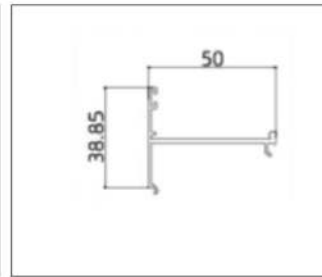


BG-PC50104 (Frame)

Thickness:1.4mm Weight: 0.404kg/m

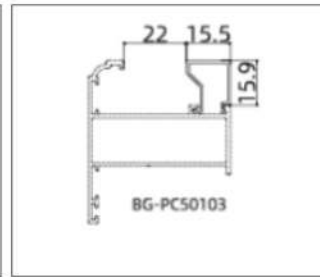


BG-PC50110 (Glazing Bead 22)

Thickness:0.9mm Weight: 0.137kg/m

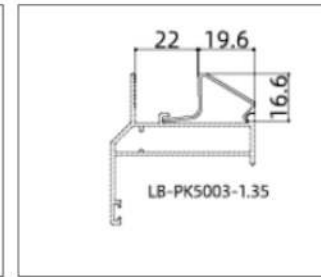


LB-PK5004A (Glazing Bead 22)

Thickness:0.9mm Weight: 0.142kg/m

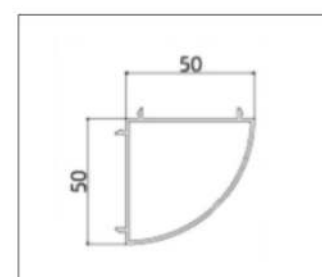


LB-PK5006(90° corner)

Thickness:1.2mm Weight: 0.626kg/m

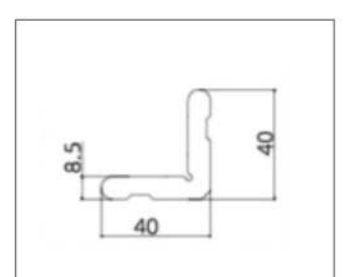


LB-PK5007 (Corner Connector)

Thickness: Weight: 1.458kg/m

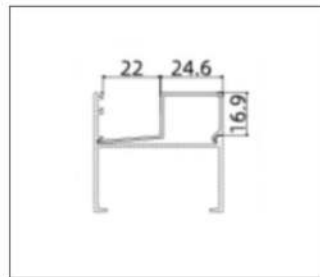


BG-PC50120 (Glazing Bead 22)

Thickness:1.0mm Weight: 0.23kg/m

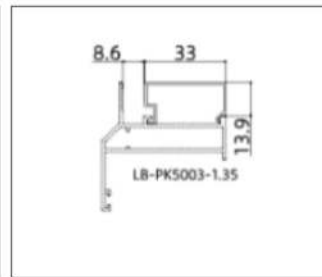


LB-PK5030 (Glazing Bead 8.6)

Thickness:1.4mm Weight: 0.589kg/m

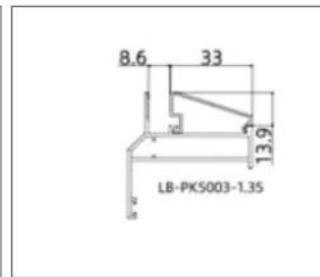


LB-PK5005 (Glazing Bead 8.6)

Thickness:0.9mm Weight: 0.164kg/m



LB-PK5005(8.1)



Thickness:0.9mm Weight: 0.164kg/m

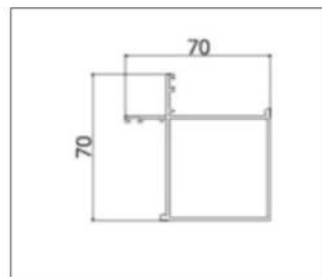


LB-PK5008(90° Corner)

Thickness:1.4mm Weight: 0.977 kg/m

XD-50 Outward Casement Window

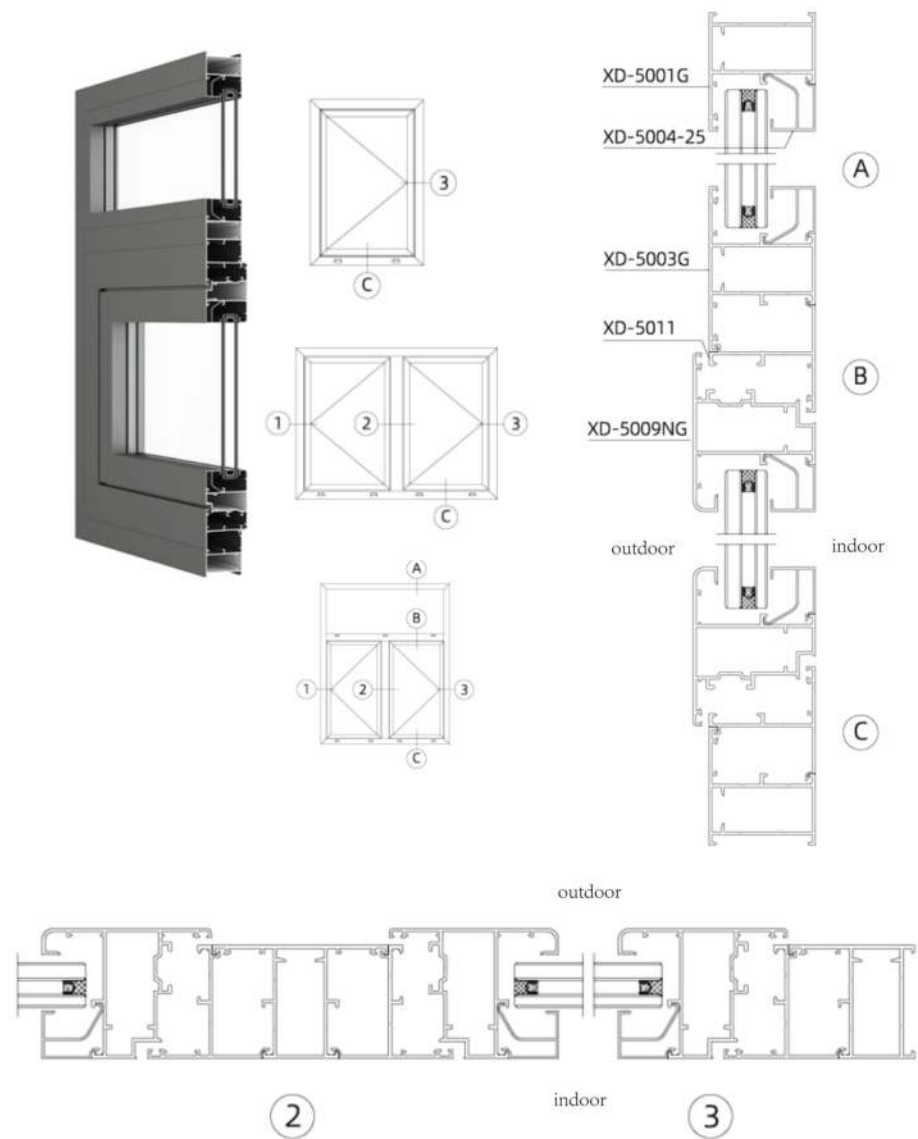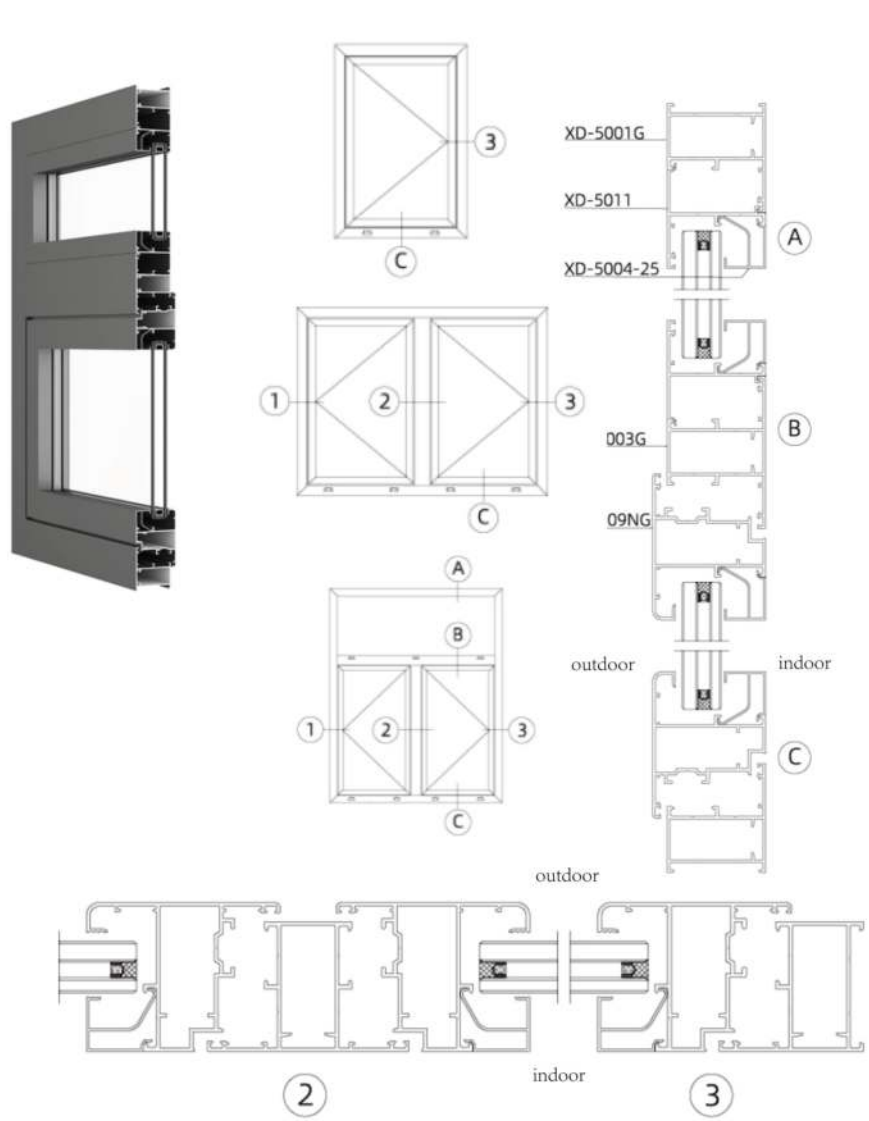


XD-50 Outward Casement Window

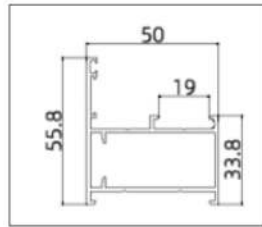


XD-5001G (Frame)

Thickness:1.4mm Weight: 0.796kg/m

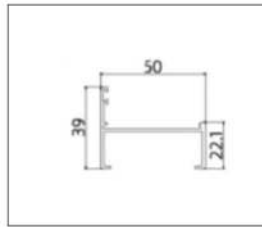


XD-5003G (Mullion)

Thickness:1.4mm Weight: 0.93kg/m

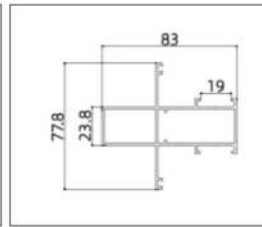


XD-5003JQ-83 (Mullion)

Thickness:1.4mm Weight: 1.225kg/m

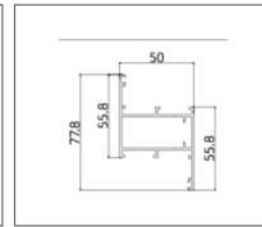


XD-5008 (Mullion)

Thickness:1.4mm Weight: 0.93kg/m

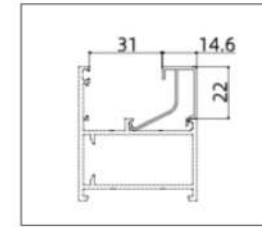


XD-5004JH (Glazing Beadr)

Thickness: 1.0mm Weight: 0.228kg/m

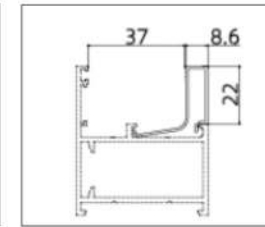


XD-5010JH-23C (Glazing Beadr)

Thickness: 1.0mm Weight: 0.209kg/m

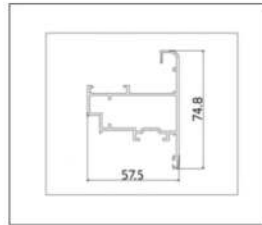


XD-5009NG (Vent)

Thickness:1.4mm Weight: 1.019kg/m

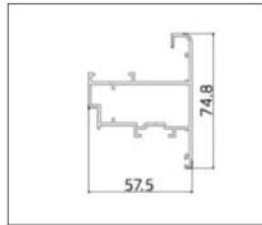


XD-5009N2 (Vent)

Thickness:1.4mm Weight: 1.019kg/m

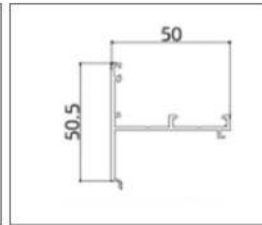


XD-5011 (Frame)

Thickness:1.4 mm Weight: 0.496kg/m

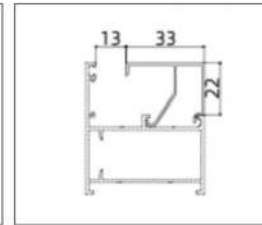


XD-5005G (Glazing Beadr)

Thickness:1.0mm Weight: 0.246kg/m

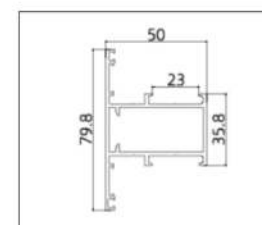


XD-5003JH-23C (Mullion)

Thickness:1.8mm Weight: 1.174kg/m

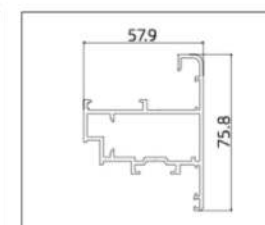


XD-5009NJH-23C (Corner Connector)

Thickness: 1.8 Weight: 1.316kg/m

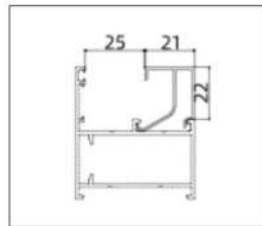


XD-5004-25 (Glazing Beadr)

Thickness:1.0mm Weight: 0.224kg/m

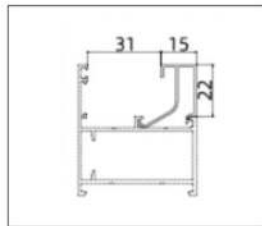


XD-5004G (Glazing Beadr)

Thickness:1.0mm Weight: 0.208kg/m

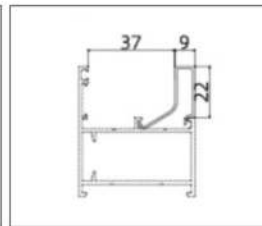


XD-5010 (Glazing Beadr)

Thickness:1.0mm Weight: 0.183kg/m

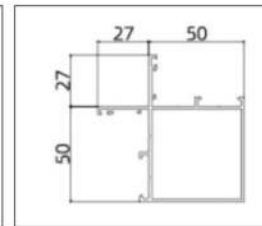


XD-507Z(90° Corner)

Thickness:1.4mm Weight: 1.08kg/m

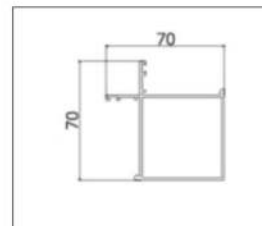


XD-5009NJH-23C (Glazing Beadr)

Thickness:1.0mm Weight: 0.265kg/m

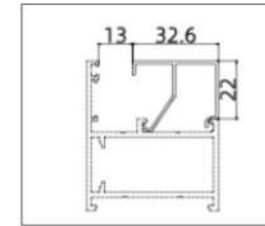


XD-5004JH-25-23C (Glazing Beadr)

Thickness:1.0mm Weight: 0.246kg/m

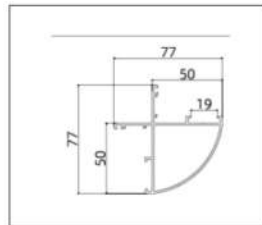


XD-5007 (90° Corner)

Thickness:1.4mm Weight: 1.012kg/m

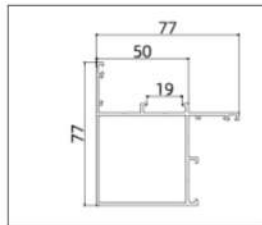


XD-5007ZND (90° Corner)

Thickness:1.4mm Weight: 1.102kg/m

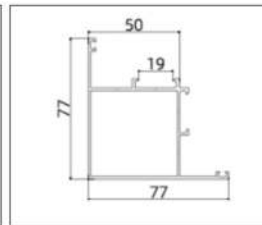

XD-50072N (90° Corner)



Thickness:1.4mm Weight: 1.08kg/m

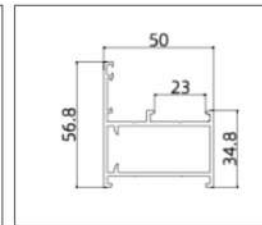

XD-5001JH-23C (Glazing Beadr)

Thickness:1.0mm Weight: 0.246kg/m

GZF50 Castment Window

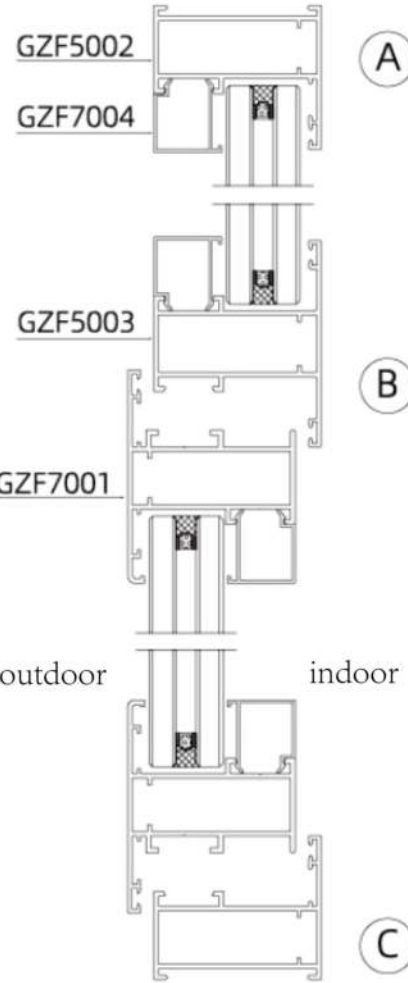
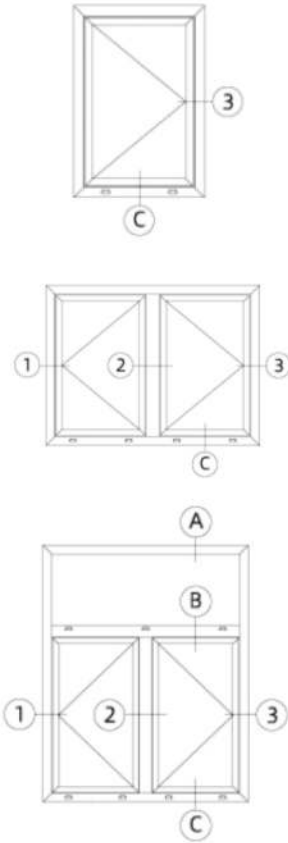


outdoor

indoor

outdoor

indoor

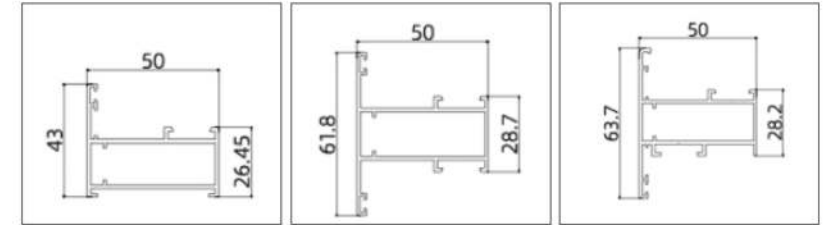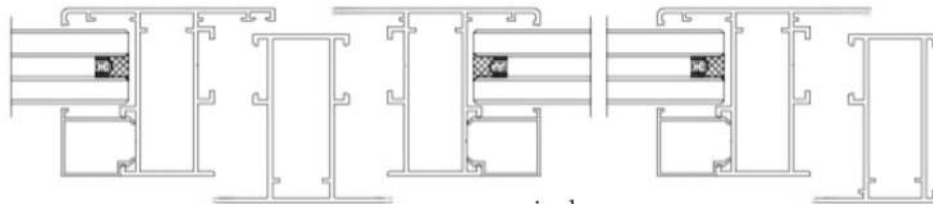


GZF5002 (Frame)

GZF5003 (Mullion)

GZF7001 (Sash)

Thickness:1.35mm Weight: 0.689kg/m Thickness:1.35mm Weight:0.791kg/m Thickness:1.35mm Weight: 0.893kg/m

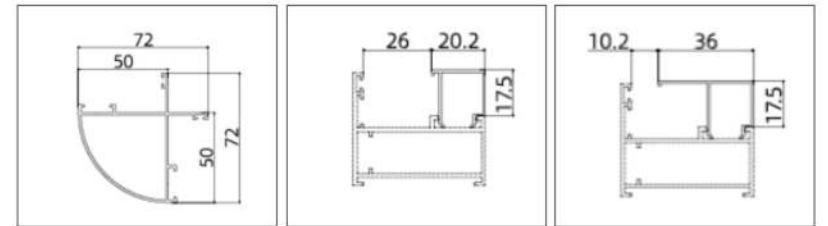


GZF7001 (90° Corner)

GZF7004 (Glazing Bead)

GZF7005 (Glazing Bead)



Thickness:1.35mm Weight: 0.931kg/m Thickness:0.8mm Weight: 0.185kg/m Thickness:1.4mm Weight: 1.225kg/m

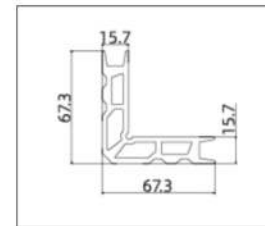


BFUS20922 (Corner Connector)

Thickness:3.0mm Weight: 2.54kg/m


GZF 7050 Frame Castment Window

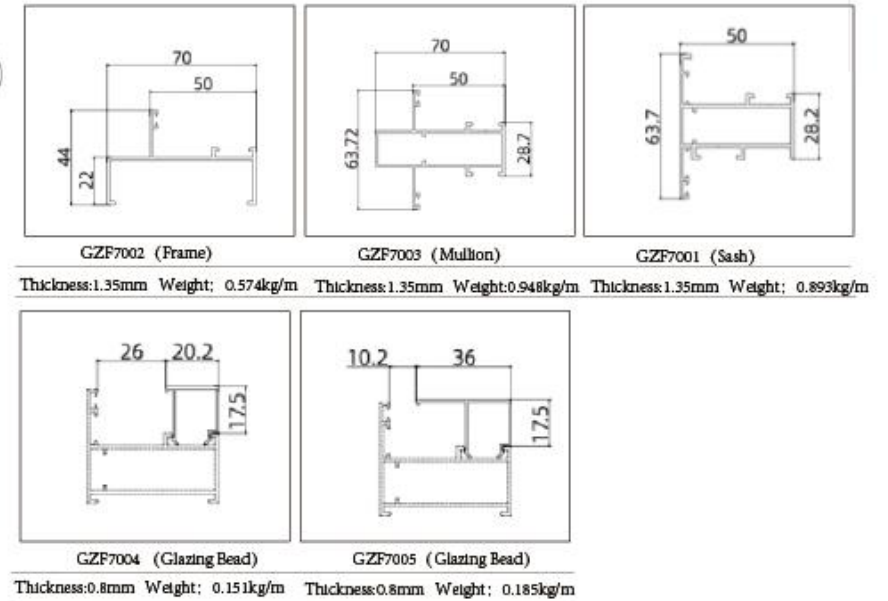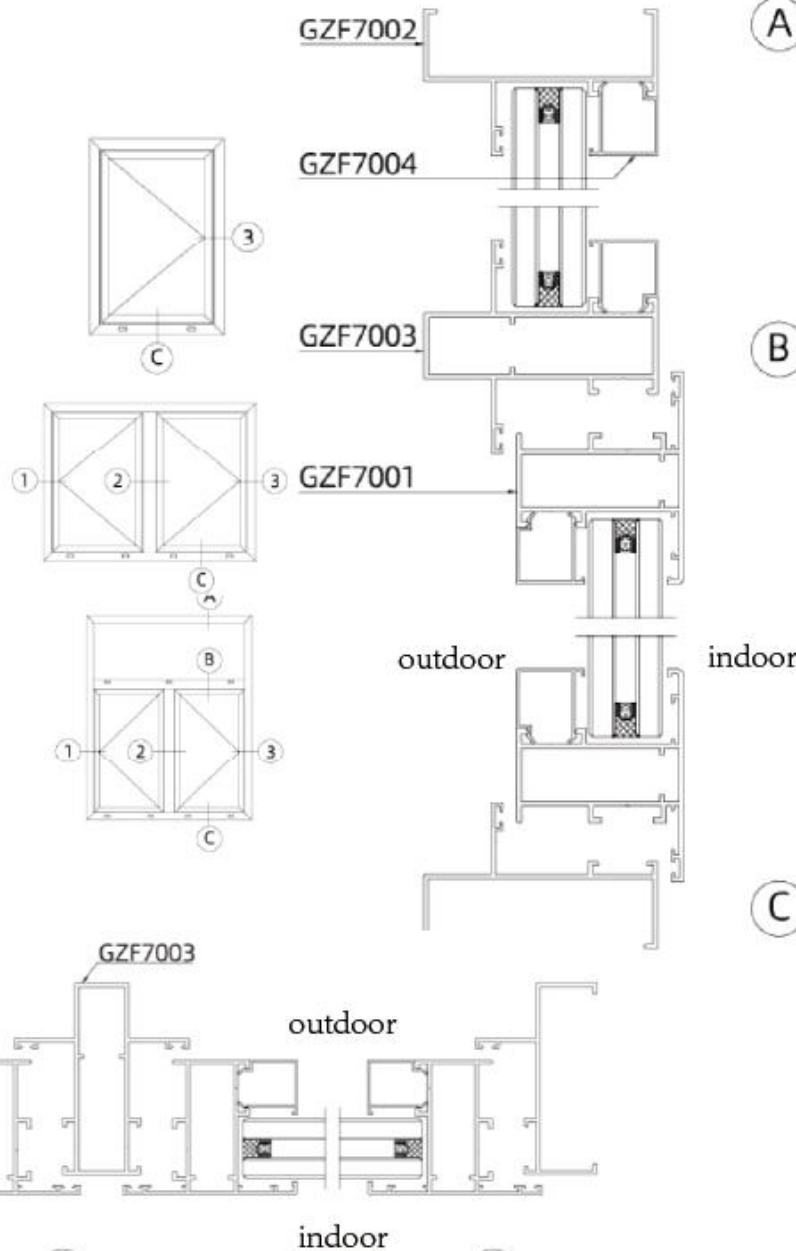


ALP70 Ourward Castment Window

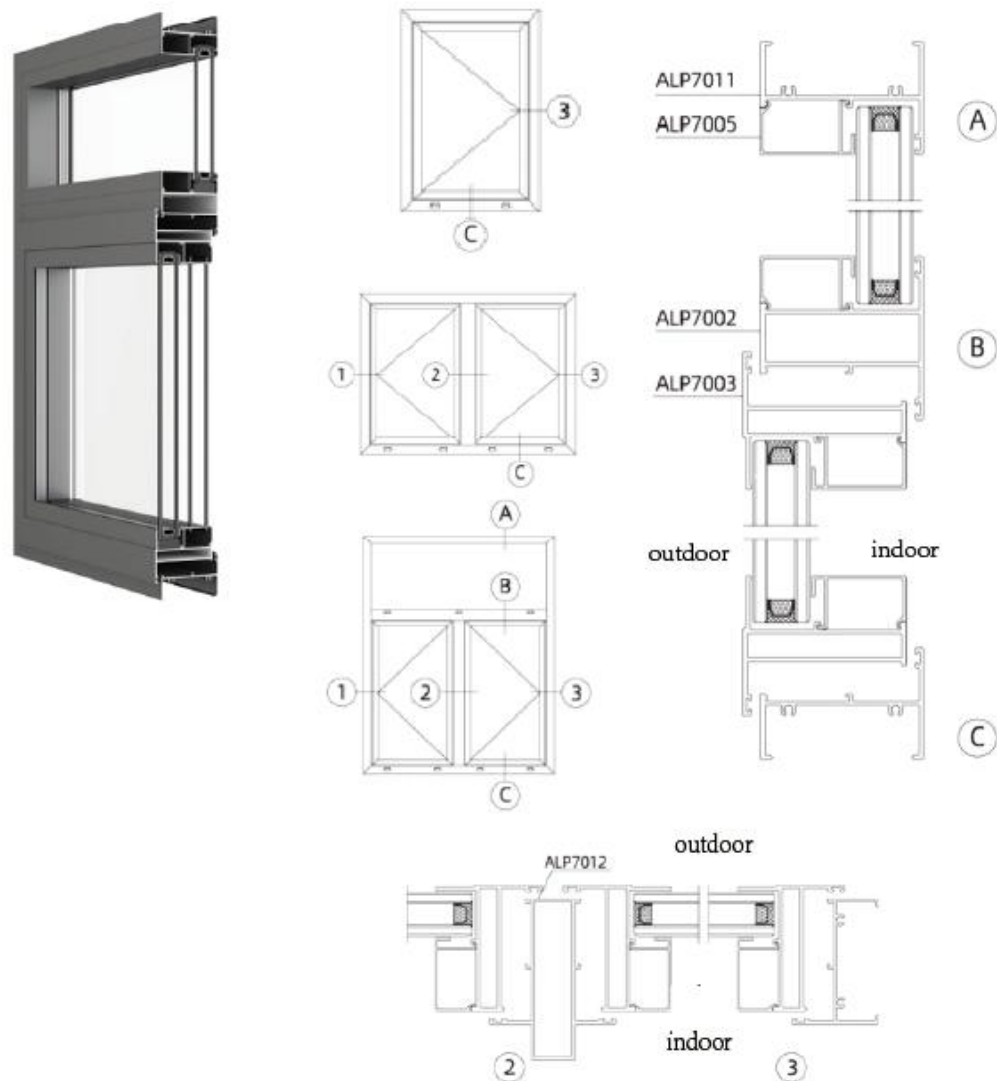

ALP70 Inward Castment Window

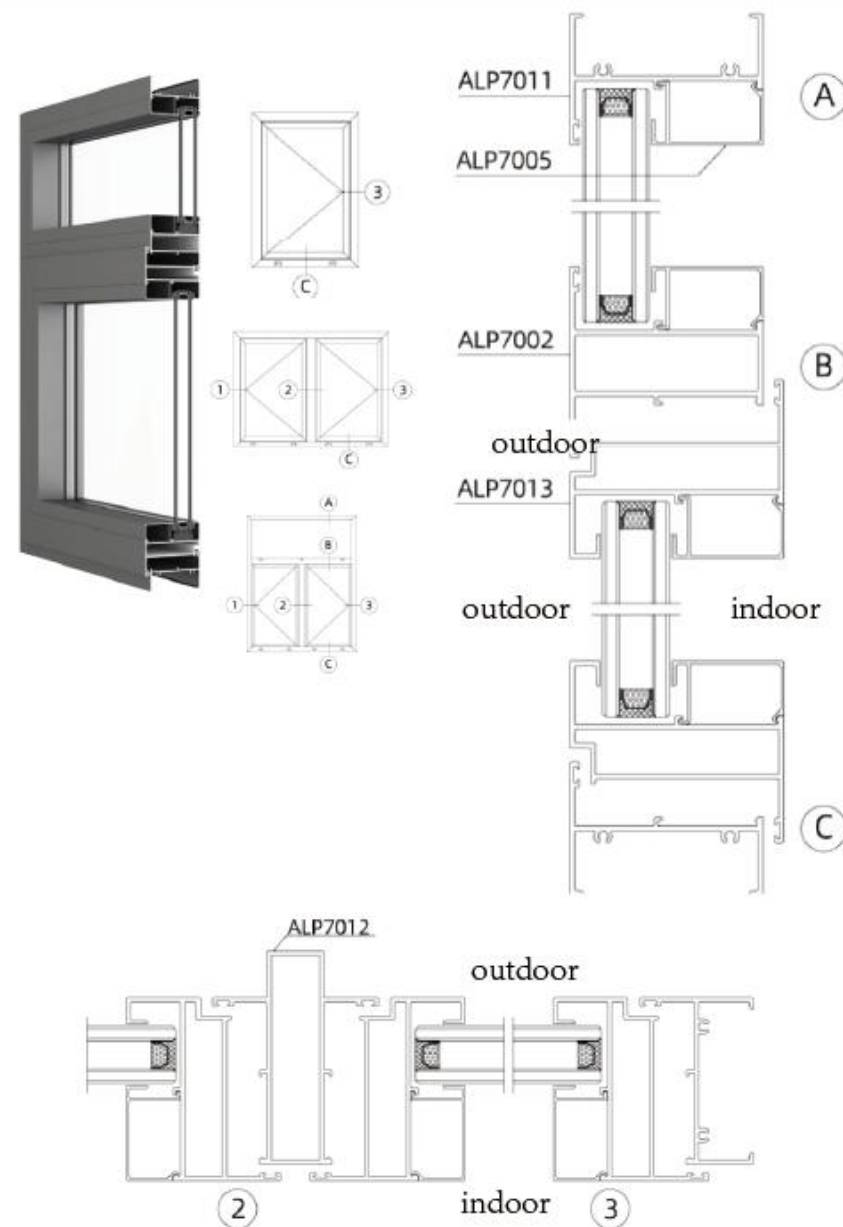


ALP70 Castment Window

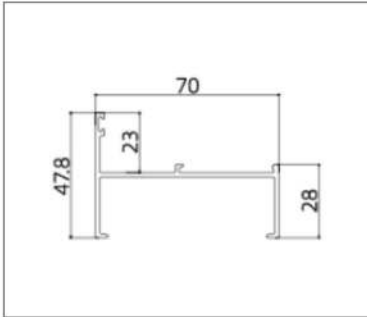


ALP7001 (Frame)

Thickness:1.75mm Weight: 0.734kg/m

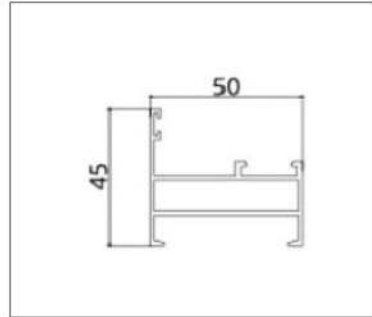


ALP7011 (Frame)

Thickness:1.75mm Weight: 0.803kg/m

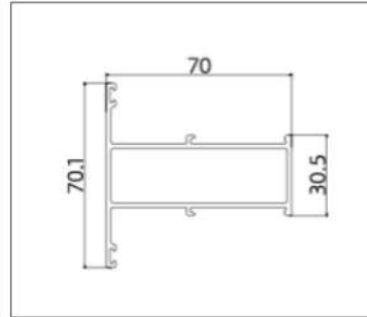


ALP7002 (Mullion)

Thickness:1.75mm Weight: 1.178kg/m

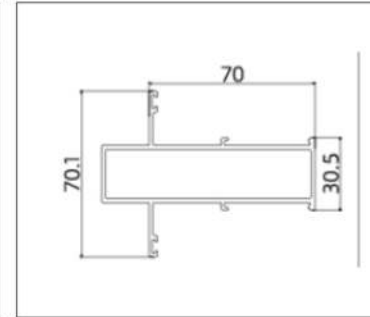


ALP7012 (Mullion)

Thickness:1.75mm Weight: 1.368kg/m

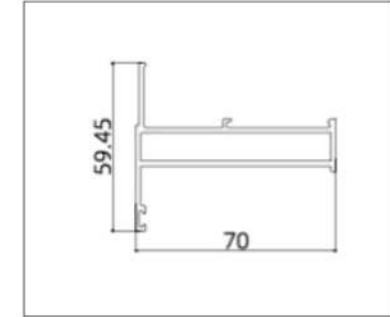


ALP7003(Sash)

Thickness:1.75 Weight: 1.041kg/m

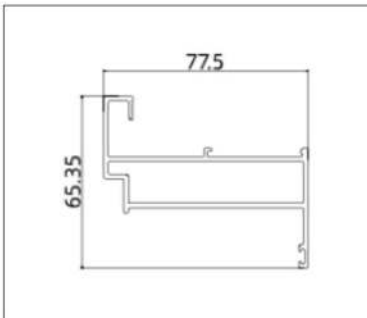


ALP7003 (Sash)

Thickness:1.75mm Weight: 1.232kg/m

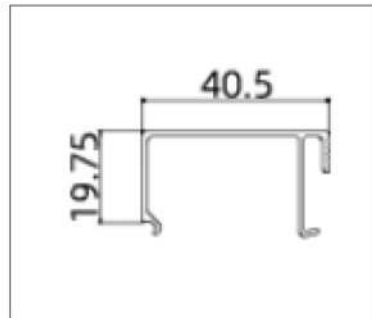


ALP7005 (Glazing Bead)

Thickness:1.0mm Weight: 0.274kg/m

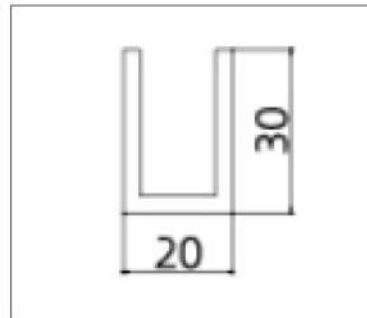


TZ-U3*20*30 (Mullion Connector)

Thickness:3.0 mm Weight: 0.602kg/m

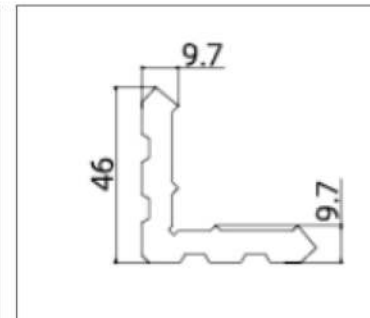



AL-PKC5014(Frame)

Thickness: Weight: 1.639kg/m























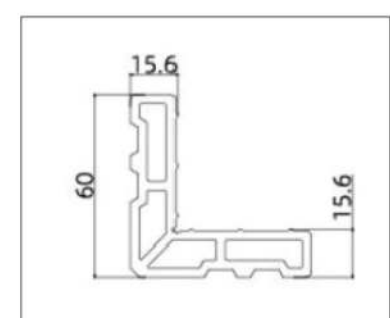


AL-PKC5013(Corner Connector)



Thickness Weight: 2.173kg/m

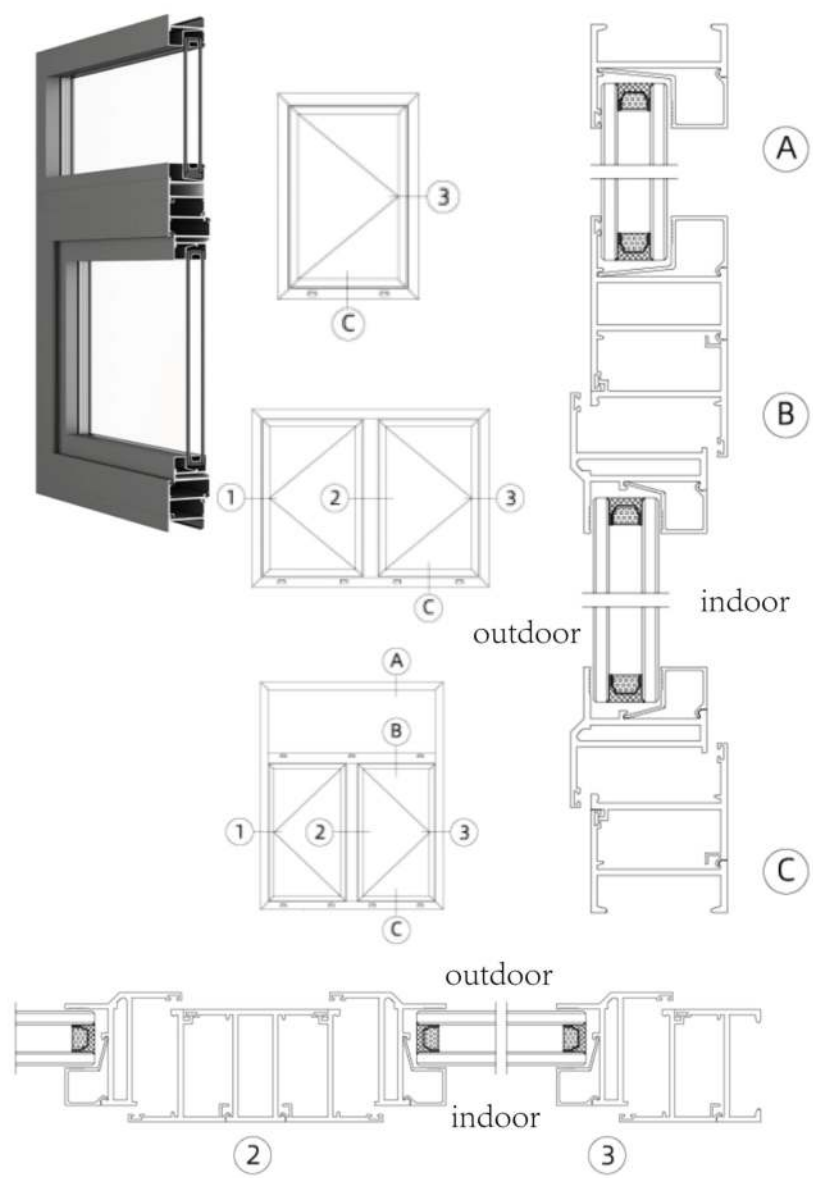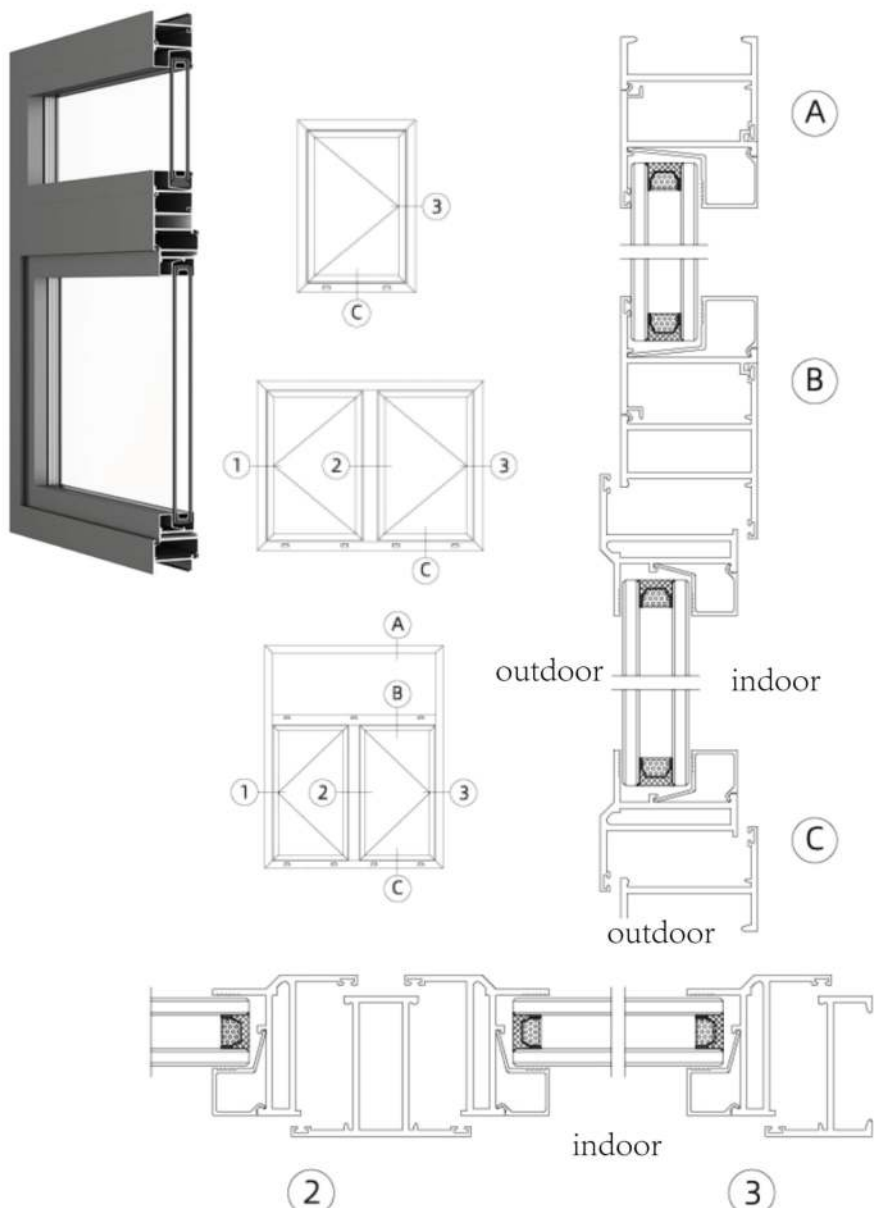

TW50 Castment Door






					
TW5023-01 (Frame)	TW5023-02 (Frame)	TW5023-03 (Frame)	TW5023-21 (Frame)	TW5023-22 (Frame)	TW5023-04 (Mullion)
Thickness:2.3mm Weight: 0.687kg/m	Thickness:2.3mm Weight: 0.727kg/m	Thickness:2.3mm Weight: 0.727kg/m	Thickness:2.3mm Weight: 0.727kg/m	Thickness: 2.3mm Weight: 0.775kg/m	Thickness: 2.3mm Weight: 1.256kg/m
					
TW5023-05 (Mullion)	TW5023-06 (Mullion)	TW5023-08 (Sash)	TW5023-12 (Frame)	TW5023-35 (Mullion Bar)	TW5023-09 (Glazing Beadr)
Thickness:2.3mm Weight: 1.149kg/m	Thickness:1.4mm Weight: 1.019kg/m	Thickness:2.3 mm Weight: 0.989kg/m	Thickness:2.3mm Weight: 0.653 kg/m	Thickness:2.3mm Weight: 1.18kg/m	Thickness: 1.2 mm Weight: 0.191kg/m
					
TW5023-S14 (Glazing Beadr)	TW5023-S09 (Glazing Beadr)	TW5023-S09QJ (Glazing Beadr)	TW5023-S09QJ (Glazing Beadr)	TW5023-S09QJ32 (Glazing Beadr)	TW5023-10 (Glazing Beadr)
Thickness:1.2mm Weight: 0.213kg/m	Thickness:1.2mm Weight: 0.208kg/m	Thickness:1.2mm Weight: 0.209kg/m	Thickness:1.2mm Weight: 0.209kg/m	Thickness:1.2mm Weight: 0.207kg/m	Thickness:1.2mm Weight: 0.252kg/m
					
TW5023-S14K (Glazing Beadr)	TW5023-S10 (Glazing Beadr)	TW5023-S10QJ (Glazing Beadr)	TW5023-S10QJ (Glazing Beadr)	TW5023-13 (Corner Connector)	
Thickness:1.2mm Weight: 0.278kg/m	Thickness:1.2mm Weight: 0.275kg/m	Thickness:1.2mm Weight: 0.297kg/m	Thickness:1.2mm Weight: 0.296kg/m	Thickness: Weight: 0.875kg/m	

HKRC65 Castment Door

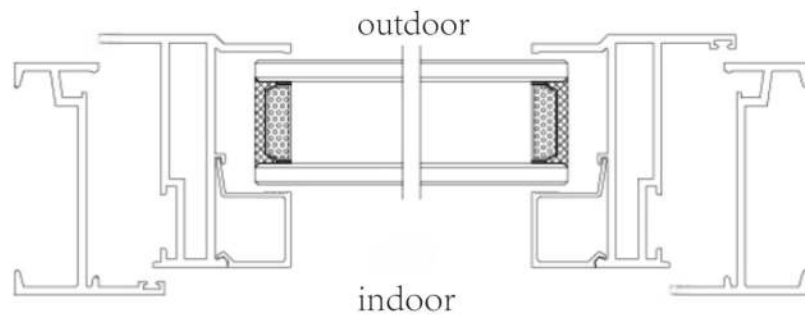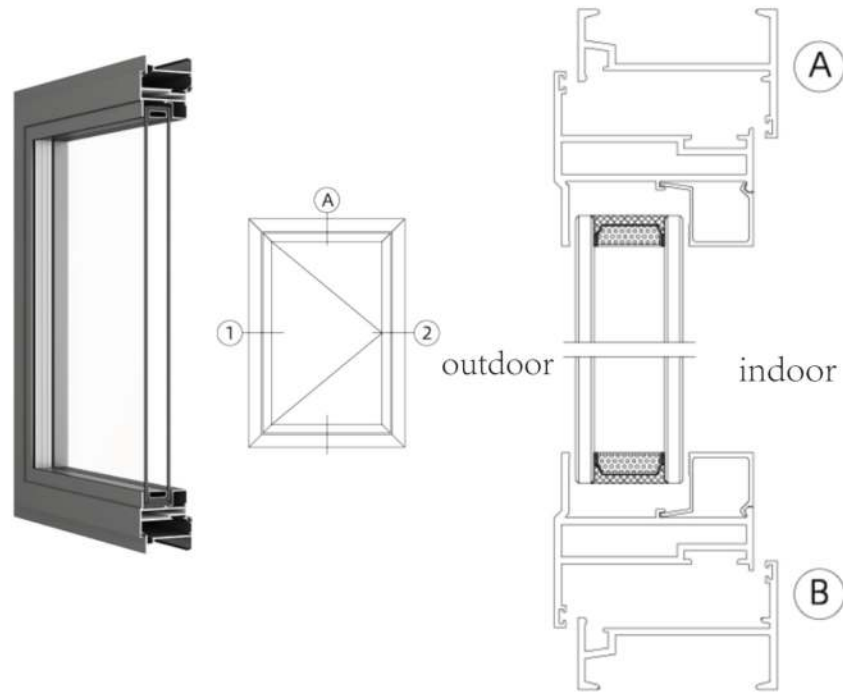


HKRC6501-A (Sash)	HKRC6501-JM (Corner Connector)	HKRC6502 (Frame)	HKRC6503 (Frame)
Thickness:2.3mm Weight: 1.306kg/m	Thickness:1.8mm Weight: 1.801kg/m	Thickness:2.3mm Weight: 0.892kg/m	Thickness:2.3mm Weight: 0.892kg/m
HKRC6504 (Frame)	HKRC6505 (Frame)	HKRC6507 (Mullion)	HKRC6508 (Glazing Bead)
Thickness:2.3mm Weight: 0.924kg/m	Thickness:2.3mm Weight: 0.924kg/m	Thickness:2.3mm Weight: 1.498kg/m	Thickness: 1.5mm Weight: 0.248kg/m
HKRC6509 (Glazing Bead)	HKRC6510 (Frame)	HKR6510 (Frame)	HKRC6512 (Frame)
Thickness:1.5mm Weight: 0.348kg/m	Thickness:2.3mm Weight: 0.9kg/m	Thickness:2.3mm Weight:0.9kg/m	Thickness:2.3mm Weight: 0.962kg/m

AB80 Sliding Window

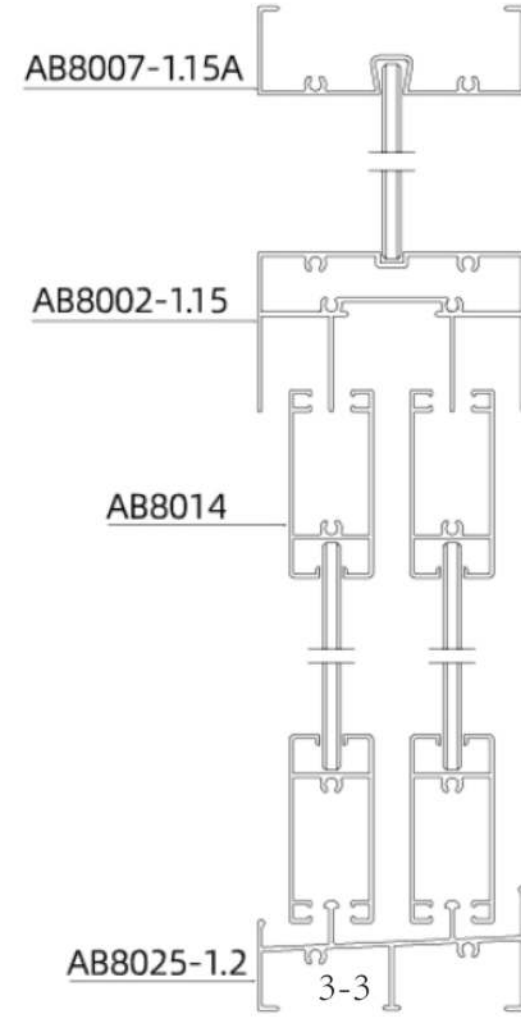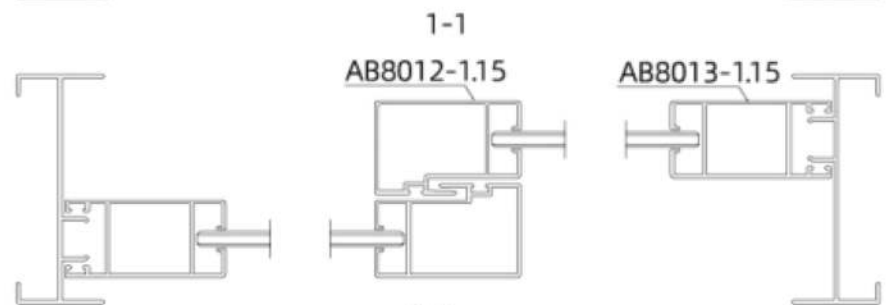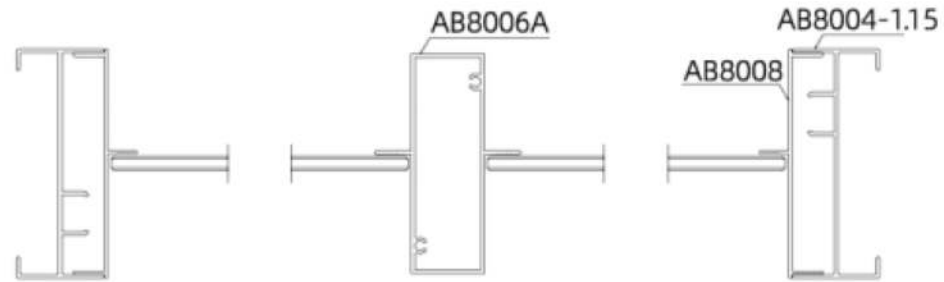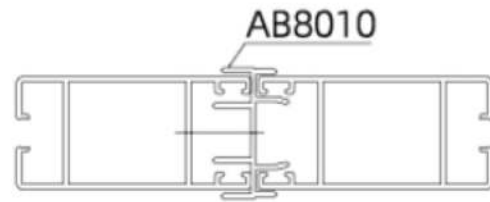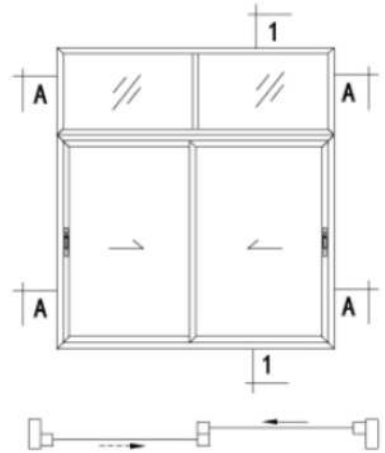


AB80 Sliding Window

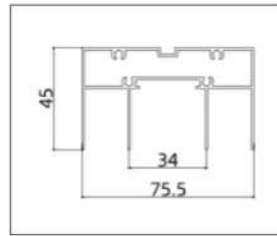


AB8002-0.95 (Track)

Thickness:1.05mm Weight: 0.973kg/m




AB8002-0.95 (Track)

Thickness:1.2mm Weight: 1.094kg/m

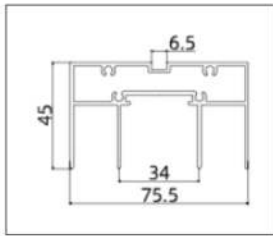


AB8002-1.35 (Track)

Thickness:1.45mm Weight: 1.295kg/m

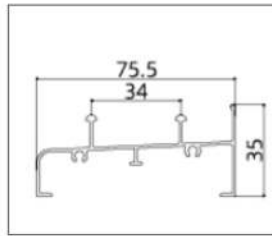


AB8002-0.95 (Track)

Thickness:1.05mm Weight: 0.568kg/m

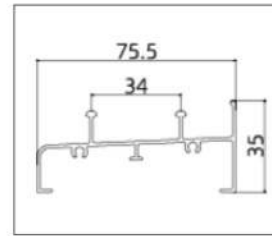


AB8003-11.5 (Track)

Thickness: 1.2mm Weight: 0.627kg/m

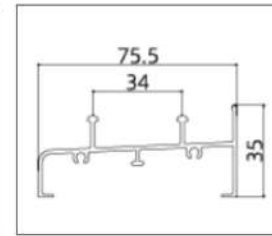


AB8003-1.35A (Track)

Thickness: 1.45mm Weight: 0.723 kg/m

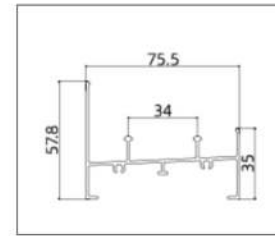


AB8003-1.35A (Track)

Thickness: 1.35mm Weight: 0.852kg/m

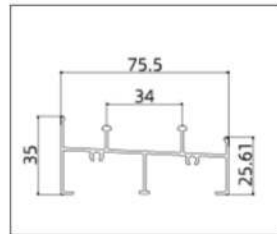


AB805-1.2 (Track)

Thickness:1.2mm Weight: 0.699kg/m

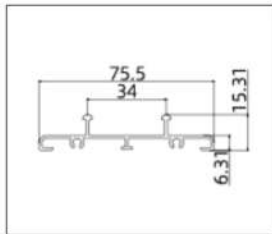


AB8026-1.2 (Track)

Thickness:1.2mm Weight: 0.47kg/m

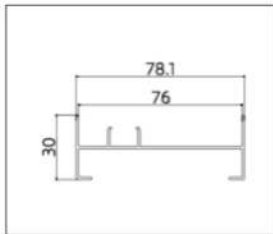


AB8004-0.95 (Frame)

Thickness:1.05 mm Weight: 0.474kg/m

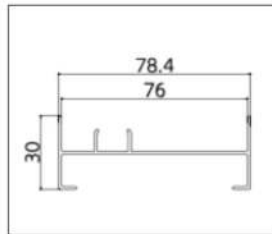


AB8004-11.5 (Frame)

Thickness:1.2mm Weight: 0.537 kg/m

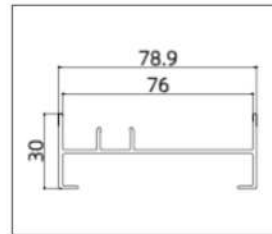


AB8004-1.35A (Frame)

Thickness:1.45mm Weight: 0.653kg/m

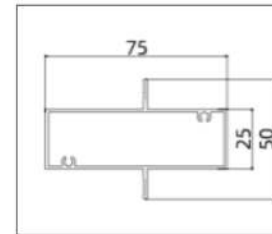


AB8006A (Transom)

Thickness: 1.45 mm Weight: 0.653kg/m

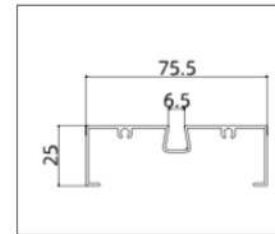


AB8007-0.95 (Frame)

Thickness: 1.05 mm Weight: 0.499kg/m

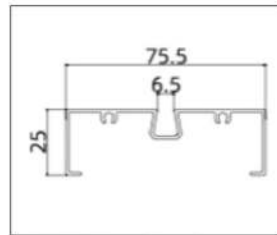


AB8007-1.15A (Frame)

Thickness:1.2mm Weight: 0.353kg/m

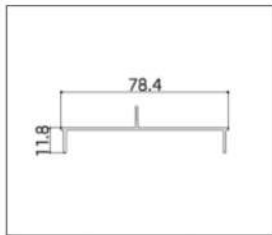


AB8008 (Frame Cover)

Thickness:1.2mm Weight: 0.353kg/m

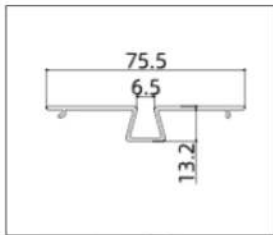


AB8009 (Interlock)

Thickness:1.2mm Weight: 0.367kg/m

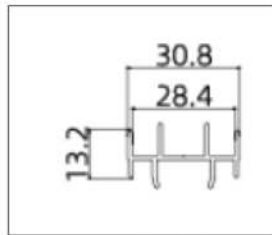


AB8010 (End Cap)

Thickness:1.2mm Weight: 0.284kg/m

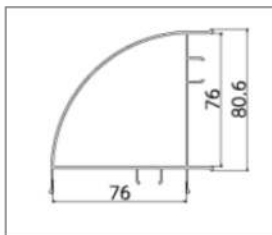


AB8011A (90° Corner)

Thickness:1.2mm Weight: 0.207kg/m

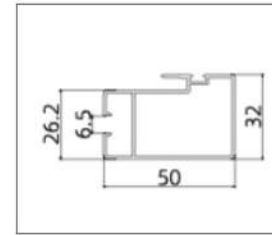


AB8012-0.95 (Striker Stile)

Thickness:1.05mm Weight: 0.553 kg/m

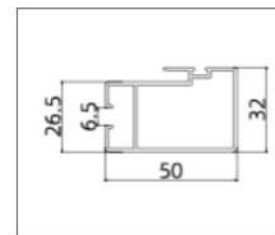


AB8012-1.15 (Striker Stile)

Thickness:1.2mm Weight: 0.624 kg/m

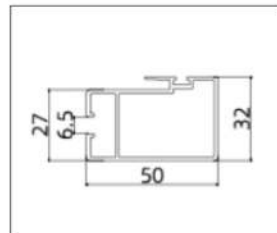


AB8012-1.35 (Striker Stile)

Thickness:1.2mm Weight: 0.624kg/m

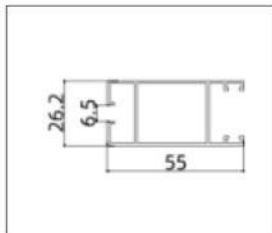


AB8013-0.95 (Lock Stile)

Thickness:1.05mm Weight: 0.5519kg/m

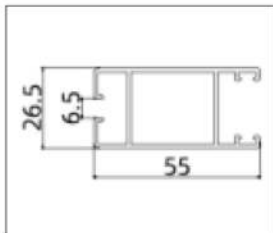


AB8013-1.15 (Lock Stile)

Thickness:1.2mm Weight: 0.628kg/m

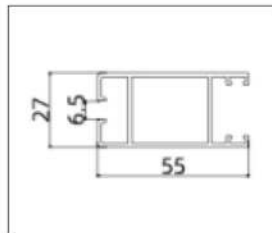


AB8013-1.35A (Lock Stile)

Thickness:1.45mm Weight: 0.747kg/m

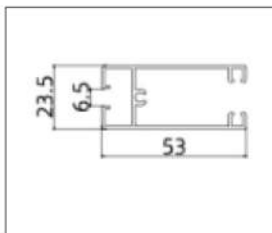

AB8014 (Door Rail)


Thickness: 1.1mm Weight: 0.529kg/m

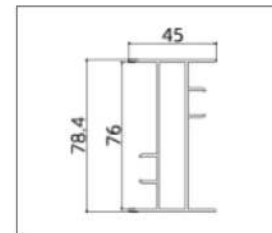


AB8024-1.2 (Double Jamb)

Thickness: 1.2mm Weight: 0.904kg/m



A85 Sliding Window

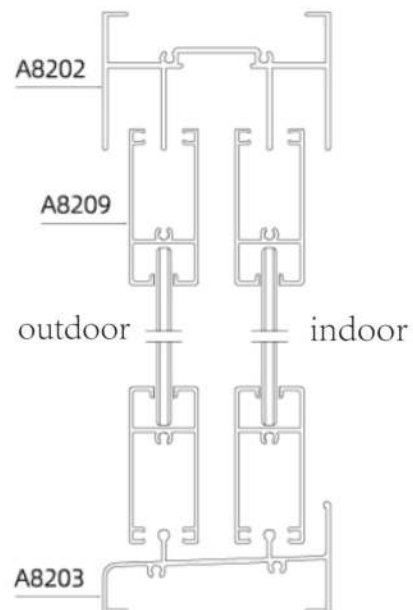


2-2

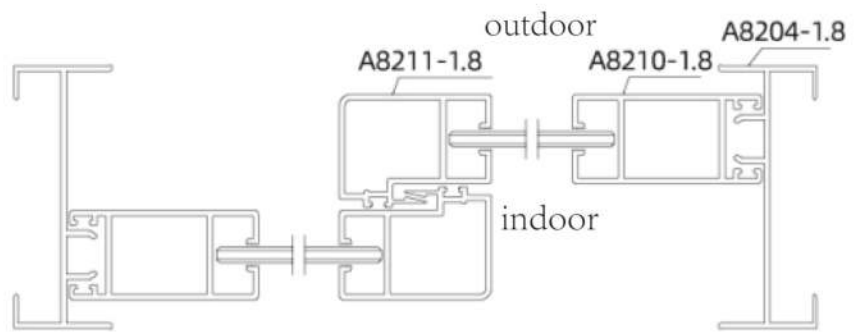


1-1

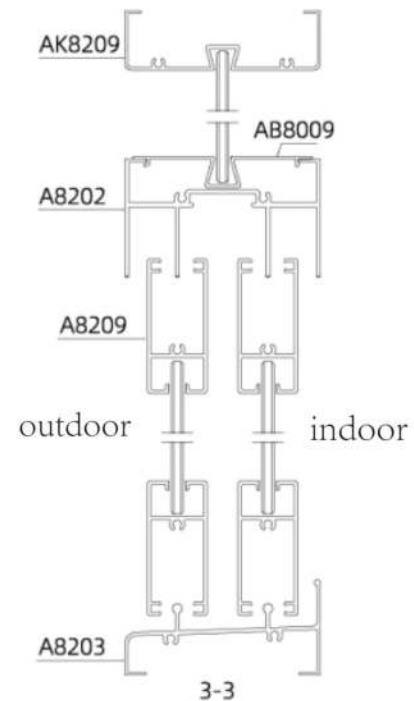

3-3

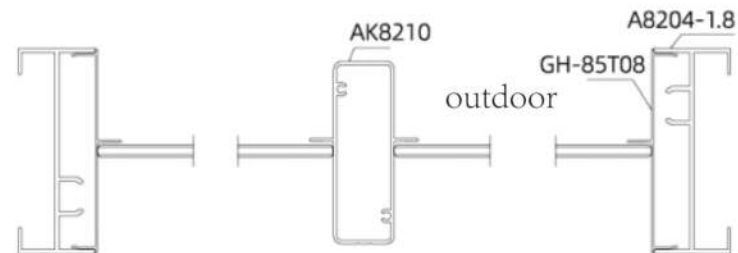


1-1

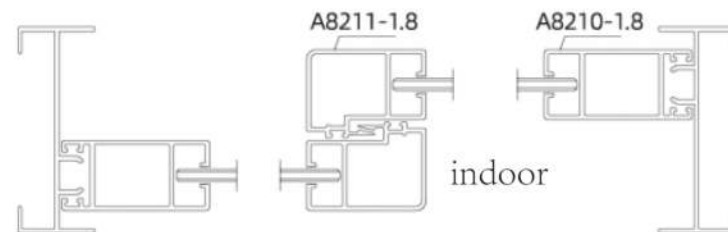


2-2

A85 Sliding Window

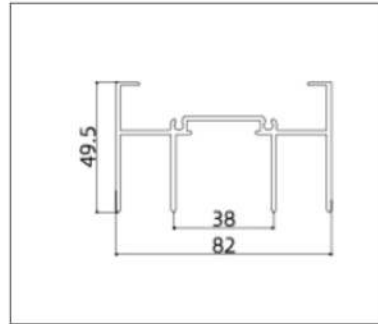


A8202 (Track)

Thickness:1.8mm Weight: 1.295kg/m

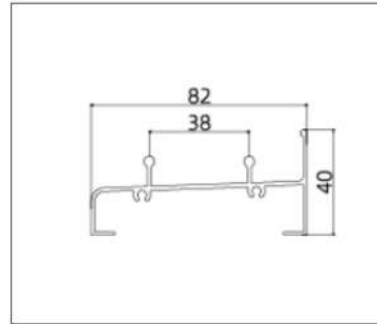


A8203 (Track)

Thickness:1.4mm Weight: 0.785kg/m

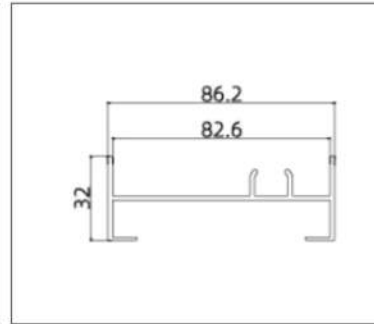


A8204-1.8 (Frame)

Thickness:1.8mm Weight: 0.875kg/m

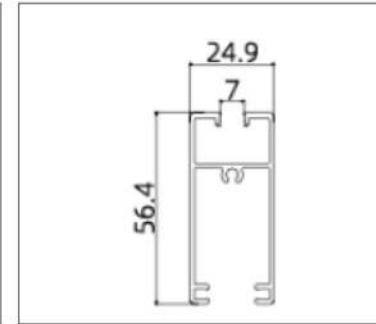


A8209 (Door Rail)

Thickness:1.4mm Weight: 0.673kg/m

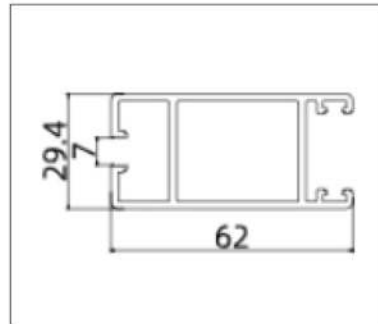


A8210-1.8 (Lock Stile)

Thickness:1.4mm Weight: 1.028kg/m

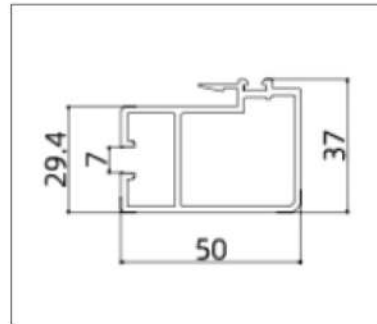


A8211-1.8 (Striker Stile)

Thickness:1.8mm Weight: 0.962kg/m

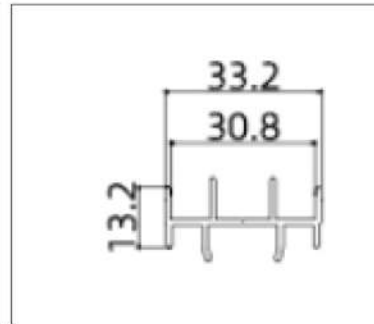


A8216 (End Cap)

Thickness:1.2 mm Weight: 0.292kg/m

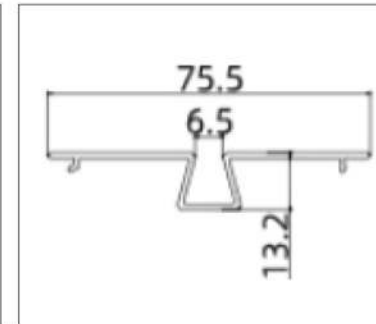


AB8009(Interlock)

Thickness: 1.2mm Weight: 0.367 kg/m

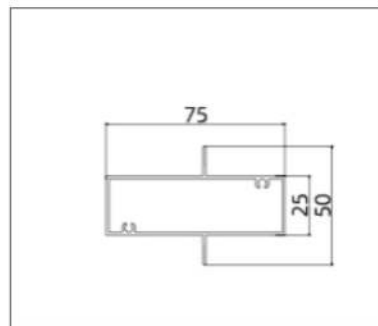


AB8006A (Transom)

Thickness:1.2mm Weight: 0.771kg/m

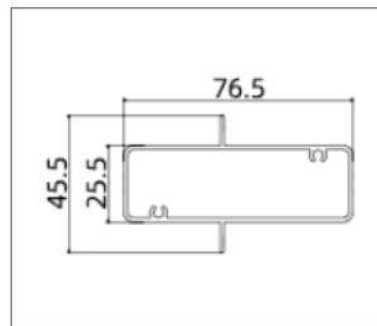


AK8210 (Transom)

Thickness:1.4mm Weight: 0.859kg/m

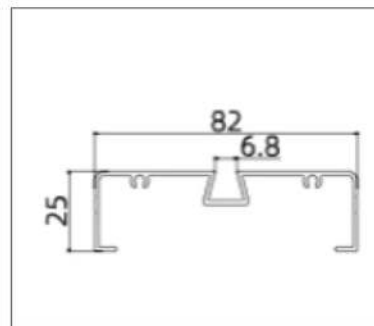

AK8209 (Frame)



Thickness:1.4mm Weight:0.621kg/m

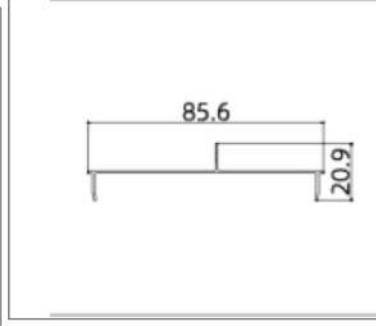


GH-85T08 (Frame Cover)

Thickness:0.9mm Weight: 0.283kg/m



Ak85 Sliding Window

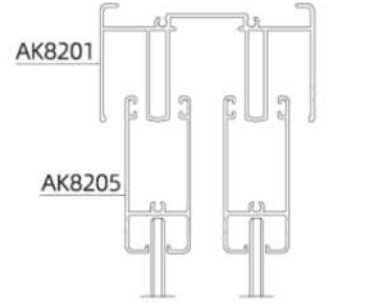



outdoor indoor




2-2

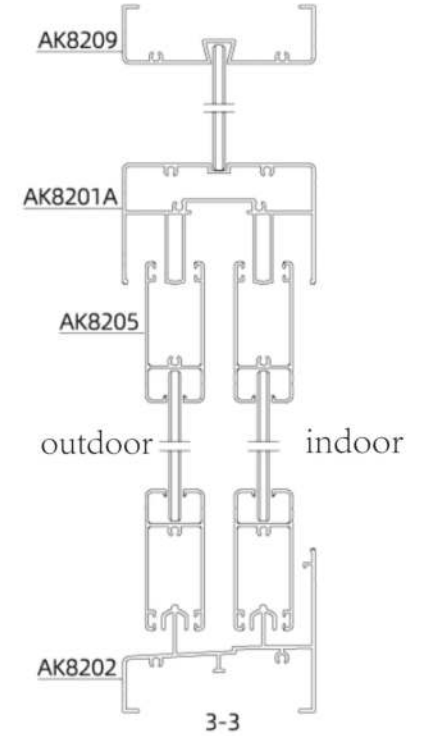

3-3

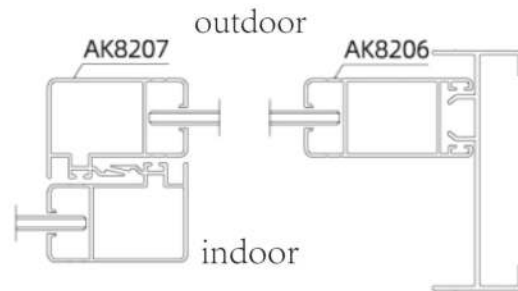



1-1

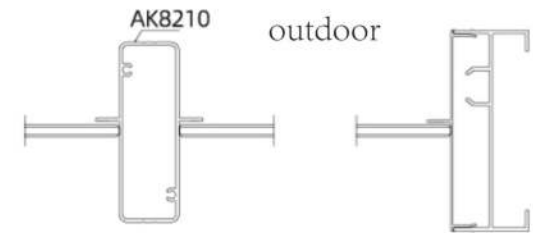

outdoor

1-1




2-2




indoor

AK85 Sliding Window

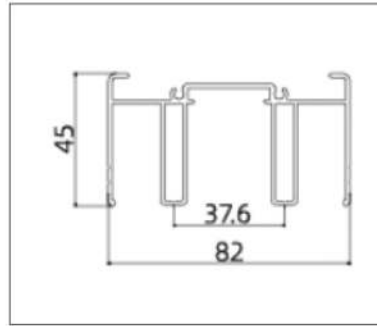


AK8201 (Top Track)

Thickness:1.4mm Weight: 1.254kg/m

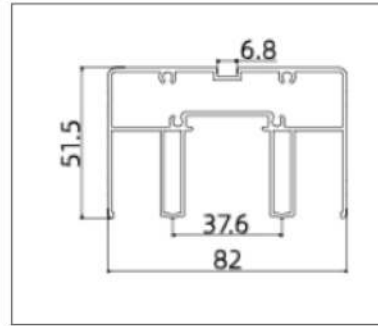


AK8201A (Top Track)

Thickness:1.3mm Weight: 1.514kg/m

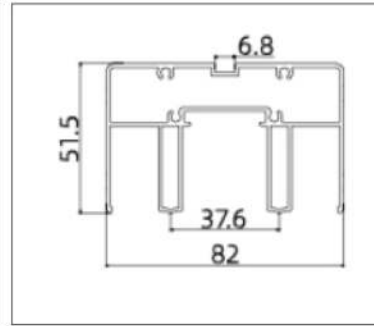


AK8201 (Roller Track)

Thickness:1.4mm Weight: 1.145kg/m

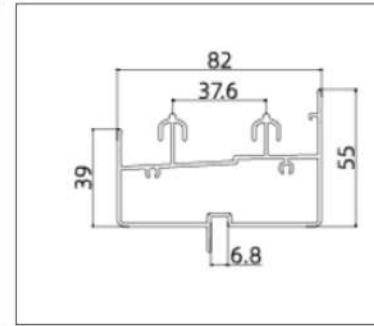


AK8202 (Roller Track)

Thickness:1.4mm Weight: 1.417kg/m

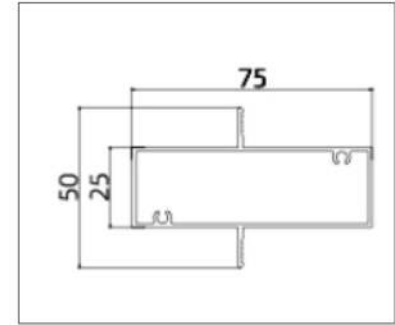


AB8006A (Transom)

Thickness:1.2mm Weight: 0.771kg/m

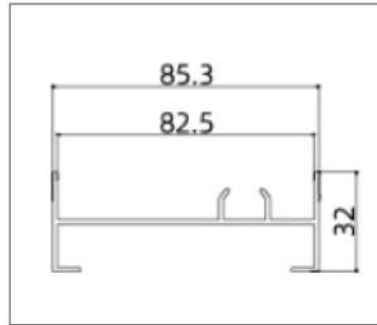


AK8203 (Frame)

Thickness:1.4mm Weight: 1.028kg/m

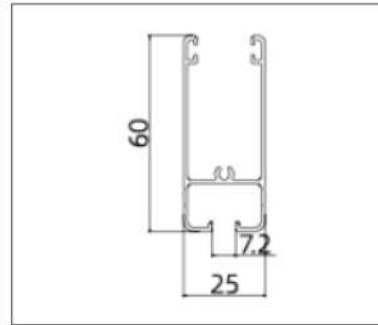


AK8205 (Door Rail)

Thickness:1.2mm Weight: 0.6kg/m

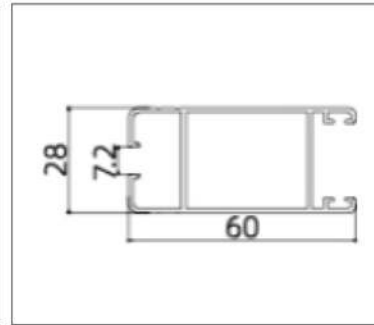


AK8206 (Lock Stile)

Thickness:1.2 mm Weight: 0.673kg/m

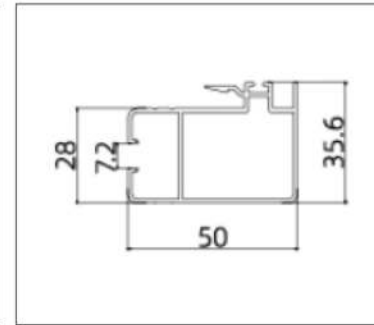


AK8207 (Striker Stile)

Thickness: 1.2mm Weight: 0.682kg/m

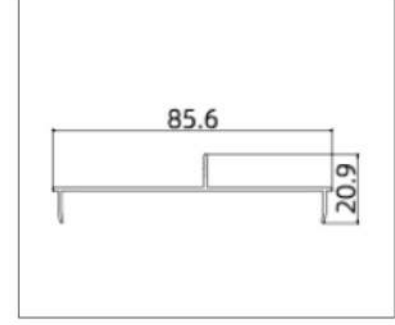


GH-85T08 (Frame Cover)

Thickness: 0.9mm Weight: 0.283kg/m

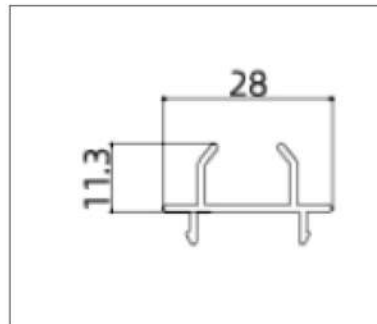


AK8208 (End Cap)

Thickness:1.2mm Weight: 0.771kg/m

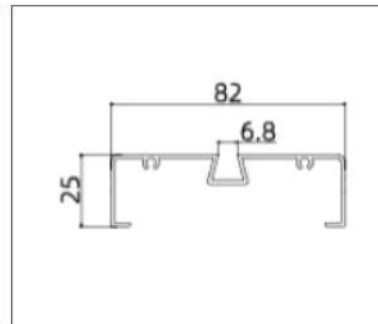


AK8209 (Frame)

Thickness:1.4mm Weight: 0.859kg/m

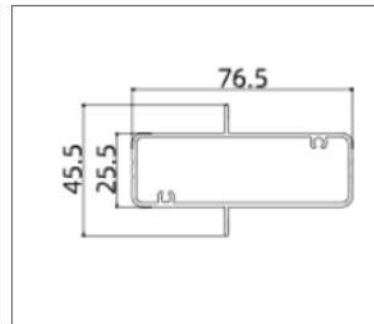

AK8210 (Transom)


Thickness:1.4mm Weight:0.859kg/m

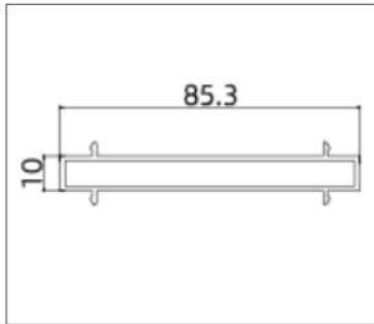




AK8212 (Mullion Bar)

Thickness:1.4mm Weight: 0.283kg/m


GH-85 Sliding Window

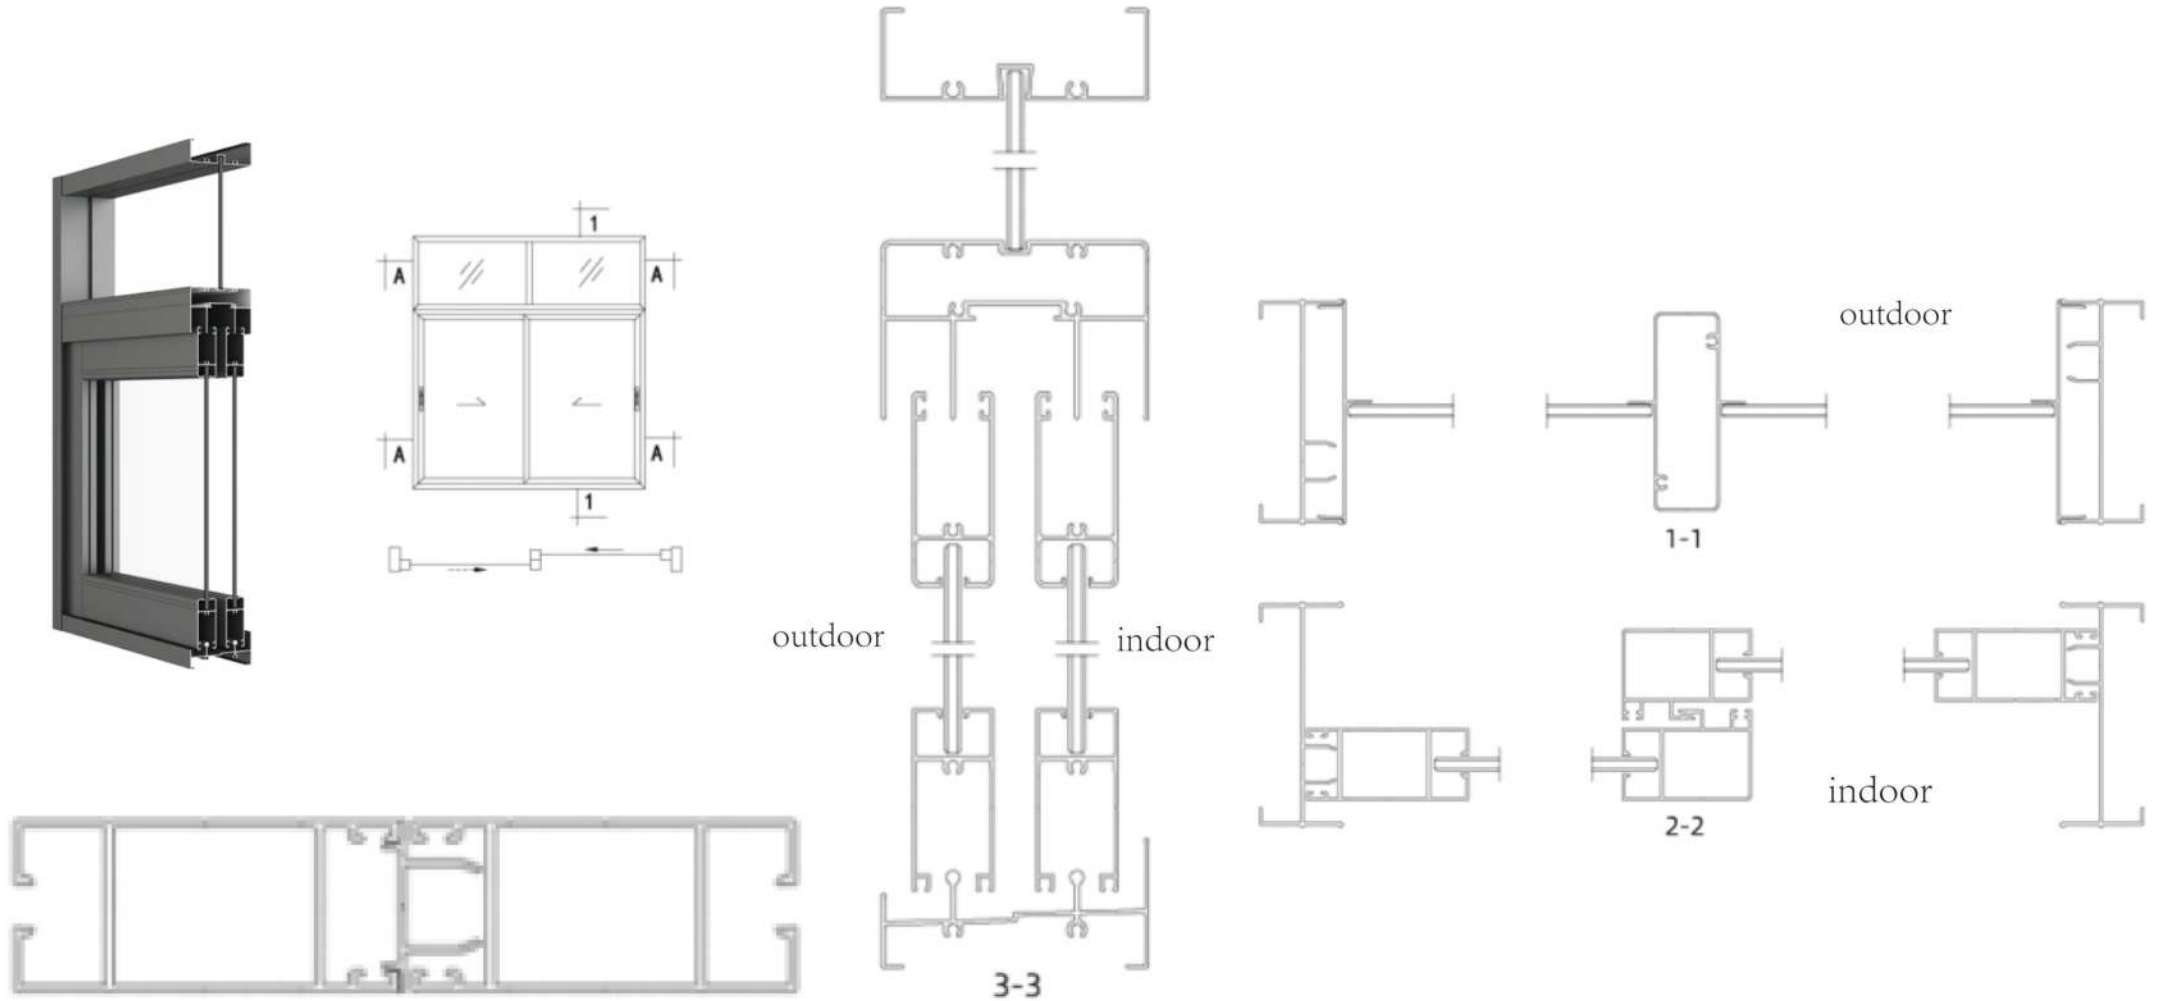

GH-85 Sliding Window

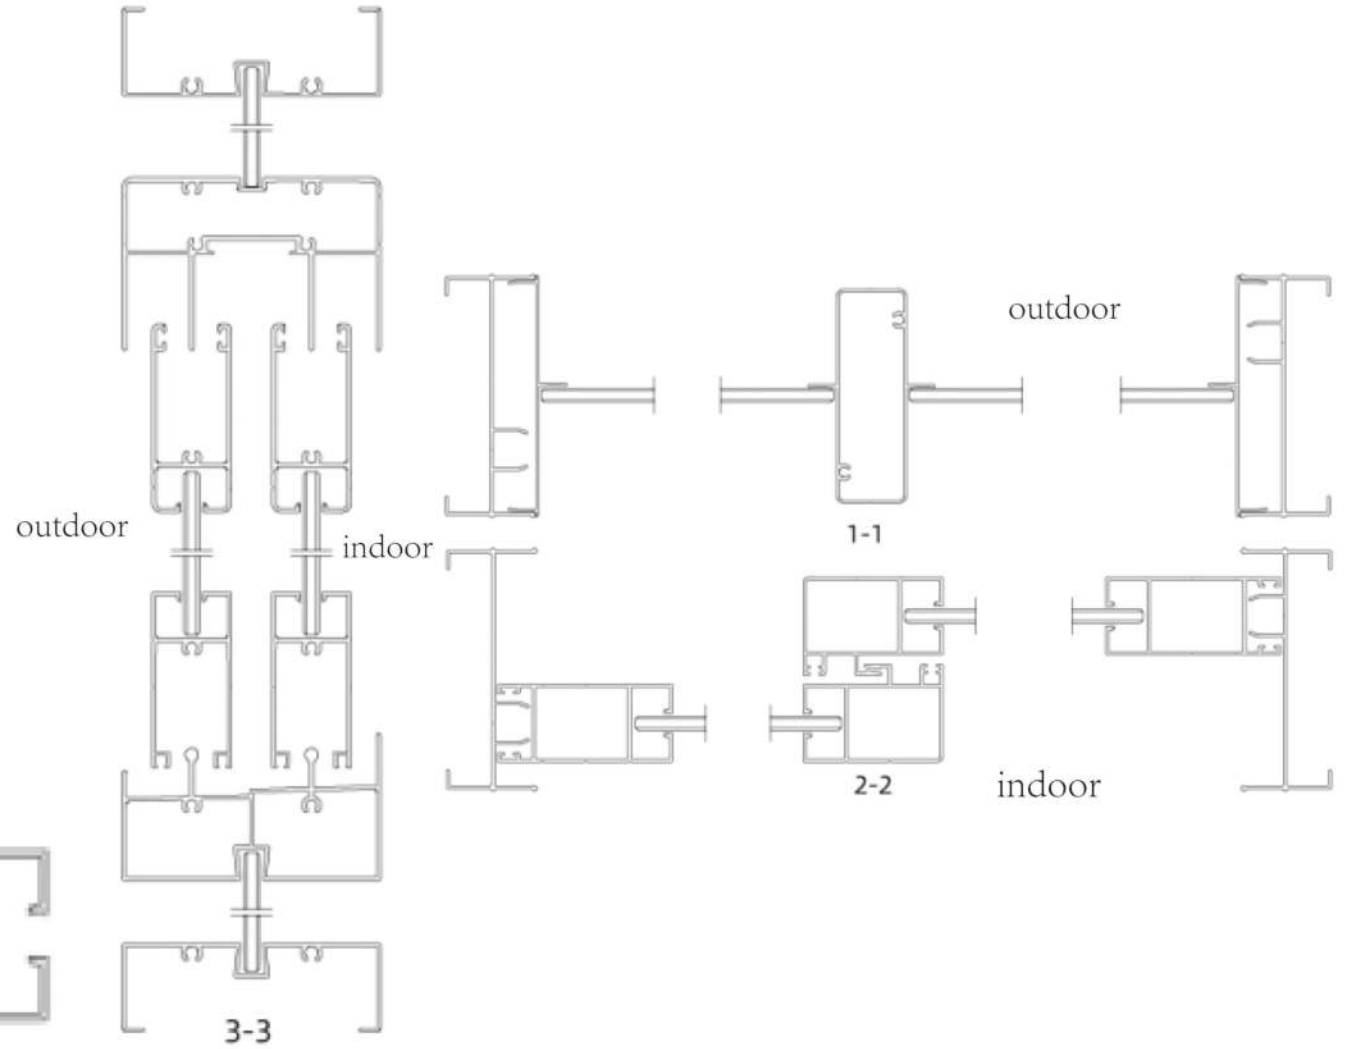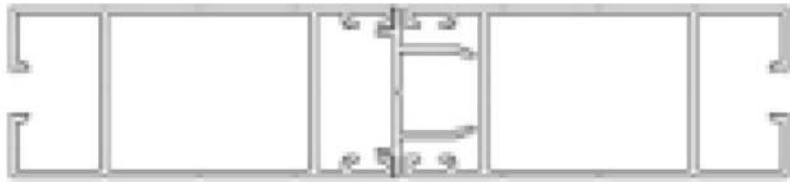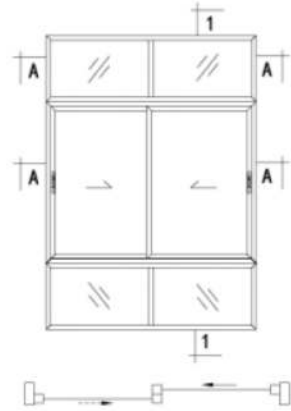


GH-85 Sliding Window

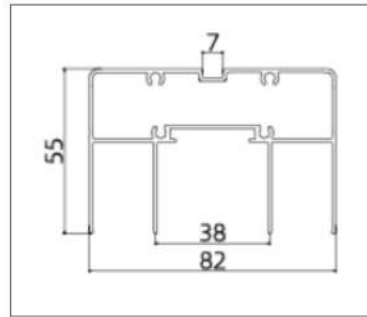


GH-85T01 (Track)

Thickness:1.2mm Weight: 1.224kg/m

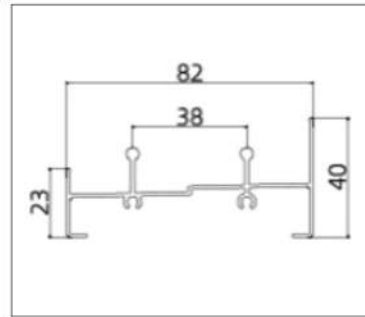


GH-85T02 (Track)

Thickness:1.1mm Weight: 0.686kg/m

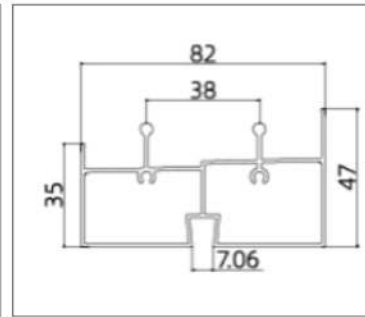


GH-85T12 (Frame)

Thickness:1.1mm Weight: 1.06kg/m

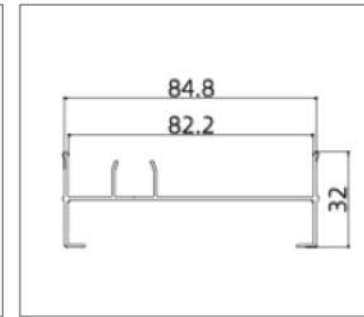


GH-85T03 (Frame)

Thickness:1.1mm Weight: 0.543kg/m

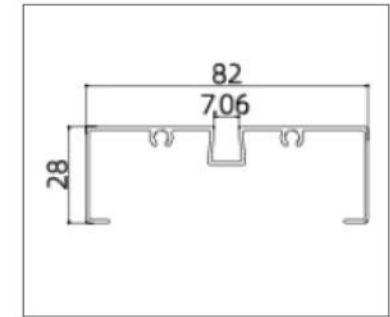


GH-85T19 (Frame)

Thickness:1.0mm Weight: 0.525kg/m

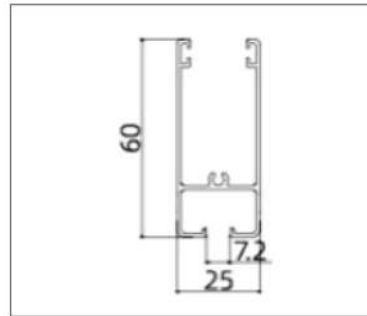


AK8205 (Door Rail)

Thickness:1.2mm Weight: 0.60kg/m

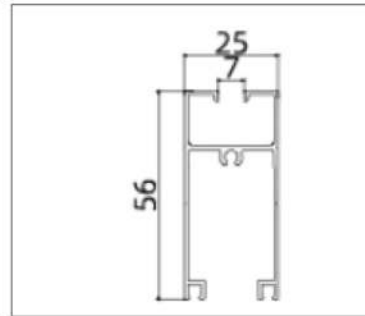


GH-85T04 (Door Rail)

Thickness:1.0mm Weight: 0.519kg/m

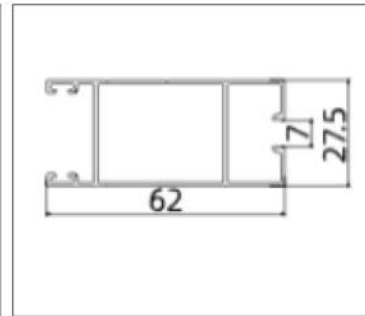


GH-85T06 (Lock Stile)

Thickness:1.0mm Weight: 0.602kg/m

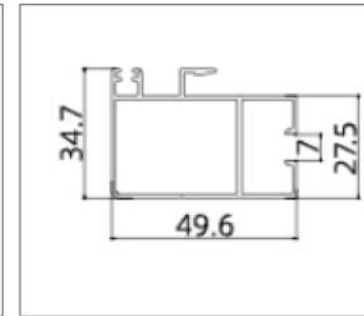


GH-85T06(Striker Stile)

Thickness: 1.0mm Weight: 0.582 kg/m

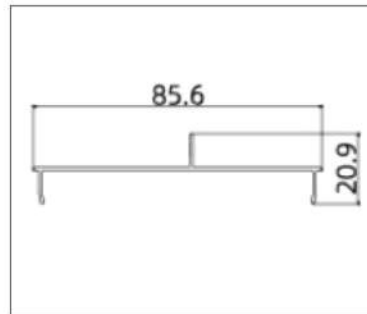


GH-85T08 (Frame Cover)

Thickness:0.9mm Weight: 0.283kg/m

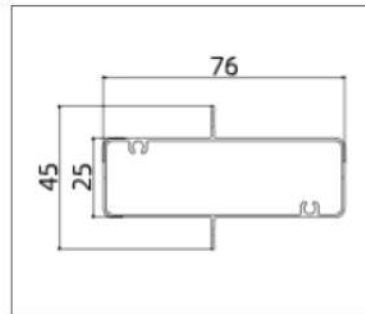


GH-85T09 (Mullion)

Thickness:0.9mm Weight: 0.577kg/m

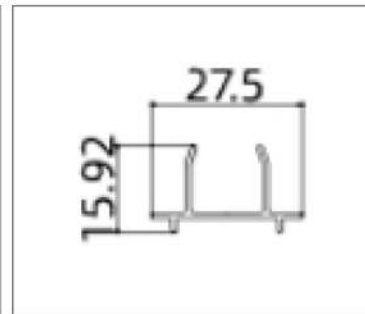

GH-85T10 (End Cap)


Thickness:1.0mm Weight:0.151kg/m

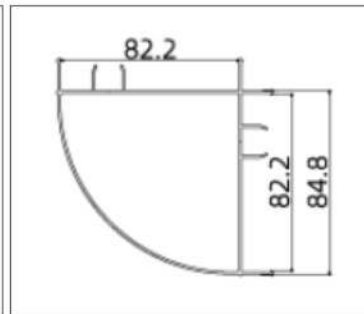


GH-85T13 (90° Corner)

Thickness:1.1mm Weight: 1.238 kg/m






A90 Sliding Window

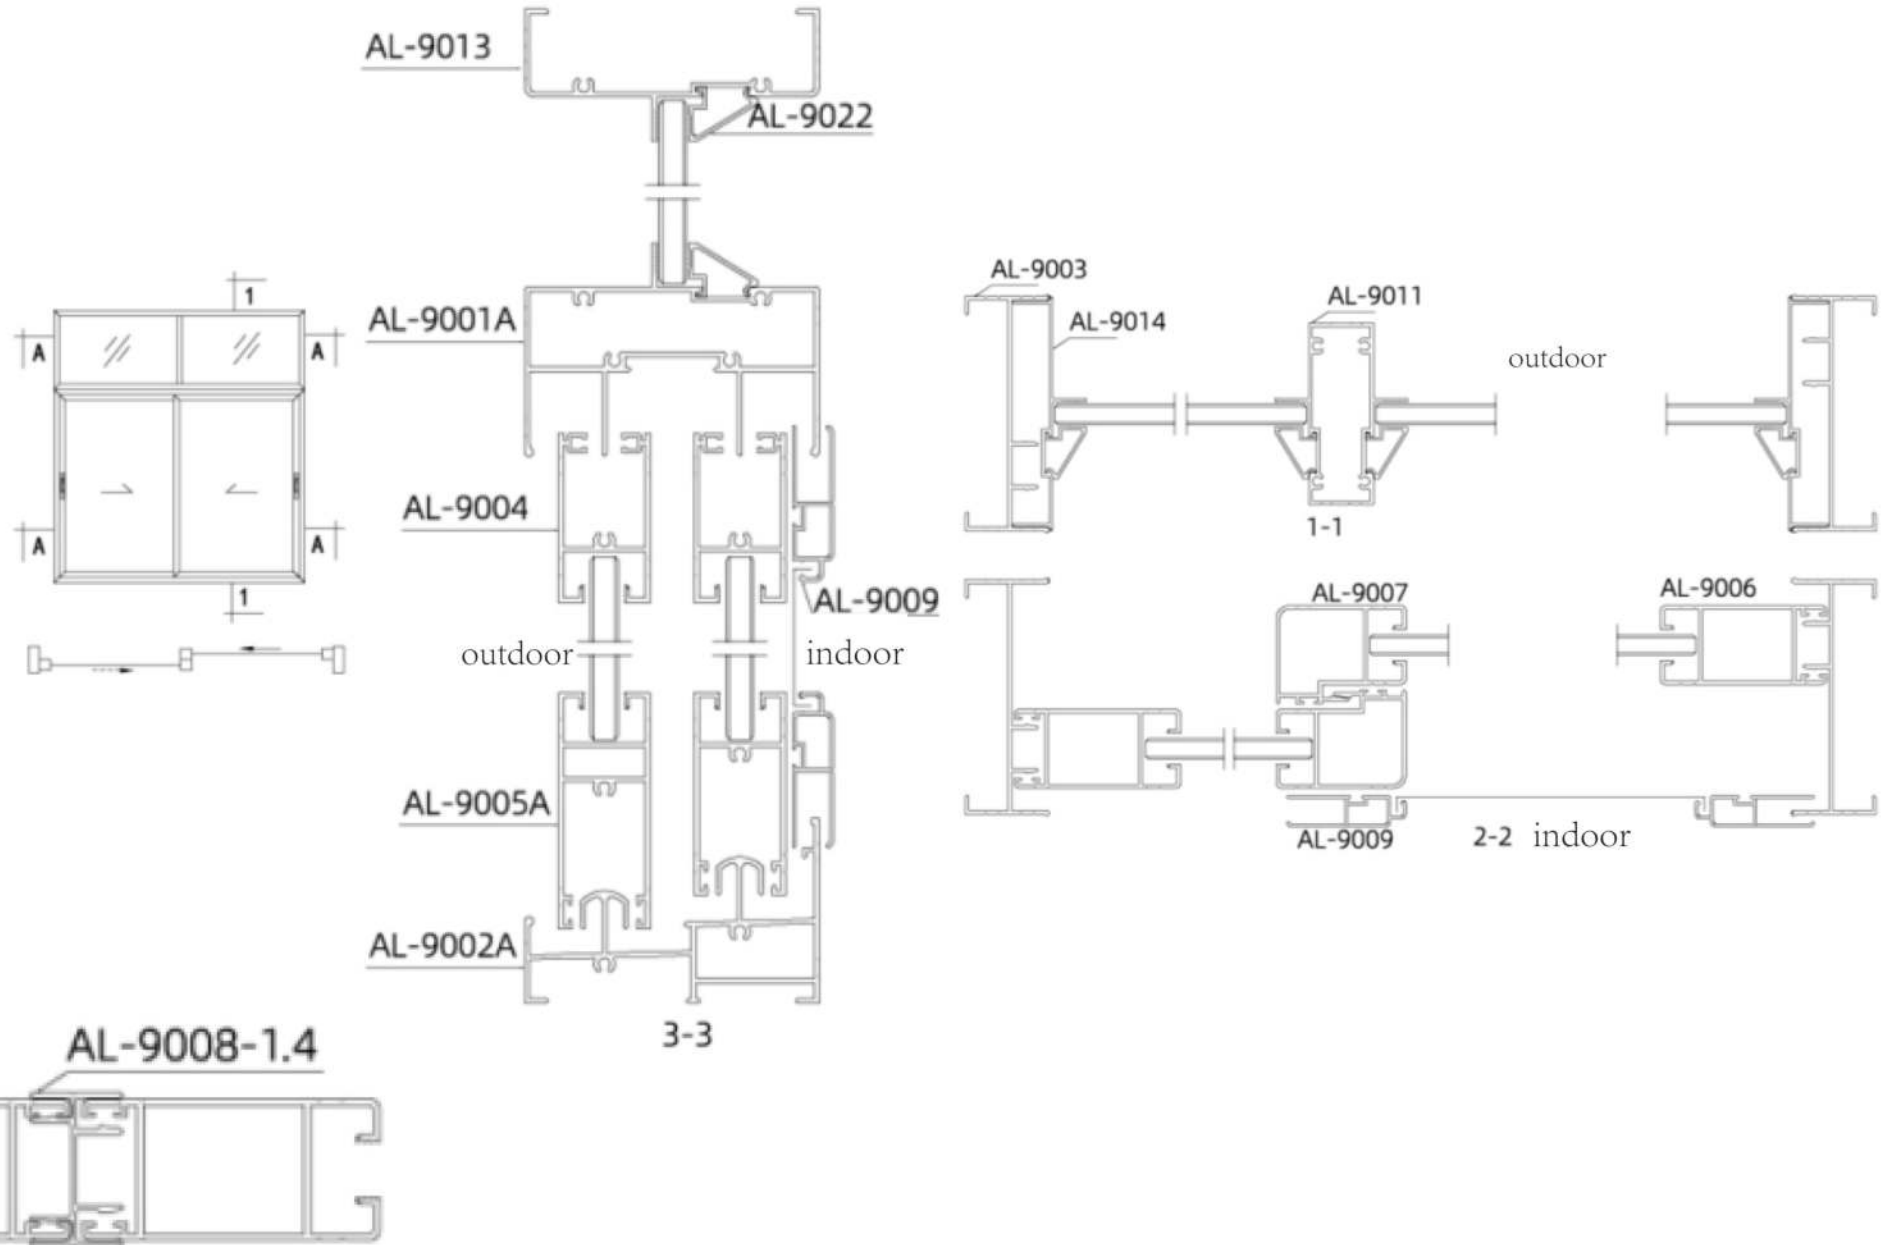


































A90 Sliding Window

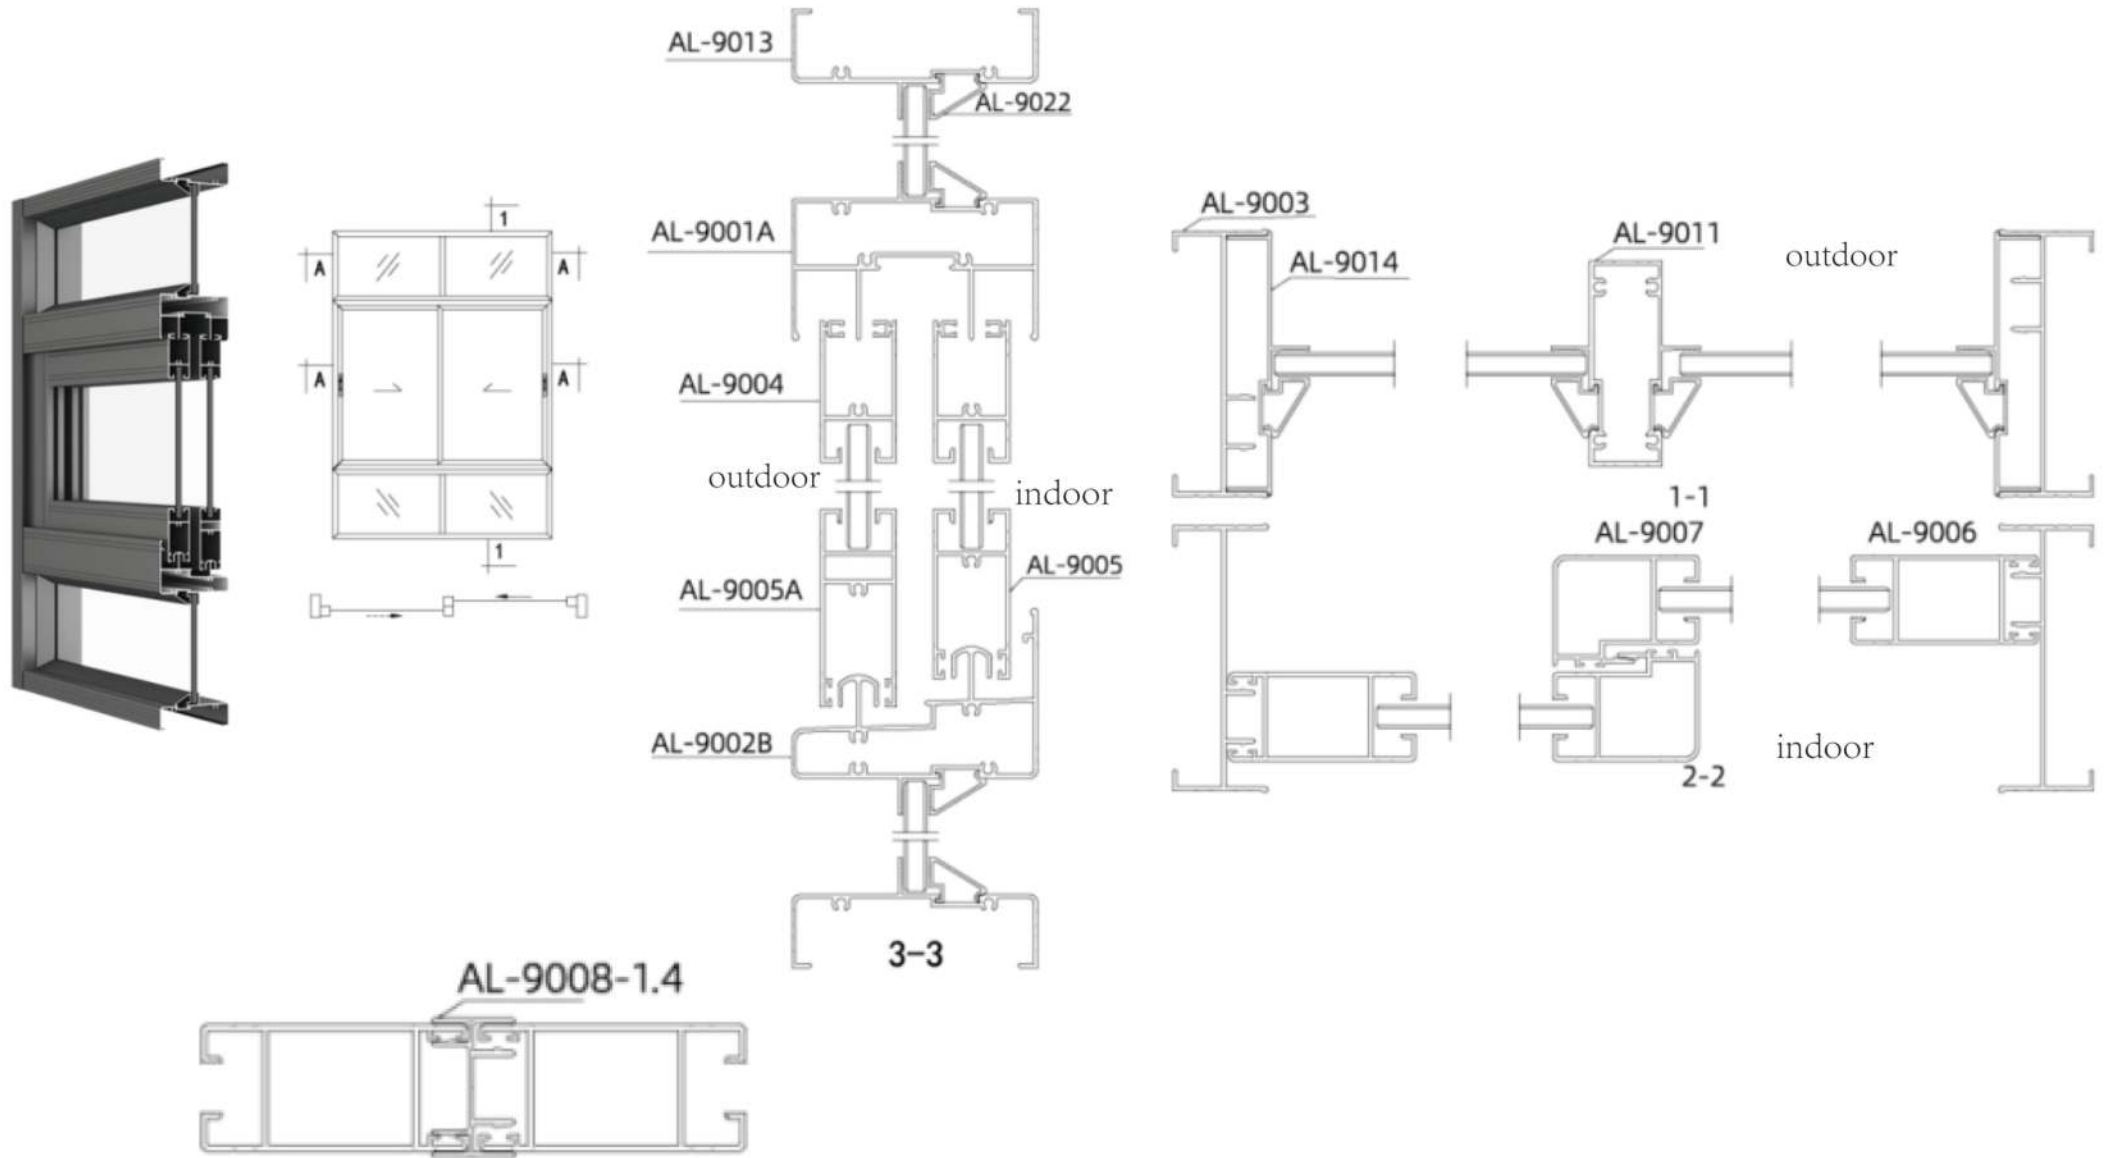


A90 Sliding Window

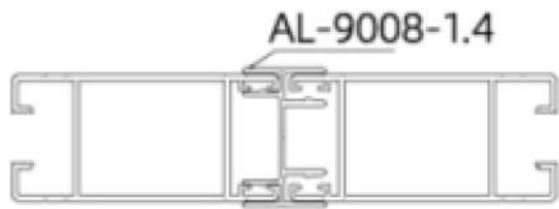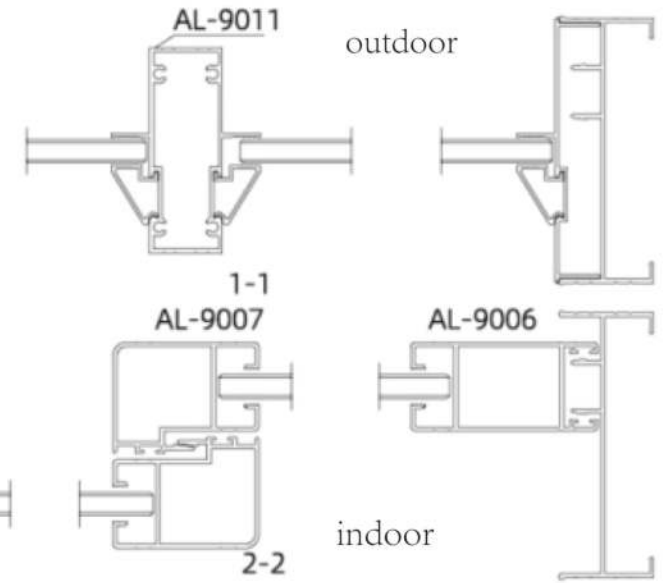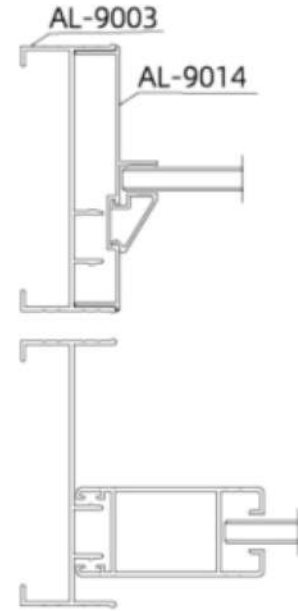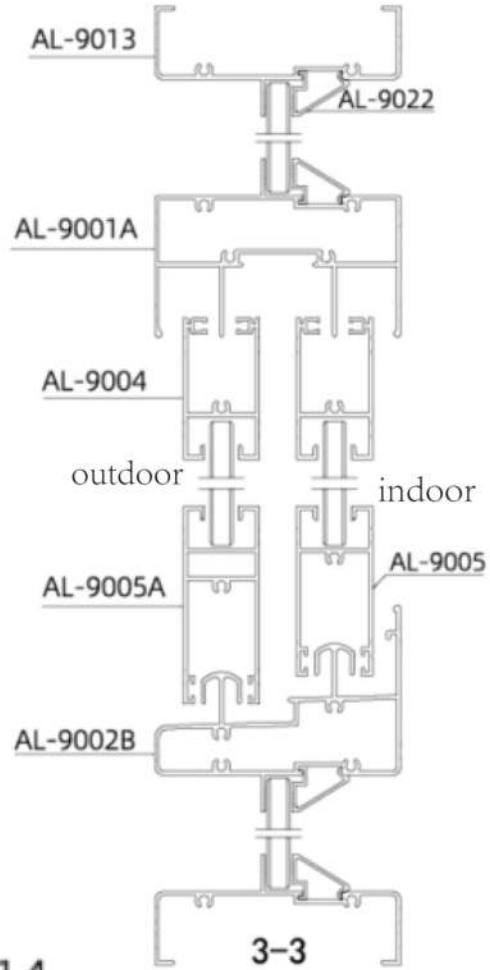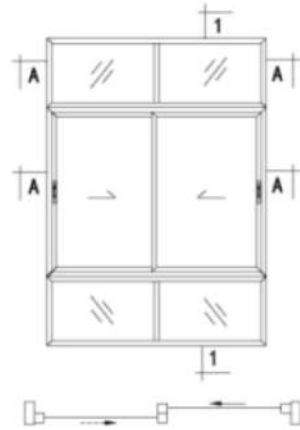


A90 Sliding Window

						
AL-9001 (Track)	AL-9001A (Track)	AL-9002 (Track)	AL-9032-1.4 (Track)	AL-9002A (Track)	AL-9002B (Track)	AL-9003 (Frame)
Thickness:1.4mm Weight: 0.91kg/m	Thickness:1.4mm Weight: 1.428kg/m	Thickness:1.4mm Weight: 0.988kg/m	Thickness:1.4mm Weight: 0.932kg/m	Thickness: 1.4mm Weight: 1.347kg/m	Thickness: 1.4mm Weight: 1.529 kg/m	Thickness: 1.4mm Weight: 0.701kg/m
						
AL-9004 (Door Rail)	AL-9004K (Door Rail)	AL-9005 (Door Rail)	AL-9005A(Door Rail)	AL-9005AK(Door Rail)	AL-9005K(Door Rail)	AL-9005K(Lock Stile)
Thickness:1.4mm Weight: 0.675kg/m	Thickness:1.4mm Weight: 0.698kg/m	Thickness:1.4 mm Weight: 0.698kg/m	Thickness:1.4mm Weight: 0.865kg/m	Thickness:1.4mm Weight: 0.806kg/m	Thickness: 1.4 mm Weight: 0.638kg/m	Thickness: 1.4 mm Weight: 0.813kg/m
						
AL-9006K (Lock Stile)	AL-9007(Striker Stile)	AL-9007K(Striker Stile)	AL-9008-1.4(End Cap)	AL-9009(Sash)	AL-9010(Transom)	AL-9010(Mullion)
Thickness:1.4mm Weight: 0.756kg/m	Thickness:1.4mm Weight: 0.756kg/m	Thickness:1.4mm Weight: 0.715kg/m	Thickness:1.2mm Weight: 0.349kg/m	Thickness:1.0mm Weight: 0.315kg/m	Thickness:1.4mm Weight: 1.014kg/m	Thickness:1.4mm Weight: 0.96 kg/m
						
AL-9012(Mullion Bar)	AL-9013(Frame)	AL-9014(Frame Cover)	AL-9015(Interlock)	AL-9016(Mullion Bar)	AL-9017(Side Frame)	AL-9018(90° Corner)
Thickness:1.4mm Weight: 0.38kg/m	Thickness:1.4mm Weight: 0.679kg/m	Thickness:1.2mm Weight: 0.461kg/m	Thickness:1.2mm Weight: 0.747kg/m	Thickness: 1.4mm Weight: 0.493kg/m	Thickness: 1.4mm Weight: 1.233kg/m	Thickness: 1.4mm Weight: 1.587kg/m
						
AL-9019 (90° Corner)	AL-9020(135° Corner)	AL-9021(135° Corner)	AL-9022(Glazing Bead)	AL-9023(Glazing Bead)		
Thickness:1.4mm Weight: 1.585kg/m	Thickness:1.4mm Weight: 1.205kg/m	Thickness:1.4mm Weight: 1.205kg/m	Thickness:1.0mm Weight: 0.138kg/m	Thickness: 0.8 mm Weight: 0.097kg/m		


XLH-85 Sliding Window

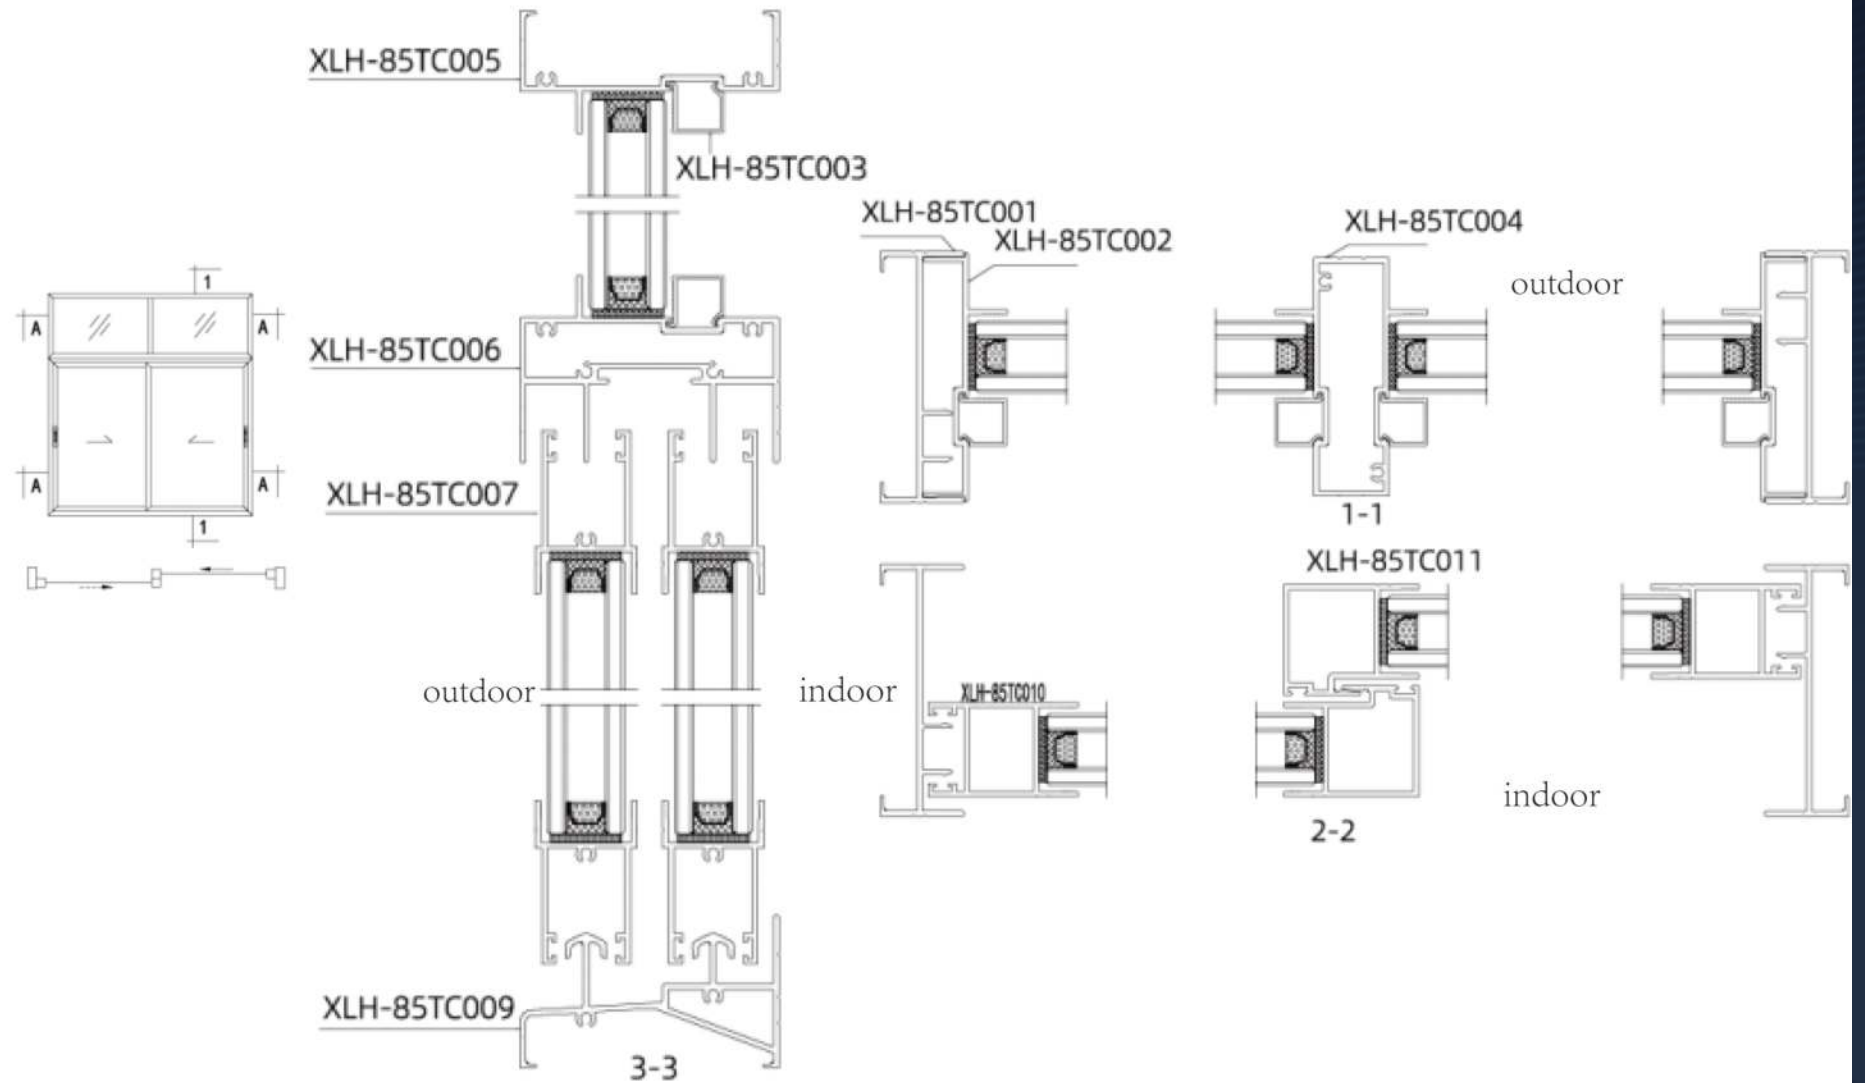


XLH-85 Sliding Window

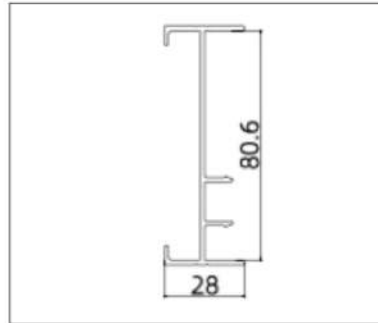


XLH-85TC001 (Side Frame)

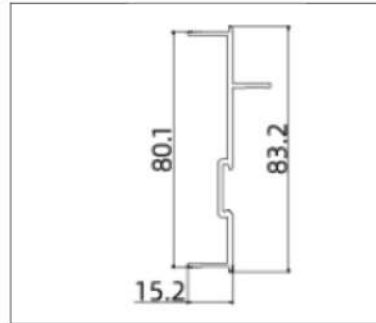

XLH-85TC002 (Frame Cover)

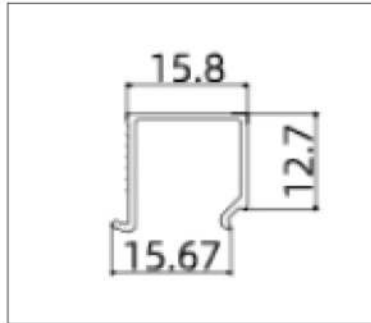


XLH-85TC003 (Glazing Bead)

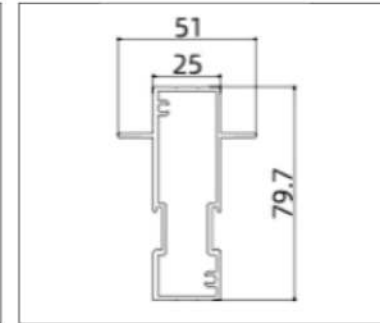


XLH-85TC004 (Mullion)


Thickness:1.72mm Weight: 0.744kg/m Thickness:1.72mm Weight: 0.567kg/m Thickness:0.9mm Weight: 0.123kg/m Thickness:1.72mm Weight:1.24kg/m

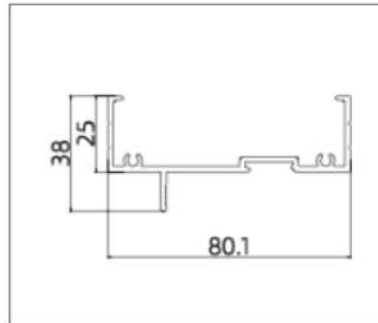


XLH-85TC005 (Frame)

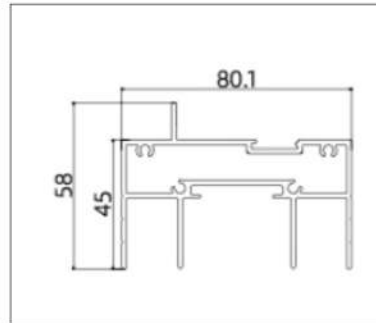

XLH-85TC006 (Track)

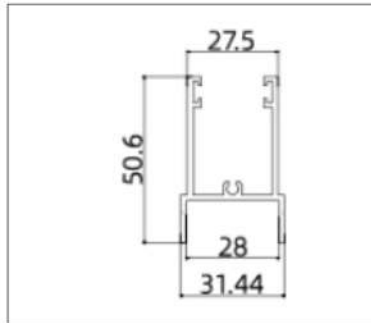


XLH-85TC007 (Door Rail)

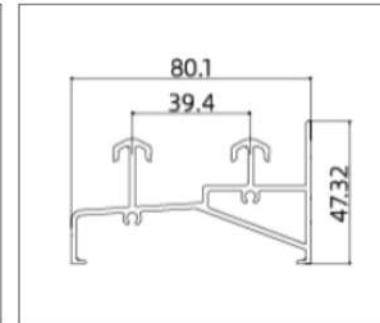


XLH-85TC009 (Door Rail)


Thickness:1.72mm Weight:0.763kg/m Thickness:1.72mm Weight: 1.574kg/m Thickness:1.72 mm Weight: 0.681kg/m Thickness: 1.72mm Weight: 1.29 kg/m

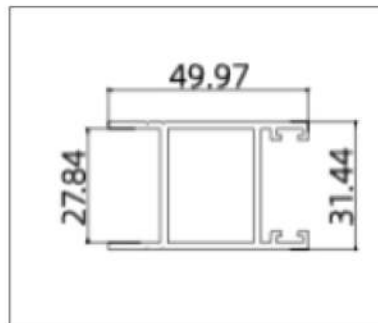

XLH-85TC010 (Lock Stile)

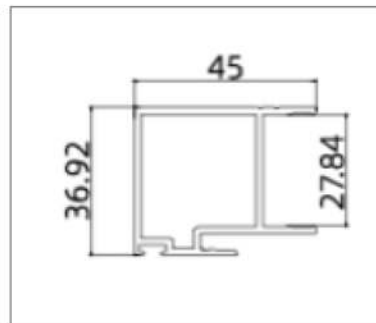




XLH-85TC011 (Striker Stile)

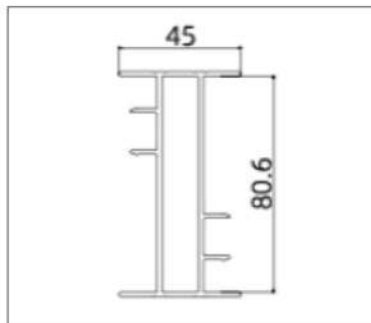


XLH-85TC011 (Side Frame)

Thickness:1.72mm Weight: 0.776kg/m Thickness:1.72mm Weight: 0.774kg/m Thickness:1.72mm Weight:1.317kg/m

AB100 Sliding Window

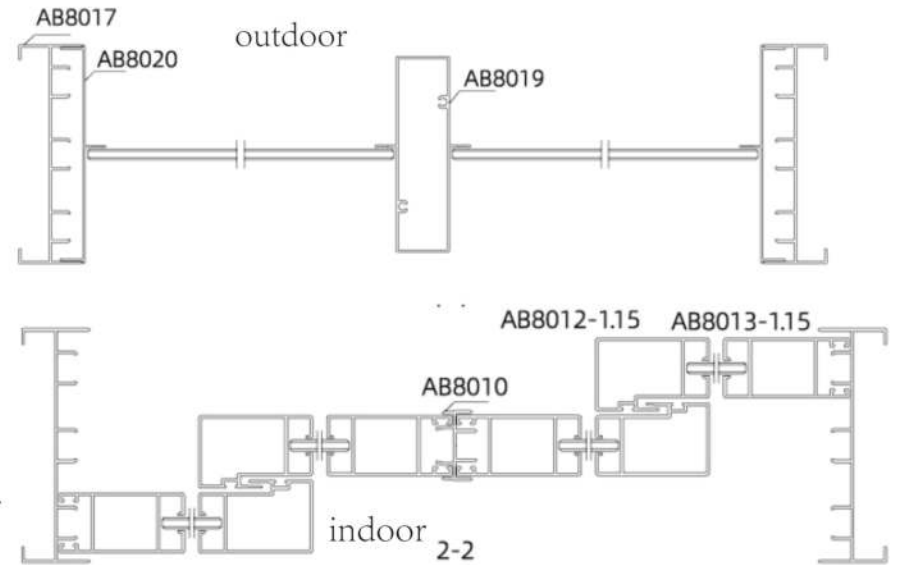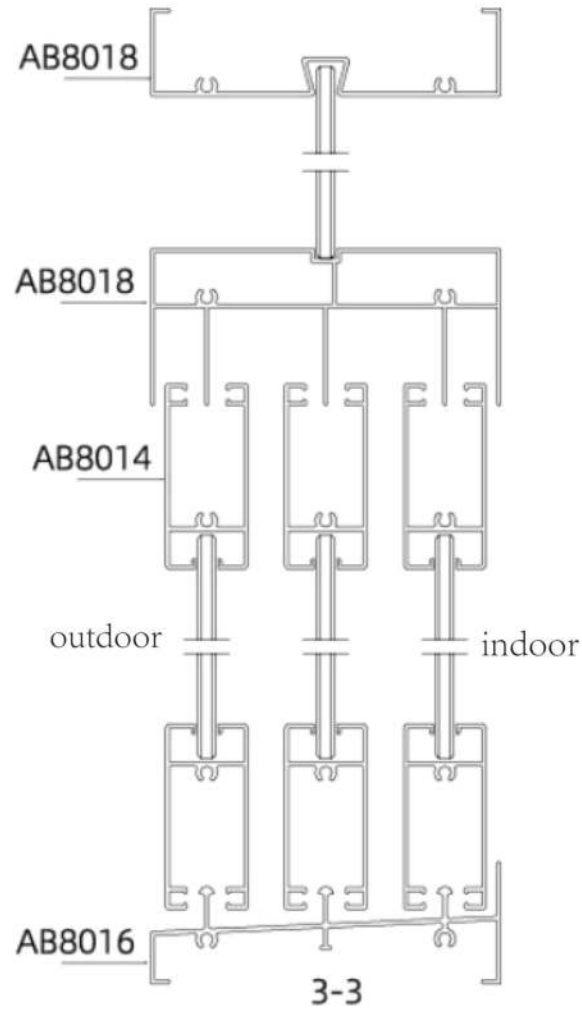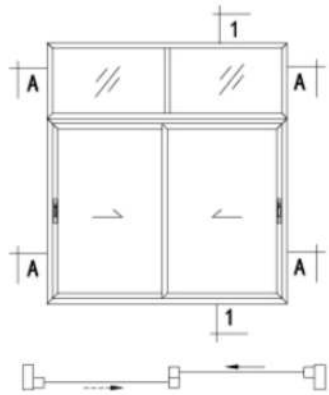


AB100 Sliding Window

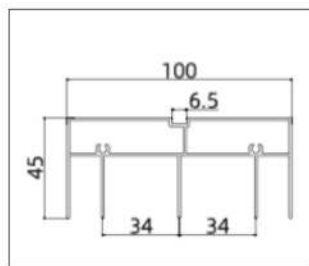


AB8015 (Track)

Thickness:1.1mm Weight: 1.212kg/m

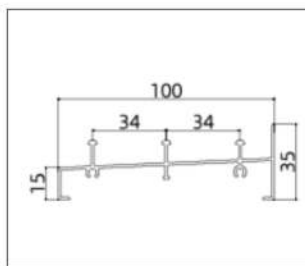


AB8016 (Track)

Thickness:1.2mm Weight:0.749 kg/m

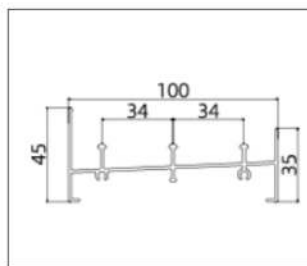


AB8016B (Track)

Thickness:1.35mm Weight: 0.941kg/m

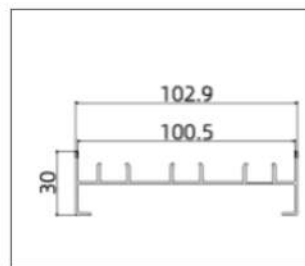


AB8017 (Side Frame)

Thickness:1.2mm Weight: 0.724kg/m

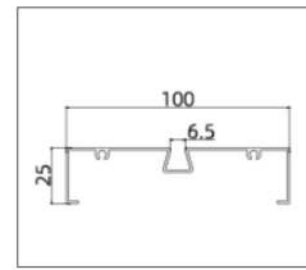


AB8018 (Frame)

Thickness:1.1mm Weight: 0.601kg/m

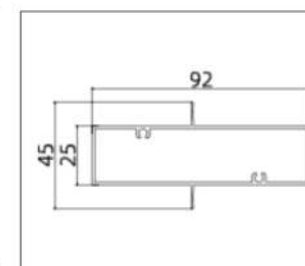


AB8018 (Frame)

Thickness:1.1mm Weight: 0.601kg/m

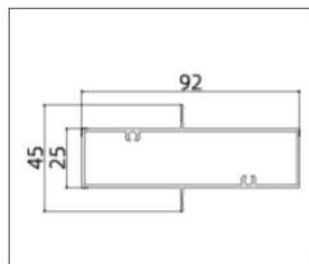


AB8020 (Frame Cover)

Thickness:1.1mm Weight: 0.361kg/m

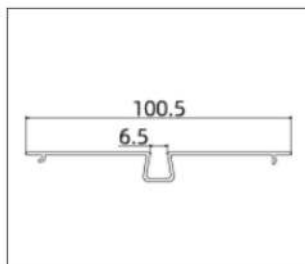


AB8021 (Interlock)

Thickness:1.2mm Weight: 0.417kg/m

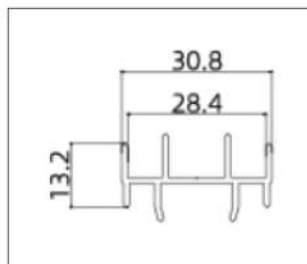


AB8010 (End Cap)

Thickness:1.2 mm Weight: 0.284kg/m

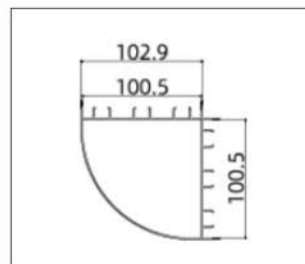


AB8022(90° Corner)

Thickness: 1.2mm Weight: 1.739kg/m

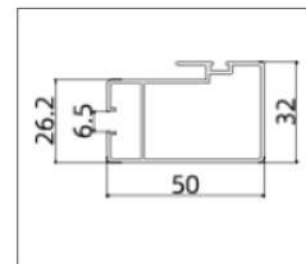


AB8012-0.95(Striker Stile)

Thickness:1.05mm Weight: 0.553kg/m

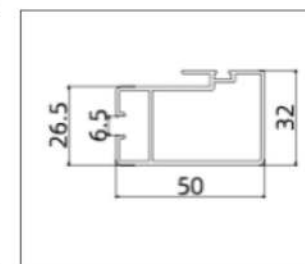


AB8012-1.15(Striker Stile)

Thickness:1.2mm Weight: 0.624kg/m

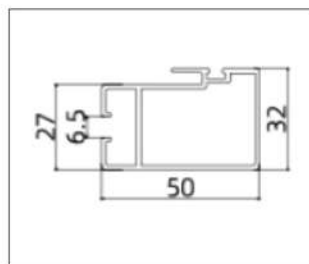


AB8012-1.35A (Striker Stile)

Thickness:1.45mm Weight: 0.745kg/m

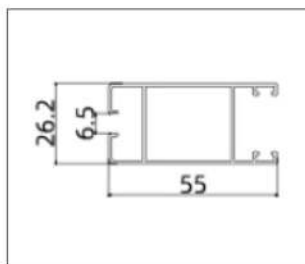


AB8013-0.95 (Striker Stile)

Thickness:1.05mm Weight: 0.551kg/m

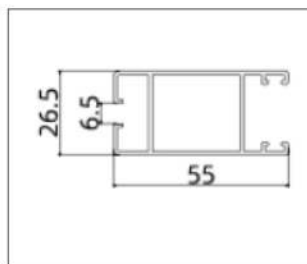


AB8013-1.15 (Striker Stile)

Thickness:1.2mm Weight:0.628kg/m

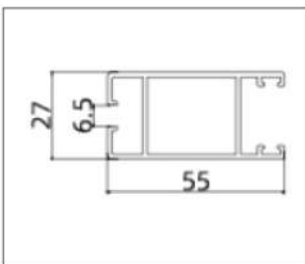

AB8013-1.35 (Striker Stile)





Thickness:1.45mm Weight: 0.747 kg/m

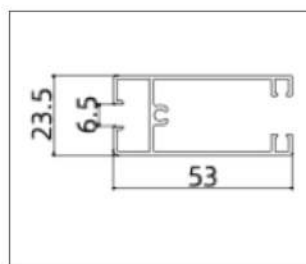

AB8014 (Door Rail)


Thickness:1.1mm Weight: 0.529 kg/m

AL90 Sliding Door

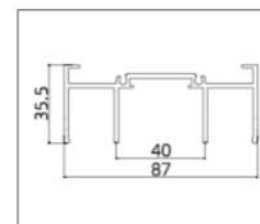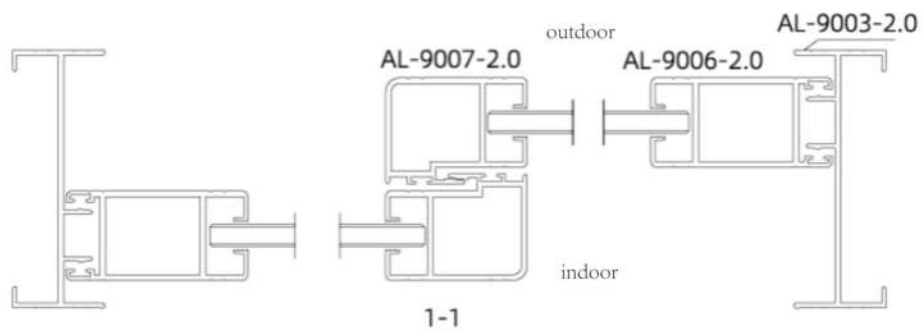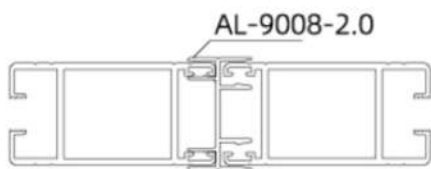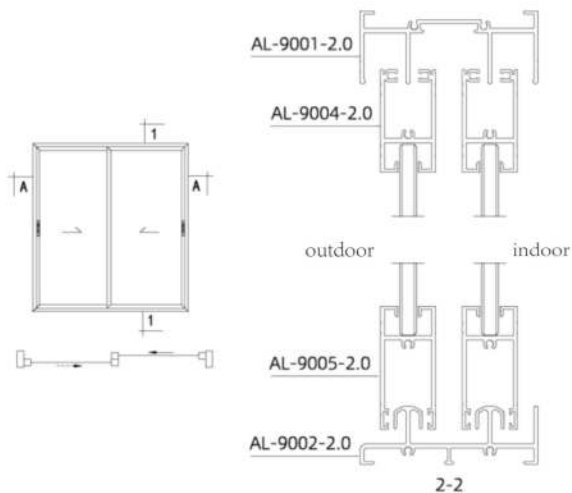


AL-9001-2.0 (Track)

Thickness:2.0mm Weight: 1.214kg/m

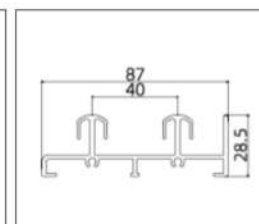


AL-9002-2.0 (Track)

Thickness:2.0mm Weight: 1.192kg/m

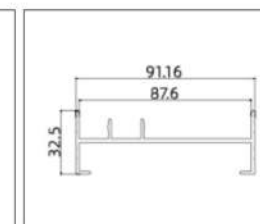


AL-9003-2.0 (Frame)

Thickness:2.0mm Weight: 0.91kg/m

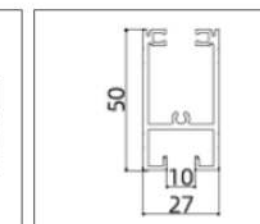


AL-9004-2.0 (Door Rail)

Thickness:2.0mm Weight: 0.867kg/m

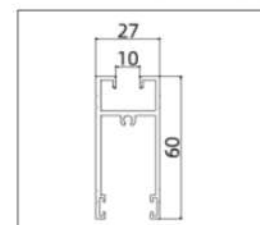


AL-9005-2.0 (Door Rail)

Thickness:2.0mm Weight: 0.9kg/m

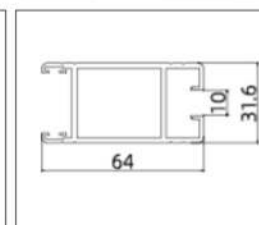


AL-9006-2.0 (Lock Stile)

Thickness:2.0mm Weight: 1.093kg/m

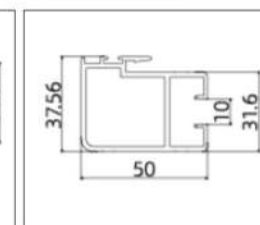


AL-9007-2.0 (Striker Stile)

Thickness:2.0mm Weight: 1.032kg/m

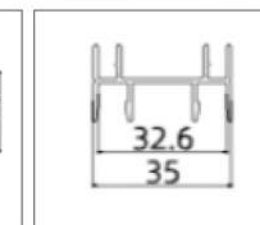

AL-9008-2.0 (End Cap)




Thickness: 1.2mm Weight: 0.35kg/m

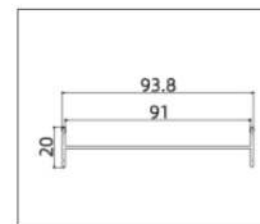

AL-9016 (Mullion Bar)


Thickness:1.4mm Weight: 0.493kg/m

GH-TM2100 Sliding Door

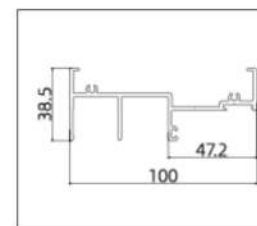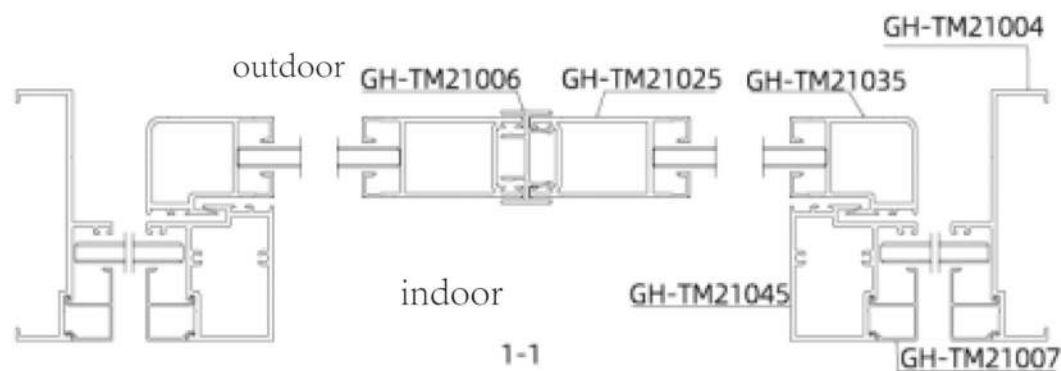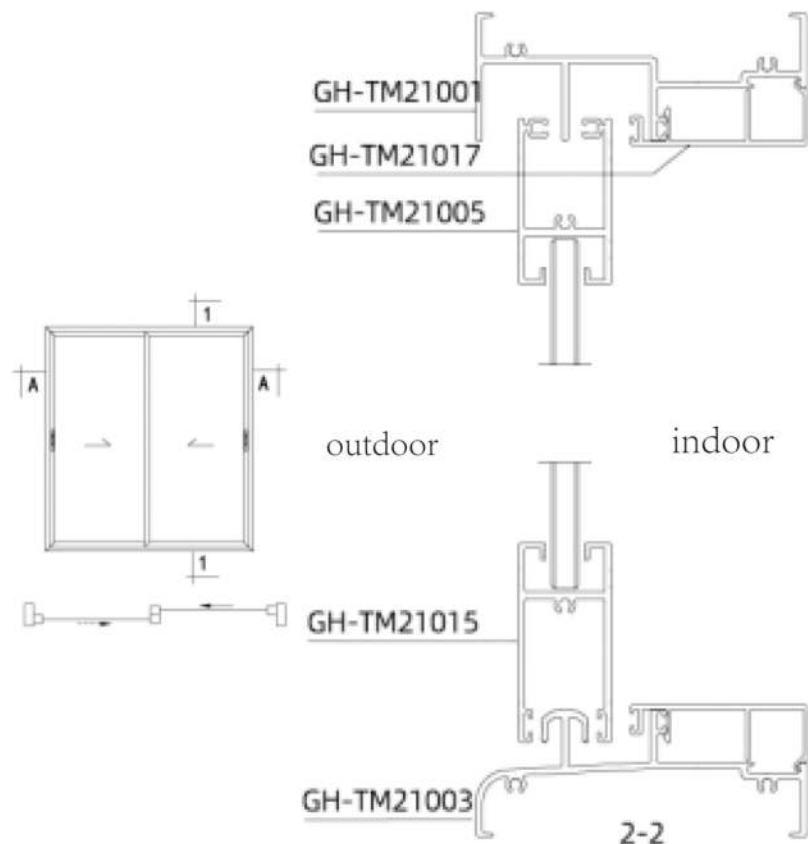


GH-TM21001 (Track)

Thickness:2.0mm Weight: 1.2kg/m

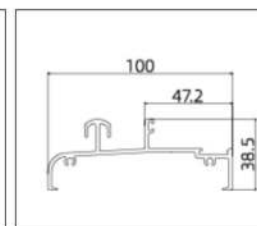


GH-TM21003 (Track)

Thickness:2.0mm Weight: 1.155kg/m

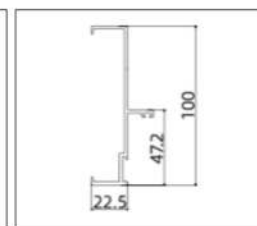


GH-TM21004 (Side Frame)

Thickness:2.0mm Weight: 0.91kg/m

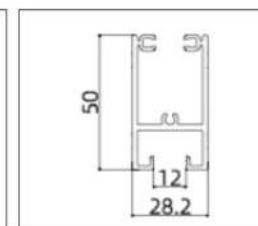


GH-TM21005 (Door Rail)

Thickness:2.0mm Weight: 0.875kg/m

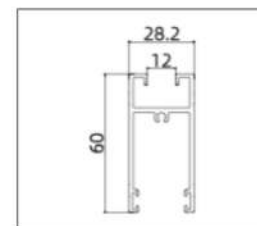


GH-TM21015 (Door Rail)

Thickness:2.0mm Weight: 0.909kg/m

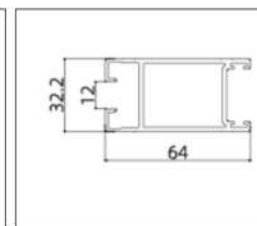


GH-TM21025 (Lock Stile)

Thickness:2.0mm Weight: 1.099kg/m

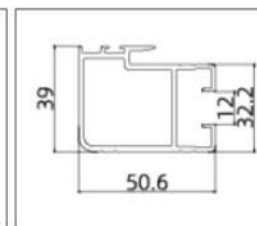


GH-TM21035 (Striker Stile)

Thickness:2.0mm Weight: 1.008kg/m

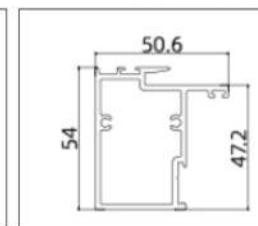


GH-TM21045 (Striker Stile)

Thickness: 2.0mm Weight: 1.159kg/m

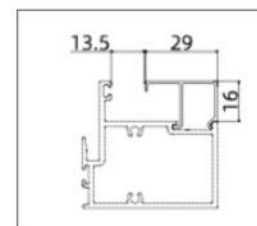


GH-TM21007 (Glazing Bead)

Thickness:1.0mm Weight: 0.191kg/m

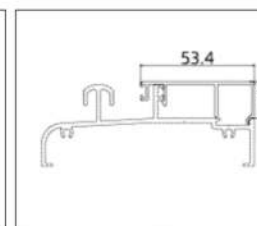

GH-TM21017 (Glazing Bead)





Thickness:1.2mm Weight: 0.353kg/m

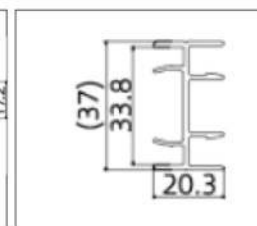

GH-TM21006 (End Cap)


Thickness:1.7mm Weight: 0.422kg/m

TC119 Sliding Door

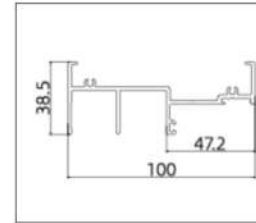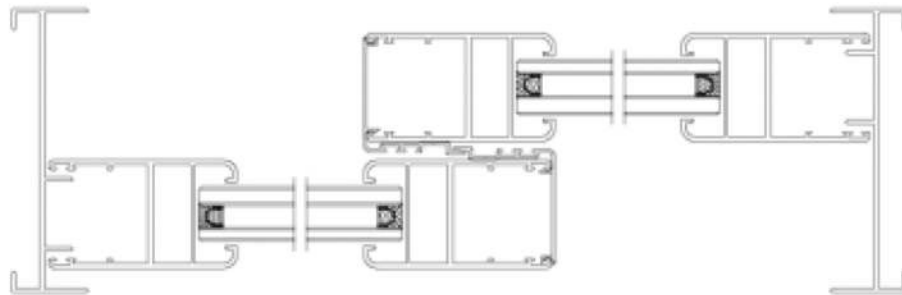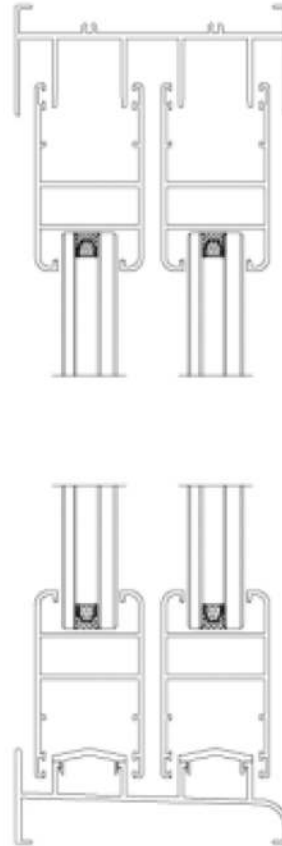


TC119001 (Track)

Thickness:2.0mm Weight:1.784kg/m

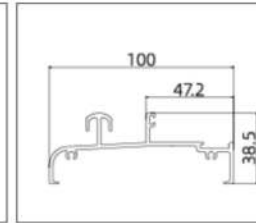


TC119002 (Track)

Thickness:1.4mm Weight:0.589kg/m

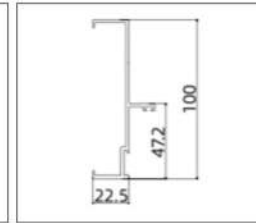


TC119003 (Side Frame)

Thickness:1.8mm Weight: 1.045kg/m

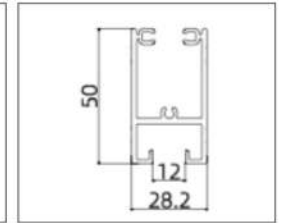


TC119006 (Lock Stile)

Thickness:2.0mm Weight:1.367kg/m

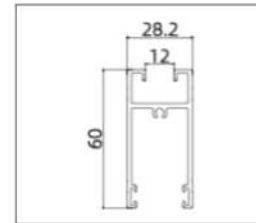


TC119008 (End Cap)

Thickness:1.6mm Weight:0.338kg/m

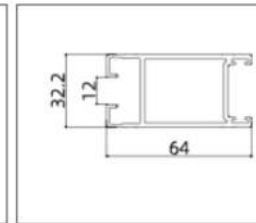


TC119009 (Lock Gear)

Thickness:1.2mm Weight:0.288kg/m

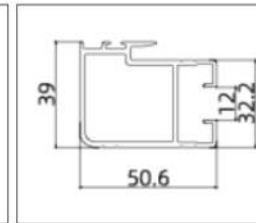

TC119010 (Track)


Thickness:2.8 mm Weight:0.271kg/m










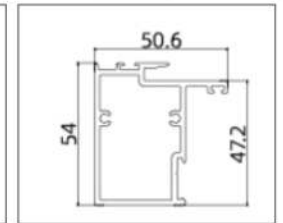


TC119020 (Frame Cover)


Thickness: 1.2mm Weight:0.362kg/m

AYPD50 Thermal Break Castment Window

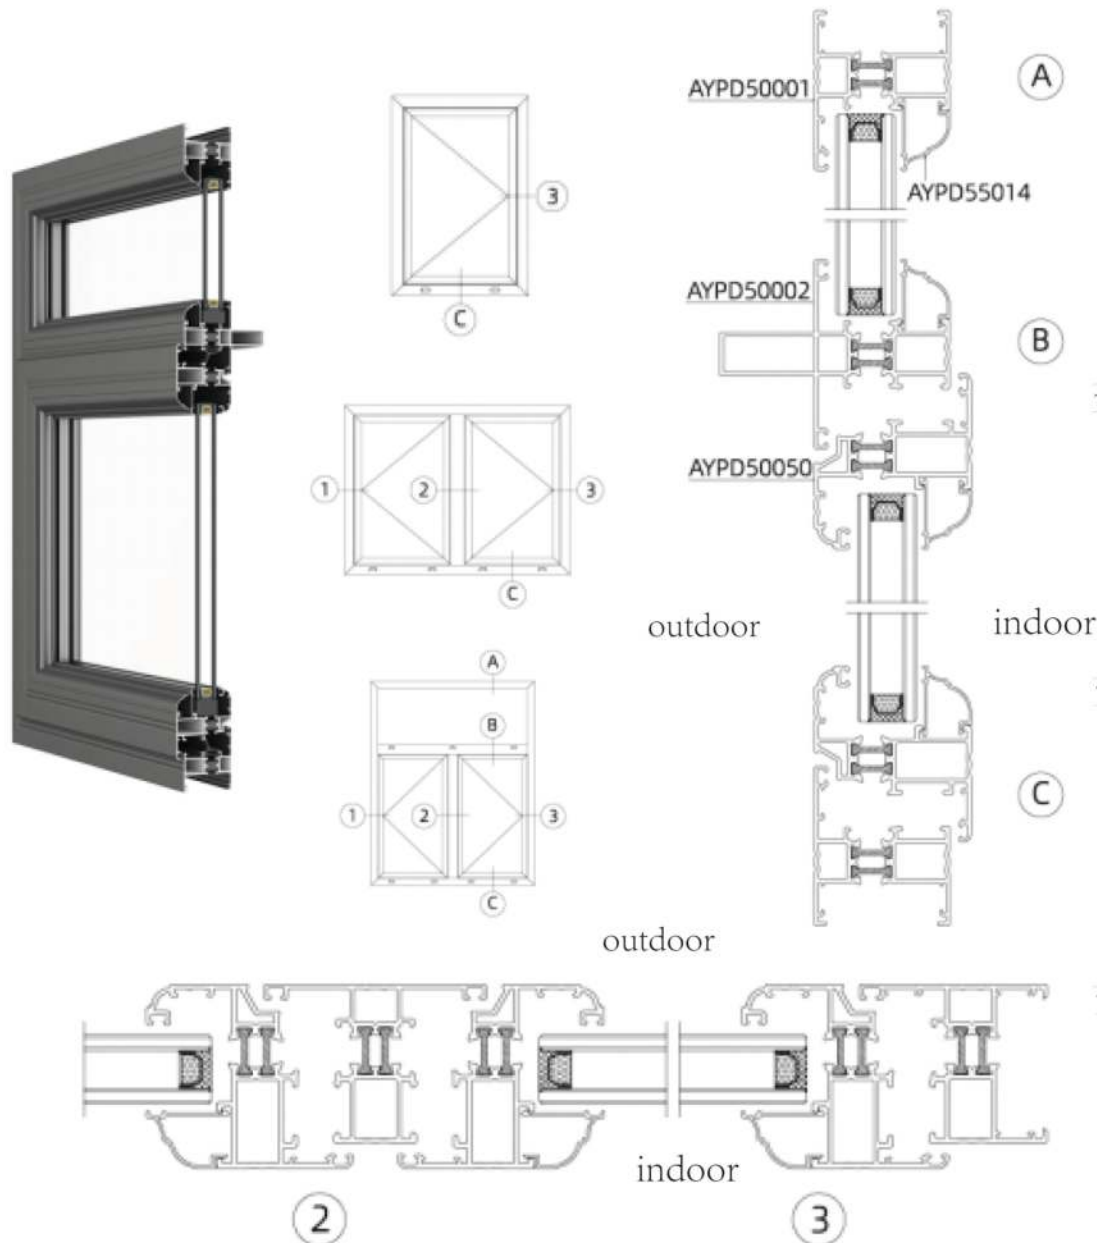


 AY55001-1A 37 59 50 14.8 AY55001-2A	 AY55002-1A 26 70 50 14.8 AY55002-2A	 AY55003-1 51 53.2 14.8 AY55003-2	 AY55050-1A 65 57.9 49.5 14.8 AY55050-2A
AYPD50001 (Frame)	AYPD50002 (Mullion)	AYPD50003 (Frame)	AYPD50050 (Sash)
Thickness:1.4mm Weight: 0.952kg/m	Thickness:1.4mm Weight:0.965kg/m	Thickness:1.4mm Weight: 0.883kg/m	Thickness:1.4mm Weight:1.035kg/m
 AYPD55042 AY55002-1A 85 50 14.8 70 26	 BFPB81006 (Frame Cover) 15.6 4	 AYPD50014(Glazing Bead) 26.95 18.15 22	 BFPD4507(Gear Rack) 19 4.3
AYPD50004 (Mullion)	BFPB81006 (Frame Cover)	AYPD50014(Glazing Bead)	BFPD4507(Gear Rack)
Thickness:1.4mm Weight: 1.284kg/m	Thickness:1.0mm Weight: 0.054kg/m	Thickness:0.8mm Weight: 0.153kg/m	Thickness: 2.3mm Weight: 0.139kg/m
 BFUS20915 (Corner Connector) 13 67.3 67.3 13	 BFUS20933 (Corner Connector) 13 60 60 13		
BFUS20915 (Corner Connector)	BFUS20933 (Corner Connector)		
Thickness:3.0mm Weight: 2.402kg/m	Thickness:2.0mm Weight: 1.495kg/m		

SHZX-PC50 Thermal Break Castment Window

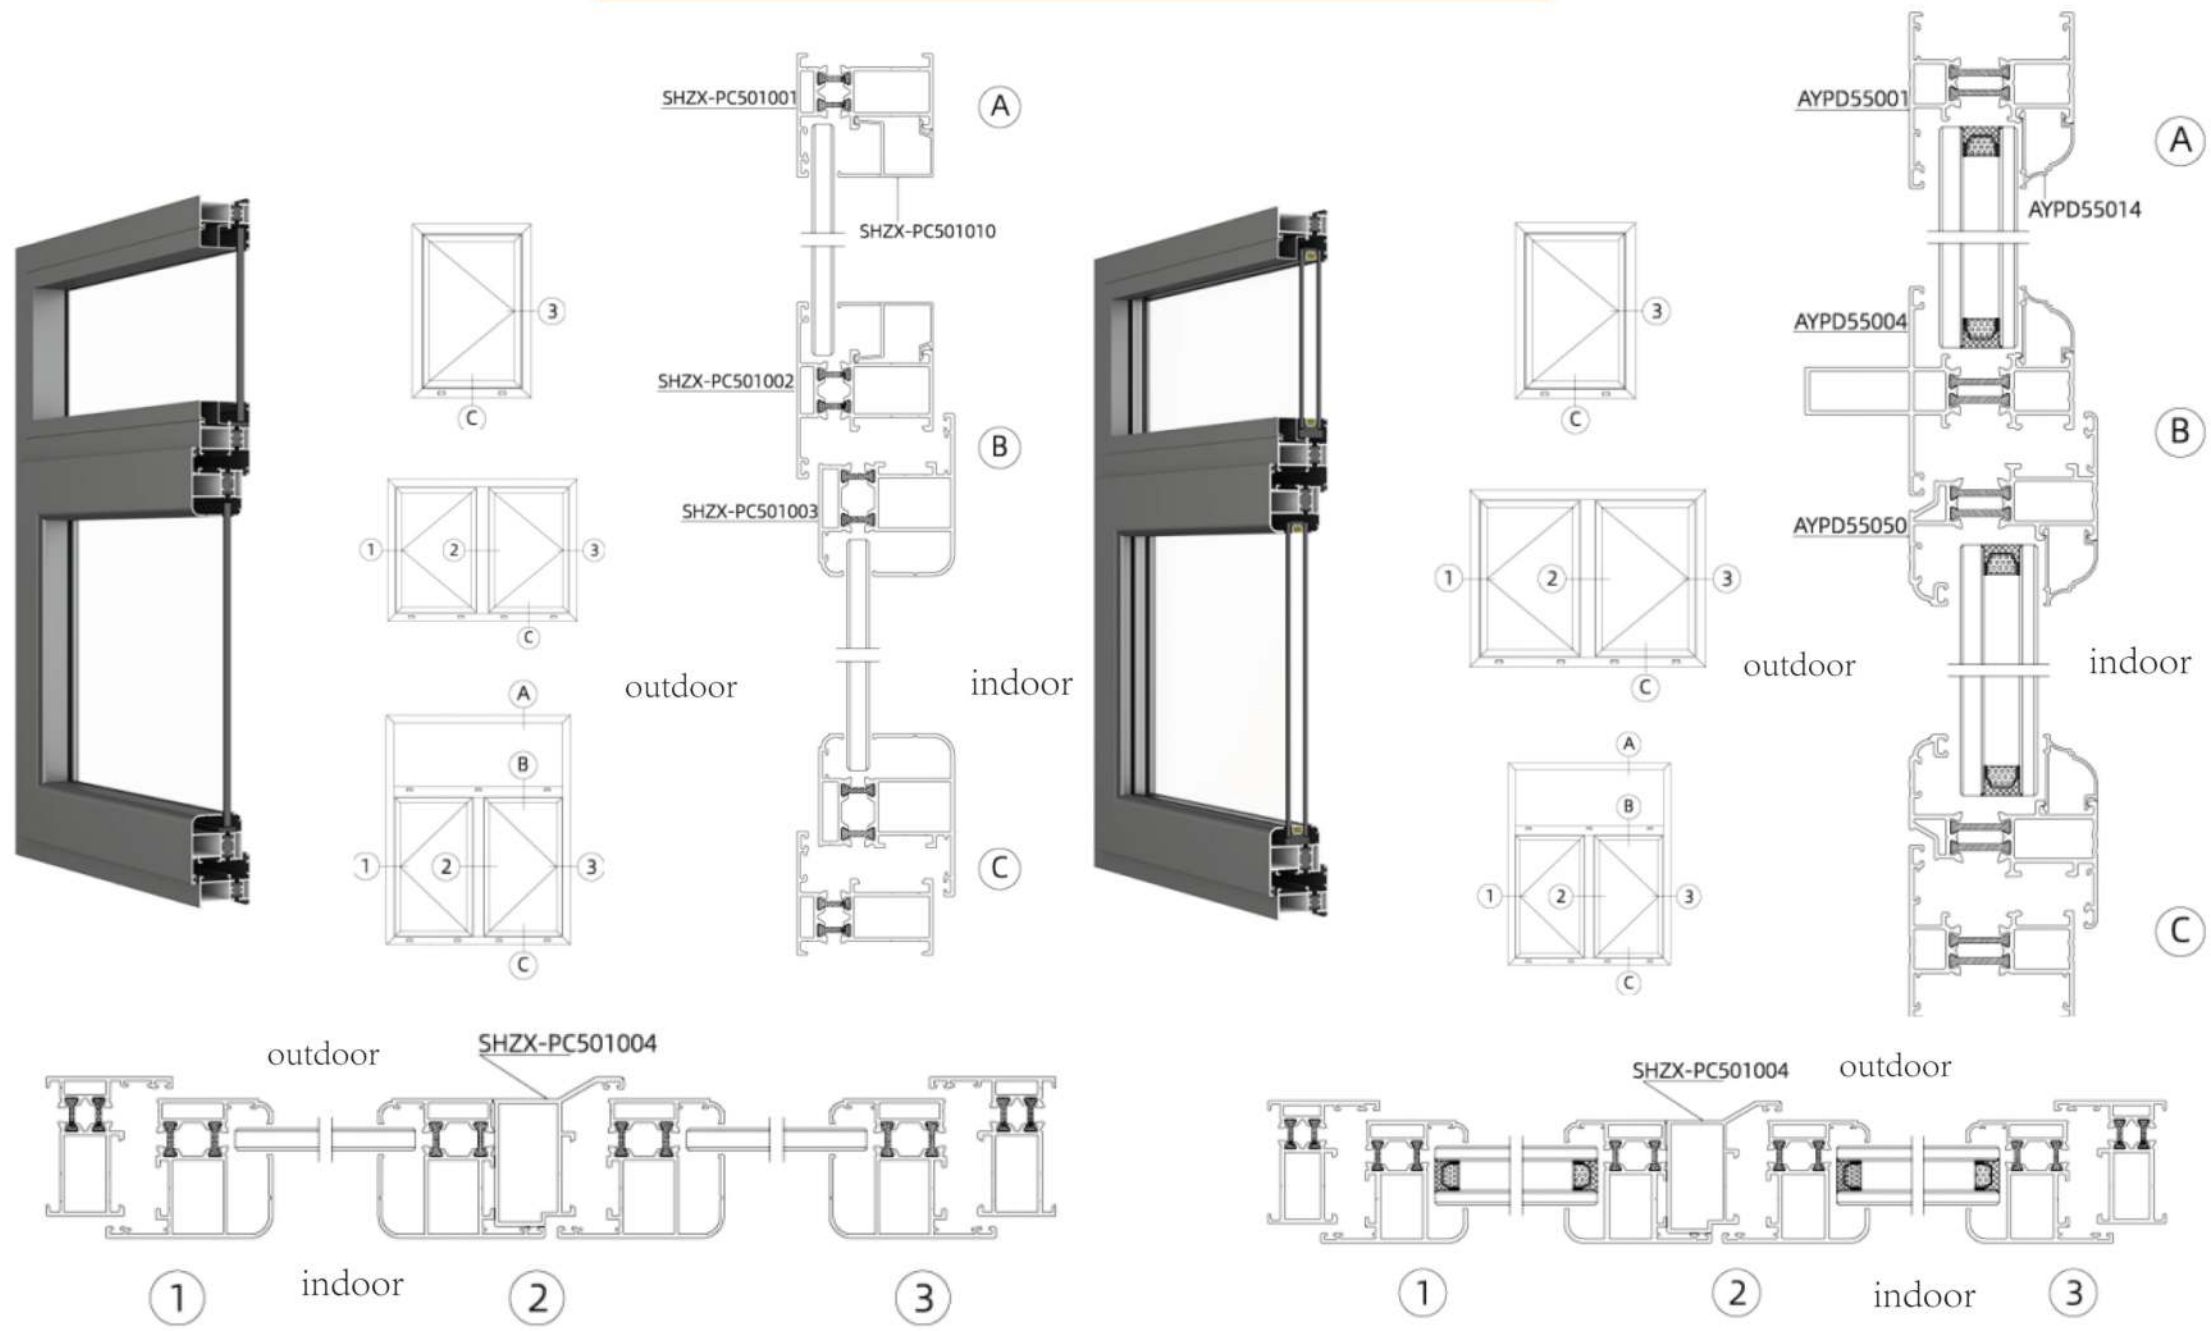

SHZX-PC50 Thermal Break Castment Window

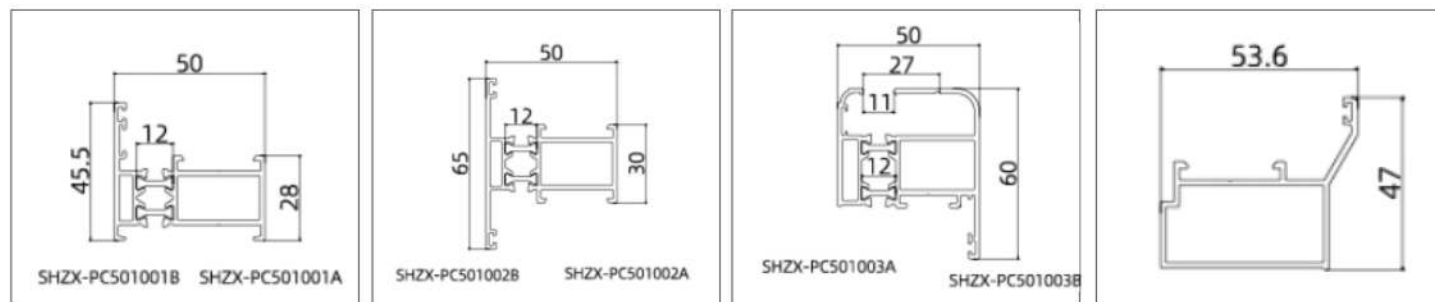


SHZX-PC501001 (Frame)

SHZX-PC501002 (Mullion)

SHZX-PC501003 (Sash)

SHZX-PC501004 (Mullion)

Thickness:1.75mm Weight: 0.970kg/m Thickness:1.75mm Weight: 1.117kg/m Thickness:1.75mm Weight: 1.117kg/m Thickness:1.75mm Weight: 0.70kg/m

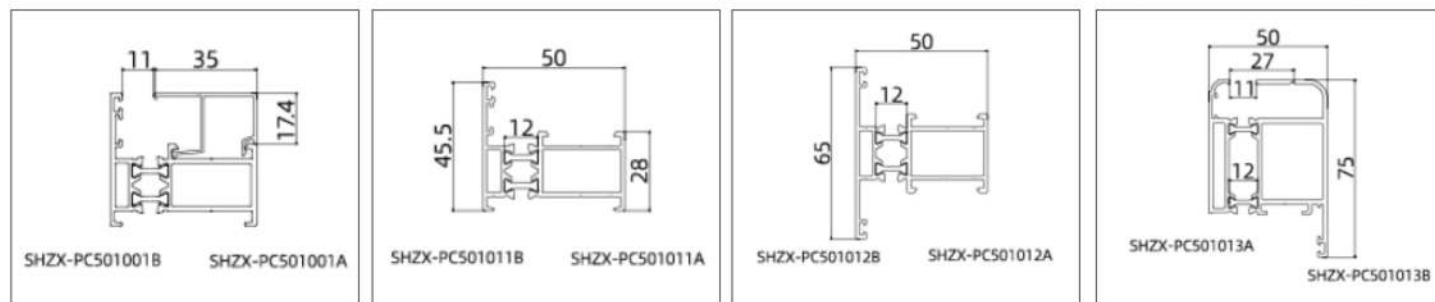


SHZX-PC501010 (Glazing Bead)

SHZX-PC501011 (Frame)

SHZX-PC501012 (Mullion)

SHZX-PC501013 (Sash)

Thickness:0.9mm Weight: 0.231kg/m Thickness:1.35mm Weight:0.854kg/m Thickness:1.35mm Weight:0.978kg/m Thickness: 1.75mm Weight: 1.659kg/m

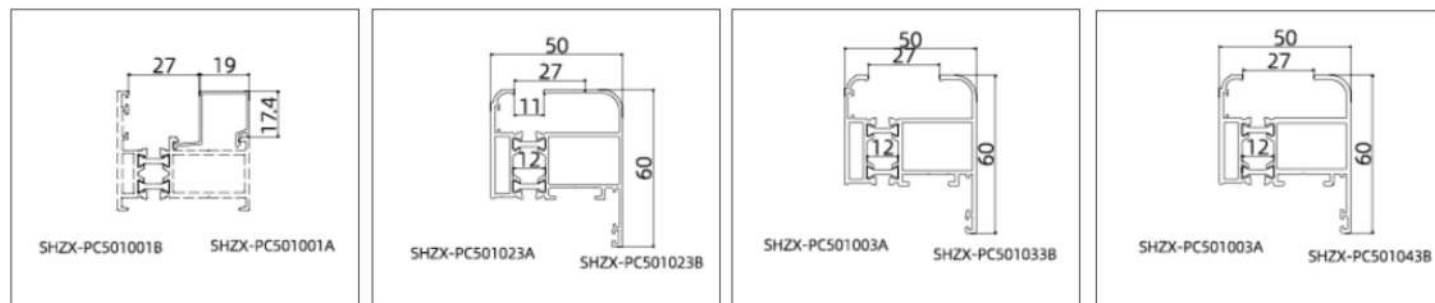

SHZX-PC501020 (Glazing Bead)



SHZX-PC501023 (Sash)

SHZX-PC501033 (Sash)

SHZX-PC501043 (Sash)

Thickness:0.9mm Weight: 0.186kg/m Thickness:1.35mm Weight: 1.111kg/m Thickness:1.35mm Weight:1.086kg/m Thickness:1.75mm Weight:1.21kg/m

AYPD55 Thermal Break Castment Window

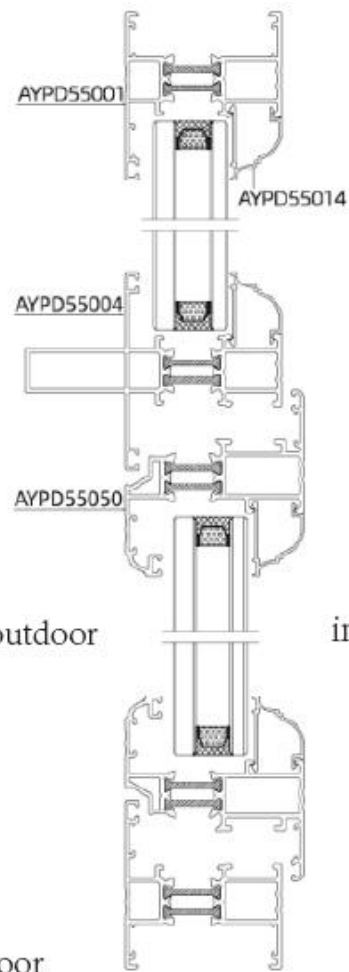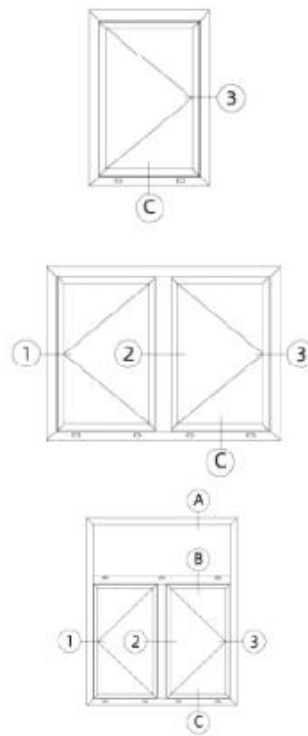


outdoor

indoor

outdoor


indoor

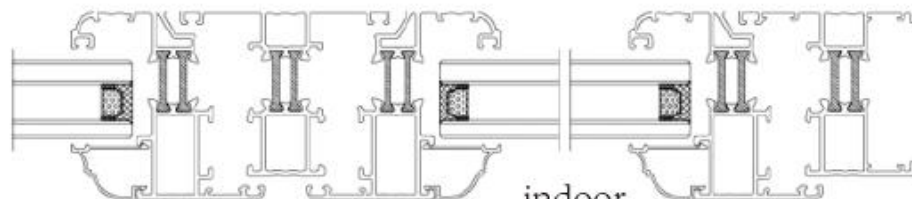

A

B

C

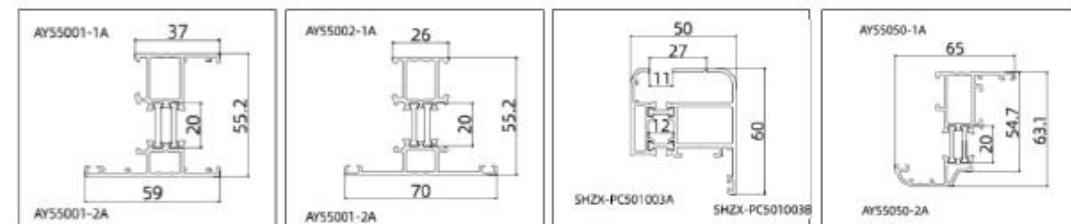


AYPD55001 (Frame)

AYPD55002 (Mullion)

AYPD55003 (Frame)

AYPD55050 (Sash)

Thickness:1.4mm Weight: 0.952kg/m Thickness:1.4mm Weight: 0.965kg/m Thickness:1.44mm Weight: 0.883kg/m Thickness:1.4mm Weight: 1.035kg/m

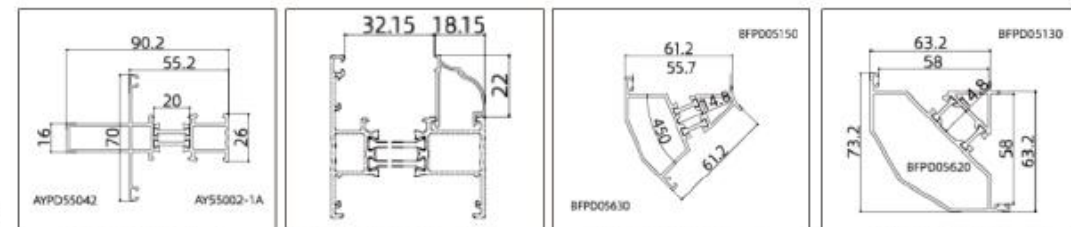


AYPD55004 (Mullion)

AYPD55014 (Glazing Bead)

BFPD05560(135° Corner)

BFPD05550(90° Corner)

Thickness:1.4mm Weight: 1.284kg/m Thickness:0.8mm Weight:0.153kg/m Thickness:1.45 mm Weight:1.2kg/m Thickness:1.45 mm Weight:1.413kg/m

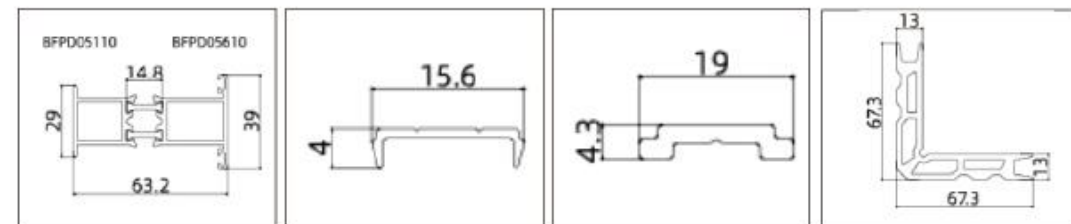


BFPD05540(Mullion Bar)

BFPB81006(Frame Cover)

BFPD04507 (Gear Rack)

BFUS20915 (Corner Connector)







Thickness:1.45 mm Weight:0.982kg/m Thickness:1.0mm Weight: 0.054kg/m Thickness:2.3mm Weight: 0.139kg/m Thickness:3.0mm Weight:2.402kg/m

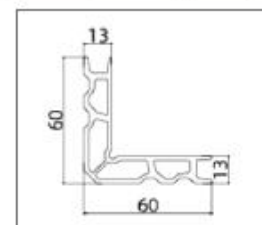


BFUS20915 (Corner Connector)

Thickness:2.0mm Weight: 1.495kg/m

APG55F Thermal Break Castment Window

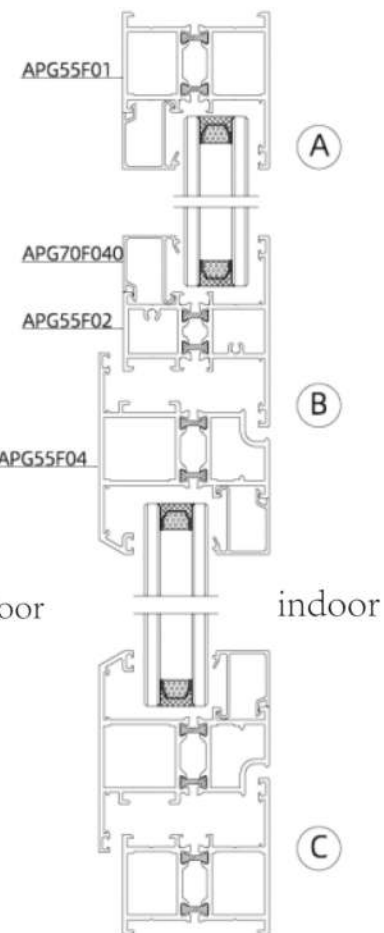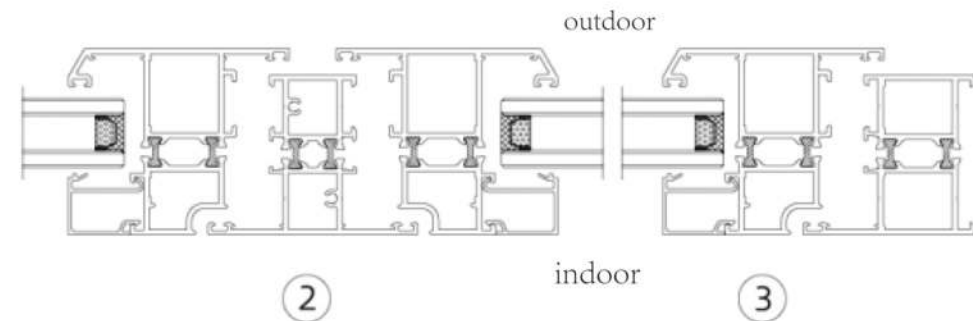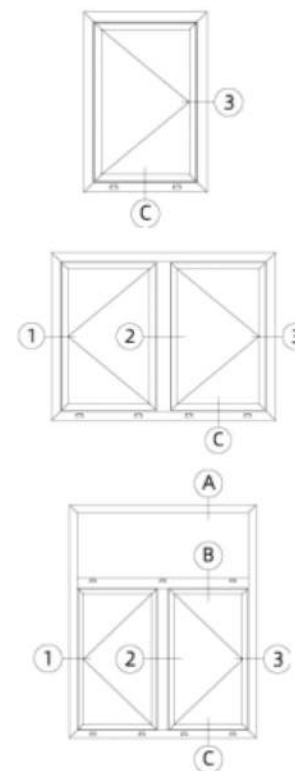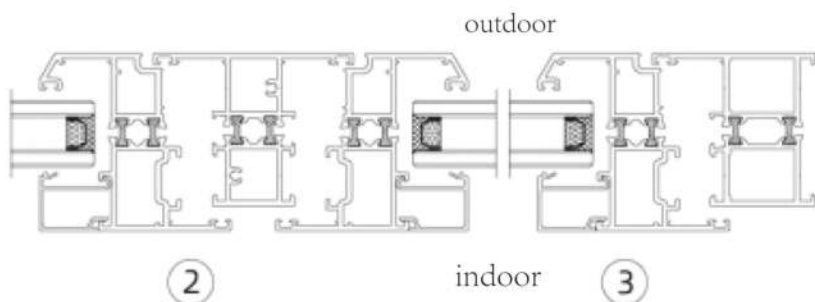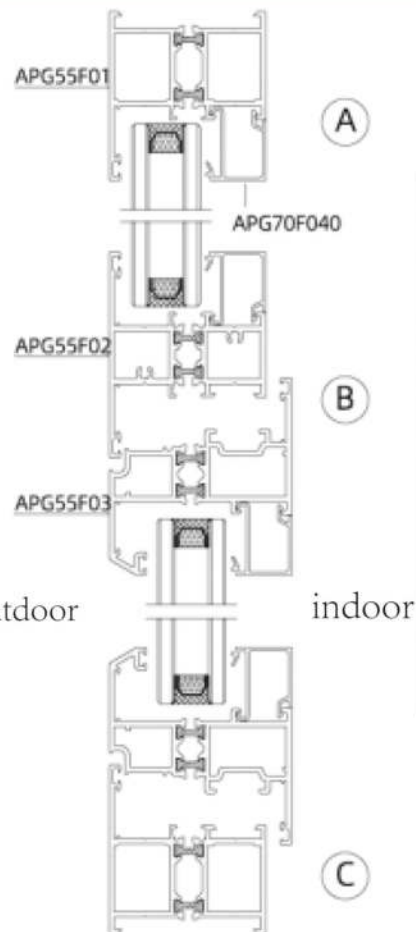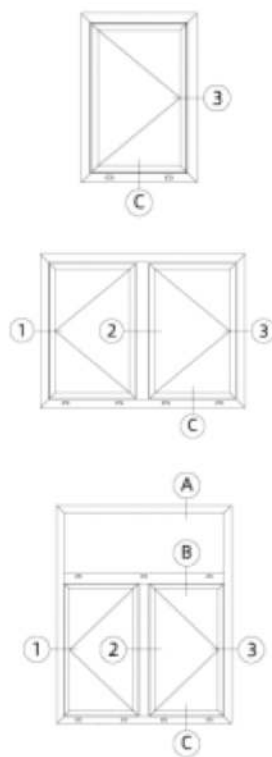


APG55F Thermal Break Castment Window

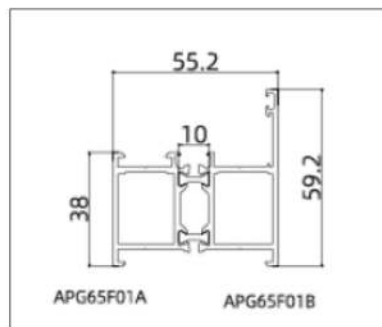


APG55F01 (Frame)

Thickness:1.8mm Weight: 1.319kg/m

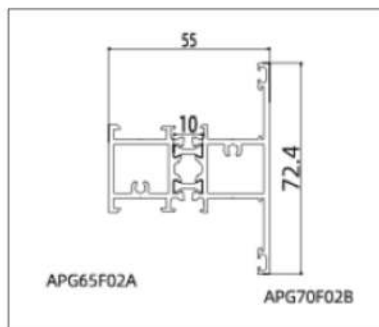


APG55F02 (Mullion)

Thickness:1.8mm Weight: 1.377kg/m

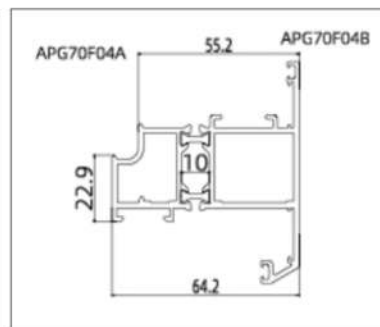


APG55F04 (Sash)

Thickness:1.8mm Weight: 1.576kg/m

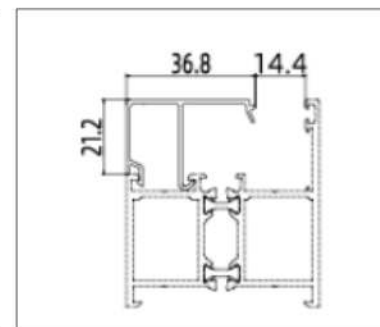


APG55F010 (Glazing Bead)

Thickness:1.0mm Weight: 0.28kg/m

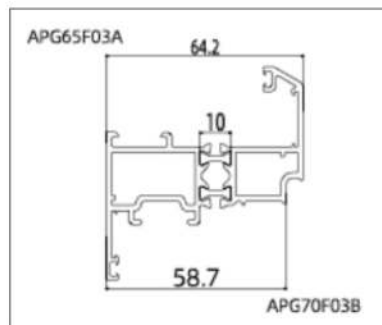


APG55F04 (Glazing Bead)

Thickness:1.8mm Weight: 1.4251kg/m

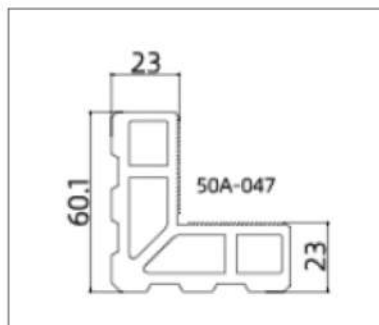


50A-047 (Corner Connector)

Thickness: Weight:3.013kg/m

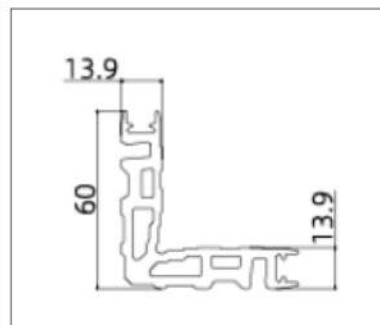


MD13.9A (Corner Connector)

Thickness: Weight:2.227kg/m

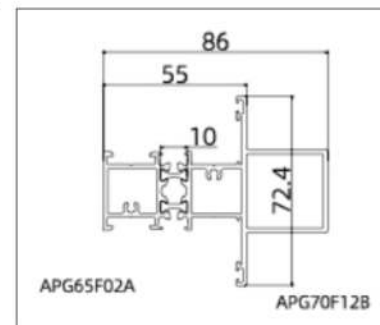


APG55F012(Mullion)

Thickness: 1.8mm Weight: 1.817kg/m

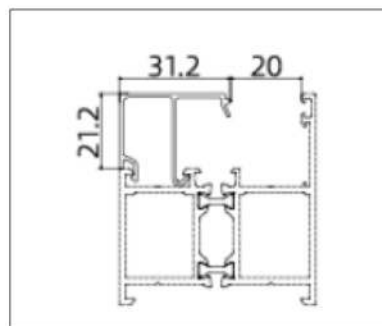


SHZX-PC501020 (Glazing Bead)

Thickness:0.9mm Weight: 0.186kg/m

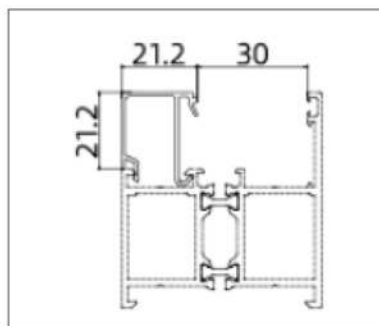


SHZX-PC501023 (Sash)

Thickness:1.35mm Weight: 1.111kg/m

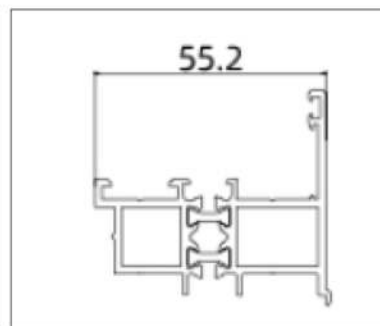

Adapter Profile (Mold Pending)


Thickness:1.8mm Weight:1.096kg/m

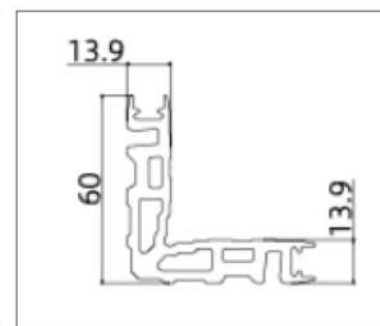


MD13.9 (Corner Connector)

Thickness:3.0mm Weight:2.227kg/m

JXGMXYY-GPC55 Thermal Break Castment Window

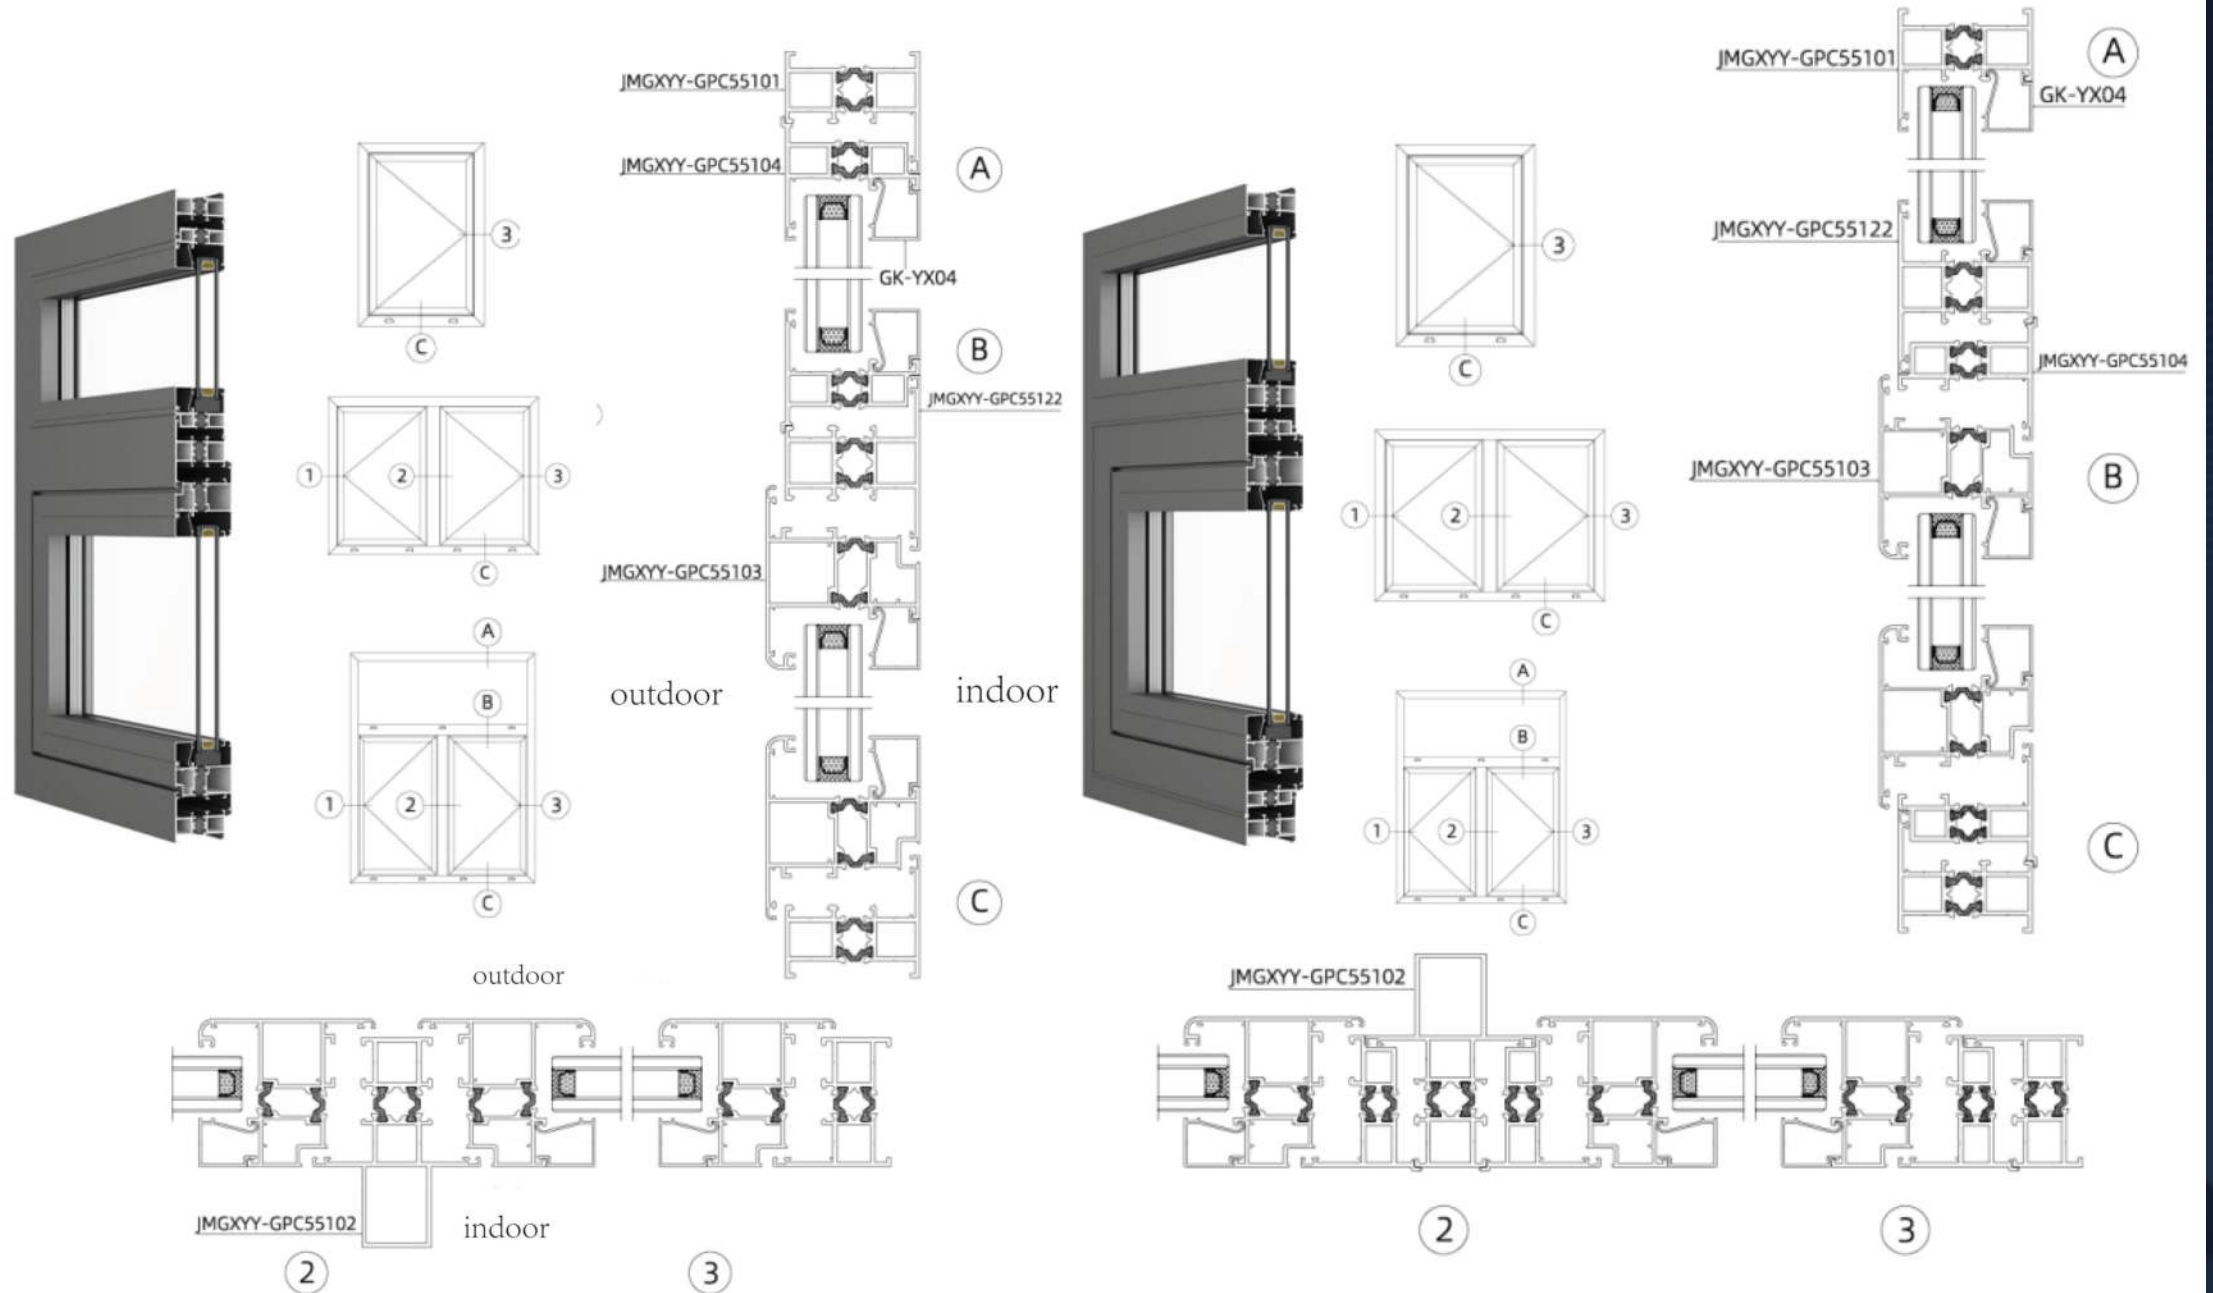


JXGMXY-GPC55 Thermal Break Castment Window

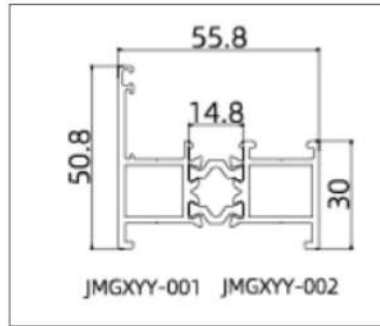


JMGXYY-GPC55101 (Frame)

Thickness:1.8mm Weight: 1.13kg/m

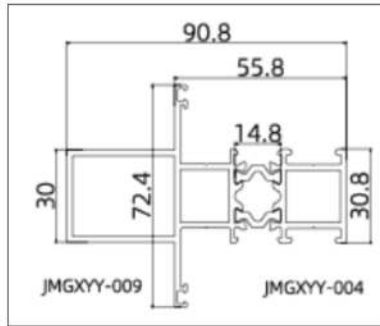


JMGXYY-GPC55102 (Mullion)

Thickness:1.8mm Weight: 1.779kg/m

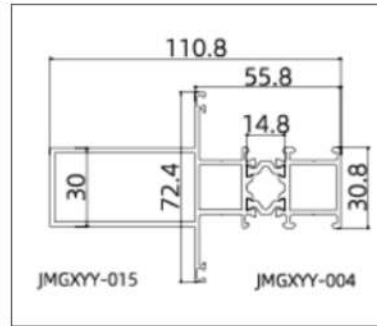


JMGXYY-GPC55112 (Mullion)

Thickness:1.8mm Weight: 1.974kg/m

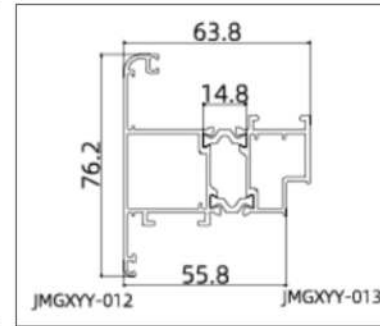


JMGXYY-GPC55103 (Sash)

Thickness:1.4mm Weight: 1.302kg/m

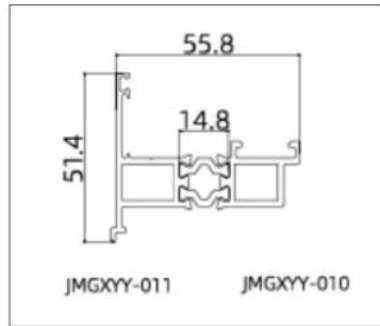


JMGXYY-GPC55104 (Frame)

Thickness:1.8mm Weight: 0.9661kg/m

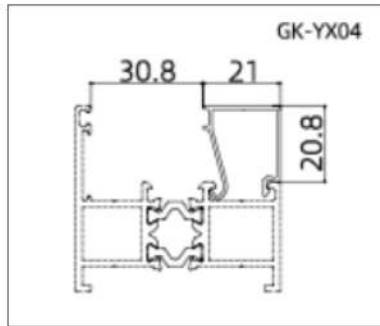


GK-YX04 (Glazing Bead)

Thickness: 1.0mm Weight:0.209kg/m

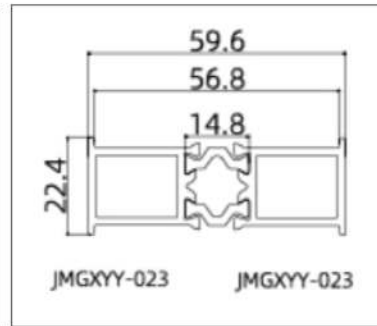


JMGXYY-GPC55108 (Mullion Bar)

Thickness: 1.8mm Weight:0.894kg/m

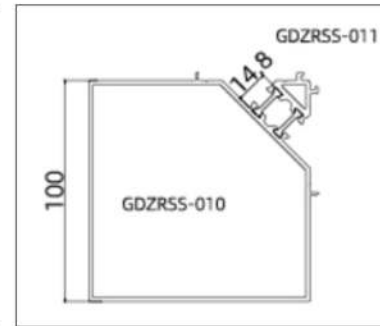


JMGXYY-GPC55109 (90° Corner)

Thickness: 1.8mm Weight: 3.013kg/m

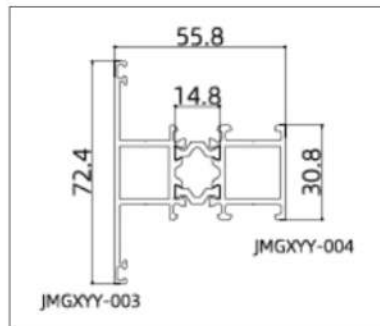

JMGXYY-GPC55122 (Mullion)







Thickness:1.8mm Weight: 1.309kg/m

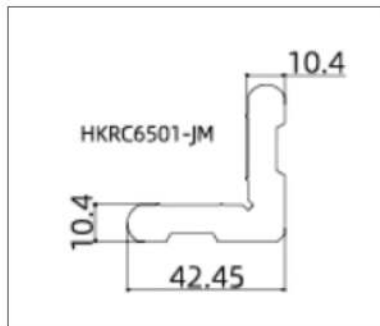


HKRC6501-JM

Thickness: Weight:


APG60F Thermal Break Castment Window

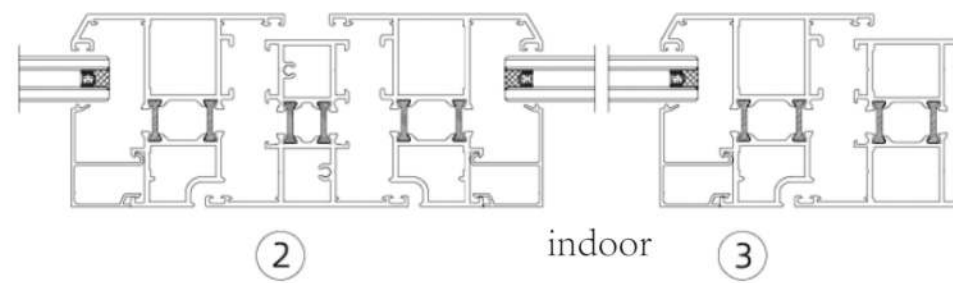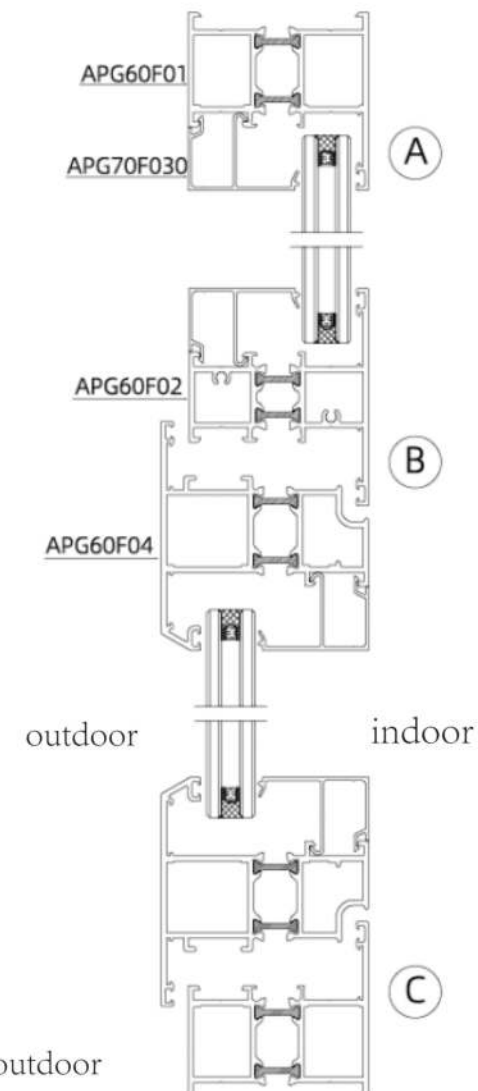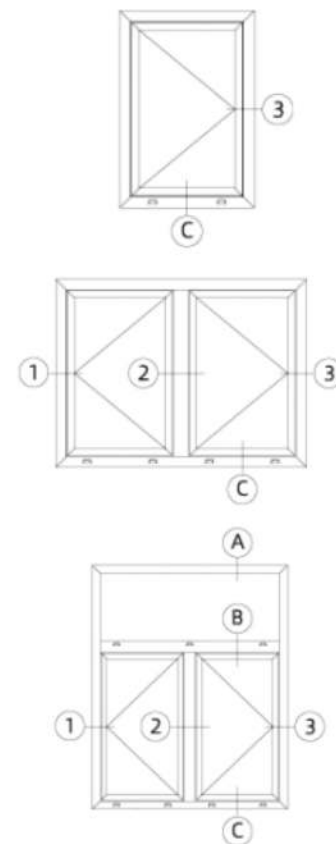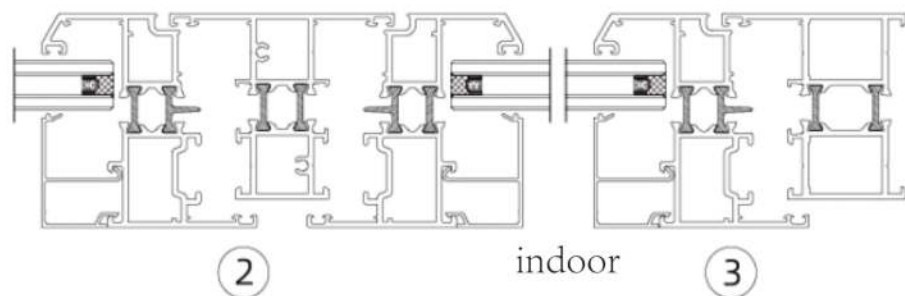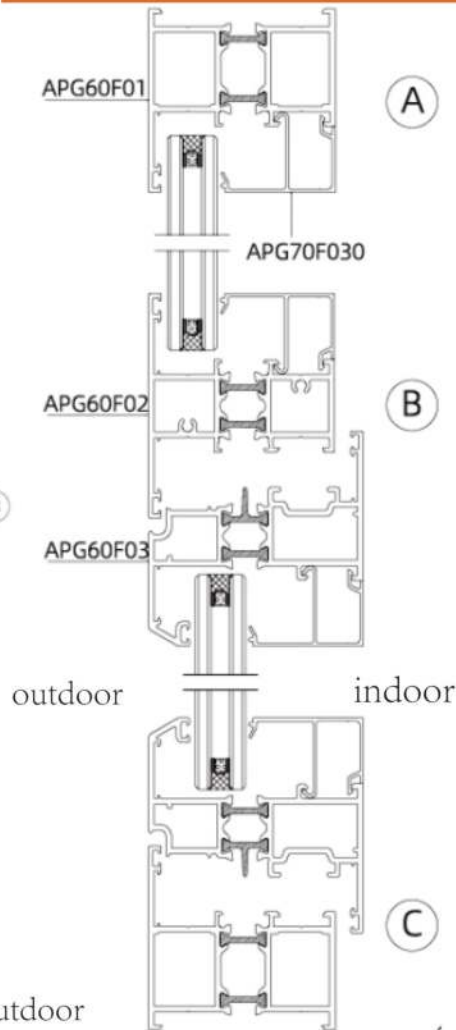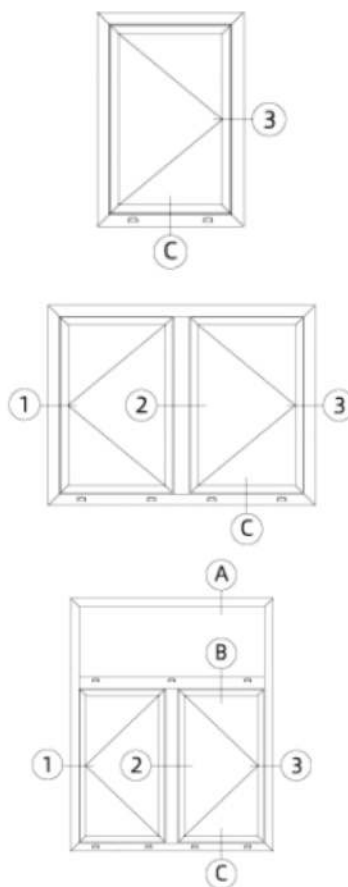


APG60F Thermal Break Castment Window

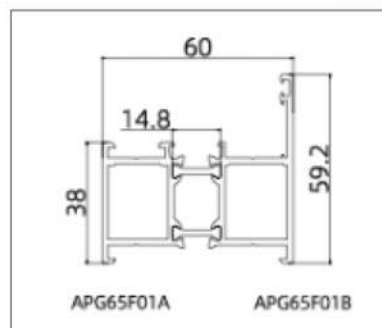


APG60F01 (Frame)

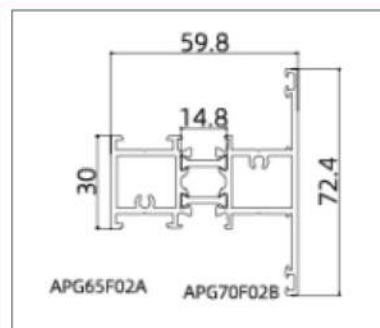

APG60F02 (Mullion)

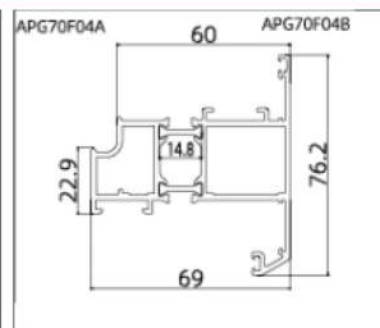

APG60F04 (Sash)

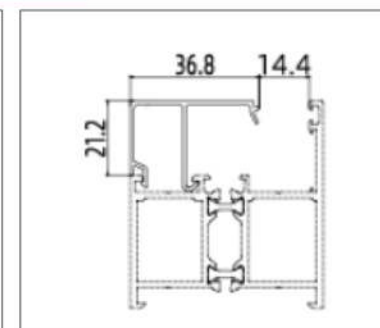


APG60F010 (Glazing Bead)

Thickness:1.8mm Weight: 1.319kg/m


Thickness:1.8mm Weight: 1.377kg/m

Thickness: Weight: 1.576kg/m


Thickness:0.28mm Weight: 1.0kg/m

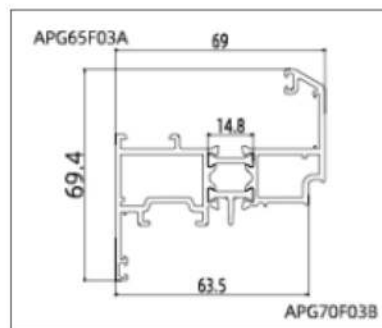


APG60F03 (Sash)

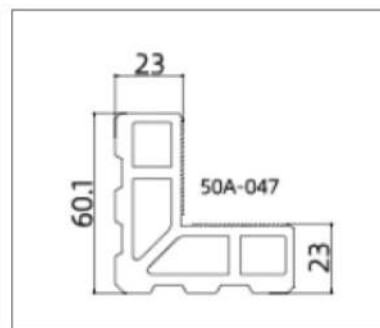

50A-047 (Corner Connector)

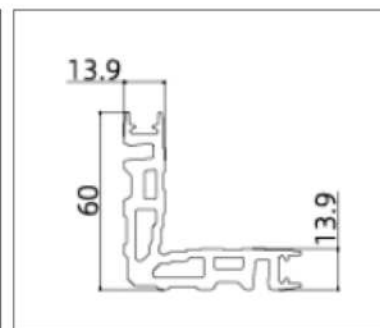

MD13.9A (Corner Connector)

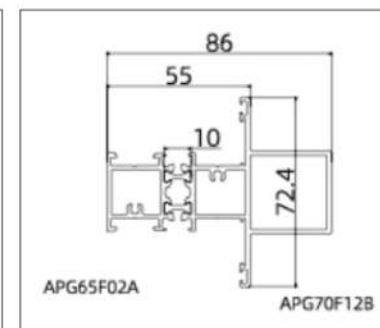


APG60F012(Mullion)

Thickness:1.8mm Weight: 1.425kg/m


Thickness: Weight:3.013kg/m

Thickness: Weight:2.227kg/m


Thickness: 1.8mm Weight: 1.817kg/m

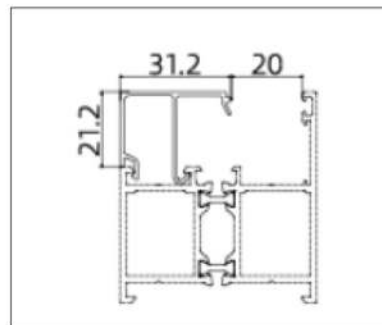


APG70F030 (Glazing Bead)

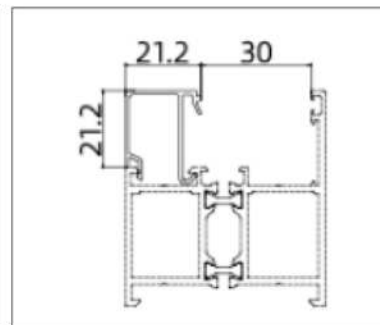

APG70F040 (Sash)

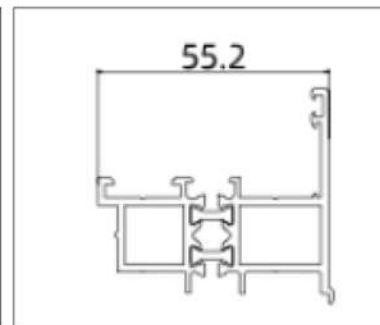

Adapter Profile (Mold Pending)

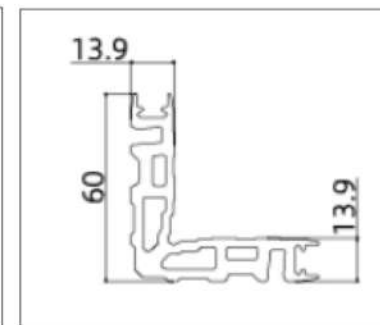

MD13.9 (Corner Connector)


Thickness:1.0mm Weight: 0.263kg/m

Thickness:1.0mm Weight: 0.233kg/m


Thickness:1.8mm Weight:1.096kg/m

Thickness:3.0mm Weight:2.227kg/m


JMGXYY-GPC60 Thermal Break Castment Window

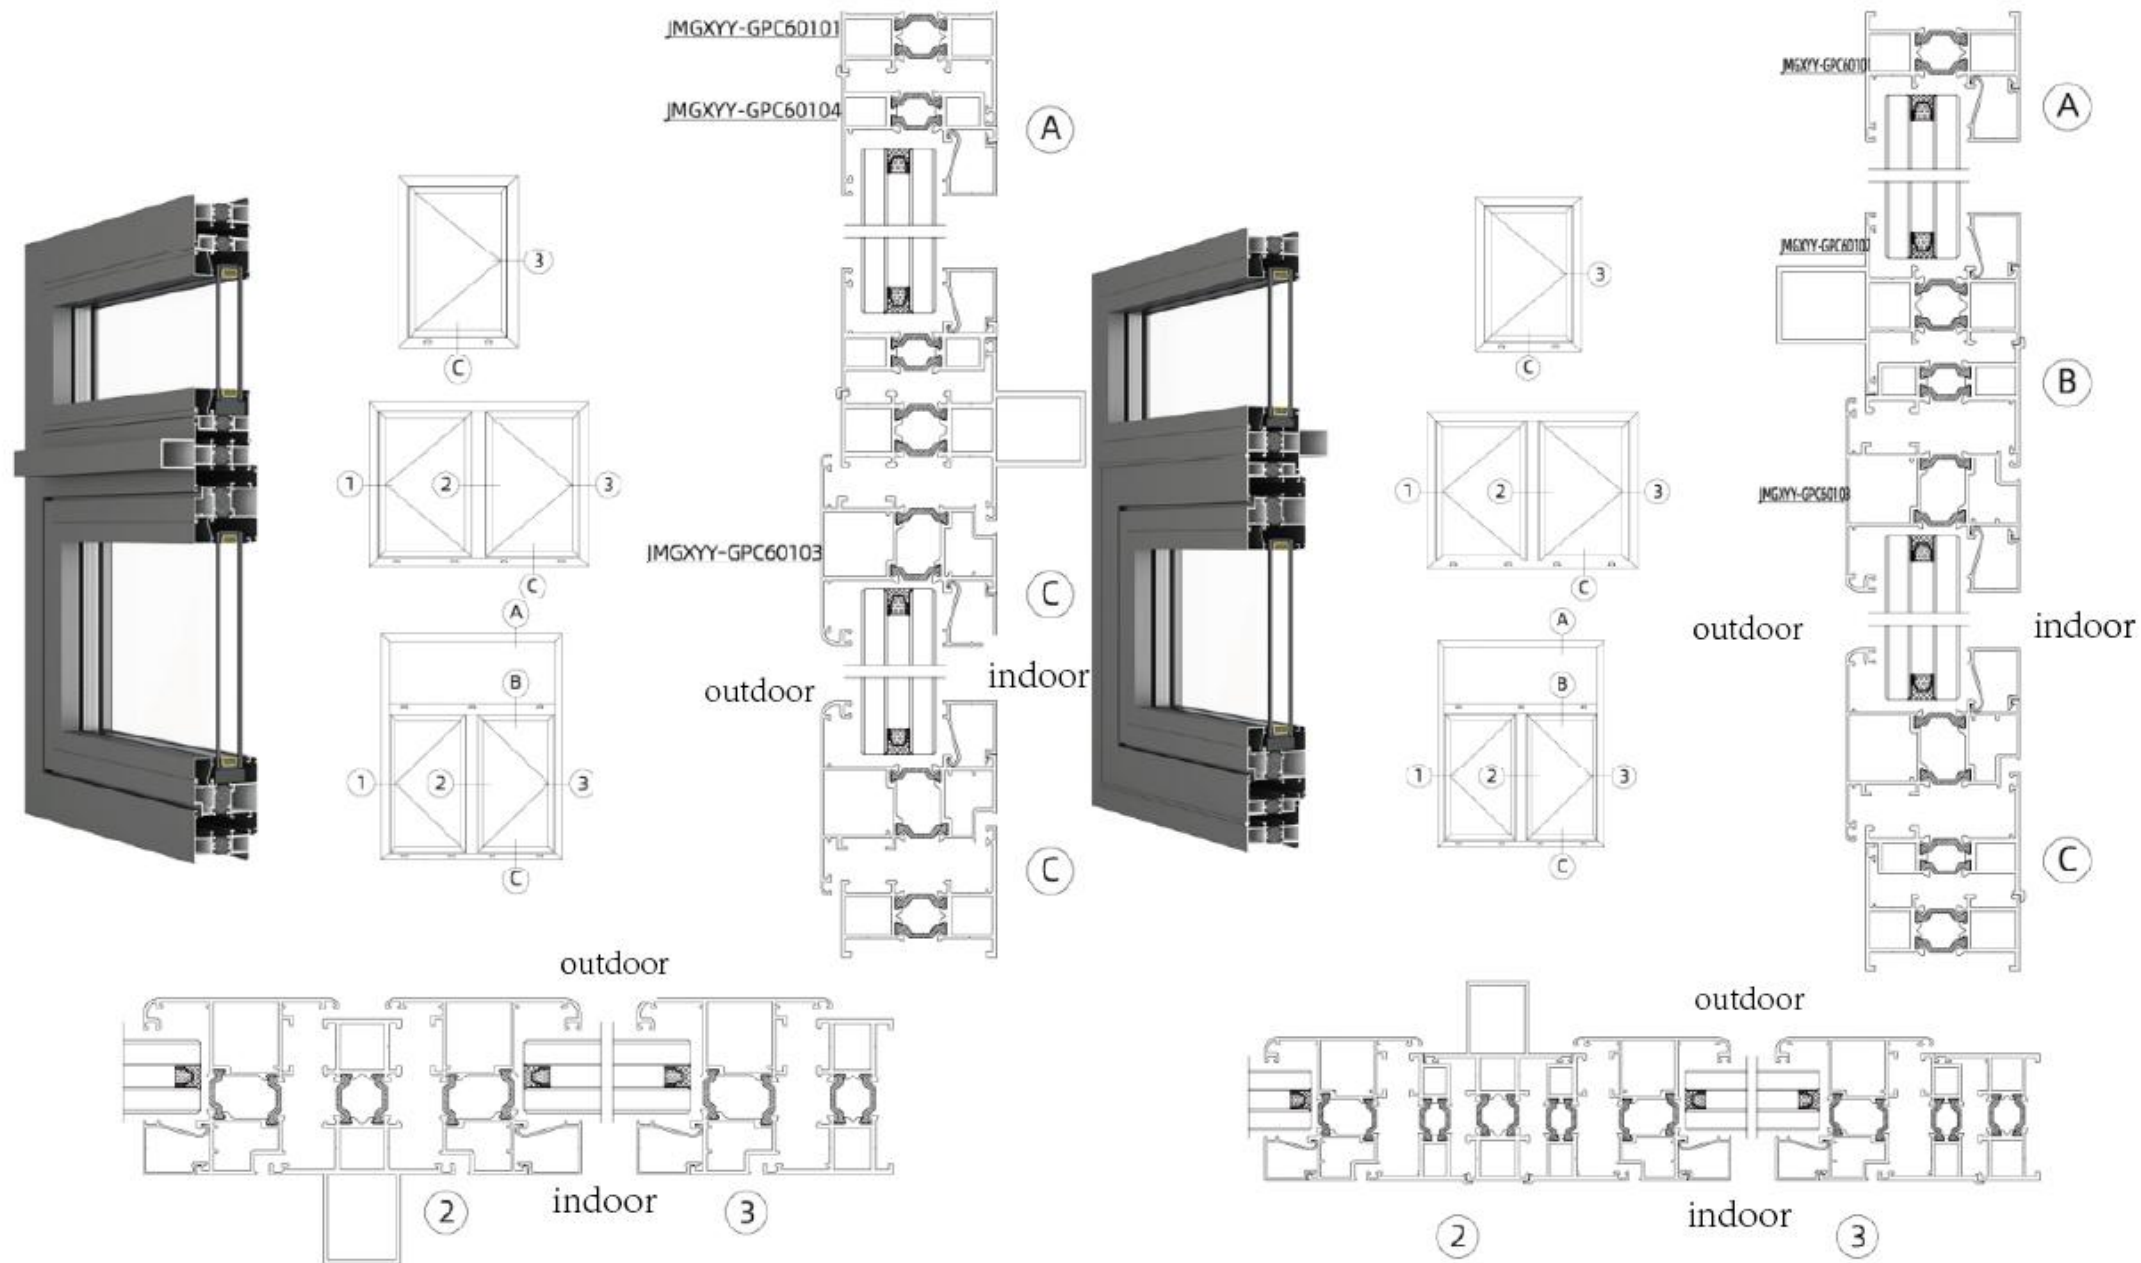


JMGXYY-GPC60 Thermal Break Castment Window

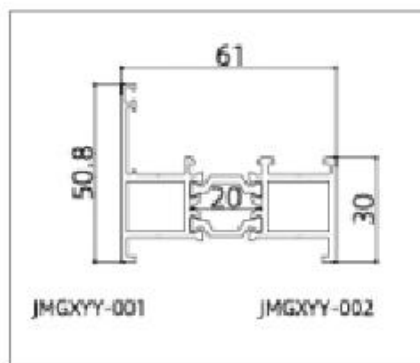


JMGXYY-GPC60101 (Frame)

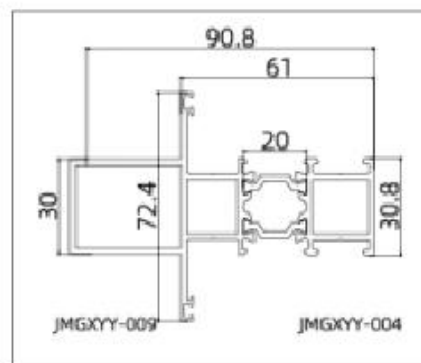

JMGXYY-GPC60102 (Mullion)

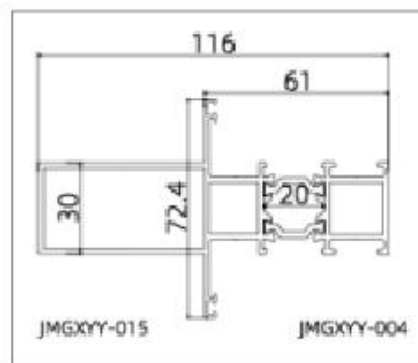

JMGXYY-GPC60112 (Mullion)

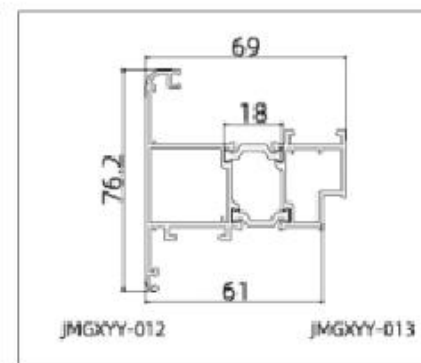


JMGXYY-GPC60103 (Sash)

Thickness:1.8mm Weight: 1.139kg/m


Thickness:1.8mm Weight: 1.779kg/m

Thickness: 1.8mm Weight: 1.974kg/m


Thickness:1.4mm Weight: 1.302kg/m

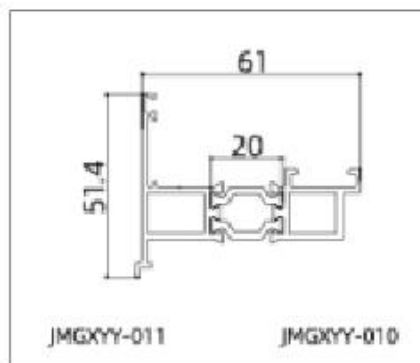

JMGXYY-GPC60104 (Frame)

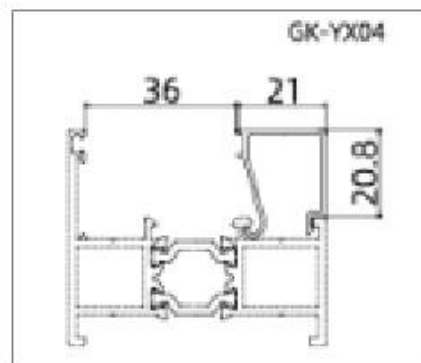

50A-047 (Corner Connector)

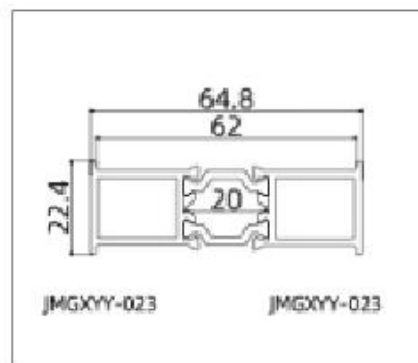



JMGXYY-GPC60108 (Mullion Bar)

Thickness:1.8mm Weight: kg/m


Thickness: Weight:3.013kg/m

Thickness: 1.8mm Weight:0.894kg/m

APG65F Thermal Break Castment Window

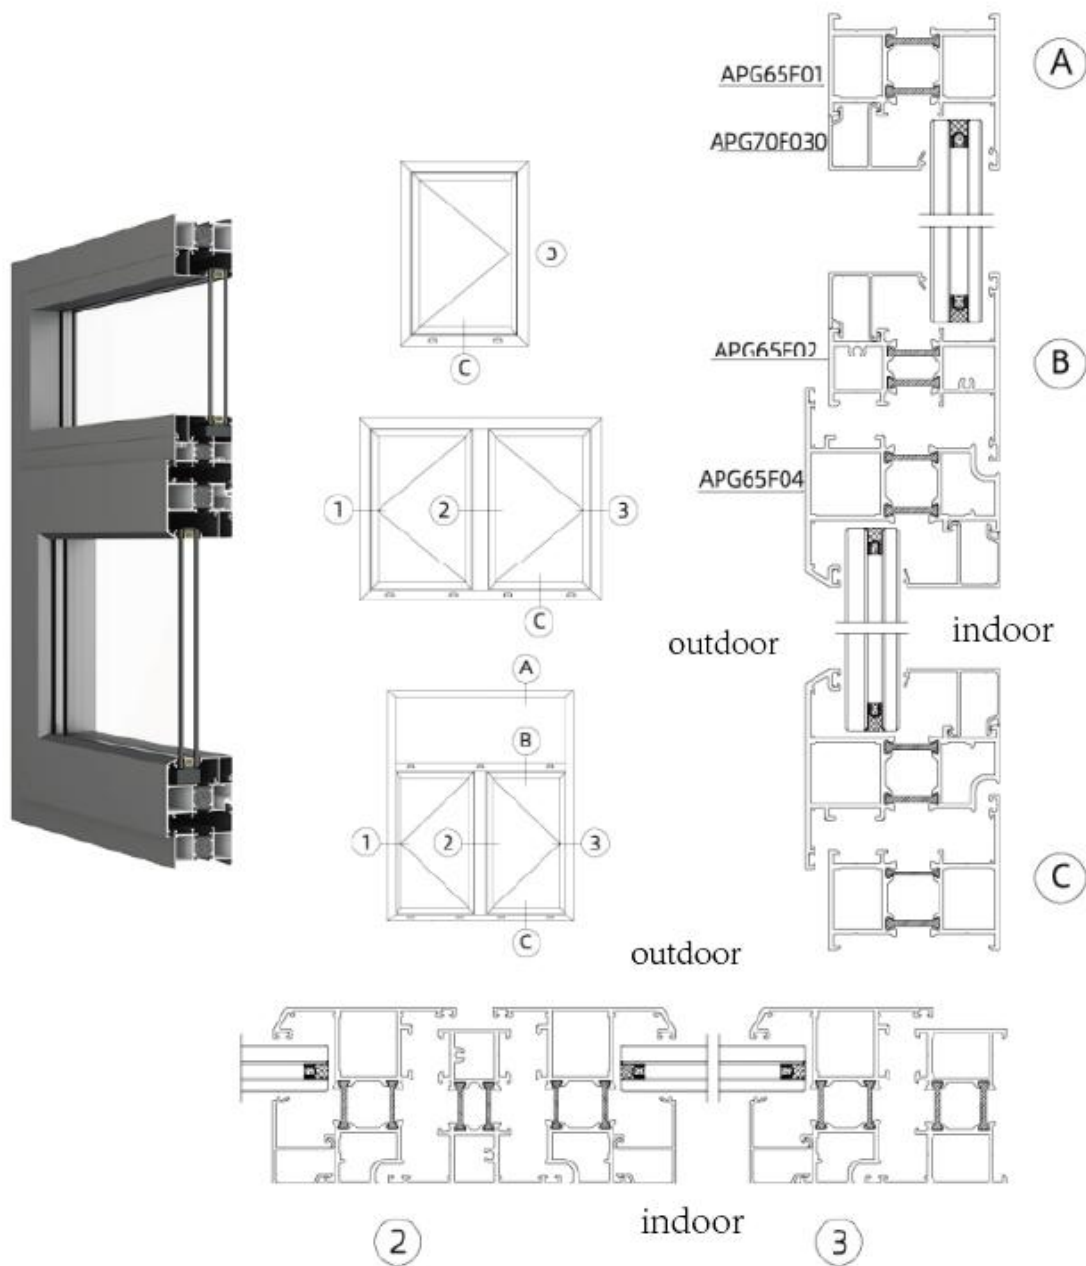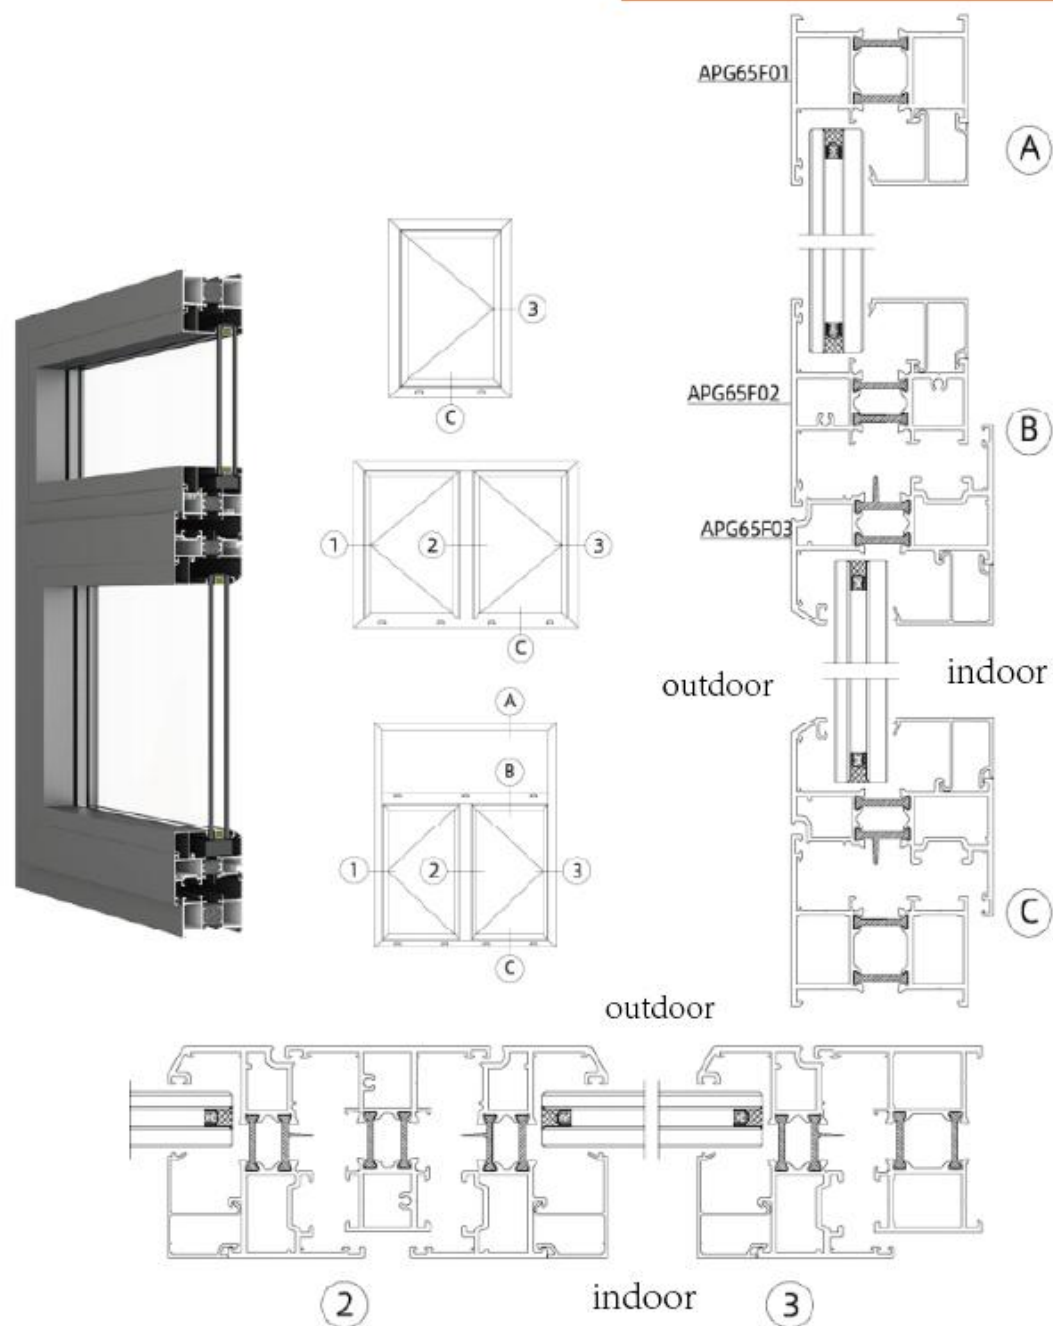


APG65F Thermal Break Castment Window

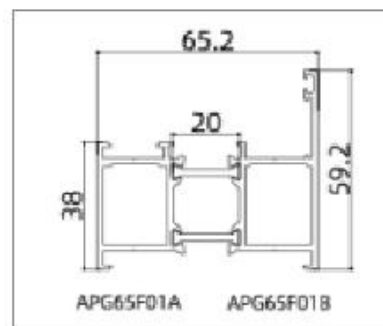


APG65F01 (Frame)

Thickness: 1.8mm Weight: 1.319kg/m

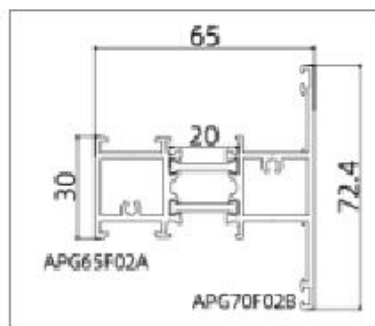


APG65F02 (Mullion)

Thickness: 1.8mm Weight: 1.377kg/m

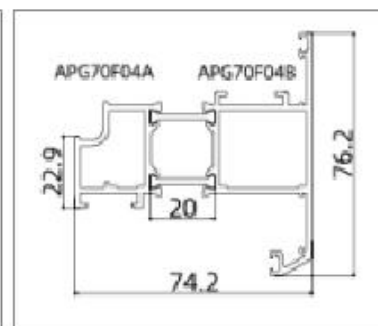


APG65F04 (Sash)

Thickness: 1.8mm Weight: 1.576kg/m

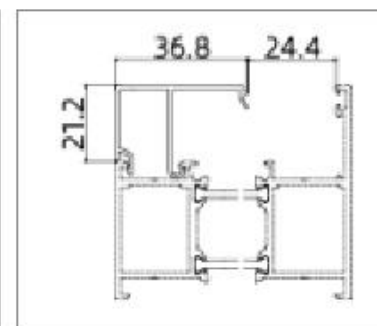


APG70F010 (Glazing Bead)

Thickness: 0.28mm Weight: 1.0kg/m

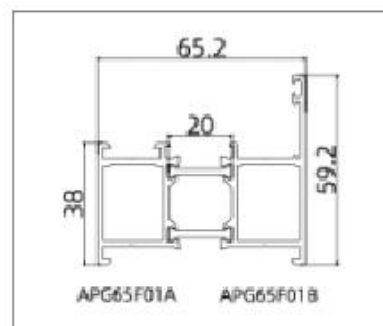


APG65F01 (Frame)

Thickness: 1.8mm Weight: 1.319kg/m

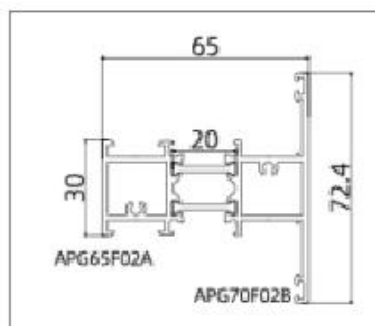


APG65F02 (Mullion)

Thickness: 1.8mm Weight: 1.377kg/m

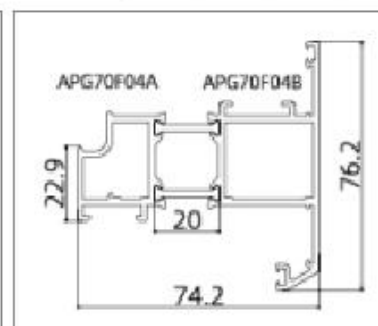


APG65F04 (Sash)

Thickness: 1.8mm Weight: 1.576kg/m

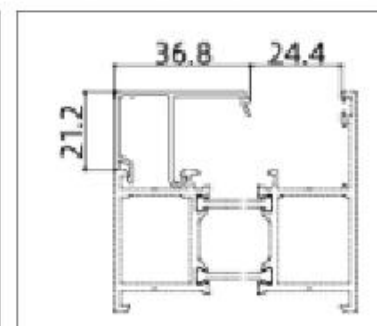


APG70F010 (Glazing Bead)

Thickness: 0.28mm Weight: 1.0kg/m

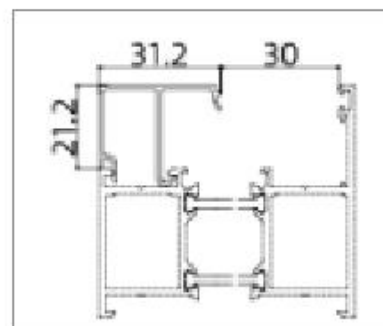


APG70F030 (Glazing Bead)

Thickness: 1.0mm Weight: 0.263kg/m

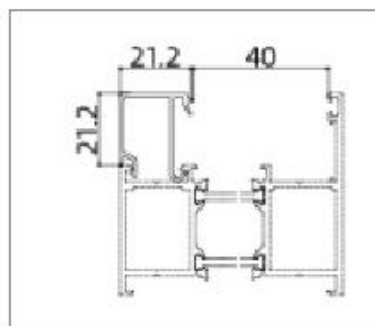


APG70F040 (Sash)

Thickness: 1.0mm Weight: 0.233kg/m

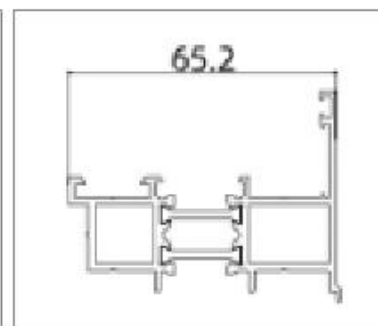

Adapter Profile (Mold Pending)


Thickness: 1.8mm Weight: 1.096kg/m

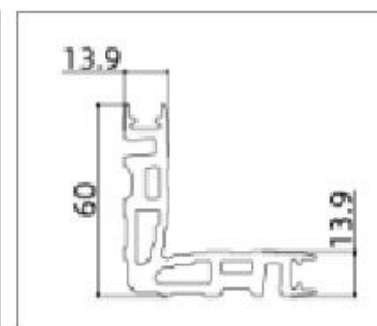


MD13.9 (Corner Connector)

Thickness: 3.0mm Weight: 2.227kg/m

JMGXYY-GPC65 Thermal Break Castment Window

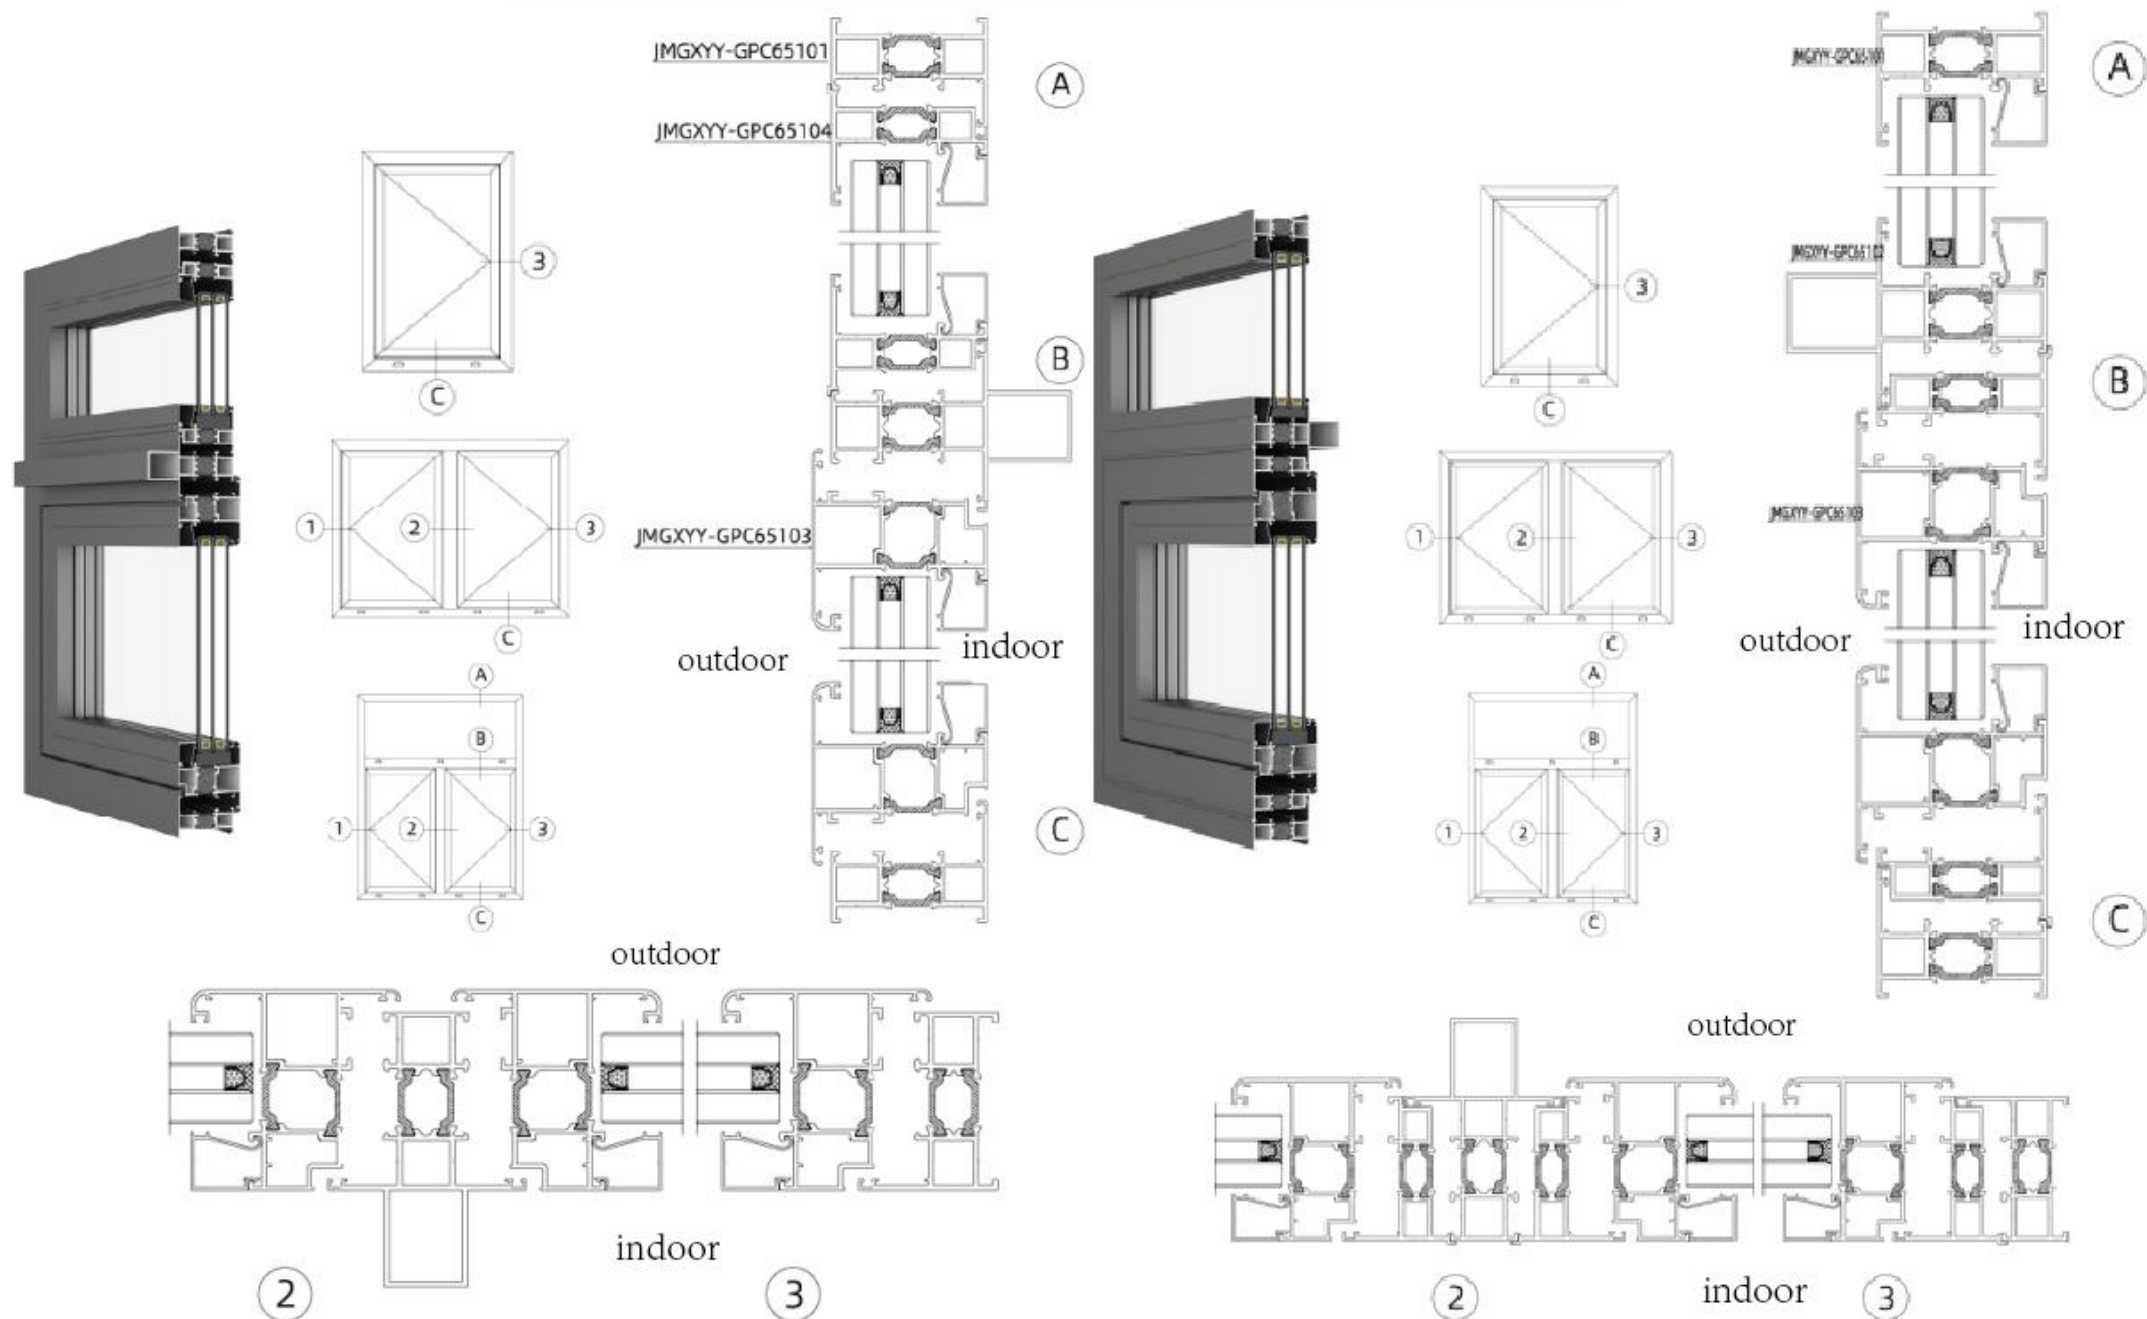


JMGXYY-GPC65 Thermal Break Castment Window

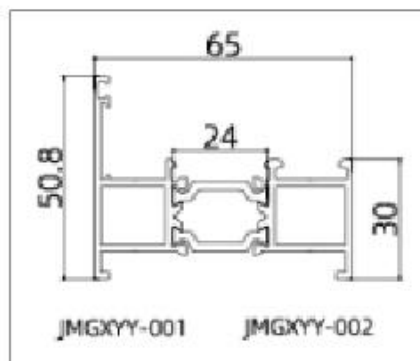


JMGXYY-GPC65101 (Frame)

Thickness:1.8mm Weight: 1.13kg/m

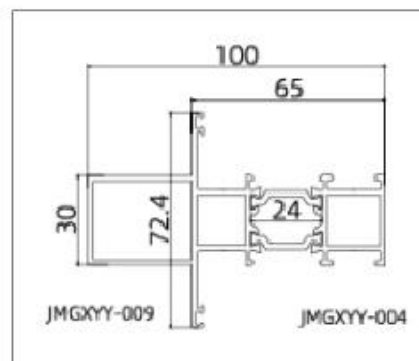


JMGXYY-GPC65102 (Mullion)

Thickness:1.8mm Weight: 1.779kg/m

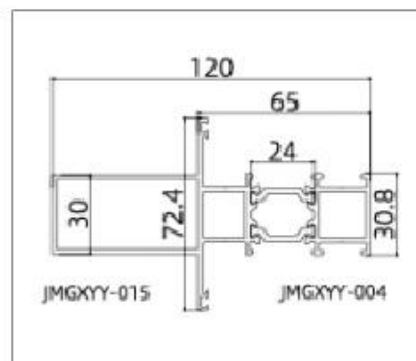


JMGXYY-GPC65112 (Mullion)

Thickness: 1.8mm Weight: 1.974kg/m

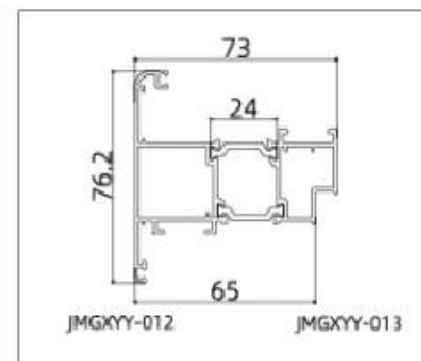


JMGXYY-GPC65103 (Sash)

Thickness:1.4mm Weight: 1.302kg/m

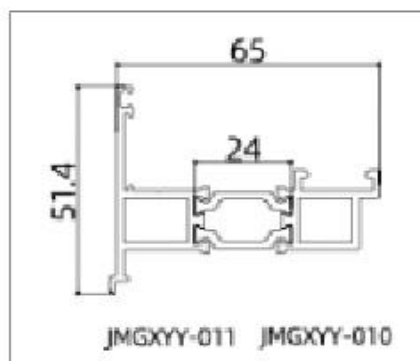


JMGXYY-GPC60104 (Frame)

Thickness:1.8mm Weight: 0.966kg/m

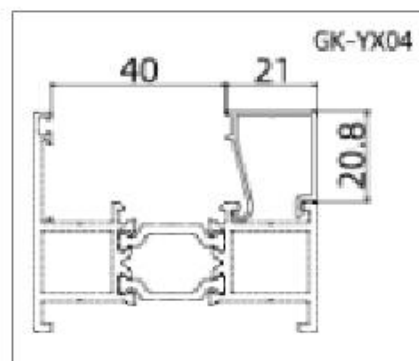

GK-YX04 (Glazing Bead)


Thickness:1.0mm Weight:0.209kg/m

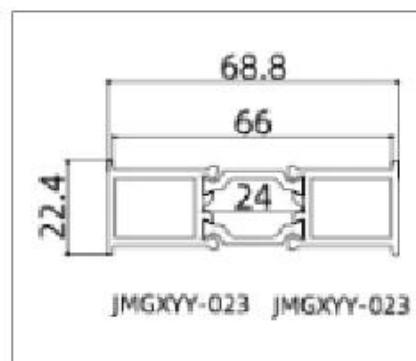

JMGXYY-GPC65108 (Mullion Bar)


Thickness: 1.8mm Weight:0.894kg/m

XD-65 Thermal Break Castment Window

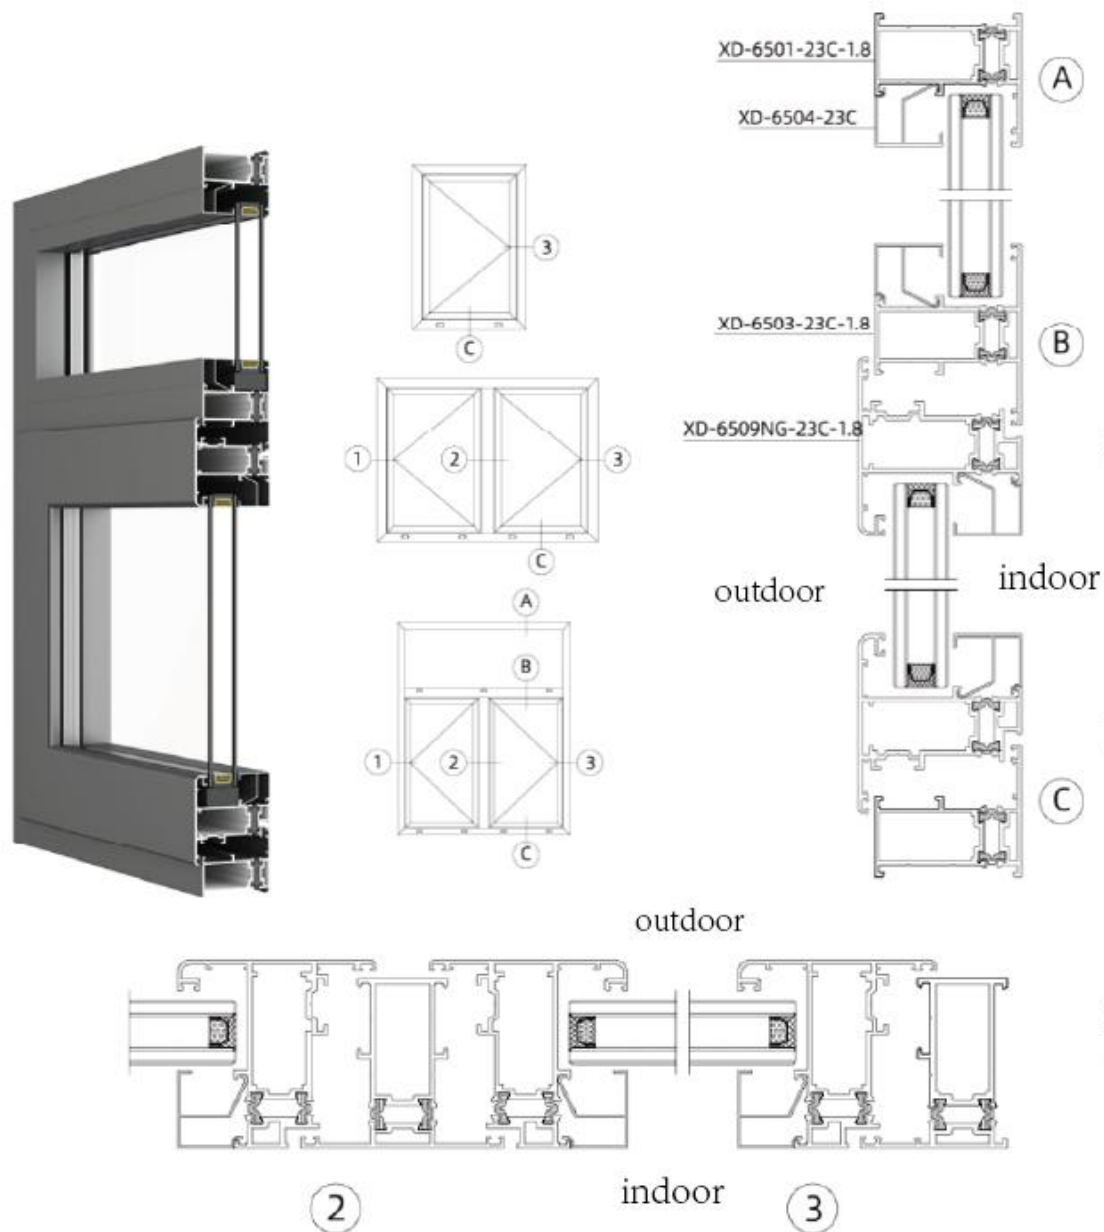


XD-6501A-23C-1.8 XD-6501D-23C-1.8 XD-6501-23C-1.8 (Frame) Thickness:1.8mm Weight:1.366kg/m	XD-6503A-23C-1.8 XD-6503D-23C-1.8 XD-6503-23C-1.8 (Mullion) Thickness:1.8mm Weight:1.458kg/m	XD-6509NGA-23C-1.8 XD-6509NGD-23C-1.8 XD-6509NG-23C-1.8 (Sash) Thickness:1.8mm Weight:1.67kg/m	XD-6505A-23C-1.8 XD-6505D-23C-1.8 XD-6505-23C (Glazing Bead) Thickness:0.9mm Weight:0.29kg/m
XD-6504A-23C-25 XD-6504D-23C-25 XD-6504-23C-25 (Glazing Bead) Thickness:0.9mm Weight:0.269kg/m	XD-6504A-23C XD-6504D-23C XD-6504-23C (Glazing Bead) Thickness:0.9mm Weight:0.253kg/m	XD-6506A-23C-1.8 XD-6506D-23C-1.8 XD-6506-23C (Glazing Bead) Thickness:0.9mm Weight:0.236kg/m	XD-6506A-47-23C XD-6506D-47-23C XD-6506-47-23C (Glazing Bead) Thickness:0.9mm Weight:0.22kg/m
BFUS20914(Corner Connector) Thickness:3.0mm Weight:2.921kg/m			

APG70F Thermal Break Castment Window

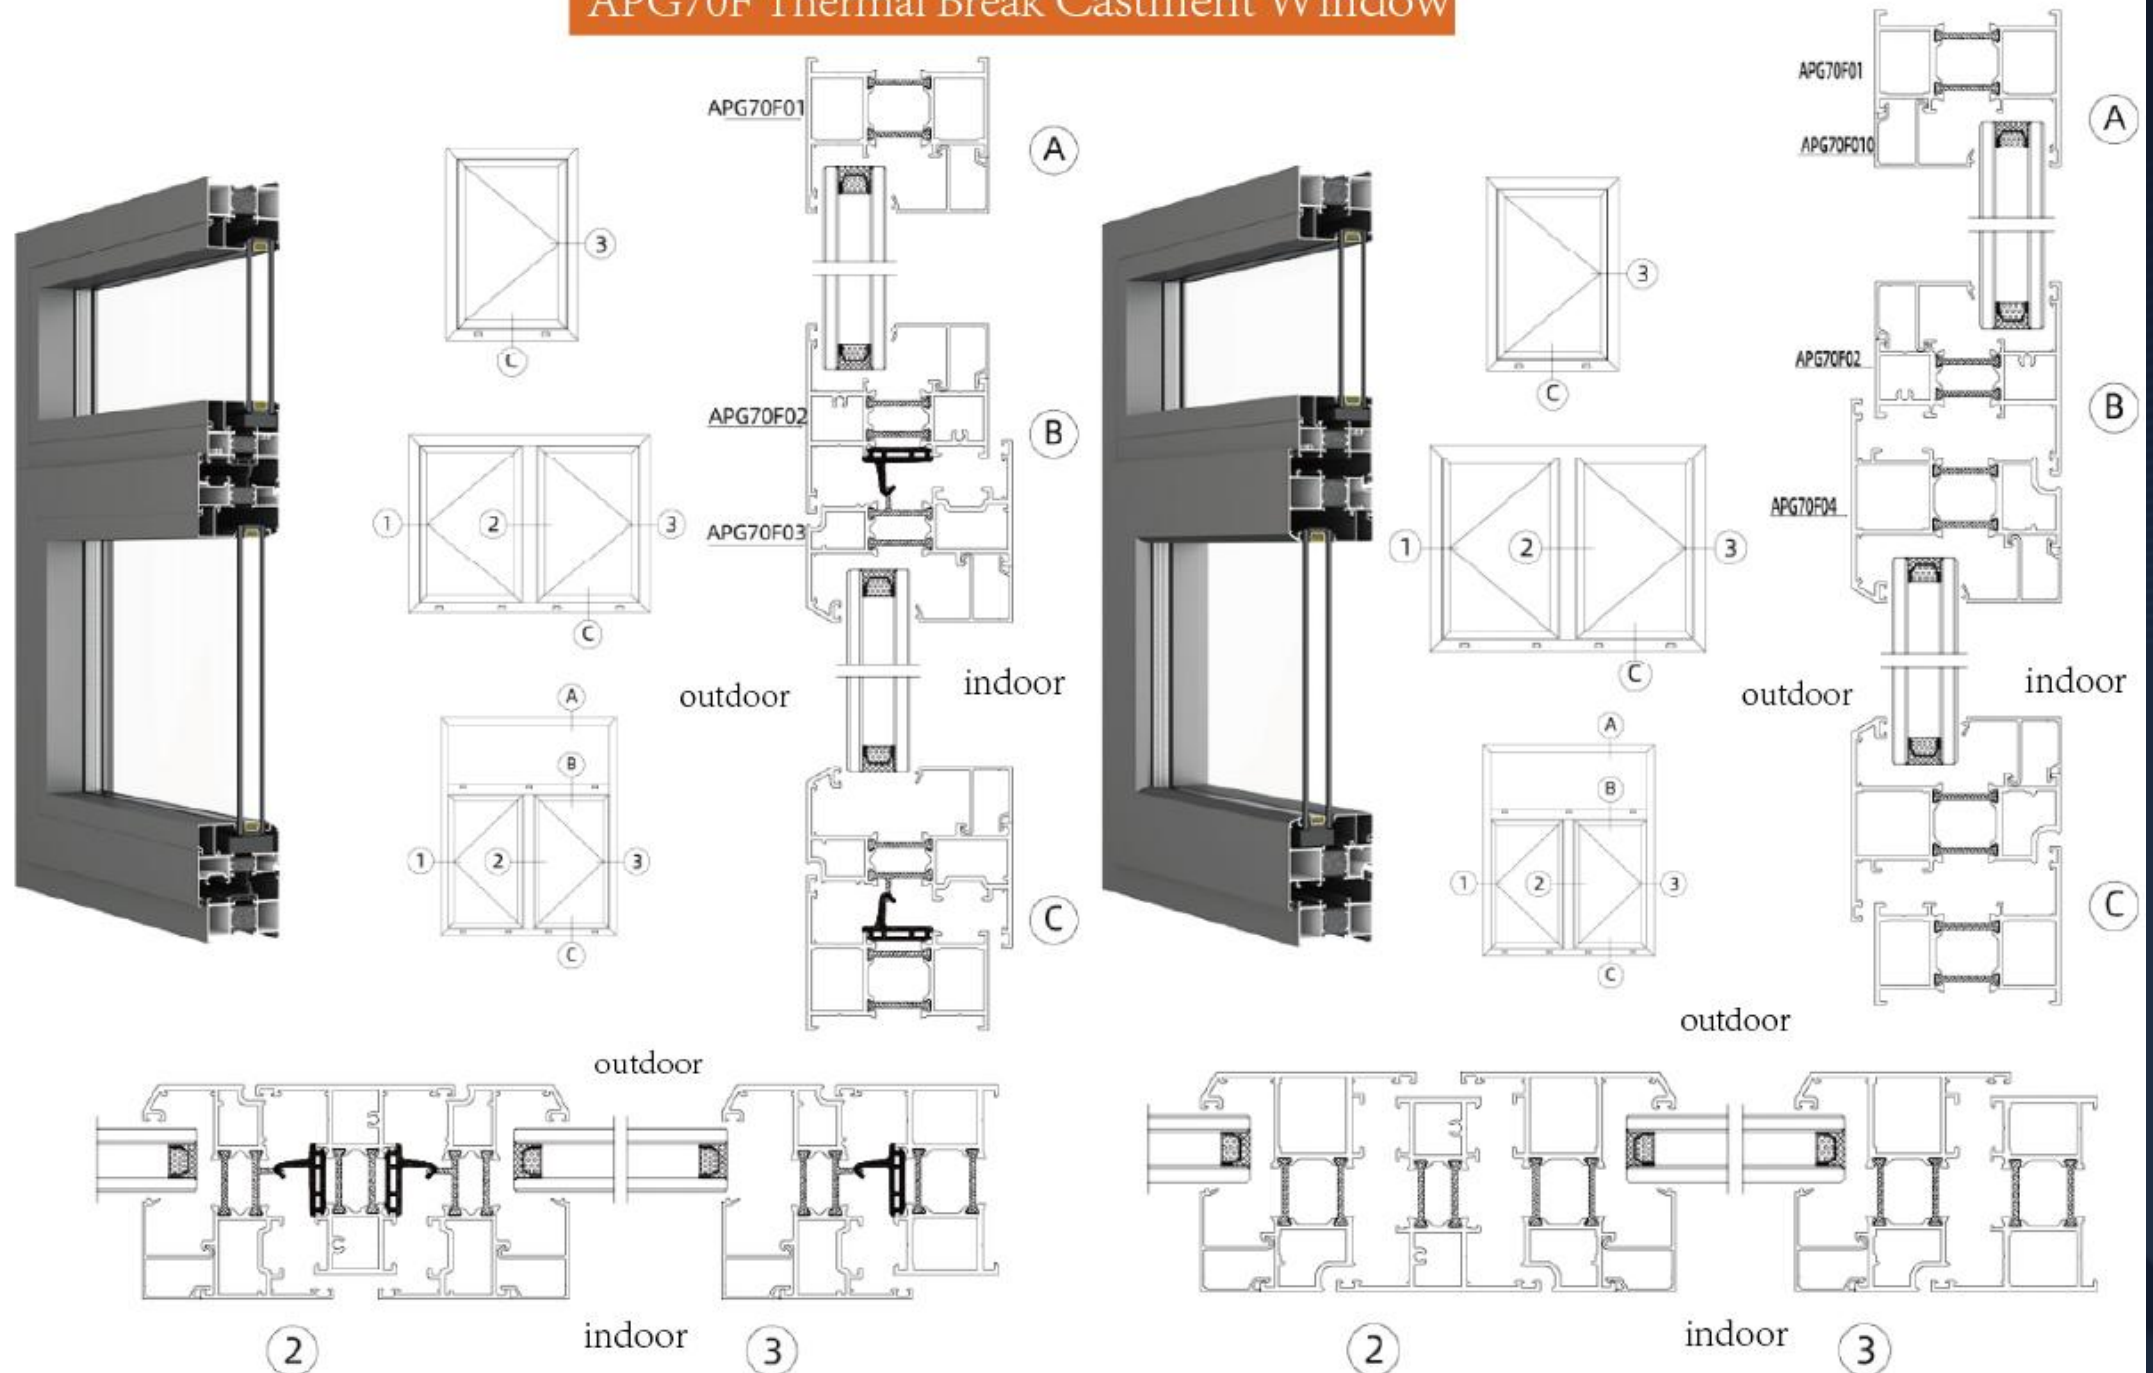


APG70F Thermal Break Castment Window

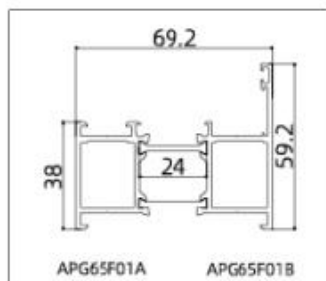


APG70F01 (Frame)

Thickness:1.8mm Weight: 1.319kg/m

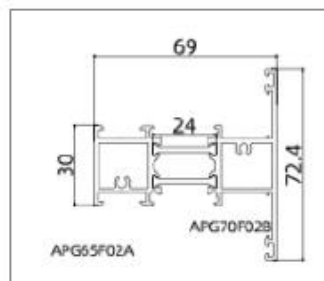


APG70F02 (Mullion)

Thickness:1.8mm Weight: 1.377kg/m

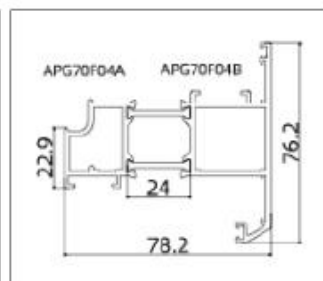


APG70F04 (Sash)

Thickness: 1.576kg/m

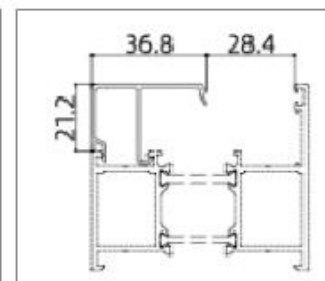


APG70F010 (Glazing Bead)

Thickness:0.28mm Weight: 1.0kg/m

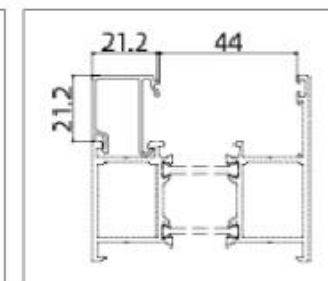


APG70F040 (Glazing Bead)

Thickness:1.0mm Weight: 0.233kg/m

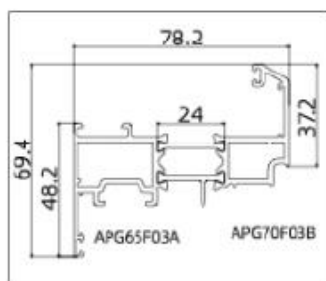


APG70F03 (Sash)

Thickness:1.8mm Weight: 1.425kg/m

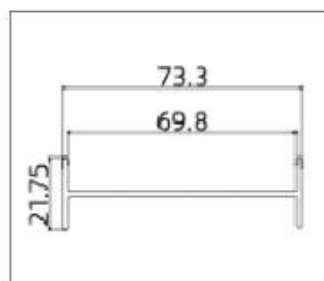


APG70F09 (Frame)

Thickness:1.8mm Weight:0.534kg/m

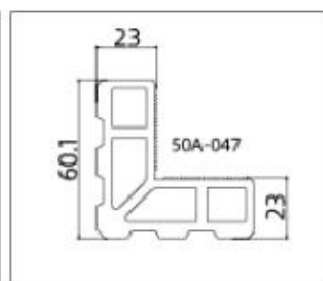


50A-047 (Corner Connector)

Thickness: 1.8mm Weight: 3.013kg/m

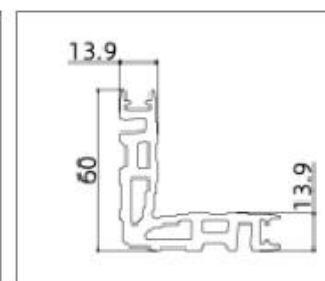


MD13.9 (Corner Connector)

Thickness: 0.28mm Weight: 1.0kg/m

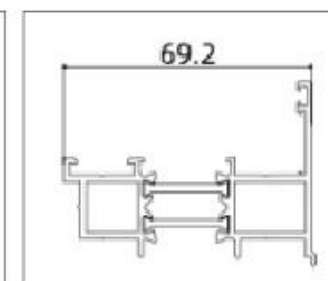


Adapter Profile (Mold Pending)

Thickness:1.8mm Weight: 1.096kg/m

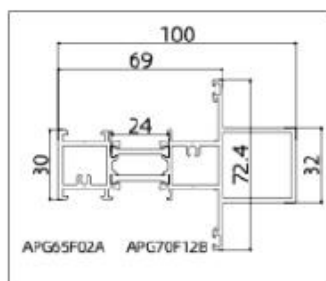


APG70F12 (Mullion)

Thickness:1.8mm Weight: 1.817kg/m

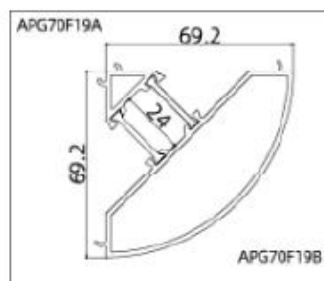


APG70F19 (90° Corner)

Thickness:1.8mm Weight: 1.484kg/m

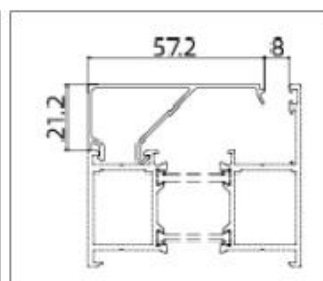


APG70F20 (Glazing Bead)

Thickness:1.0mm Weight:0.368kg/m

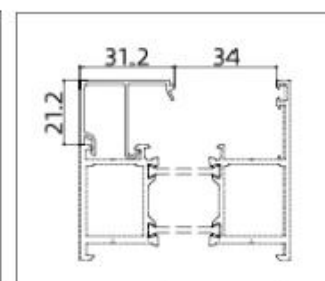

APG70F30 (Glazing Bead)





Thickness:1.0mm Weight:0.263kg/m

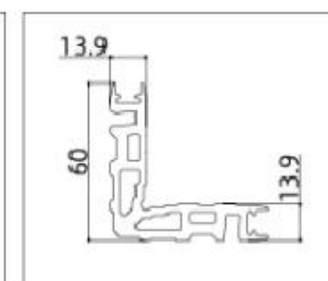


MD 13.9 (Glazing Bead)

Thickness:3.0mm Weight: 2.227kg/m


JMGXYY-GPC70 Casement Window

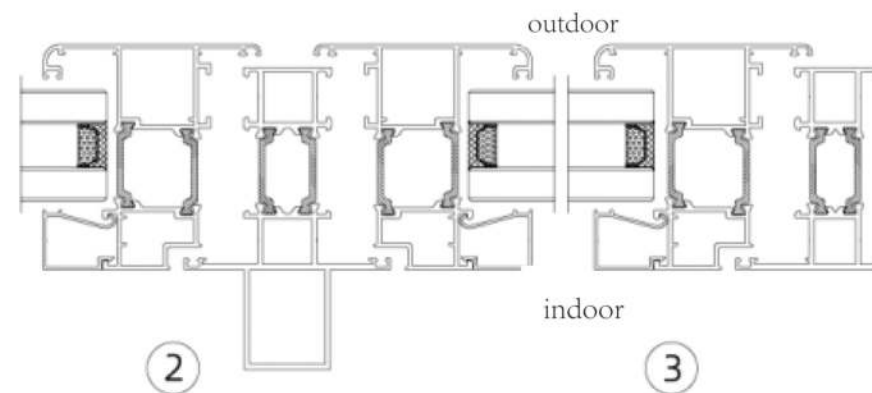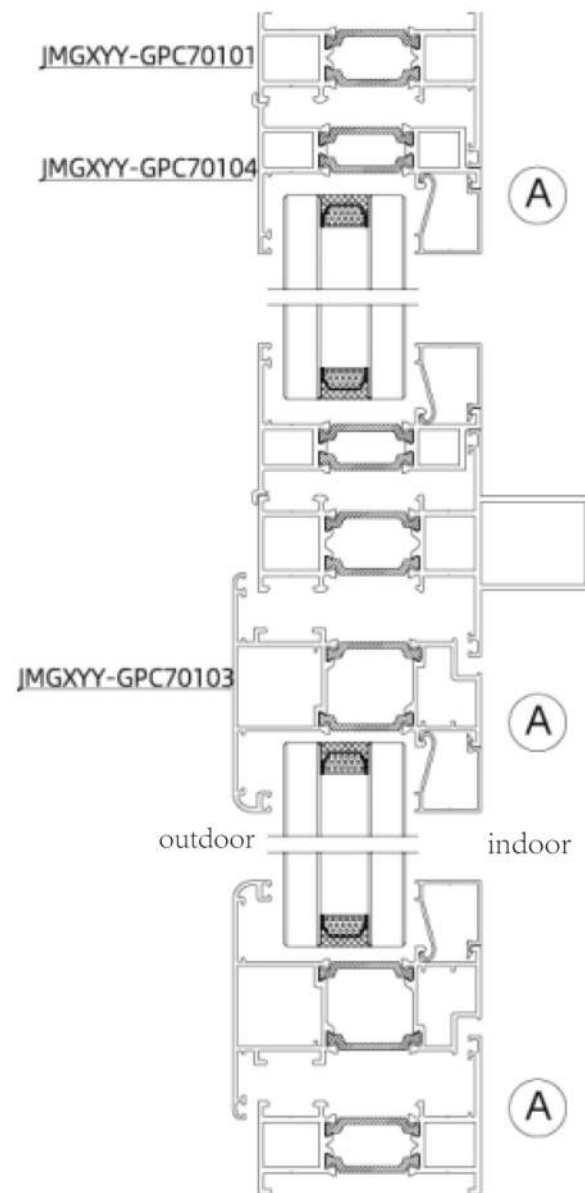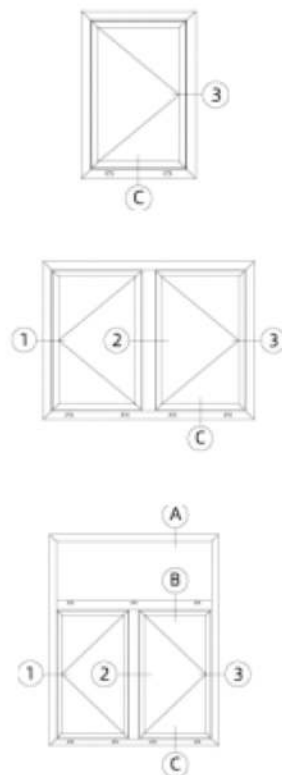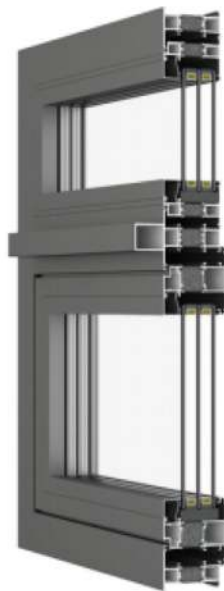


JMGXYY-GPC70 Casement Window

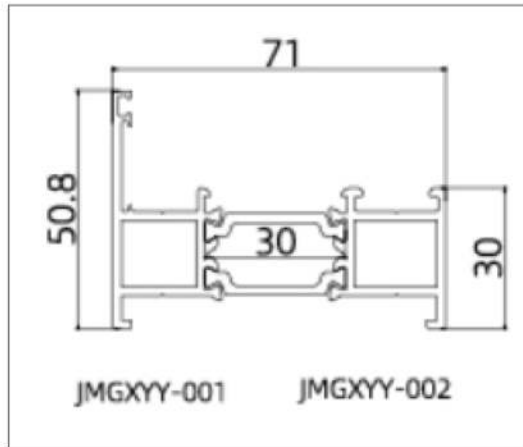


JMGXYY-GPC70101 (Frame)

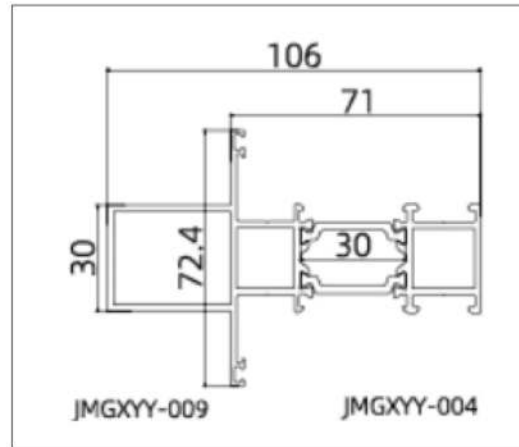

JMGXYY-GPC70102 (Mullion)

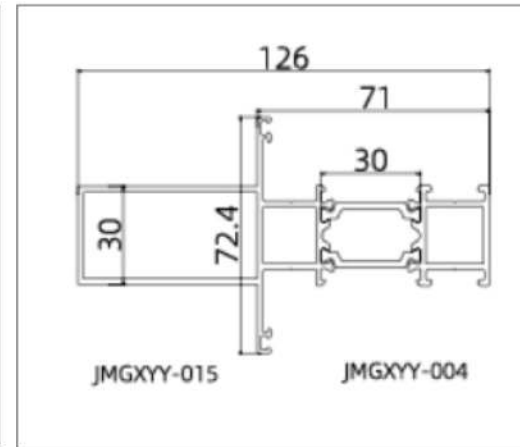

JMGXYY-GPC70112 (Mullion)

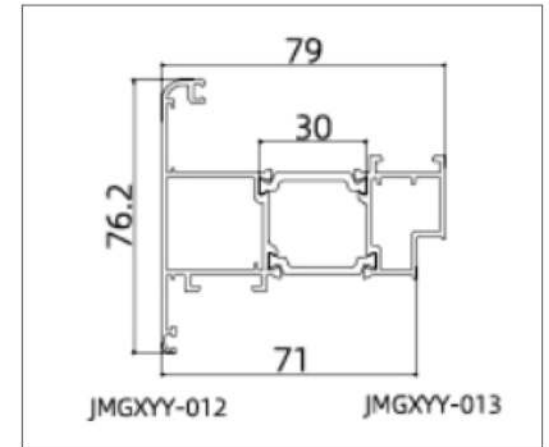


JMGXYY-GPC70103 (Sash)

Thickness:1.8mm Weight: 1.13kg/m


Thickness:1.8mm Weight: 1.779kg/m

Thickness:1.8mm Weight: 1.974kg/m


Thickness:1.4mm Weight: 1.302kg/m

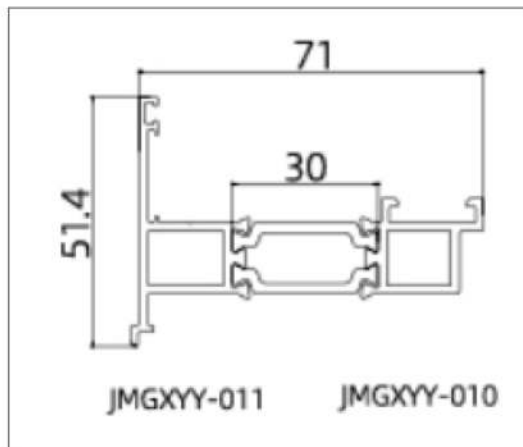

JMGXYY-GPC70104 (Frame)

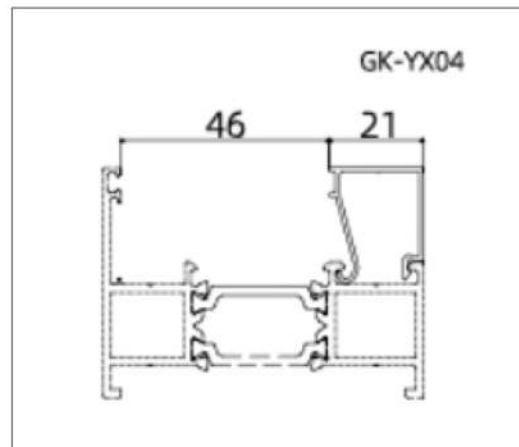

GK-YX04(Glazing Bead)

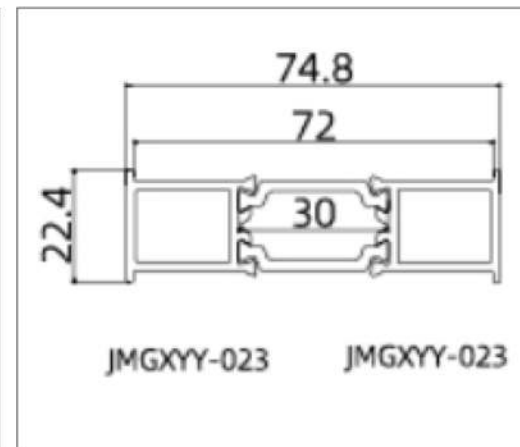


JMGXYY-GPC70108 (Mullion Bar)

Thickness:1.8mm Weight: 0.966kg/m


Thickness:1.0mm Weight: 0.209kg/m

Thickness:1.8 mm Weight: 0.894kg/m


XLH-70&50 Thermal Break Casement Window

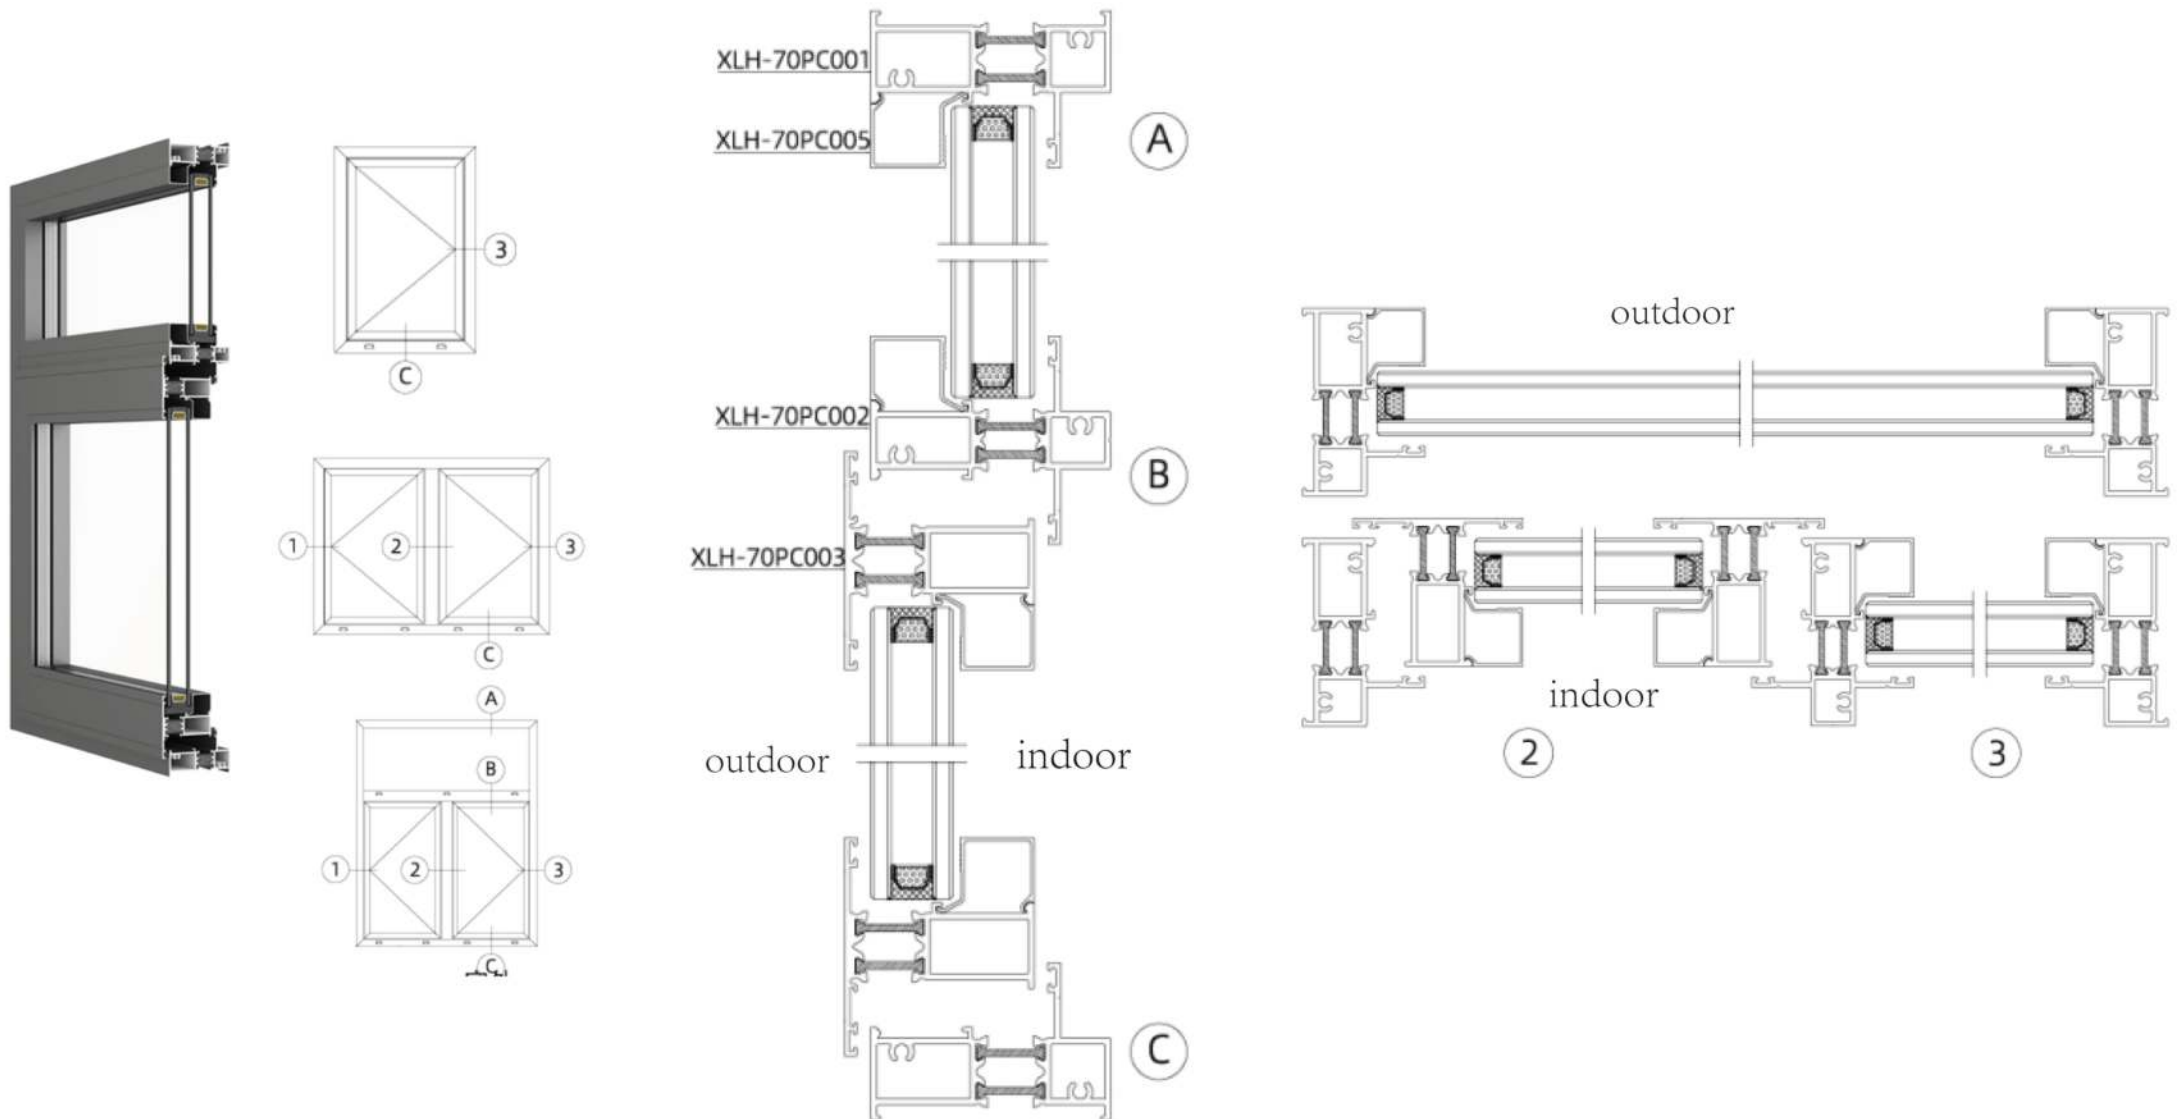


XLH-70&50 Thermal Break Casement Window

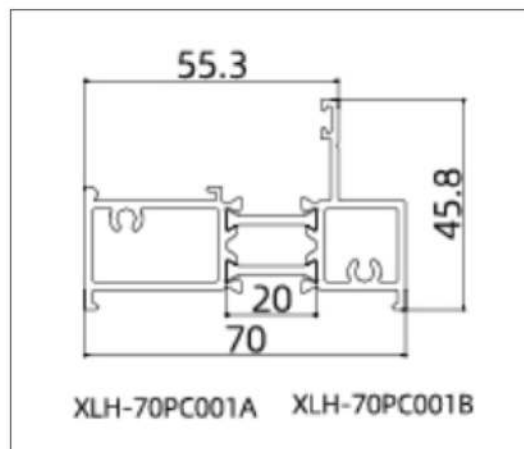


XLH-70PC001 (Frame)

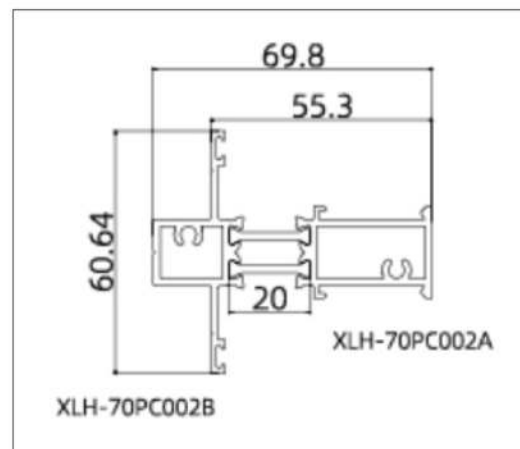

XLH-70PC002 (Mullion)

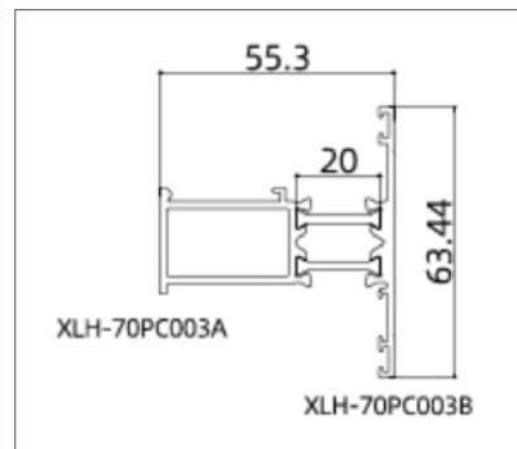


XLH-70PC003 (Sash)

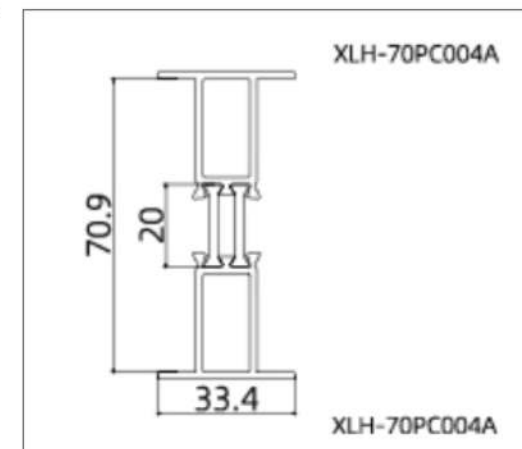


XLH-70PC004 (Mullion Bar)

Thickness:1.72mm Weight: 1.187kg/m Thickness:1.72mm Weight: 1.222kg/m Thickness:1.72mm Weight: 1.031kg/m Thickness:1.72mm Weight: 1.004kg/m

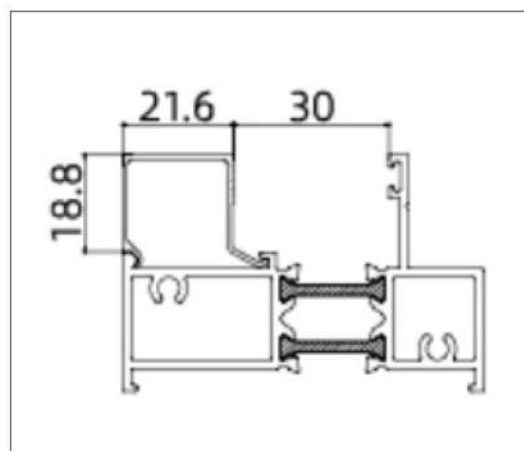



XLH-70PC005 (Glazing Bead)

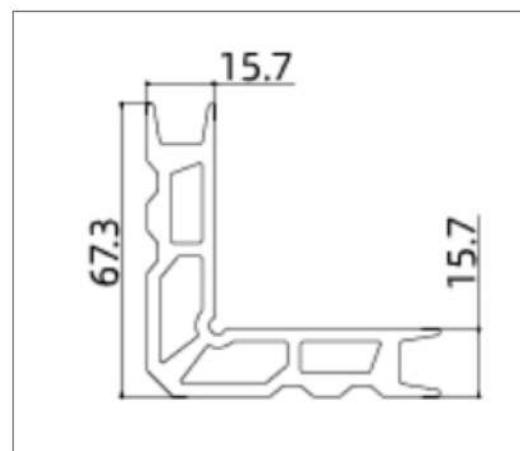


BFUS20922(Corner Connector)

Thickness:0.9mm Weight: 0.177kg/m Thickness:3.0mm Weight: 2.54kg/m

JMGXYY-GPM55 Thermal Break Casement Door

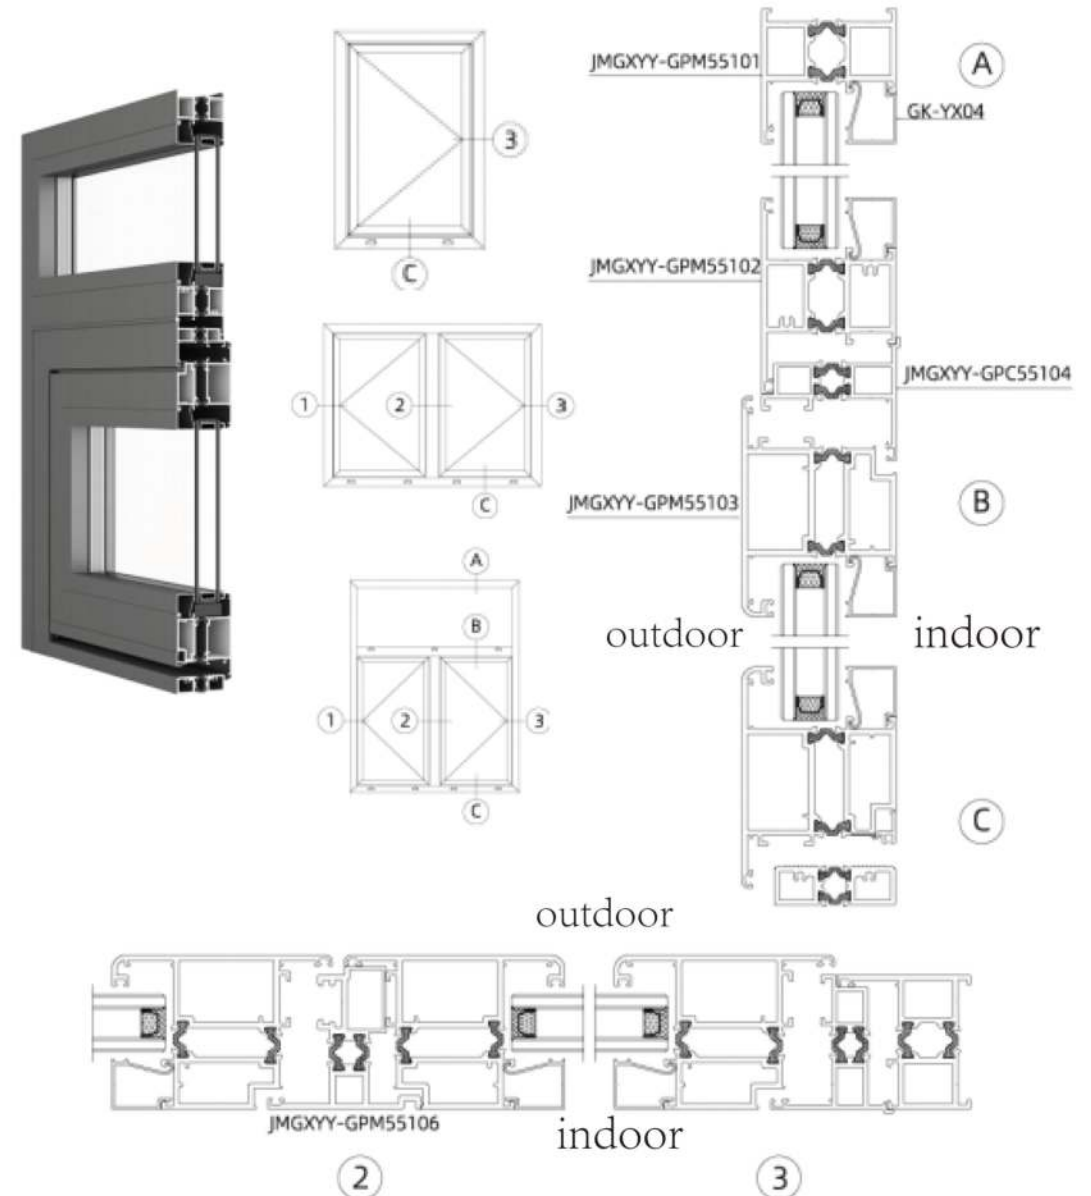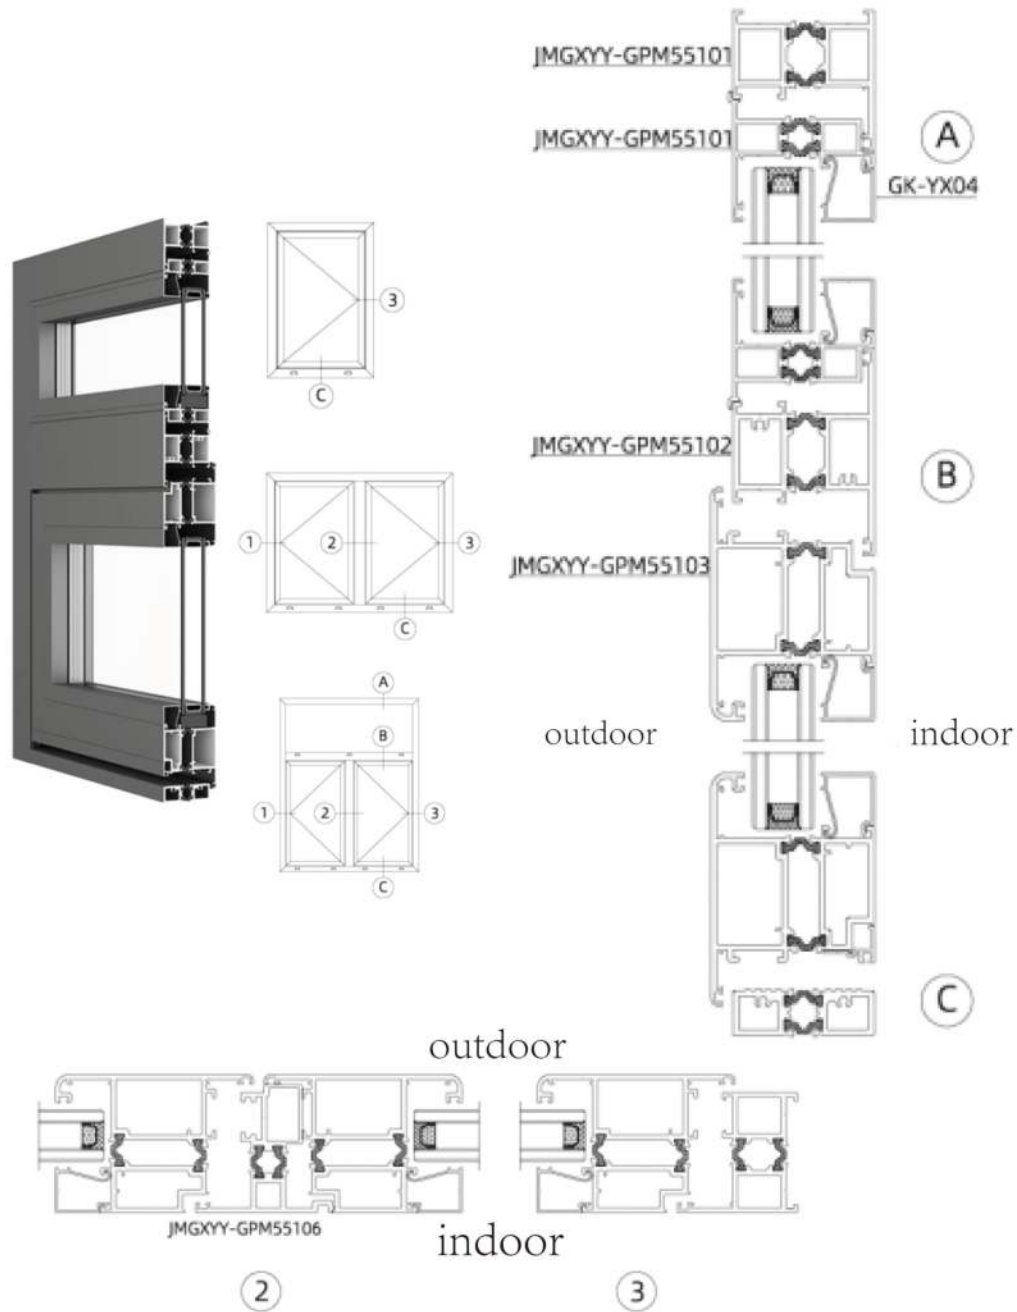


JMGXYY-GPM55 Thermal Break Casement Door

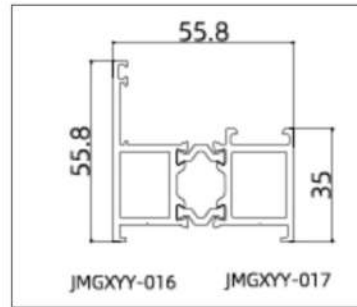


JMGXYY-016 JMGXYY-017

Thickness:2.2mm Weight:1.411kg/m

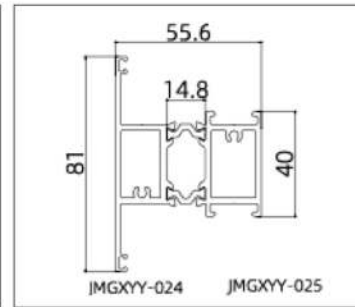


JMGXYY-024 JMGXYY-025

Thickness:2.2mm Weight:1.718kg/m

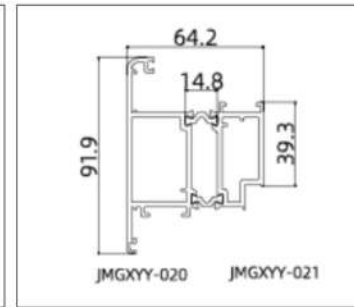


JMGXYY-020 JMGXYY-021

Thickness:2.2mm Weight: 2.203kg/m

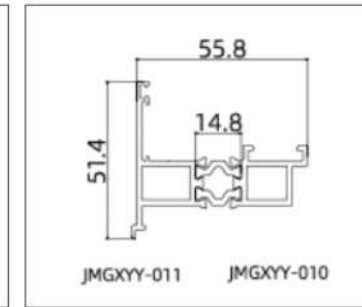


JMGXYY-011 JMGXYY-010

Thickness:1.8mm Weight: 0.966kg/m

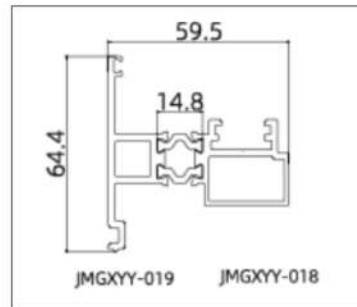


JMGXYY-019 JMGXYY-018

Thickness:2.2mm Weight:1.383kg/m

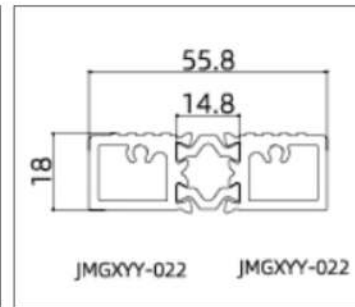


JMGXYY-022 JMGXYY-022

Thickness:2.2mm Weight: 1.066kg/m

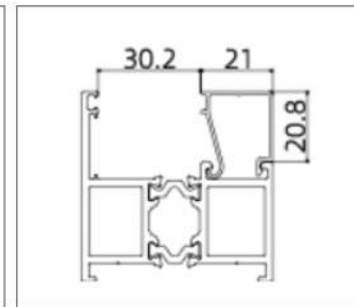


GK-XY04 (Glazing Bead)

Thickness:1.0 mm Weight:0.209kg/m

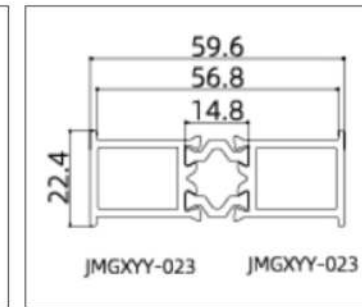


JMGXYY-023 JMGXYY-023

Thickness: 1.8mm Weight: 0.894kg/m

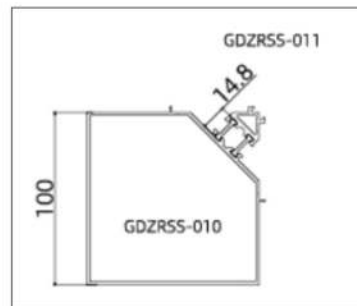


JMGXYY-GPM55109(90° Corner)

Thickness:1.8mm Weight: 3.013kg/m

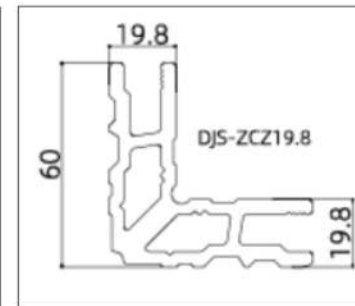

DJS-ZCZ19.8(Frame)


Thickness:4.5mm Weight:2.659kg/m

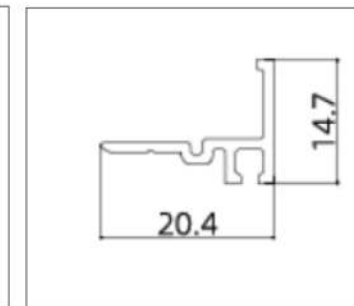


Jamb(Tooling Pending)

Thickness:1.2mm Weight:0.138kg/m

JMGXYY-GPM60 Thermal Break Castment Door

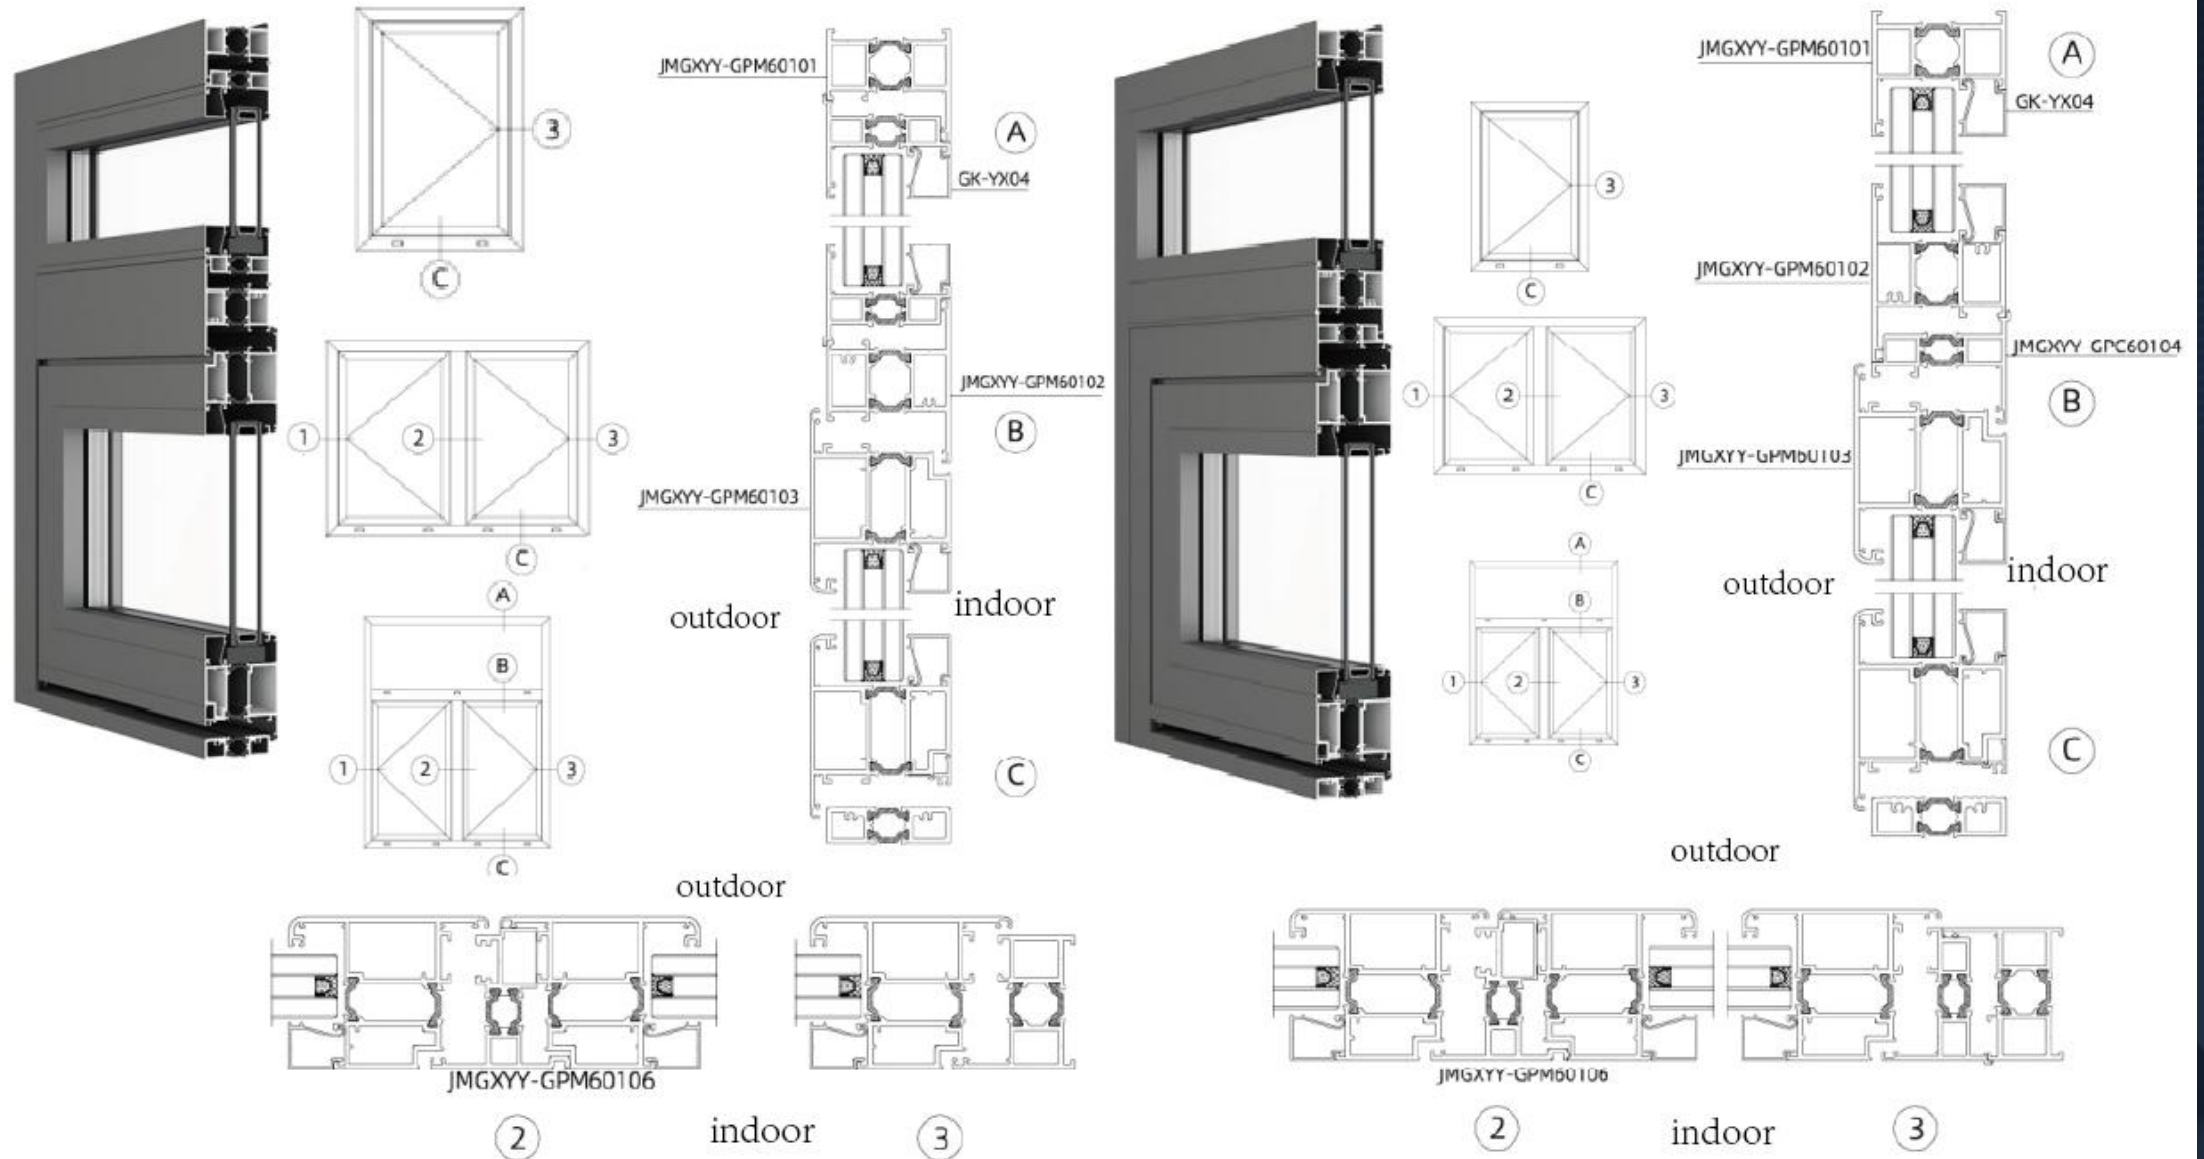


JMGXXY-GPM60 Thermal Break Castment Door

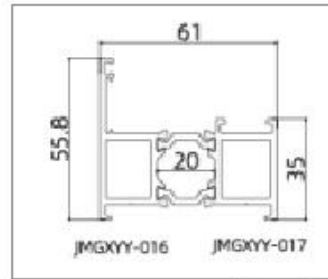


JMGXXY-GPM60101 (Frame)

Thickness: 2.2mm Weight: 1.411kg/m

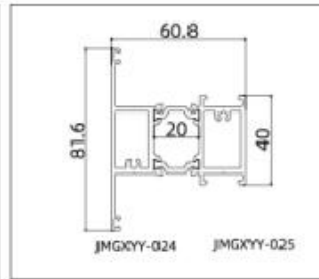


JMGXXY-GPM60102 (Mullion)

Thickness: 2.2mm Weight: 1.718kg/m

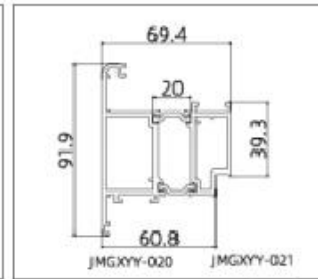


JMGXXY-GPM60103 (Sash)

Thickness: 2.2mm Weight: 2.203kg/m

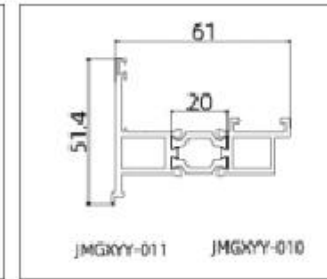


JMGXXY-GPM60104 (Frame)

Thickness: 1.8mm Weight: 0.966kg/m

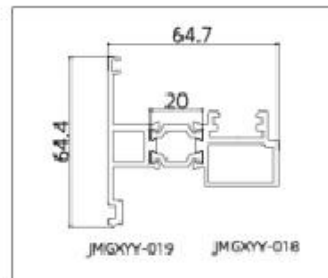


JMGXXY-GPM60106 (Mullion)

Thickness: 2.2mm Weight: 1.383kg/m

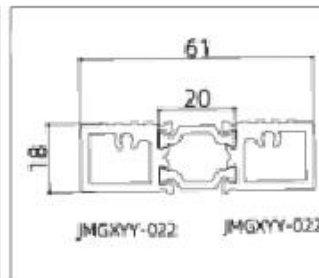


JMGXXY-GPM60107 (Bottom Rail)

Thickness: 2.2mm Weight: 1.066kg/m




GK-YX04 (Glazing Bead)

Thickness: 1.0mm Weight: 0.209kg/m

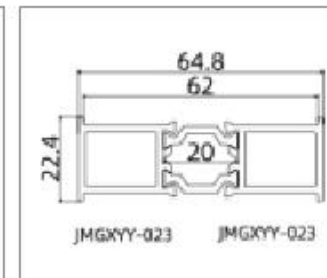


JMGXXY-GPM60108 (Mullion Bar)

Thickness: 1.8mm Weight: 0.894kg/m

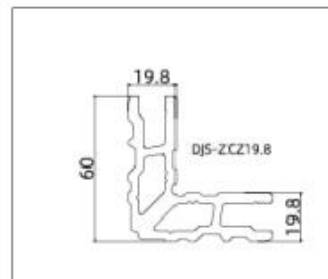

DJS-ZCZ19.8 (Guide Rail)


Thickness: 4.5mm Weight: 2.659kg/m

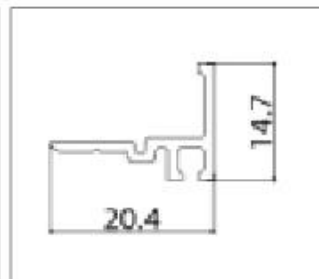


Guide Rail (Mold Pending)

Thickness: 1.2mm Weight: 0.138kg/m

JMGXYY-GPM65 Thermal Break Castment Door

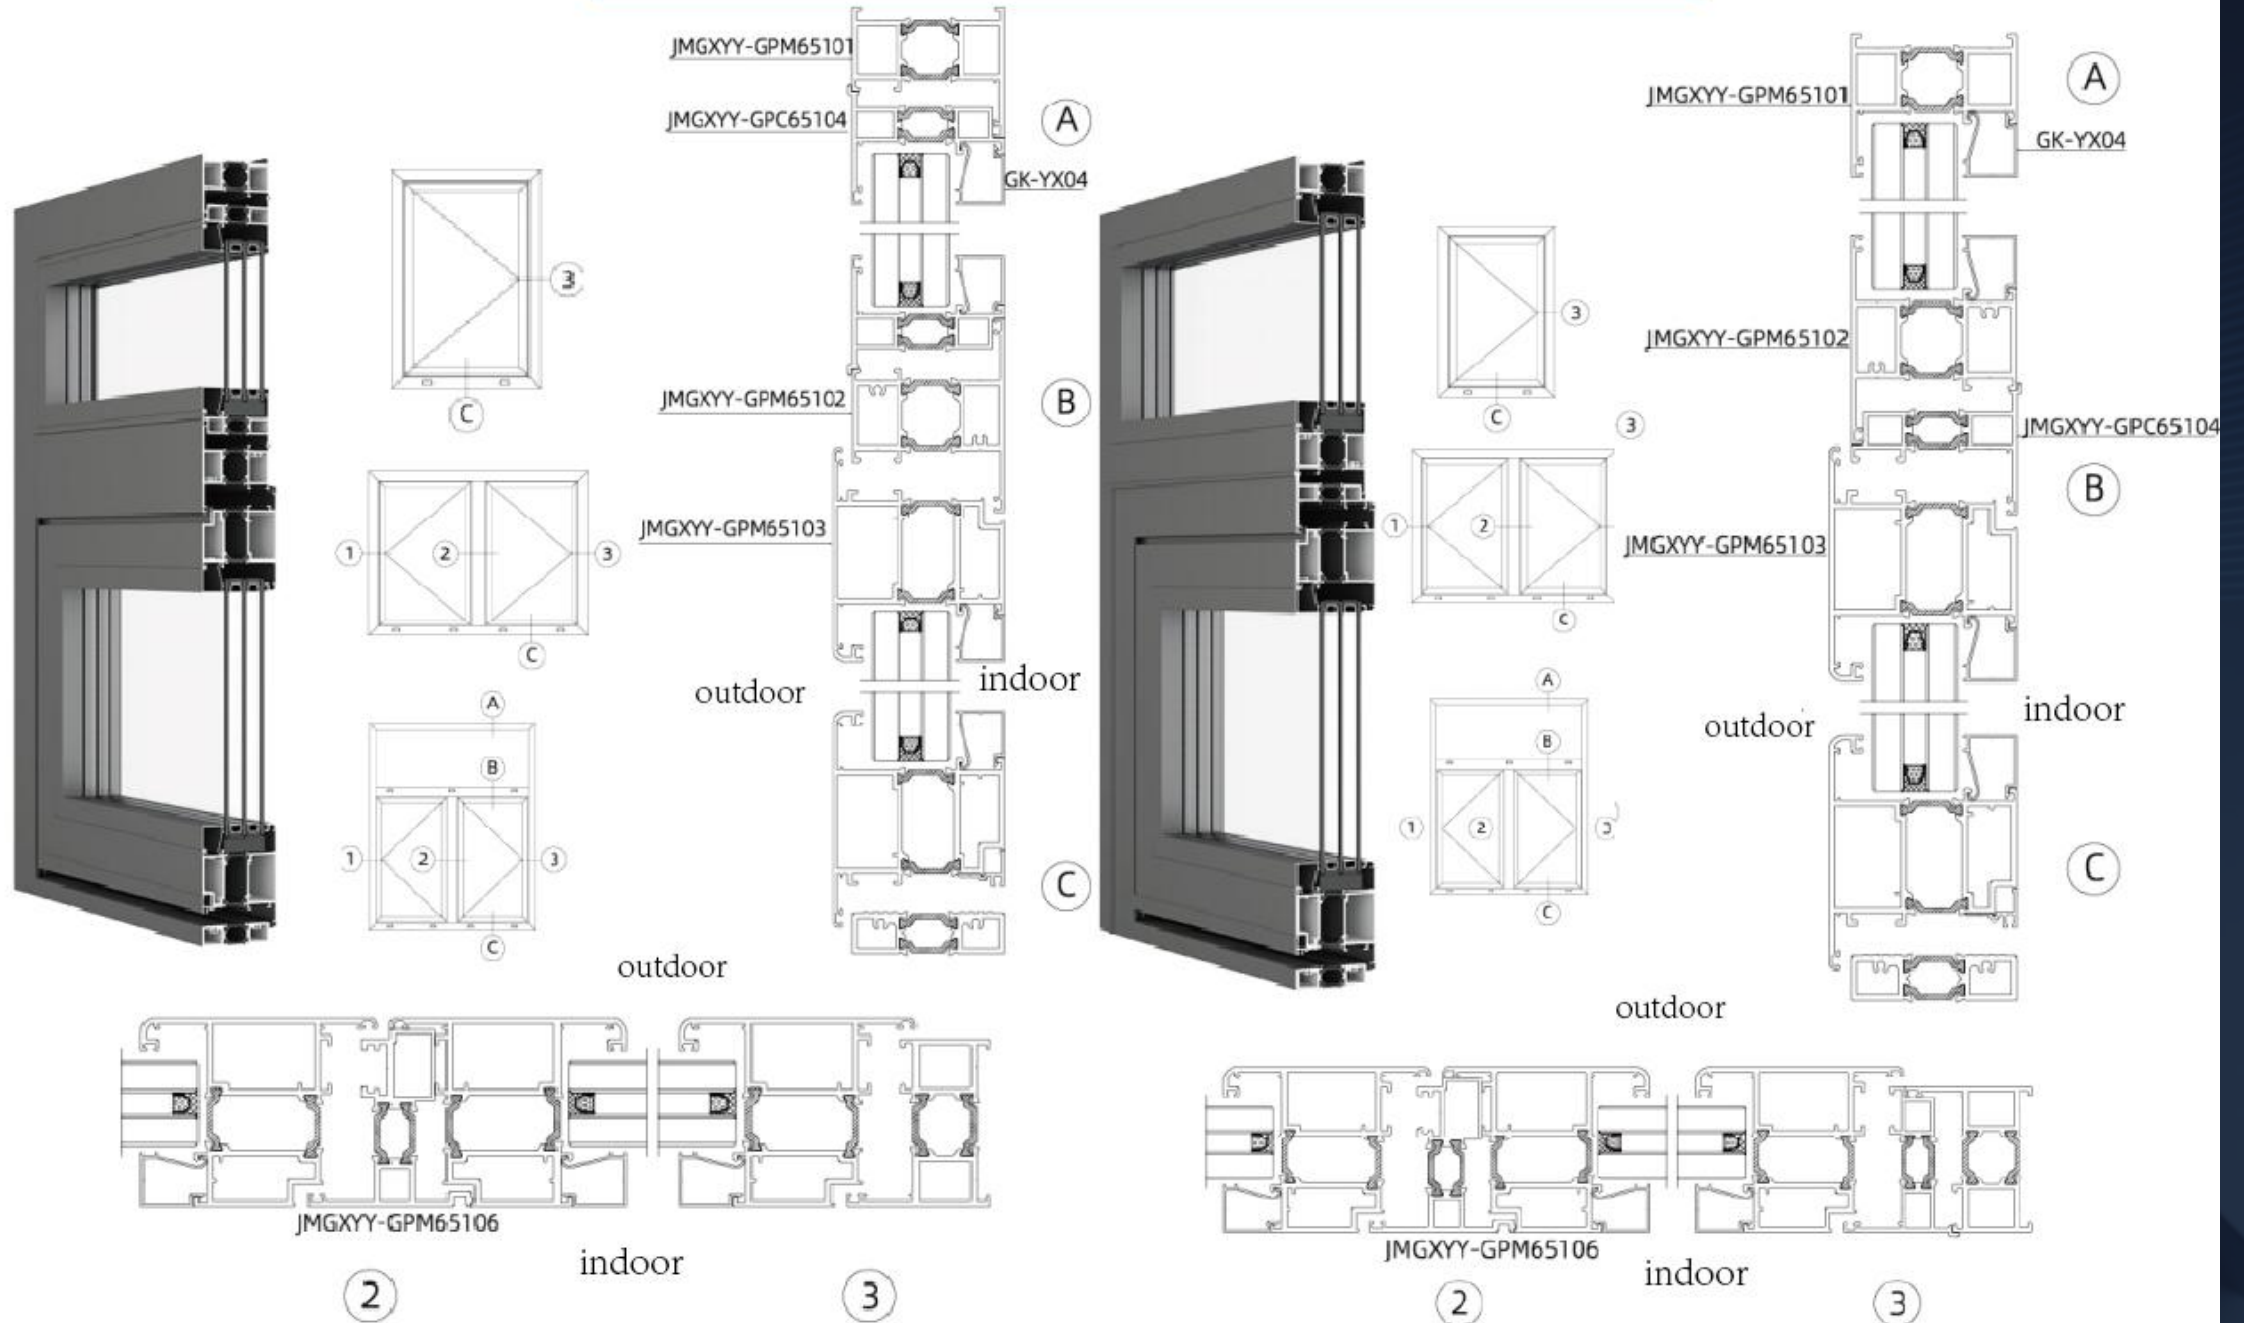


JMGXXY-GPM65 Thermal Break Castment Door

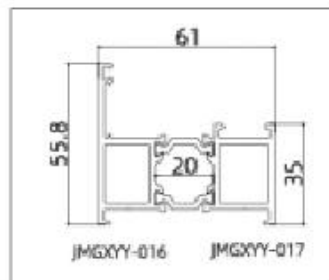


JMGXXY-GPM65101 (Frame)

Thickness:2.2mm Weight: 1.411kg/m

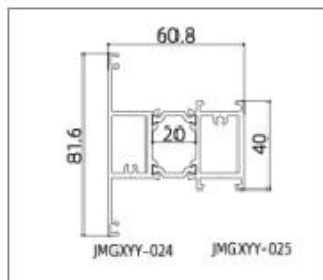


JMGXXY-GPM65102 (Mullion)

Thickness:2.2mm Weight: 1.718kg/m




JMGXXY-GPM65103 (Sash)

Thickness: 2.2mm Weight: 2.203kg/m

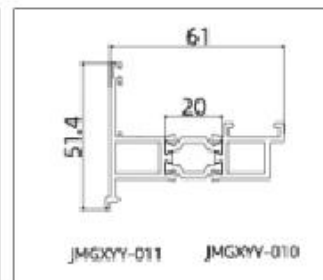


JMGXXY-GPM65104 (Frame)

Thickness:1.8mm Weight: 0.966kg/m

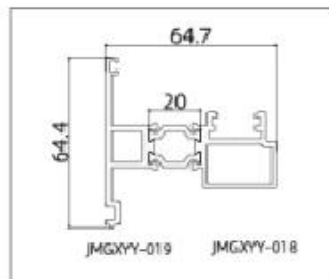


JMGXXY-GPM65106 (Mullion)

Thickness:2.2mm Weight: 1.383kg/m

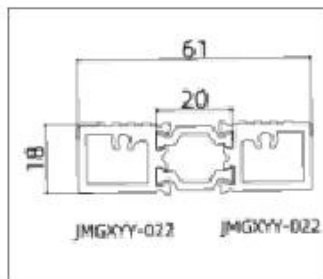


JMGXXY-GPM65107 (Bottom Rail)

Thickness:2.2mm Weight:1.066kg/m

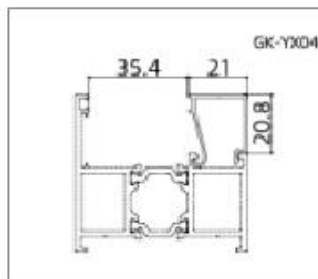


GK-YX04 (Glazing Bead)

Thickness: 1.0mm Weight: 0.209kg/m

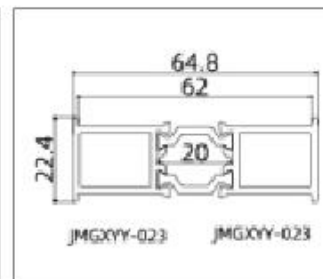


JMGXXY-GPM65108 (Mullion Bar)

Thickness: 1.8mm Weight: 0.894kg/m



DJS-ZCZ19.8 (Guide Rail)


Thickness:4.5mm Weight: 2.659kg/m

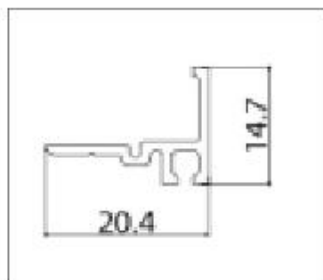


Guide Rail (Mold Pending)

Thickness:1.2mm Weight: 0.138kg/m

JMGXYY-GPM70 Thermal Break Casement Door

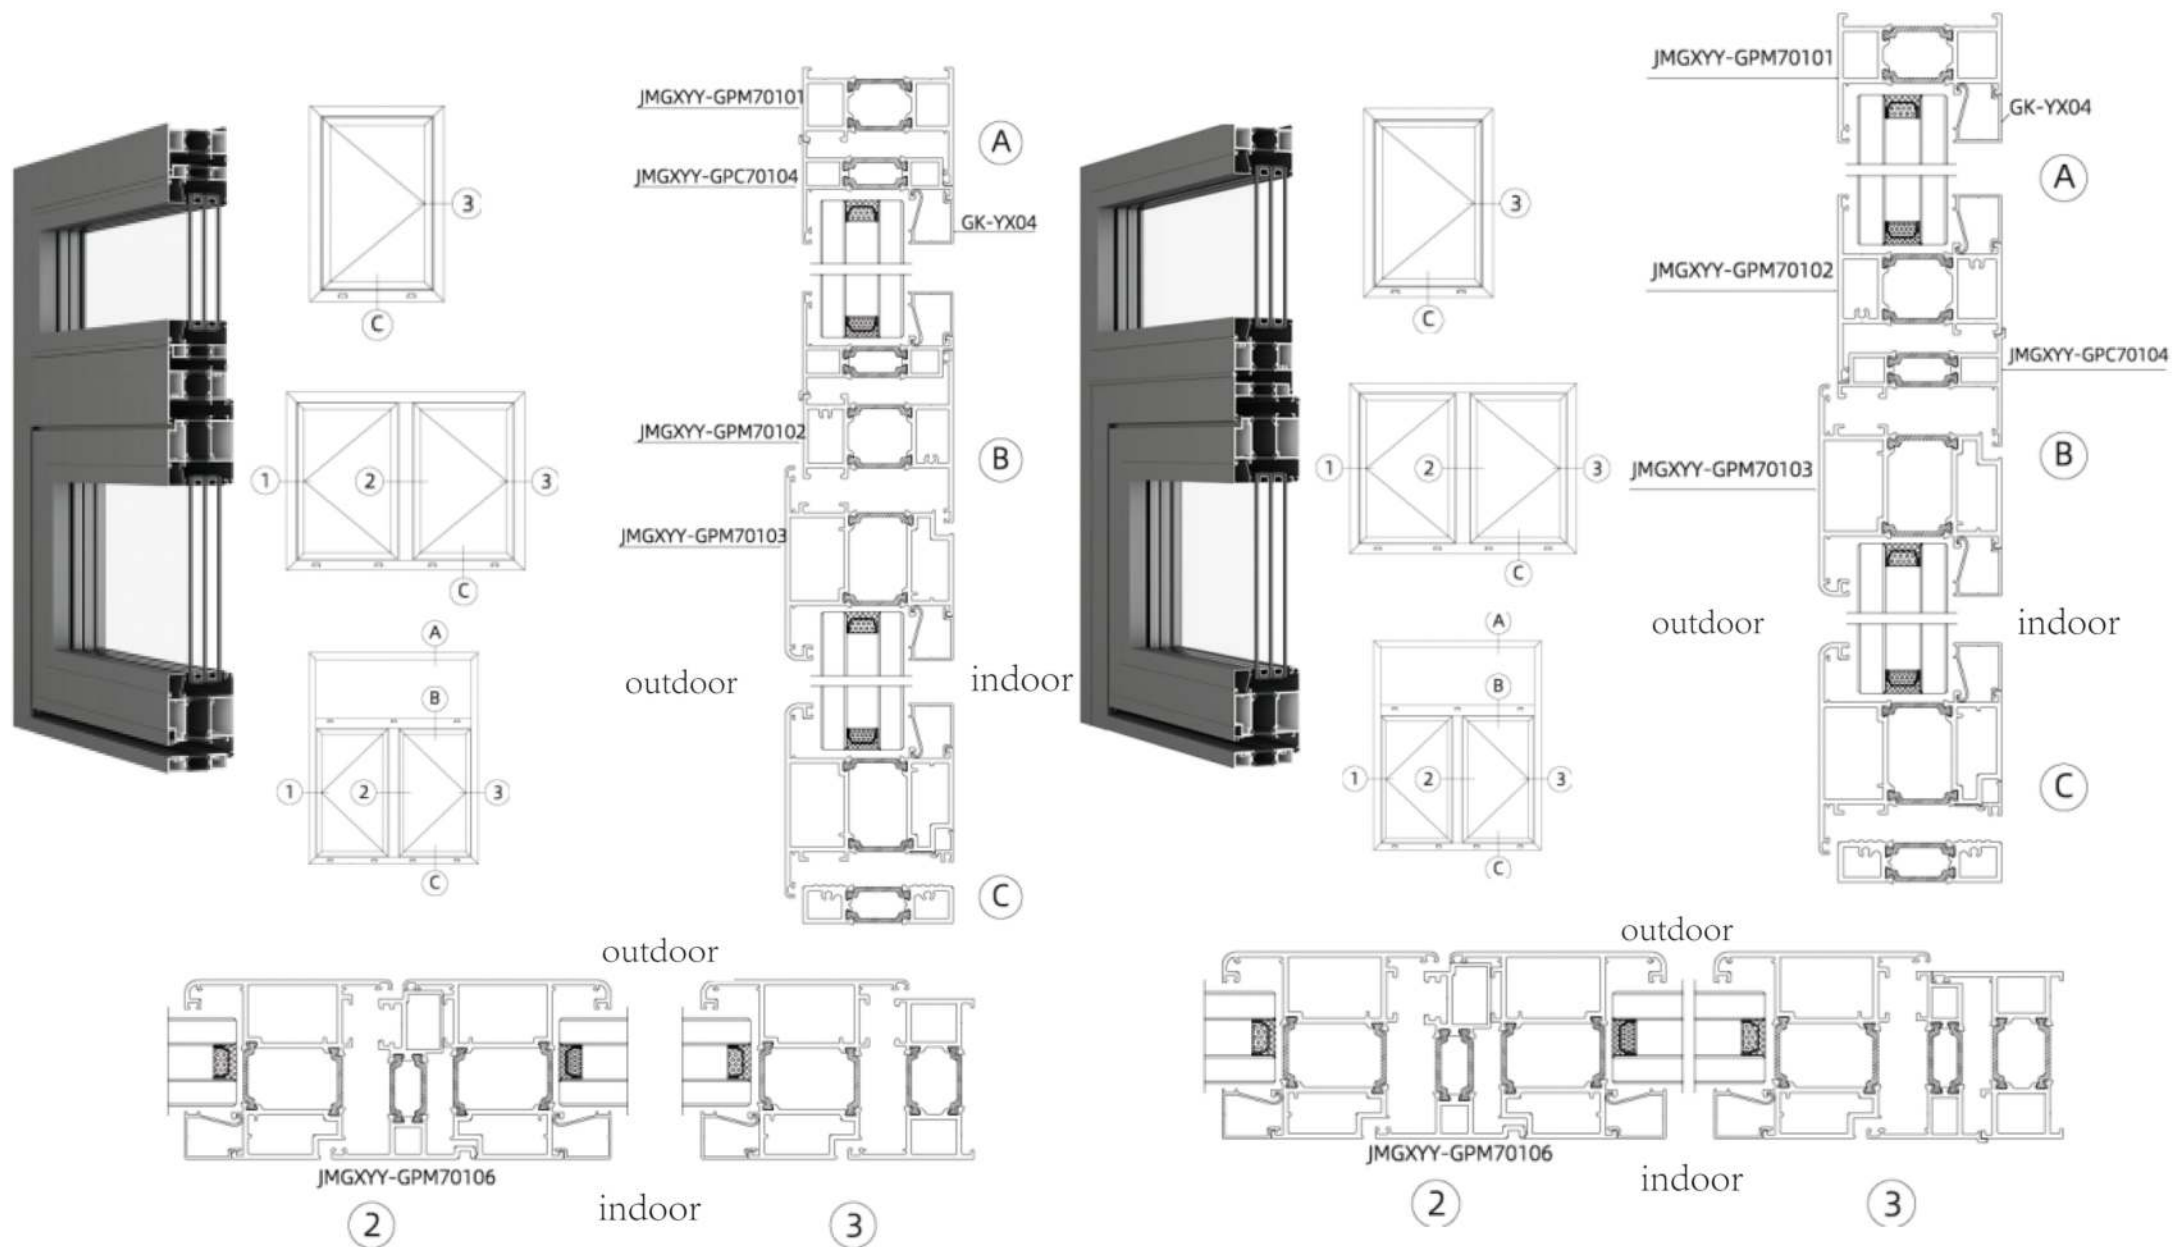


JMGXYY-GPM70 Thermal Break Casement Door

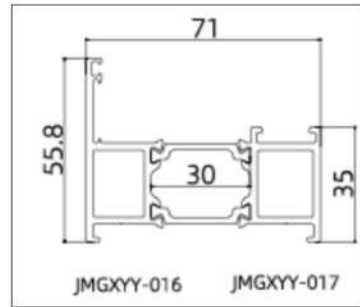


JMGXYY-016 JMGXYY-017

Thickness:2.2mm Weight:1.411kg/m

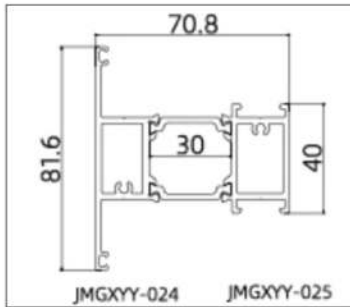


JMGXYY-024 JMGXYY-025

Thickness:2.2mm Weight:1.718kg/m




JMGXYY-020 JMGXYY-021

Thickness:2.2mm Weight: 2.203kg/m

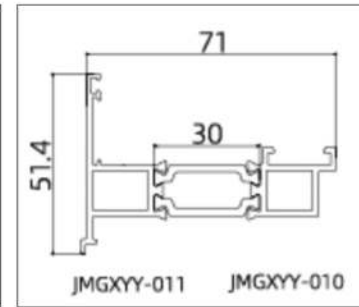


JMGXYY-011 JMGXYY-010

Thickness:1.8mm Weight: 0.966kg/m

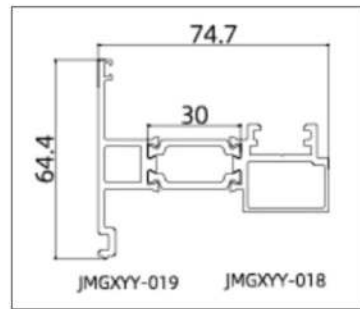


JMGXYY-019 JMGXYY-018

Thickness:2.2mm Weight:1.383kg/m

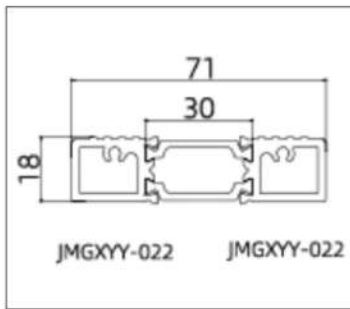


JMGXYY-022 JMGXYY-022

Thickness:2.2mm Weight: 1.066kg/m

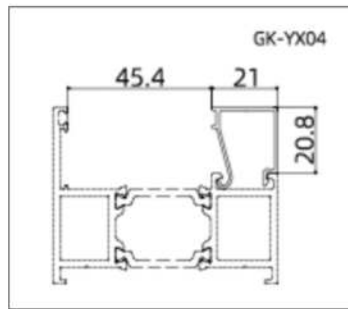


GK-XY04 (Glazing Bead)

Thickness:1.0 mm Weight:0.209kg/m

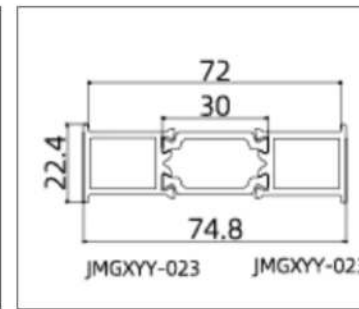


JMGXYY-023 JMGXYY-023

Thickness: 1.8mm Weight: 0.894kg/m

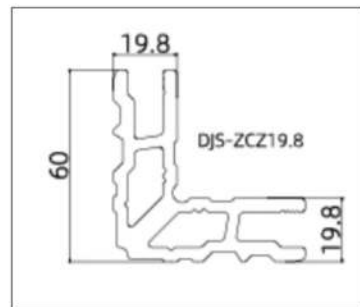

DJS-ZCZ19.8(Frame)


Thickness:4.5mm Weight:2.659kg/m

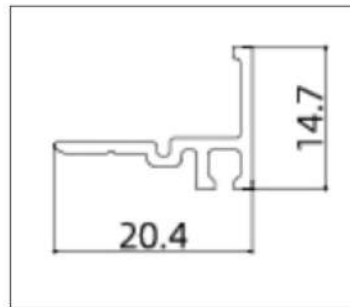


Jamb(Tooling Pending)

Thickness:1.2mm Weight:0.138kg/m

BFTD81 Thermal Break Sliding Window

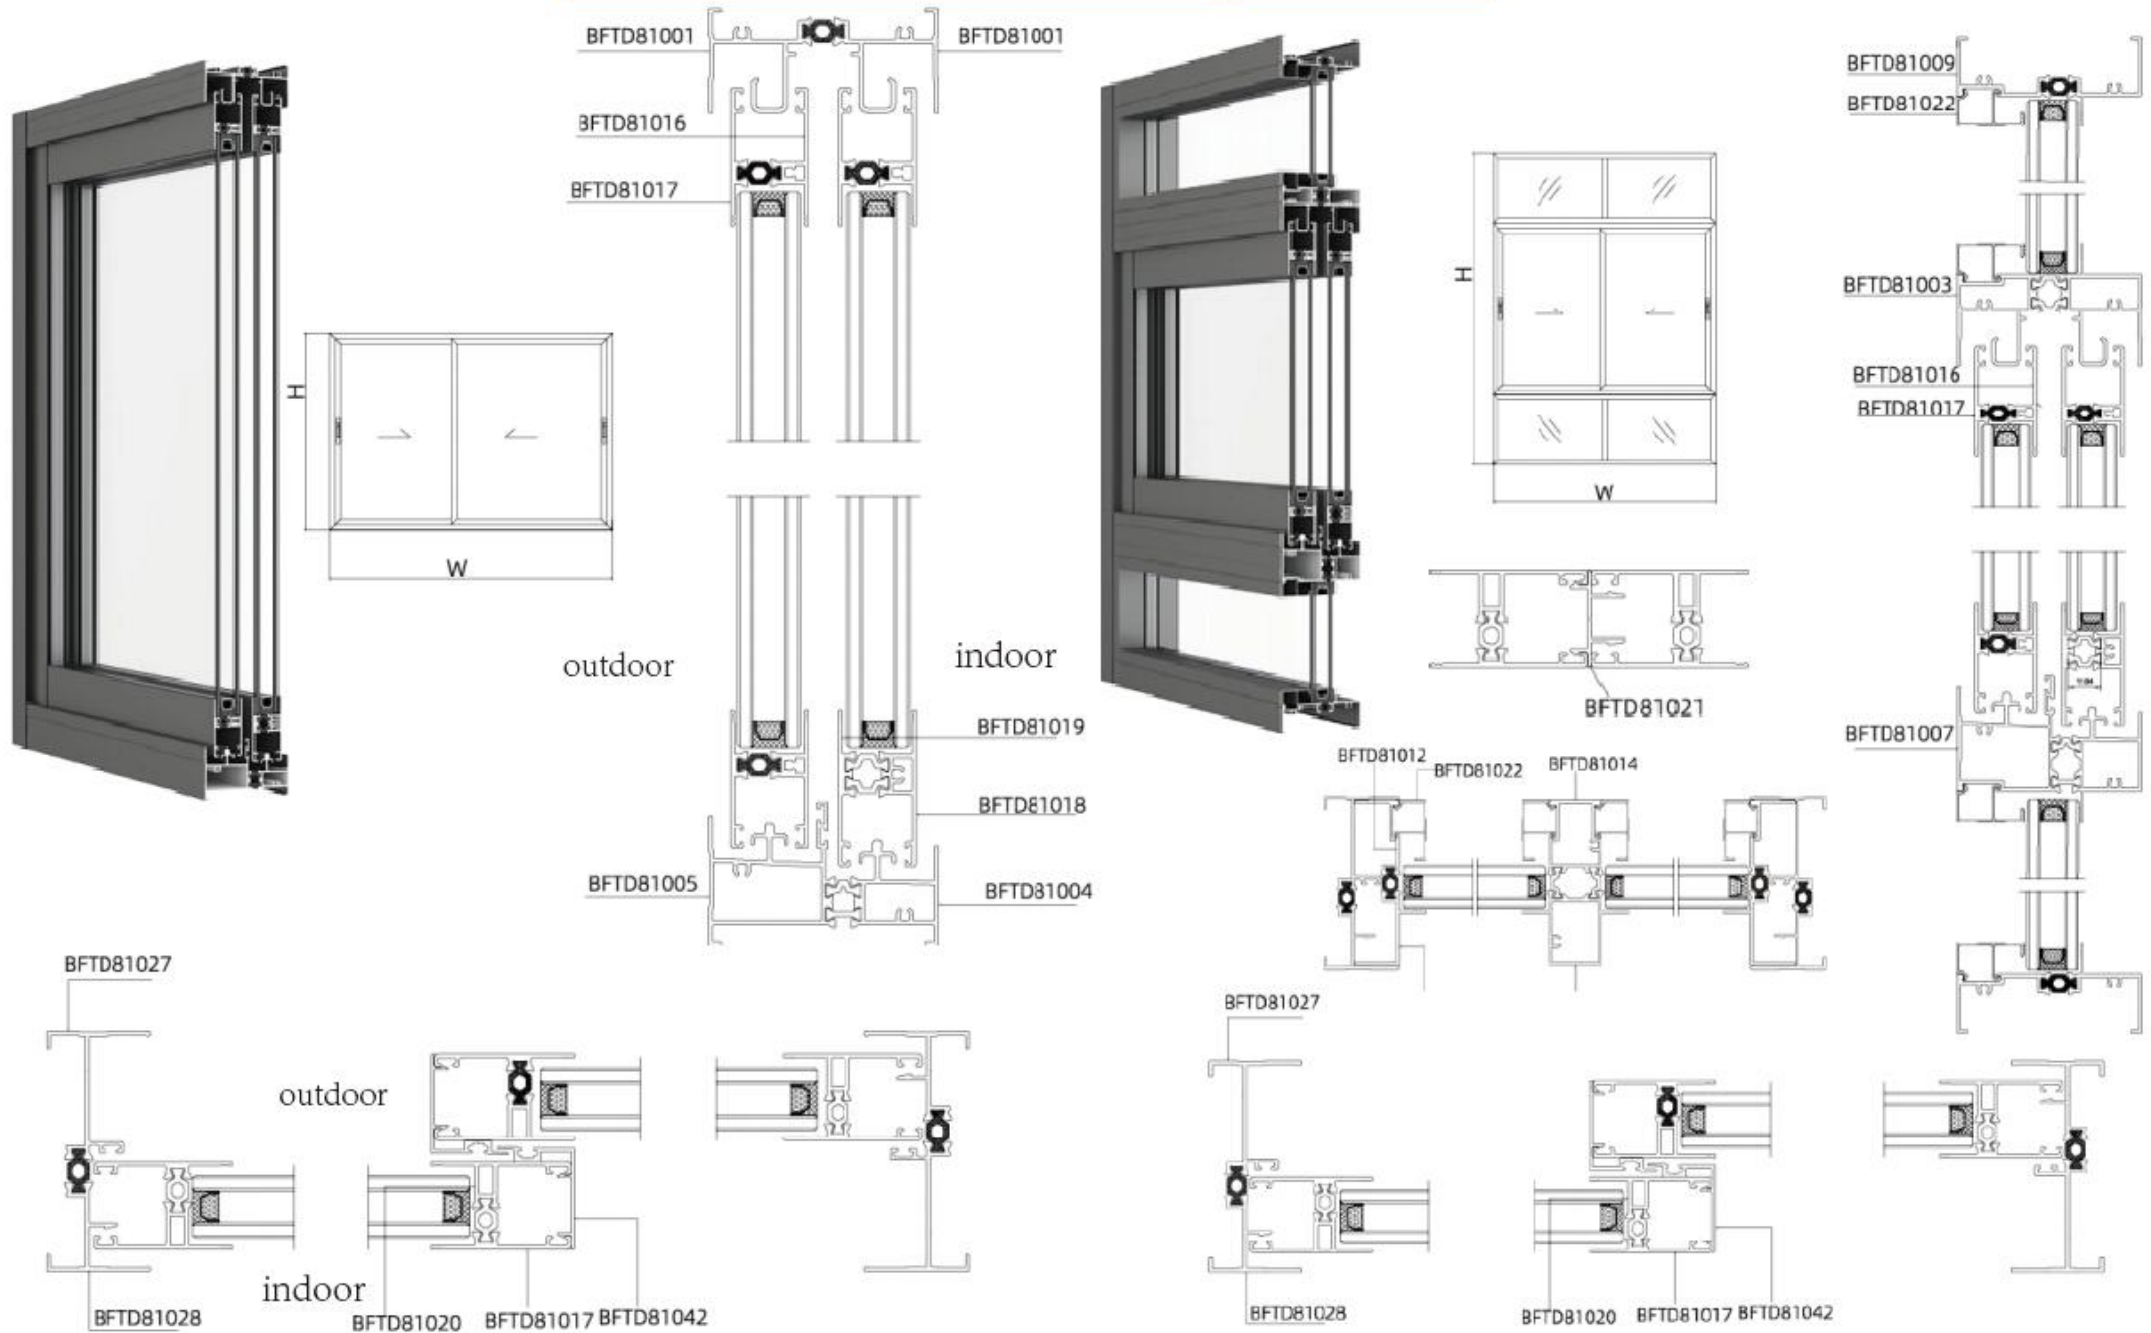


BFTD81 Thermal Break Sliding Window

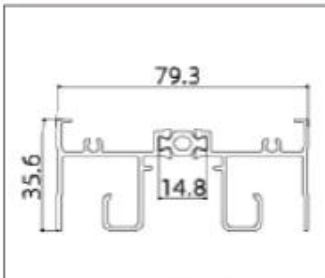


BFTD81001 (Track)

Thickness:1.4mm Weight: 0.538kg/m




Track

Thickness: 1.4mm Weight: 1.494kg/m




Track

Thickness: 1.4mm Weight: 1.472kg/m




Track

Thickness: 1.4mm Weight: 1.588kg/m




Side Frame

Thickness: 1.2mm Weight: 0.25kg/m




Track

Thickness: 1.4mm Weight: 1.588kg/m




Frame Cover

Thickness: 1.4mm Weight: 0.546kg/m




Million

Thickness: 1.4mm Weight: 1.16kg/m




Door Rail

Thickness: 1.4mm Weight: 0.608kg/m

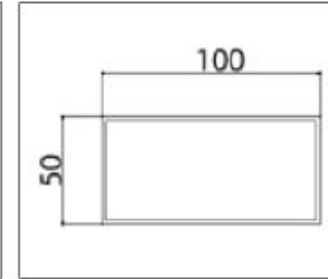


OL-FG100X20-2.0(方管)

Thickness: 2.0mm Weight: 1.538kg/m

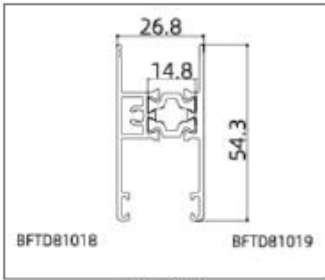


Door Rail

Thickness: 1.4mm Weight: 0.732kg/m

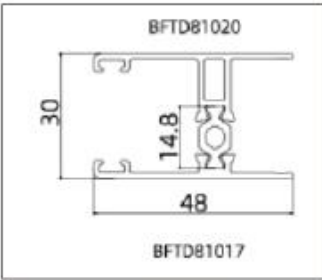


Lock Stile

Thickness: Weight: 0.615kg/m



APG70F20 (Glazing Bead)

Thickness: 1.0mm Weight: 0.368kg/m

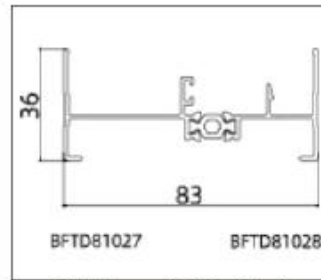


BFTD81022 (Glazing Bead)

Thickness:0.8mm Weight:0.153kg/m



AYPD50 Thermal Break Castment Window

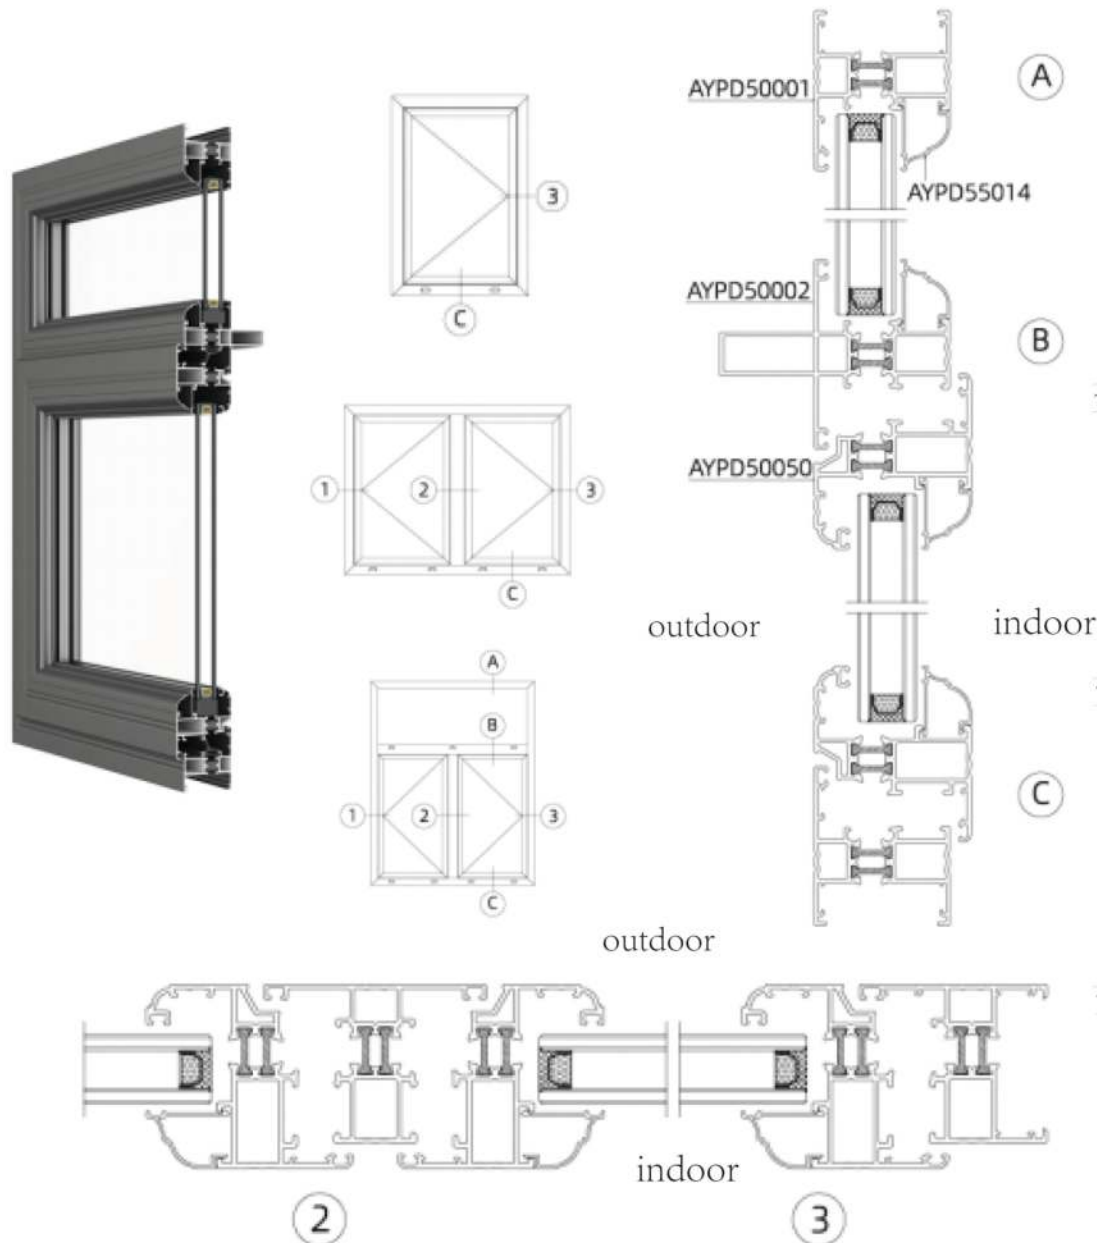

AY55001-1A AY55001-2A	AY55002-1A AY55002-2A	AY55003-1 AY55003-2	AY55050-1A AY55050-2A
-------------------------------------	-------------------------------------	-----------------------------------	-------------------------------------

AYPD50001 (Frame)

AYPD50002 (Mullion)

AYPD50003 (Frame)

AYPD50050 (Sash)

Thickness:1.4mm Weight: 0.952kg/m

Thickness:1.4mm Weight: 0.965kg/m

Thickness:1.4mm Weight: 0.883kg/m

Thickness:1.4mm Weight: 1.035kg/m

AYPD55004

AY55002-1A

AYPD55004 (Mullion)

BFPB81006

BFPB81006 (Frame Cover)

AYPD50014

AYPD50014 (Glazing Bead)

BFPD4507

BFPD4507 (Gear Rack)

Thickness:1.4mm Weight: 1.284kg/m

Thickness:1.0mm Weight: 0.054kg/m

Thickness:0.8mm Weight: 0.153kg/m

Thickness: 2.3mm Weight: 0.139kg/m

BFUS20915

BFUS20915 (Corner Connector)


BFUS20933

BFUS20933 (Corner Connector)

Thickness:3.0mm Weight: 2.402kg/m


Thickness:2.0mm Weight: 1.495kg/m

AL-GTM105 Thermal Break Sliding Window

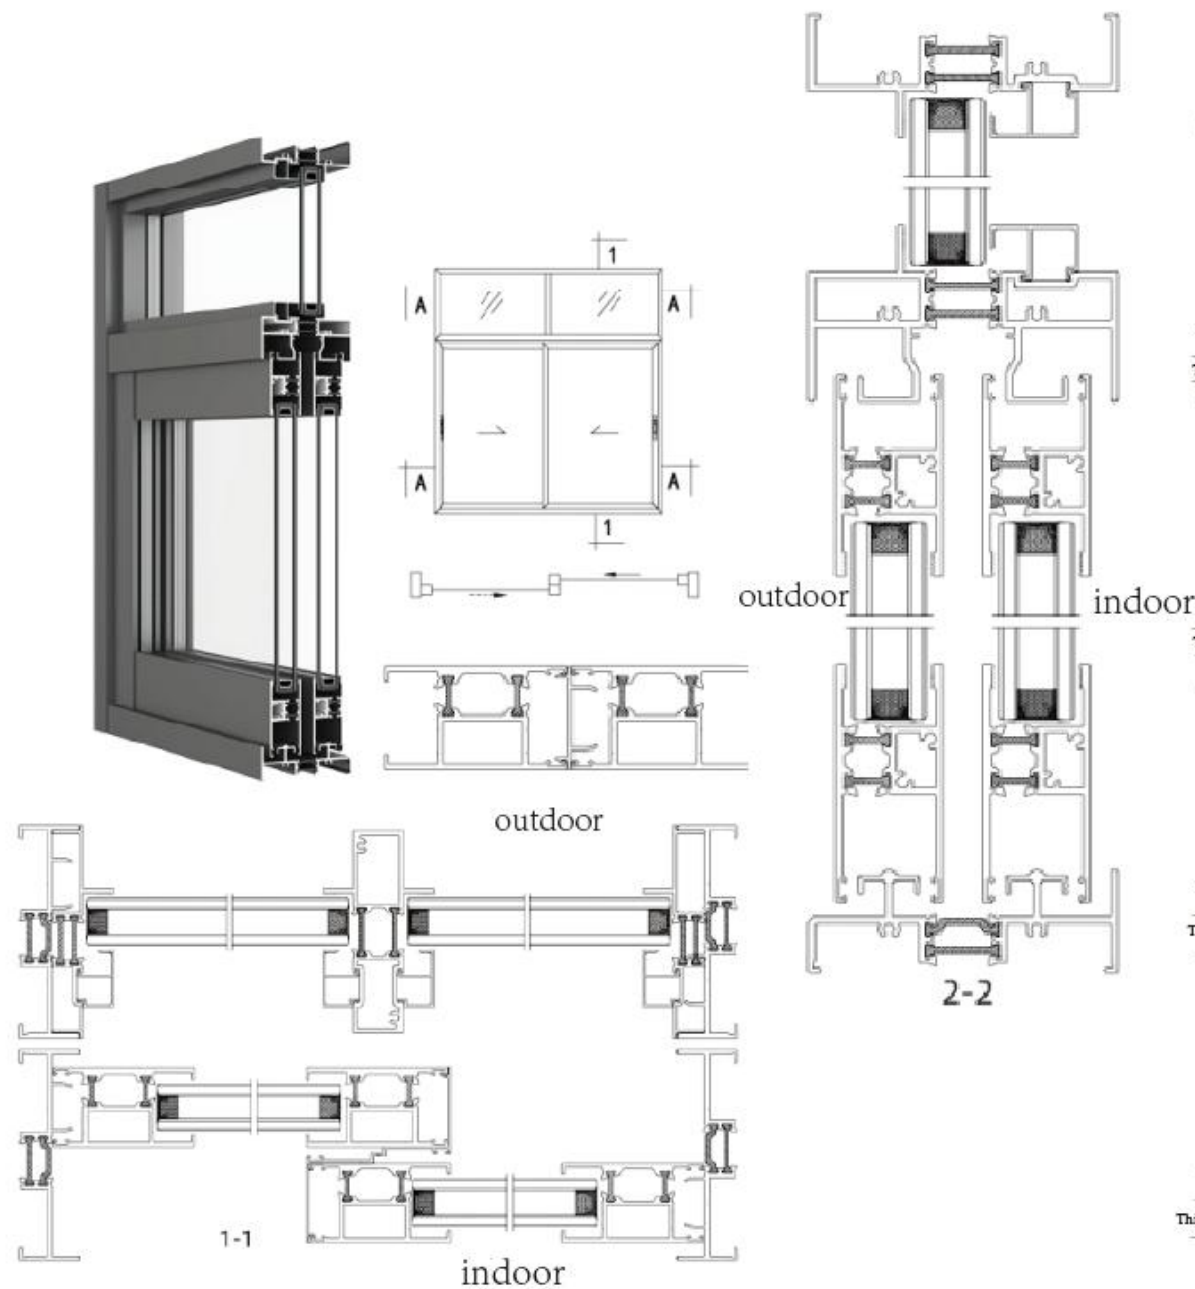

AL-GTM105001A AL-GTM105001A 42 24 47.6 100	WY-XW10541A WY-XW10541B 42 24 47.6 100	100 47.6 24 43 18 AL-GTM105002A AL-GTM105002B	105 30 24 AL-GTM105003A AL-GTM105003B
AL-GTM105001 (Track)	WY-XW10541 (Track)	AL-GTM105002 (Track)	AL-GTM105003 (Side Frame)
Thickness: 2.2mm Weight: 1.798kg/m	Thickness: 2.2mm Weight: 2.37kg/m	Thickness: 2.2mm Weight: 1.491kg/m	Thickness: 2.2mm Weight: 1.178kg/m
AL-GTM105004A AL-GTM105004B 65 14.8 28 34.6	34.6 28 77 14.8 AL-GTM105005A AL-GTM105005B	AL-GTM105006A 70 39.6 28 14.8 AL-GTM105006B	36.55 43.1
AL-GTM105004 (Door Rail)	AL-GTM105005 (Door Rail)	AL-GTM105006 (Lock Stile)	AL-GTM105007 (Striker Stile)
Thickness: 2.2mm Weight: 1.314kg/m	Thickness: 2.2mm Weight: 1.467kg/m	Thickness: 2.2mm Weight: 1.529kg/m	Thickness: 1.2mm Weight: 0.288kg/m
39.4 25 16.4	WY-XW10549A WY-XW10549B 100 25 24	28.18 14.9	100 25 24 WY-XW10540A WY-XW10540B
AL-GTM105008 (End Cap)	WY-XW10549 (Frame)	AL-GTM105010 (Glazing Bead)	WY-XW10549 (Mullion)
Thickness: 1.6mm Weight: 0.263kg/m	Thickness: 2.2mm Weight: 1.251kg/m	Thickness: 1.0mm Weight: 0.205kg/m	Thickness: 2.2mm Weight: 1.85kg/m
105 24 WY-XW10542A WY-XW10542B			
WY-XW10542 (Frame Cover)			
Thickness: 2.2mm Weight: 0.742kg/m			


AL-DTM460 Pivot Door

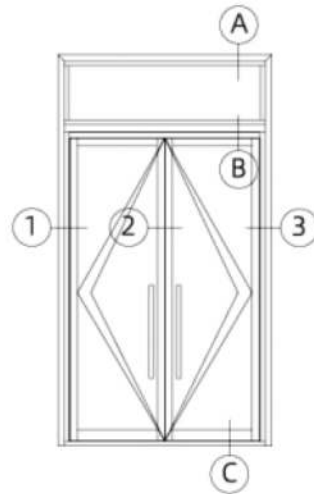


outdoor

indoor


outdoor

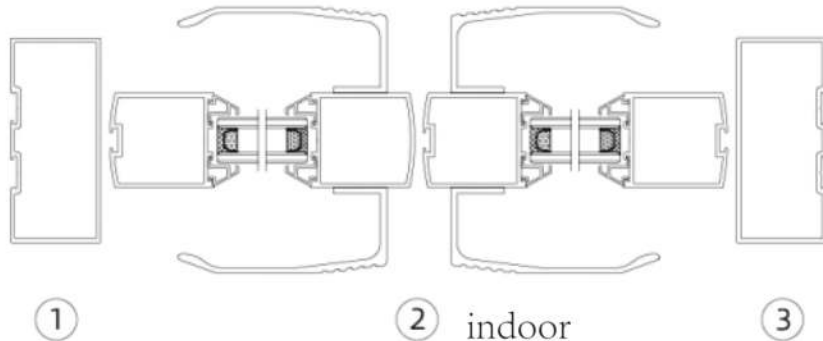


indoor




A



B

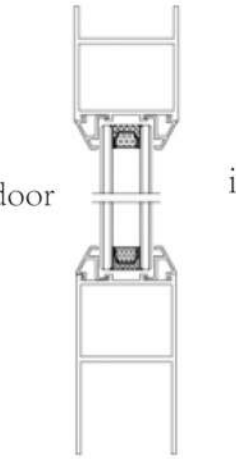


C




AL-DTM4601(460 Transom)

Thickness: 2.0mm Weight: 1.089kg/m




AL-DTM4602(460 Transom)

Thickness: 2.0mm Weight: 1.031kg/m




AL-DTM4603(460 Transom)

Thickness: 2.0mm Weight: 1.055kg/m

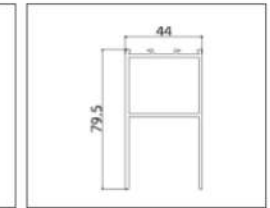


AL-DTM4604(460 Transom)

Thickness: 2.0mm Weight: 1.332kg/m




AL-DTM4605(Glazing Bead)

Thickness: 1.0mm Weight: 0.118kg/m




AL-DTM4606(Glazing Bead)

Thickness: 1.0mm Weight: 0.112kg/m




GH-GD001 (Mullion Bar)

Thickness: 2.0mm Weight: 1.596kg/m

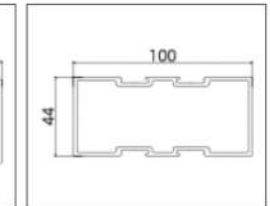


GH-GD002 (Mullion Bar)

Thickness: 2.0mm Weight: 1.685kg/m




GH-GD003 (Mullion Bar)

Thickness: 2.0mm Weight: 1.425kg/m




AL-9022(Glazing Bead)

Thickness: 1.0mm Weight: 0.127kg/m




BFTB08051(Glazing Bead)

Thickness: 0.8mm Weight: 0.127kg/m

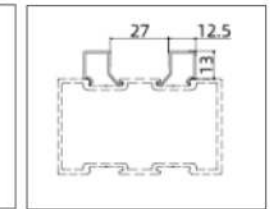


GH-YX01(Glazing Bead)

Thickness: 1.0mm Weight: 0.111kg/m



GH-GD004 (Frame Cover)




Thickness: 1.0mm Weight: 0.064kg/m




AL-DTM4607(Door Handle)

Thickness: 1.0mm Weight: 1.37kg/m

GRDTM460 Thermal Break Pivot Door


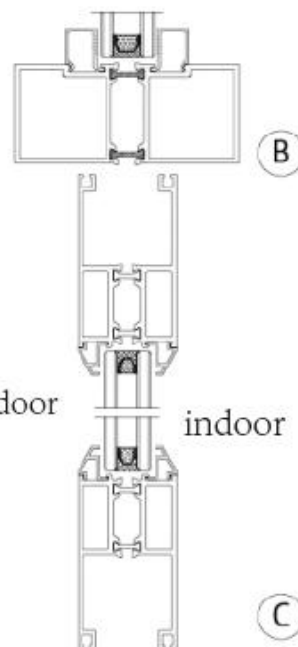

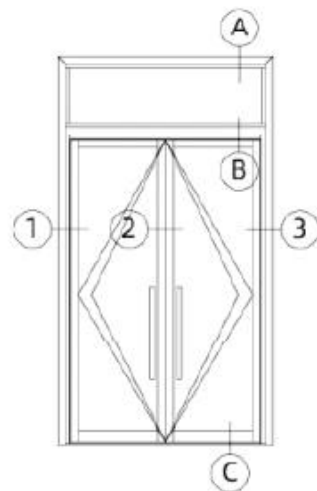


outdoor indoor

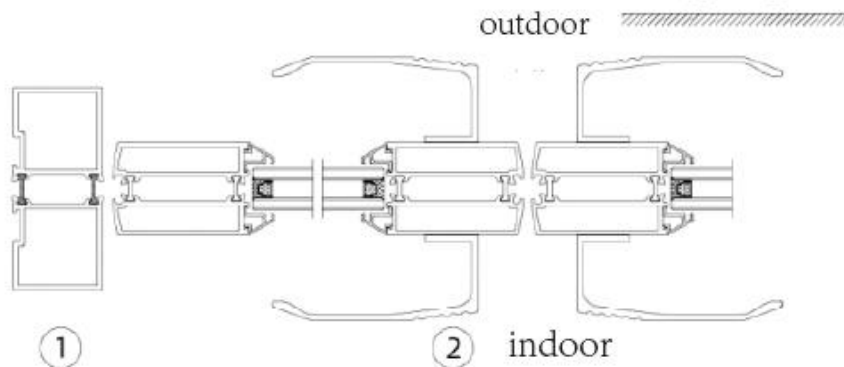


AL-GTC90110 AL-GTC90110 GRDTM100X44-2.2A GRDTM100X44-2.2A	AL-GTC90110 AL-GTC90110 GRG100X44-2.2A GRG100X44-2.2A	AL-DTM4606 GRDTM4601A AL-DTM4606 GRDTM4601A	AL-DTM4606 AL-DTM4605 GRDTM4602A GRDTM4602A
GRDTM100X44-2.2 (Mullion Bar)	GRDTM100X44-2.2 (Mullion Bar)	GRDTM4601 (Mullion)	GRDTM4602 (Transom)
Thickness: 2.2mm Weight: 2.168kg/m	Thickness: 2.2mm Weight: 2.234kg/m	Thickness: 2.2mm Weight: 2.06kg/m	Thickness: 2.2mm Weight: 1.868kg/m
AL-GTC90110 AL-GTC90110 GRDTM100X44-2.2A GRDTM100X44-2.2A	AL-DTM4605 AL-DTM4605 SRDTM4602A SRDTM4602A	AL-DTM4606 AL-DTM4606 SRDTM4602A SRDTM4602A	AL-DTM4607 (Door Handle)
GRDTM4602 (Glazing Bead)	AL-DTM4605 (Glazing Bead)	AL-DTM4606 (Glazing Bead)	AL-DTM4607 (Door Handle)
Thickness: 1.0mm Weight: 0.166kg/m	Thickness: 1.0mm Weight: 0.118kg/m	Thickness: 1.0mm Weight: 0.112kg/m	Thickness: 3.0mm Weight: 1.37kg/m


65 exposed frame curtain wall

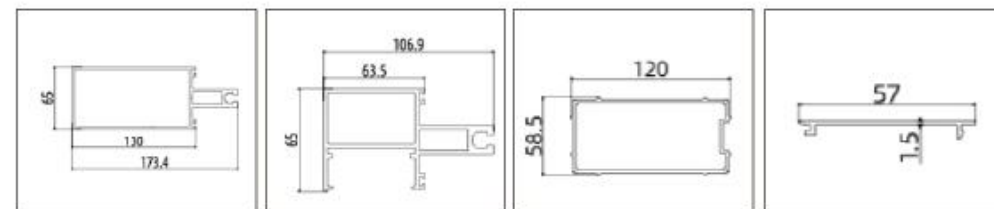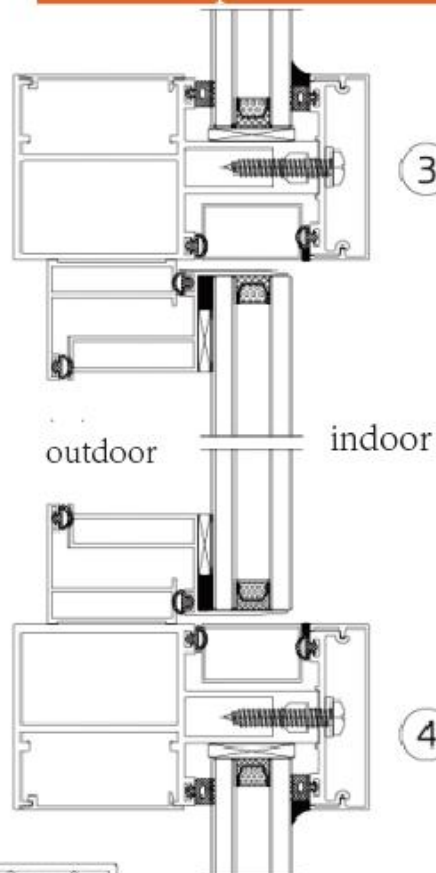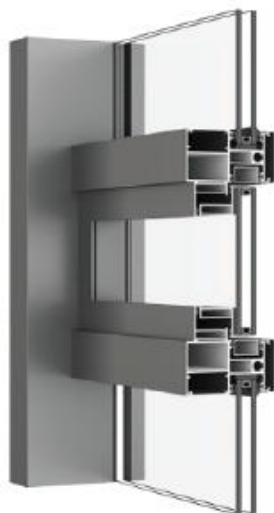


KQS13001(Mullion) Thickness:3.0mm Weight: 4.125kg/m
 KQS13002() Thickness:2.5mm Weight: 2.702kg/m
 KQS13003(reinforcing core) Thickness: 2.2mm Weight: 2.06kg/m
 YLH06BC(Frame Cover) Thickness:1.5mm Weight: 0.268kg/m

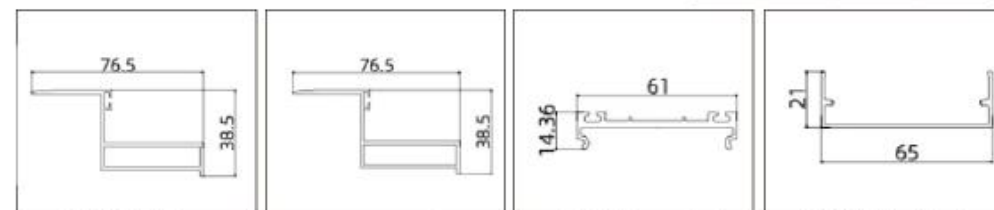

KQS13050(Sash) Thickness:1.5mm Weight: 0.721kg/m
 KQS13051(Sash) Thickness:1.5mm Weight:0.721kg/m
 KQS15007(pressure plate) Thickness: 2.6mm Weight: 0.642kg/m
 KQS15008(Frame Cover) Thickness:1.2mm Weight: 0.382kg/m




KQS15009(End Cap)
 Thickness: 1.0mm Weight: 0.288kg/m

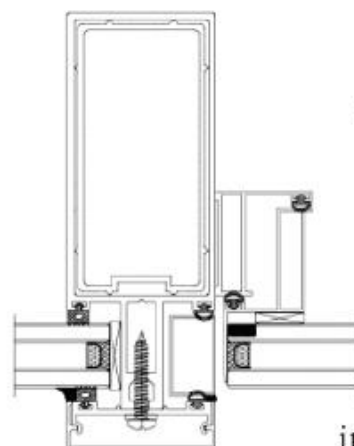




outdoor

indoor

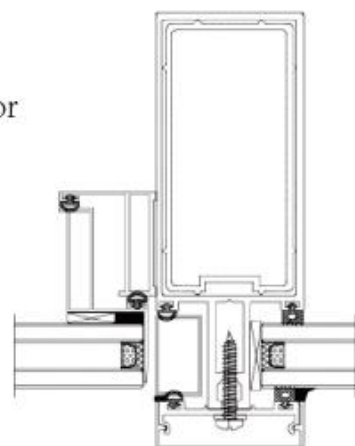

1





75 Horizontally hidden, vertically exposed curtain wall

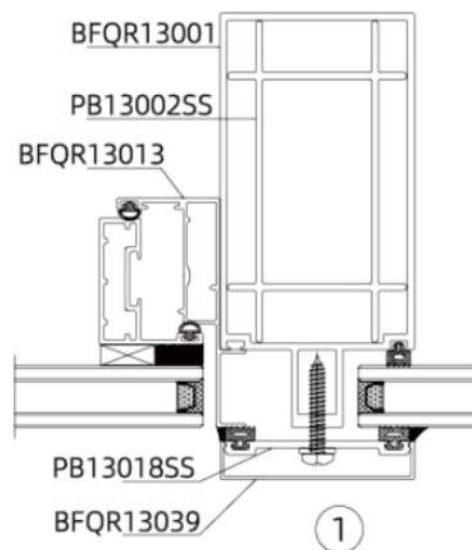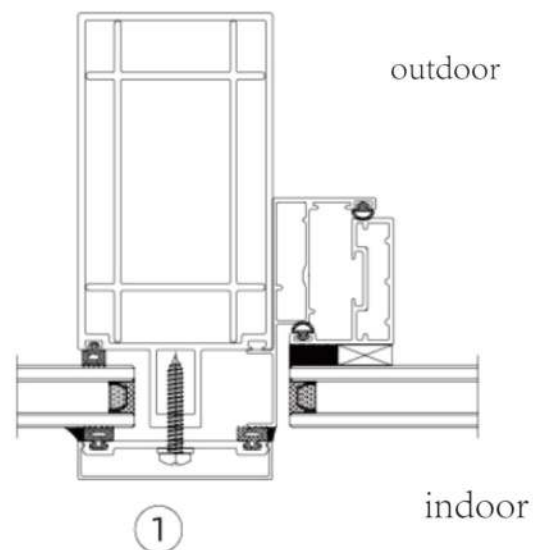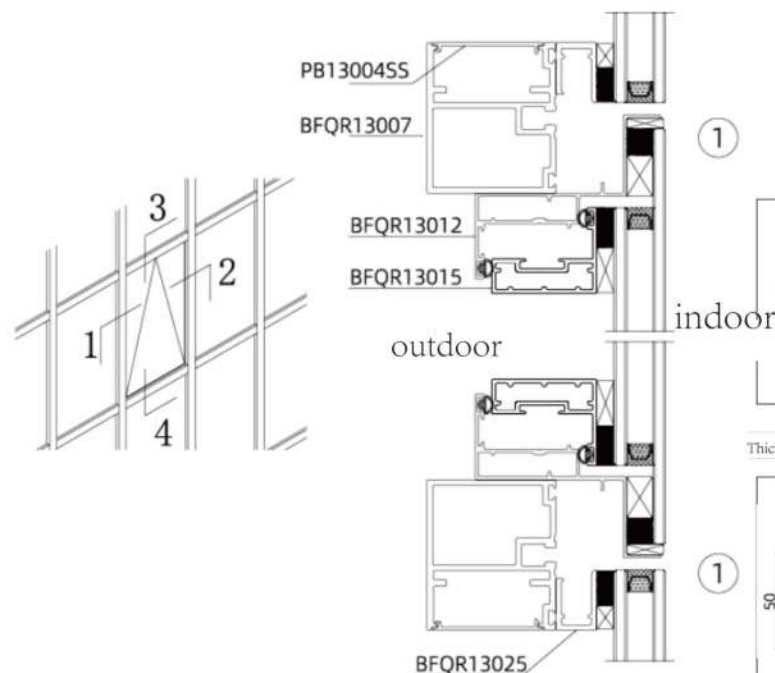

BFQR13001(Mullion)	PB13002SS(reinforcing core)	BFQR13007(Transom)	PB13004SS(Frame Cover)
Thickness:2.6mm Weight: 3.503kg/m	Thickness:2.6mm Weight: 2.642kg/m	Thickness: 2.6mm Weight: 2.159kg/m	Thickness:1.5mm Weight: 0.229kg/m
BFQR13003(Frame)	BFQR13012(Frame)	BFQR13015(Sash)	BFQR13015(Frame Cover)
Thickness:1.4mm Weight: 0.87kg/m	Thickness:1.4mm Weight:0.943kg/m	Thickness: 1.8mm Weight: 0.847kg/m	Thickness: 3.0mm Weight: 0.625kg/m
BFQR13039(Frame Cover)	BFQR13025(Frame)	BFQR13068(Gear Rack)	
Thickness: 1.2mm Weight: 0.339kg/m	Thickness: 2.5mm Weight: 0.459kg/m	Thickness: 2.5mm Weight: 0.138kg/m	

Surface Treatment

We offer a comprehensive range of aluminum profile surface finishing solutions, designed to meet your diverse needs for aesthetics, performance, and cost-effectiveness.

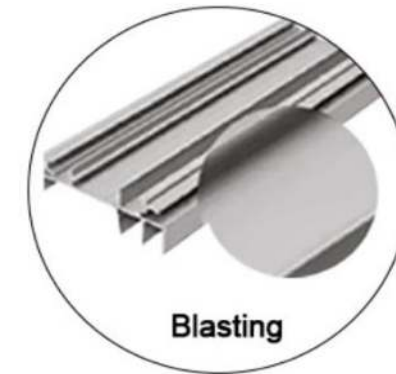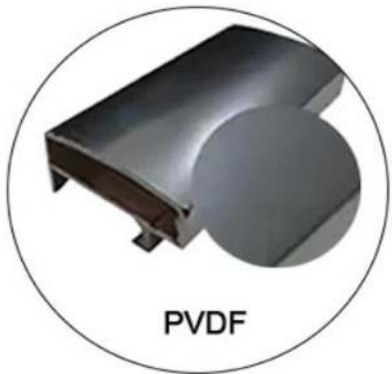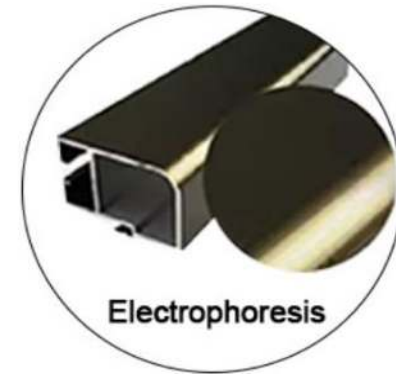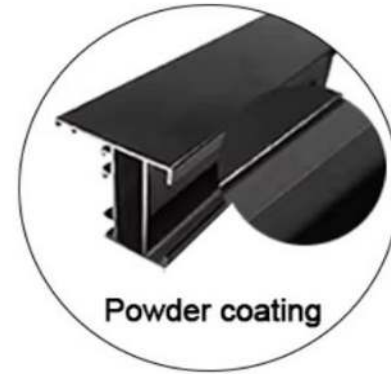

Powder Coating : **Widely used for windows&doors**

Unlimited Color& Texture Options

Durable & Vibrant

Expanded Design Versatility

Optimized Performance




Wood Grain : The Warmth of Wood, The Strength of Aluminum



Electrophoretic Coating: Mirror-Like Finish



Anodizing Finishes: A Spectrum of Metallic Beauty

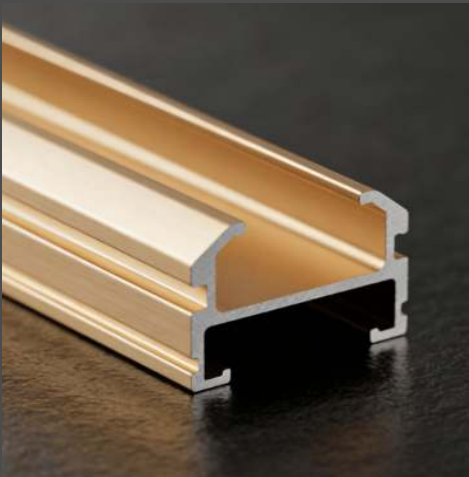

PVDF Coating: Unmatched Durability



Export & Service

Your success is our responsibility



Professional Packaging

Moisture-proof and scratch-resistant packaging to protect profiles during transit.



Drawing & Die

Provide CAD drawing and die development services.



Flexible Logistics

Cooperation with major ports and multiple transportation options (sea, air, rail).



Processing support

Provide pre-processing services, such as cutting, drilling, milling, etc.



Efficient Response


Quick order processing and prompt communication to meet urgent market demands and deadlines.



One-stop solution

Provide guidance on profile application and procurement services for door and window accessories.

Custom Profile Development

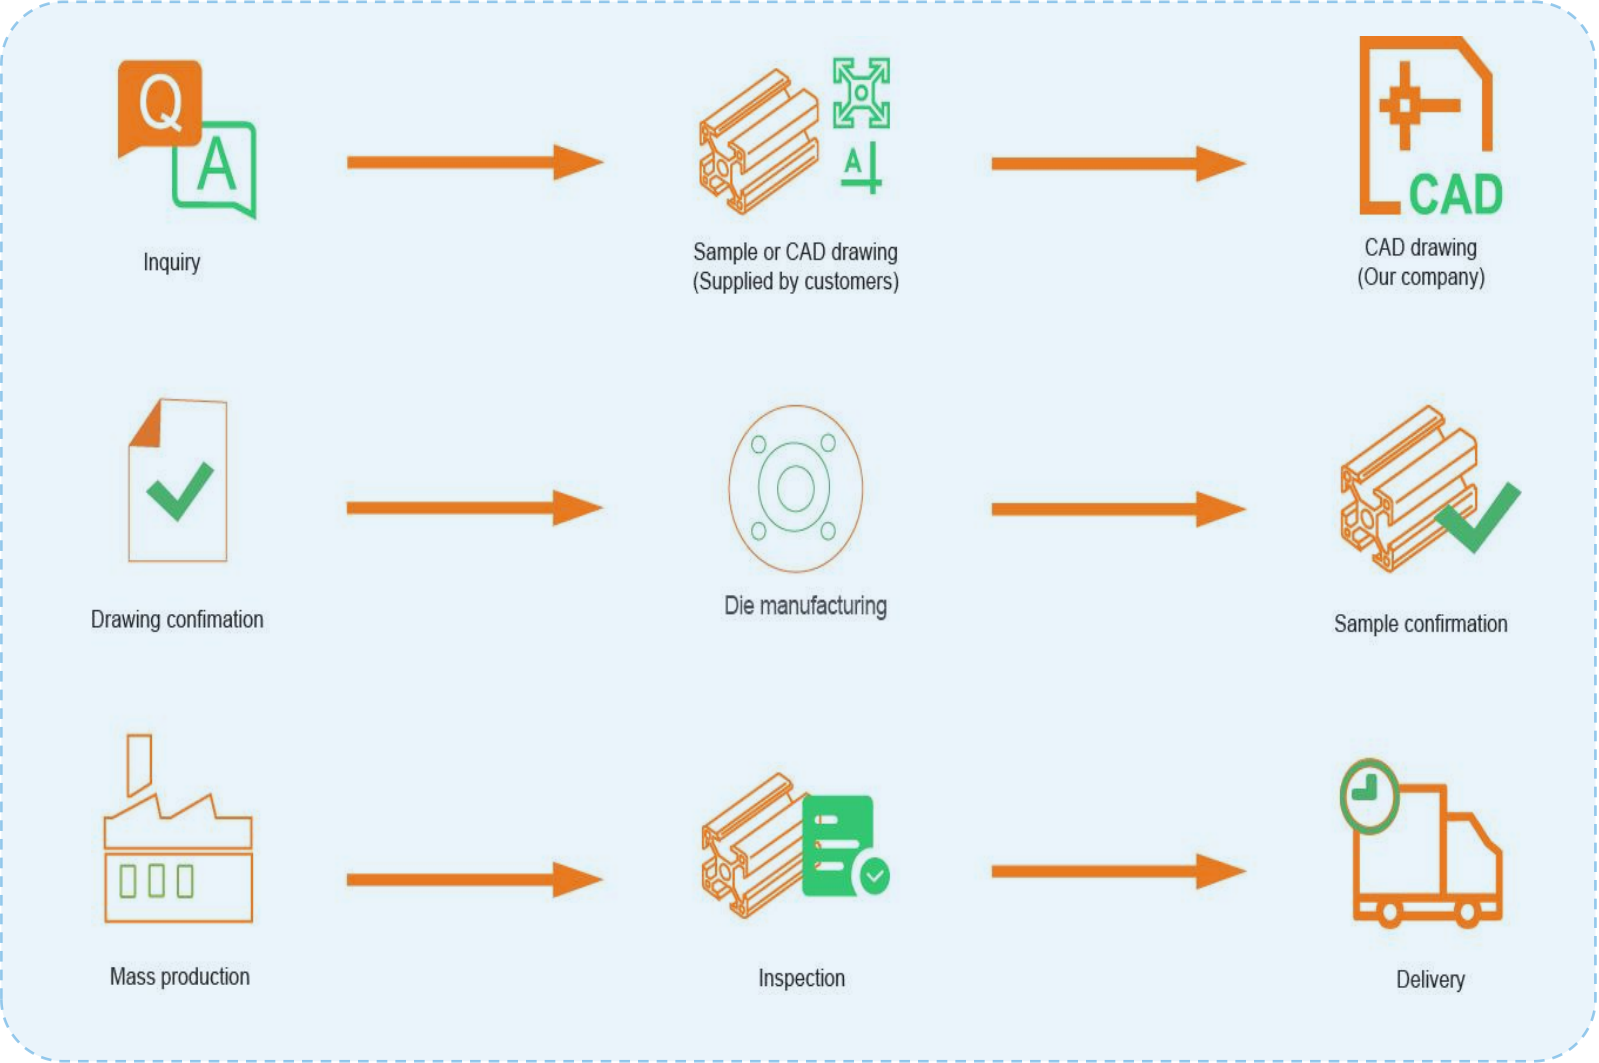

Key process

Drawing analysis

2D/3D design optimization

Die manufacturing within 7 days

Sample production

Mass prouction

Cooperation Case

Be the aluminum profile production enterprise with the highest customer satisfaction.



Cooperation Partners & Certification

We believe in creating solutions that lead to a sustainable future.



Why Choose Us

Not only your material supplier, but also your overseas factory.



Focused Expertise

Over a decade of industry experience,
with a deep understanding of customer
needs.
Flexible OEM / custom profile capability.



Rapid Prototyping

Fast response to custom mold requests,
shortening your product launch cycle.
Vertically Integrated Manufacturing.
Strategic Sourcing & Bulk Procurement



Stable Quality

Strict quality inspection system.
100% visual inspection and random AQL
(Acceptable Quality Level) sampling
based on ISO 2859 or ANSI/ASQ Z1.4.



Reliable Delivery

Complete in-house extrusion and surface
finishing.
Strong production capacity guarantees on-
time order fulfillment.



Mature Export Service

A professional team provides one-stop
export solutions.
Export experience to 60+ countries.



Competitive price

Our competitive pricing is sustainable
because it is built on a foundation of
operational excellence, not on shortcuts in
quality or materials.

Contact Info



FACTORY :

Sihui Aoli Aluminum Industry Co., Ltd.



ADDRESS :

No. 3, Zhenxing Avenue East, Fuxi Industrial Park, Dasha Town, Sihui City.



MARKETING OFFICE :

Foshan Aolijie Building Materials Technology Co., Ltd.



ADDRESS:

1103, Building 5, No. 133 Jihua West Road, Nanzhuang Town, Chancheng District, Foshan City.



PHONE : 18029386403



WHATSAPP : 18029386403



EMAIL: Diona@cnaoli.com



WEBSITE: www.cnaoli.com



PHONE : 18029386470



WHATSAPP : 18029386470



EMAIL: silvan@cnaoli.com



WEBSITE: www.cnaoli.com

