

ZHEJIANG QIXUAN ELECTRIC TECHNOLOGY CO.,LTD

Address: 101-105, Huancheng, West Road, Guanhaiwei Cixi City, Zhejiang, China. 315315
Tel: +8657463972315
Email Address: info@vehiclefreezer.com
Online Store: <https://1stcool.en.alibaba.com>

Keeken

ZHEJIANG QIXUAN ELECTRIC TECHNOLOGY CO.,LTD

Make Things Cool




CONTENT

F-20A/K-10 Series	01-02
F-20A	
F-30A	
K-10	
K-15	
X-25A/X-30S Series	03-04
X-25A	
X-35	
X-55	
X-30S	
X-40S	
X-50S	
W-18 Series	05-06
W-18	
W-25	
W-40/W-40L Series	07-08
W-40	
W-50	
W-60	
W-40L	
W-50L	
W-60L	
W-35/W-35DL Dual zones Series	09-10
W-35 Dual zones	
W-45 Dual zones	
W-55 Dual zones	
W-35DL Dual zones	
W-45DL Dual zones	
W-55DL Dual zones	
W-35S/W-35L Dual zones Series	11-12
W-35S Dual zones	
W-45S Dual zones	
W-55S Dual zones	
W-35L Dual zones	
W-45L Dual zones	
W-55L Dual zones	
K-20 Series	13-16
K-20	
K-26	
K-30	
K-40	
K-26S	
K-30L	
X-15 Series	17-18
X-15	
X-25	
Q-18 Series	19-20
Q-18	
Q-22	
Q-28	
Q-26 Series	21-22
Q-26	
Q-36	
Q-30 Series	23-26
Q-30	
Q-40	
Q-55	
Q-65	
HF-01 Series	27-28
HF-01	
HF-02	
G-55	29-30

COMPANY PROFILE

Zhejiang Qixuan Electric Technology Co.,Ltd is one of the most professional compressor car freezer manufacturers in China. With the introduction of European technique & equipment and our own mould designing and making department, we enjoy a huge advantage in new product development. 10 engineers with more than 8 years R&D experience enable us to offer at least 3 new items one year according to our customers request.

Our factory is certified by ISO 9001 and we also have CE RoHS Emark LFGB certificate for all of our car fridges. A good and long term cooperation relationship was built with many customers from Europe, Japan, Korea and America for our high quality car fridge.



**F-20A**

- Capacity:21L
- Average power consumption:48W
- N.W.:11KGS/G.W.:13.5KGS
- Dimensions:560*335*340mm
- Packing:590*385*385mm (1pc)
- FCL quantity:360/720/720

**F-30A**

- Capacity:30L
- Average power consumption:50W
- N.W.:11.8KGS/G.W.:14.3KGS
- Dimensions:560*335*425mm
- Packing:590*385*470mm (1pc)
- FCL quantity:300/600/600

**K-10**

- Capacity:9L
- Average power consumption:55W
- N.W.:7.1KGS/G.W.:8.7KGS
- Dimensions:480*320*242mm
- Packing:535*370*290mm (1pc)
- FCL quantity:504/1056/1056


**K-15**

- Capacity:15L
- Average power consumption:55W
- N.W.:8KGS/G.W.:9.8KGS
- Dimensions:480*320*327mm
- Packing:535*370*375mm (1pc)
- FCL quantity:378/774/903



**X-25A**

- Capacity:25.3L
- Average power consumption:55W
- N.W.:12.2KGS/G.W.:15.9KGS
- Dimensions:603*375*373mm
- Packing:670*450*450mm(1pc)
- FCL quantity:210/435/435

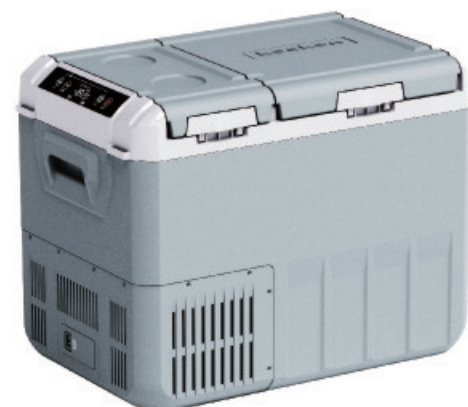**X-35**

- Capacity:35L
- Average power consumption:60W
- N.W.:13.8KGS/G.W.:17.7KGS
- Dimensions:603*375*457mm
- Packing:670*450*535mm (1pc)
- FCL quantity:172/352/352

**X-55**

- Capacity:50L
- Average power consumption:65W
- N.W.:15.1KGS/G.W.:19.6KGS
- Dimensions:603*375*580mm
- Packing:670*450*660mm (1pc)
- FCL quantity:129/264/352

**X-30S**

- Capacity:27.5L
- Average power consumption:50W
- N.W.:11.5KGS/G.W.:15.1KGS
- Dimensions:603*375*373mm
- Packing:670*450*450mm(1pc)
- FCL quantity:210/435/435

**X-40S**

- Capacity:39.1L
- Average power consumption:55W
- N.W.:13KGS/G.W.:16.9KGS
- Dimensions:603*375*457mm
- Packing:670*450*535mm (1pc)
- FCL quantity:172/352/352

**X-50S**

- Capacity:56.3L
- Average power consumption:60W
- N.W.:14.3KGS/G.W.:18.8KGS
- Dimensions:603*375*508mm
- Packing:670*450*660mm (1pc)
- FCL quantity:129/264/352



Keeken



W-18

- Capacity:18L
- Average power consumption:55W
- N.W.:12.7KGS/G.W.:14.9KGS
- Dimensions:616*340*338mm
- Packing:675*395*406mm (1pc)
- FCL quantity:245/485/582



W-25

- Capacity:25L
- Average power consumption:55W
- N.W.:13.5KGS/G.W.:15.6KGS
- Dimensions:616*340*403mm
- Packing:675*395*470mm (1pc)
- FCL quantity:245/485/485





W-40

- Capacity:40L
- Average power consumption:48W
- N.W.:16.2KGS/G.W.:19.5KGS
- Dimensions:670*406*440mm
- Packing:685*490*504mm (1pc)
- FCL quantity:144/300/375



W-50

- Capacity:50L
- Average power consumption:50W
- N.W.:17KGS/G.W.:20.6KGS
- Dimensions:670*406*507mm
- Packing:685*490*567mm (1pc)
- FCL quantity:144/300/300



W-60

- Capacity:60L
- Average power consumption:50W
- N.W.:18.2KGS/G.W.:22.2KGS
- Dimensions:670*406*572mm
- Packing:685*490*632mm (1pc)
- FCL quantity:108/225/300



W-40L

- Capacity:40L
- Average power consumption:48W
- N.W.:17.1KGS/G.W.:20.9KGS
- Dimensions:665*439*457mm
- Packing:735*505*515mm (1pc)
- FCL quantity:136/284/355



W-50L

- Capacity:50L
- Average power consumption:50W
- N.W.:18.1KGS/G.W.:22.2KGS
- Dimensions:665*439*519mm
- Packing:735*505*580mm (1pc)
- FCL quantity:136/284/284



W-60L

- Capacity:60L
- Average power consumption:50W
- N.W.:19.3KGS/G.W.:23.8KGS
- Dimensions:665*439*582mm
- Packing:735*505*645mm (1pc)
- FCL quantity:102/213/284



W-35 Dual zones

- Capacity:35L
- Average power consumption:55W
- N.W.:15.7KGS/G.W.:19KGS
- Dimensions:670*406*440mm
- Packing:685*490*504mm (1pc)
- FCL quantity:144/300/375



W-45 Dual zones

- Capacity:45L
- Average power consumption:60W
- N.W.:16.4KGS/G.W.:20KGS
- Dimensions:670*406*507mm
- Packing:685*490*567mm (1pc)
- FCL quantity:144/300/300



W-55 Dual zones

- Capacity:55L
- Average power consumption:60W
- N.W.:17.4KGS/G.W.:21.4KGS
- Dimensions:670*406*572mm
- Packing:685*490*632mm (1pc)
- FCL quantity:108/225/300



W-35DL Dual zones

- Capacity:35L
- Average power consumption:55W
- N.W.:16.6KGS/G.W.:20.4KGS
- Dimensions:665*439*457mm
- Packing:735*505*515mm (1pc)
- FCL quantity:136/284/355



W-45DL Dual zones

- Capacity:45L
- Average power consumption:60W
- N.W.:17.5KGS/G.W.:21.4KGS
- Dimensions:665*439*519mm
- Packing:735*505*580mm (1pc)
- FCL quantity:136/284/284



W-55DL Dual zones

- Capacity:55L
- Average power consumption:60W
- N.W.:18.5KGS/G.W.:22.8KGS
- Dimensions:665*439*582mm
- Packing:735*505*645mm (1pc)
- FCL quantity:102/213/284



W-35S Dual zones

- Capacity:35L
- Average power consumption:55W
- N.W.:15.7KGS/G.W.:19.7KGS
- Dimensions:670*406*440mm
- Packing:685*490*504mm (1pc)
- FCL quantity:144/300/375



W-35L Dual zones

- Capacity:35L
- Average power consumption:55W
- N.W.:16.6KGS/G.W.:20.4KGS
- Dimensions:665*439*457mm
- Packing:735*505*515mm (1pc)
- FCL quantity:136/284/355



W-45S Dual zones

- Capacity:45L
- Average power consumption:60W
- N.W.:16.7KGS/G.W.:21KGS
- Dimensions:670*406*507mm
- Packing:685*490*567mm (1pc)
- FCL quantity:144/300/300



W-45L Dual zones

- Capacity:45L
- Average power consumption:60W
- N.W.:17.6KGS/G.W.:21.7KGS
- Dimensions:665*439*519mm
- Packing:735*505*580mm (1pc)
- FCL quantity:136/284/284



W-55S Dual zones

- Capacity:55L
- Average power consumption:65W
- N.W.:17.4KGS/G.W.:21.4KGS
- Dimensions:670*406*572mm
- Packing:685*490*632mm (1pc)
- FCL quantity:108/225/300



W-55L Dual zones

- Capacity:55L
- Average power consumption:65W
- N.W.:18.8KGS/G.W.:23.1KGS
- Dimensions:665*439*582mm
- Packing:735*505*645mm (1pc)
- FCL quantity:102/213/284



Low Voltage
Protection



ECO



Vehicle Battery

36W

20°C~
-22°C



BSCI



UK
CA



PAHS


LFGB

REACH

Keeken


K-20

- Capacity:19L
- Average power consumption:36W
- N.W.:10.1kg/ G.W.:12kg
- Dimensions:610*320*285mm
- Packing: 655*385*365mm
- FCL Quantity:288/612/714

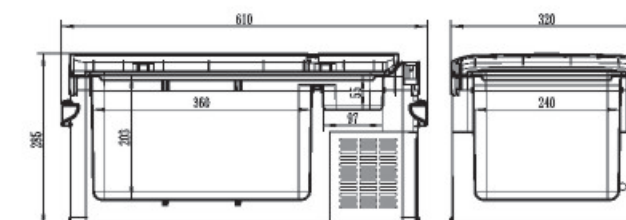

K-26


- Capacity:23L
- Average power consumption:40W
- N.W.:10.7kg/ G.W.:12.3kg
- Dimensions:610*320*335mm
- Packing: 655*385*415mm
- FCL Quantity:240/512/612

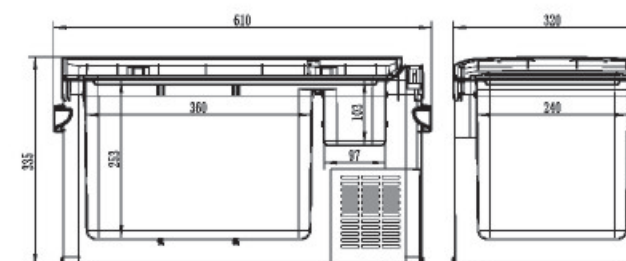




K-30

- Capacity:30L
- Average power consumption:45W
- N.W.:11.6kg/ G.W.:13.6kg
- Dimensions:610*320*400mm
- Packing:655*385*485mm (1pc)
- FCL Quantity:192/408/510

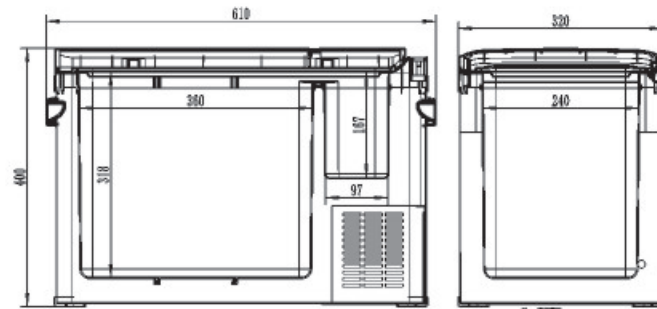


K-40

- Capacity:39L
- Average power consumption:48W
- N.W.:12.5KGS/G.W.:16KGS
- Dimensions:610*320*470mm
- Packing:655*385*552mm (1pc)
- FCL quantity:196/400/400

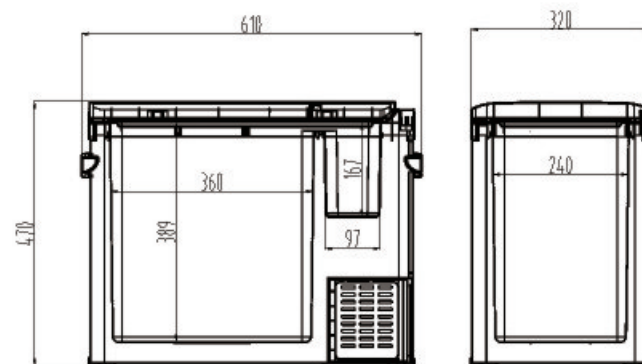


K-26S

- Capacity:23L
- Average power consumption:40W
- N.W.:10.5kg/ G.W.:12.1kg
- Dimensions:578*317*360mm
- Packing: 655*385*415mm
- FCL Quantity:240/510/612

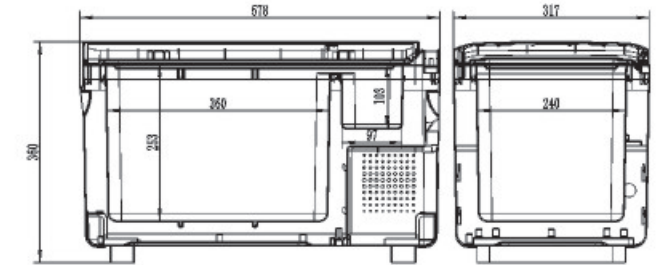

K-30L


- Capacity:30L
- Average power consumption:45W
- N.W.:11.6kg/ G.W.:12/14Kg
- Dimensions:578*350*420mm
- Packing: 655*385*480mm
- FCL Quantity:192/408/510

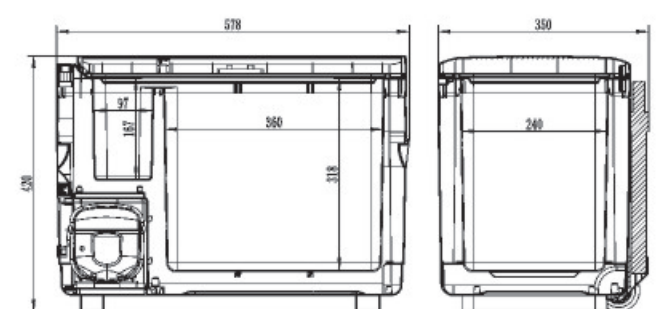





X-15

- Capacity:16.5L
- Average power consumption:40W
- N.W.:10.5kg/ G.W.:12kg
- Dimensions:580*360*280mm
- Packing: 670*450*355mm
- FCL Quantity:258/528/616

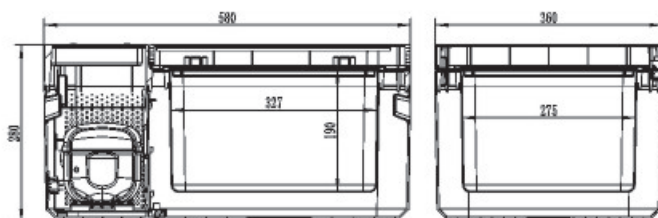

X-25


- Capacity:25L
- Average power consumption:42W
- N.W.:11.5kg/ G.W.:14kg
- Dimensions:580*360*370mm
- Packing: 670*450*445mm
- FCL Quantity:215/440/440

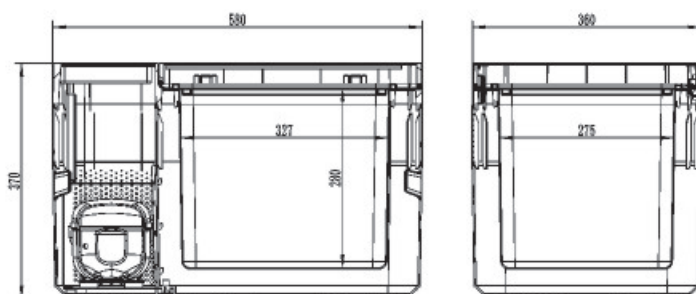




Q-18

- Capacity:17L
- Average power consumption:36W
- N.W.:10.7kg/ G.W.:12.4kg
- Dimensions:610*320*275mm
- Packing:655*385*367mm (1pc)
- FCL Quantity:288/612/714

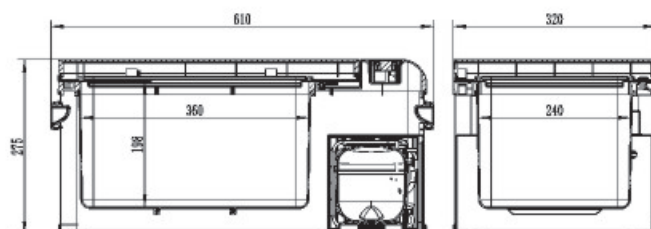



Q-22

- Capacity:20L
- Average power consumption:40W
- N.W.:11.5kg/ G.W.:13.2kg
- Dimensions:610*320*325mm
- Packing:655*392*418mm (1pc)
- FCL Quantity:240/510/612

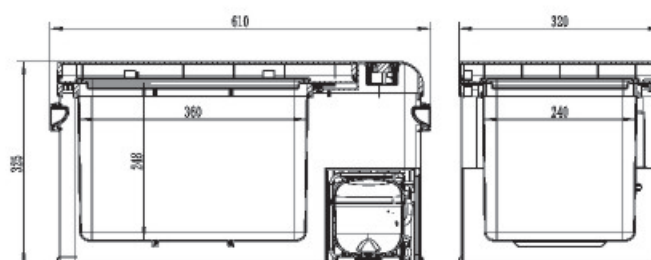

Q-28

- Capacity:27L
- Average power consumption:45W
- N.W.:12kg/ G.W.:15kg
- Dimensions:610*320*390mm
- Packing:655*392*480mm (1pc)
- FCL Quantity:192/408/510

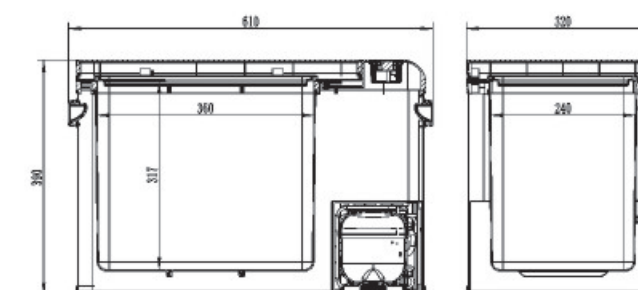



- Low Voltage Protection
- ECO
- Vehicle Battery
- 45W
- 20°C~ -22°C
- E
- BSCI
- CE
- UK CA
- FC
- PAHS
- LFGB
- REACH




- Low Voltage Protection
- ECO
- Vehicle Battery
- 45W
- 20°C~ -22°C
- E
- BSCI
- CE
- UK CA
- FC
- PAHS
- LFGB
- REACH

Keeken


Q-26

- Capacity:28L
- Average power consumption:45W
- N.W.:12.5kg/ G.W.:15kg
- Dimensions:605*320*395mm
- Packing: 655*375*460mm
- FCL Quantity:254/540/540

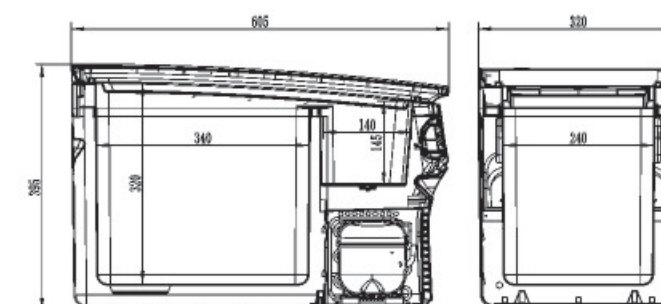

Q-36

- Capacity:32L
- Average power consumption:48W
- N.W.:13kg/ G.W.:15.5kg
- Dimensions:605*320*445mm
- Packing: 655*375*510mm
- FCL Quantity:204/432/540

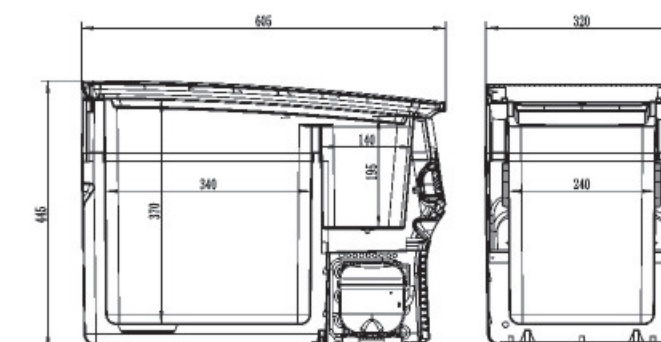



Low Voltage
Protection



ECO



Vehicle Battery

45W

20°C~
-22°C



BSCI



UK
CA



PAHS


LFGB

REACH



Q-30

- Capacity:30L
- Average power consumption:45W
- N.W.:14.7kg/ G.W.:16.8kg
- Dimensions:742*360*340mm
- Packing: 755*425*405mm
- FCL Quantity:195/405/486

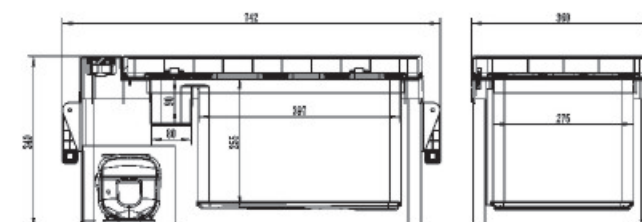

Low Voltage
Protection



ECO



Vehicle Battery

45W

20°C~
-22°C



BSCI



UK
CA



PAHS


LFGB

REACH




Q-40

- Capacity:38L
- Average power consumption:48W
- N.W.:15.3kg/ G.W.:17.5kg
- Dimensions:742*360*405mm
- Packing: 755*425*470mm
- FCL Quantity:195/405/405

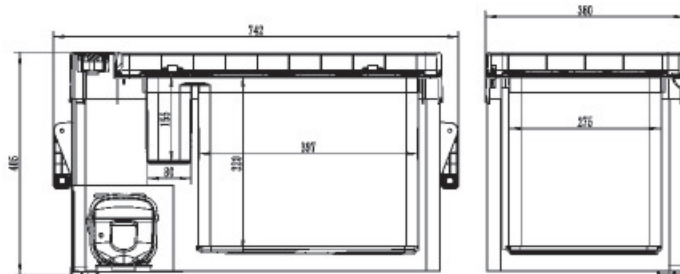


Q-55

- Capacity:50L
- Average power consumption:50W
- N.W.:16kg/ G.W.:19.5kg
- Dimensions:742*360*495mm
- Packing: 755*425*560mm
- FCL Quantity:156/324/324

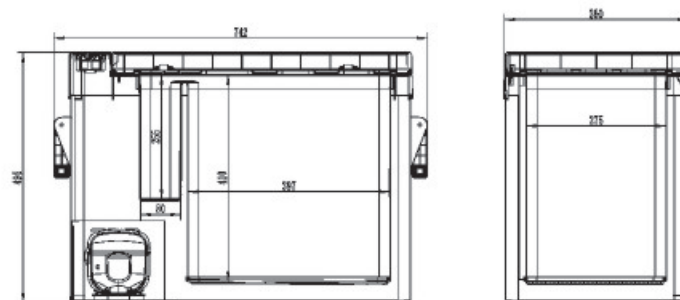

Q-65

- Capacity:60L
- Average power consumption:55W
- N.W.:16kg/ G.W.:17.6/ 20.5
- Dimensions:742*360*590mm
- Packing: 755*425*650mm
- FCL Quantity:117/243/324

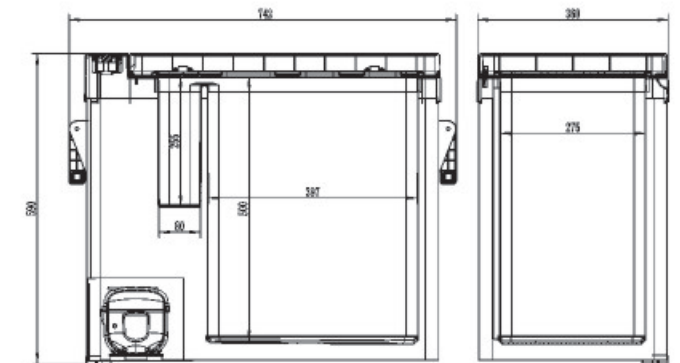

Low Voltage
Protection



ECO



Vehicle Battery

55W

20°C~
-22°C



BSCI



UK
CA




PAHS

LFGB

REACH




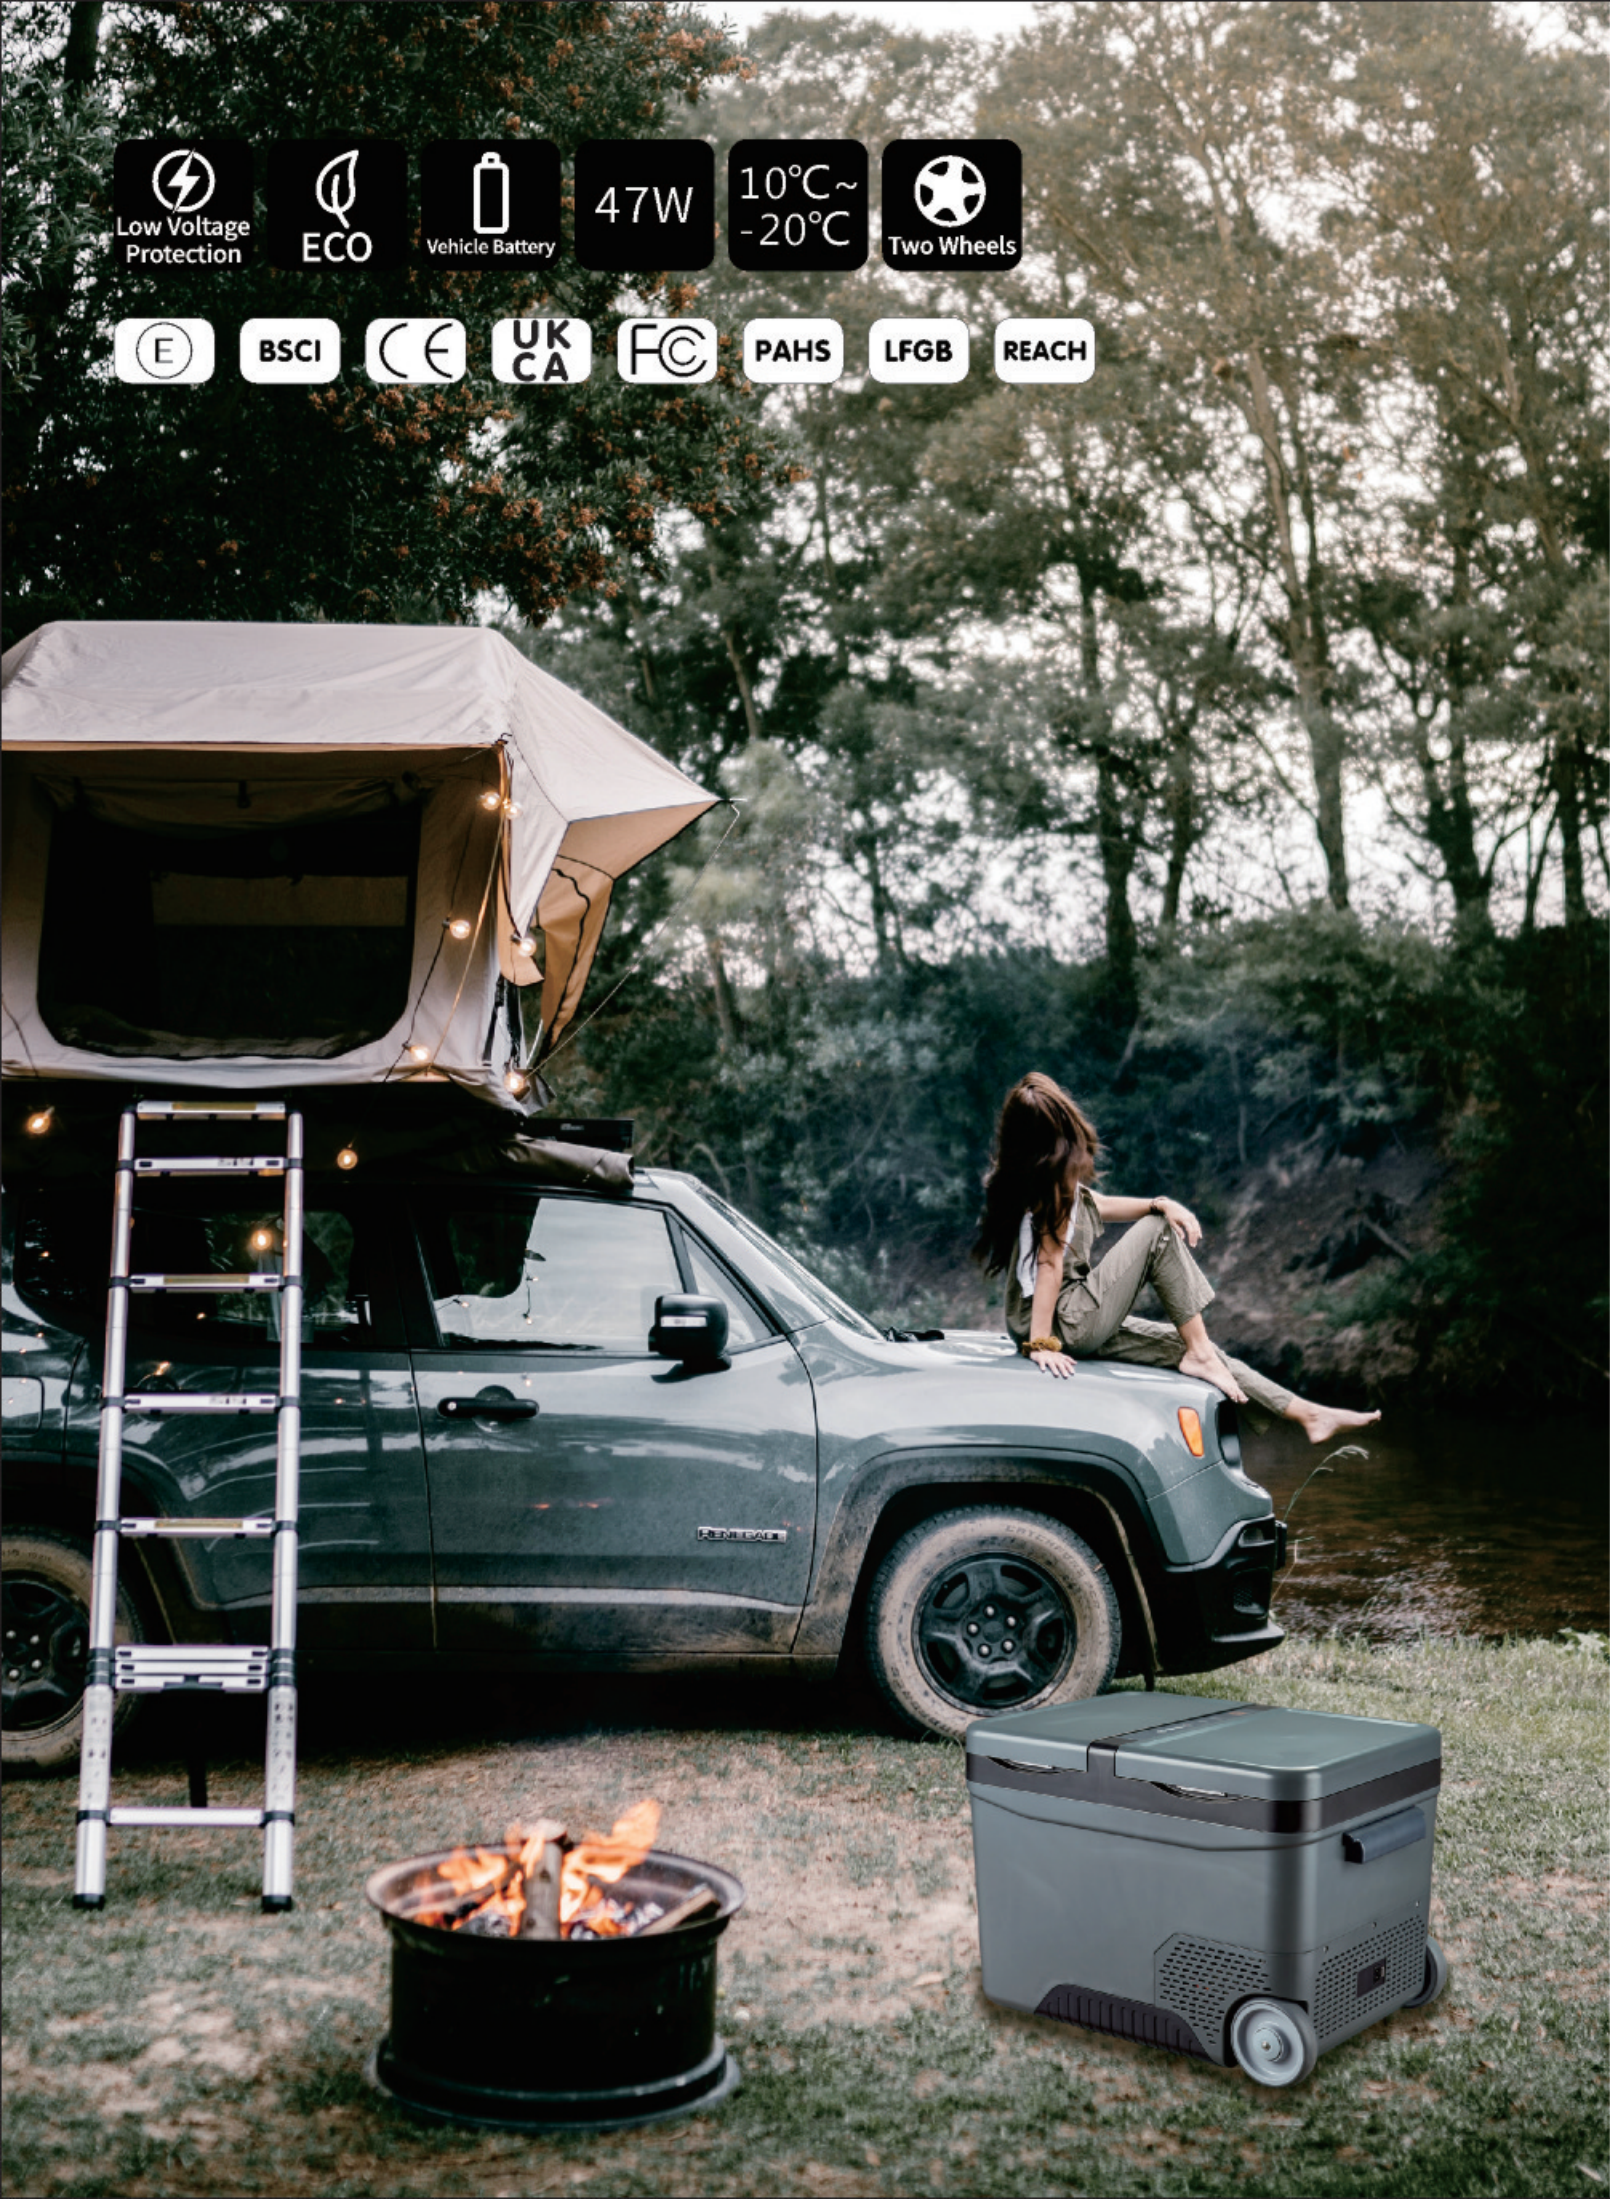

Keeken


HF-01

- Capacity:35L
- Average power consumption:47W
- N.W.:16kg/ G.W.:18kg
- Dimensions:632*420*428mm
- Packing: 665*475*500mm
- FCL Quantity:144/288/360

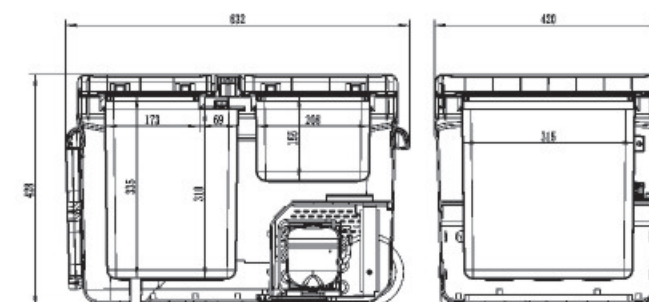

HF-02

- Capacity:45L
- Average power consumption:49W
- N.W.:17kg/ G.W.:19kg
- Dimensions:632*420*508mm
- Packing: 665*475*580mm
- FCL Quantity:144/288/288

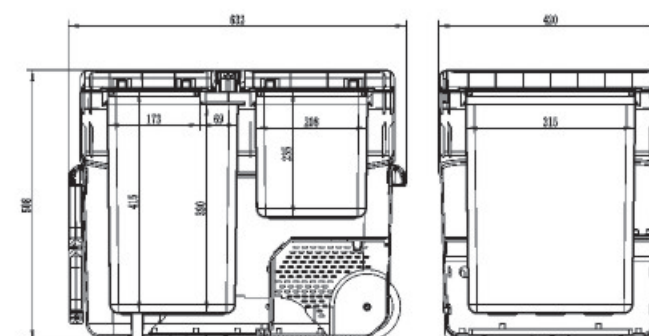



Low Voltage
Protection



ECO



Vehicle Battery

50W

10°C~
-20°C



BSCI



UK
CA



PAHS

LFGB

REACH



Low Voltage
Protection




ECO



Vehicle Battery

50W

10°C~
-20°C



BSCI



UK
CA



PAHS

LFGB

REACH

Keeken

G-55

- Capacity:52L
- Average power consumption:50W
- N.W.:16.8KGS/G.W.:20.5KGS
- Dimensions:726*420*485mm
- Packing:770*500*560mm (1pc)
- FCL quantity:136/280/280

