



- Creative Team Of Fountains Design
- Strong R&D And Production Capacity
- Rich Projects Construction Experience
- International Standardization

CONTACT US

TEL/WHATSAPP: +86 18816238859

EMAIL: sales@huaxinfountains.com

WEBSITE: www.huaxinfountain.com



BUSINESS BROCHURE

FOCUS ON WATER SHOW PROJECTS

HUAXIN FOUNTAIN



ABOUT US

Neijiang Huaxin Art Fountain Factory is a comprehensive fountain enterprise. Our business includes the research and development of fountain equipment, the design and installation of water show projects, and the operation and maintenance of fountain projects, etc.



With 20 years of experience in more than 400 fountain projects, the team of Huaxin combined water, fire, light, shadow, sound, and color wonderfully, we have created landmarks and landscapes one after another with our clients together. We have passed the ISO9001 quality management system and D-U-N-S factory certification. Now holds 18 national-level utility patents. Products have passed CE, RoHS, SABER certification, etc. We have serviced more than 400 projects in 50 countries.

We began in fountain equipment manufacturing but what we do today goes well beyond - from customized fountain equipment production to fountain design and build. Since 2008, we have been providing fountain services for clients all over the world, today Huaxin Fountain is a proven innovator in both domestic and global markets. Our services cover fountain design, customized manufacturing, installation, technical support, and project maintenance. Being committed to the concept of "working outside the box" Huaxin Fountain is providing fountain build and design services to all kinds of fountain settings ranging from commercial to governmental and from private to public. We work closely with clients to realize our common vision.

SERVICE PROCESS



Design



Manufacture



Installation





Maintenance

DUNS Registered TM Supplier Capability Evaluation (Manufacturing)

Summary

Company Overview	
Company Name	Neijiang Huaxin Art Fountain Factory
Start Year	2008
Employee Size	32(Here)
Registered Capital	RMB 5,000,000
Current Shareholder	Wei Liu(100%)
Original Capital	-
Original Shareholder	Chuntao Zhou(100%)

Credit Risk	
According to its financial capacity and credit condition, subject was rated a D&B Rating of 3A3 . Risk Index was rated at EMMA Score 6 , which means Below the Average Risk. Subject was rated a Paydex of 85 , indicating it pays its suppliers 10 days sooner than terms.	

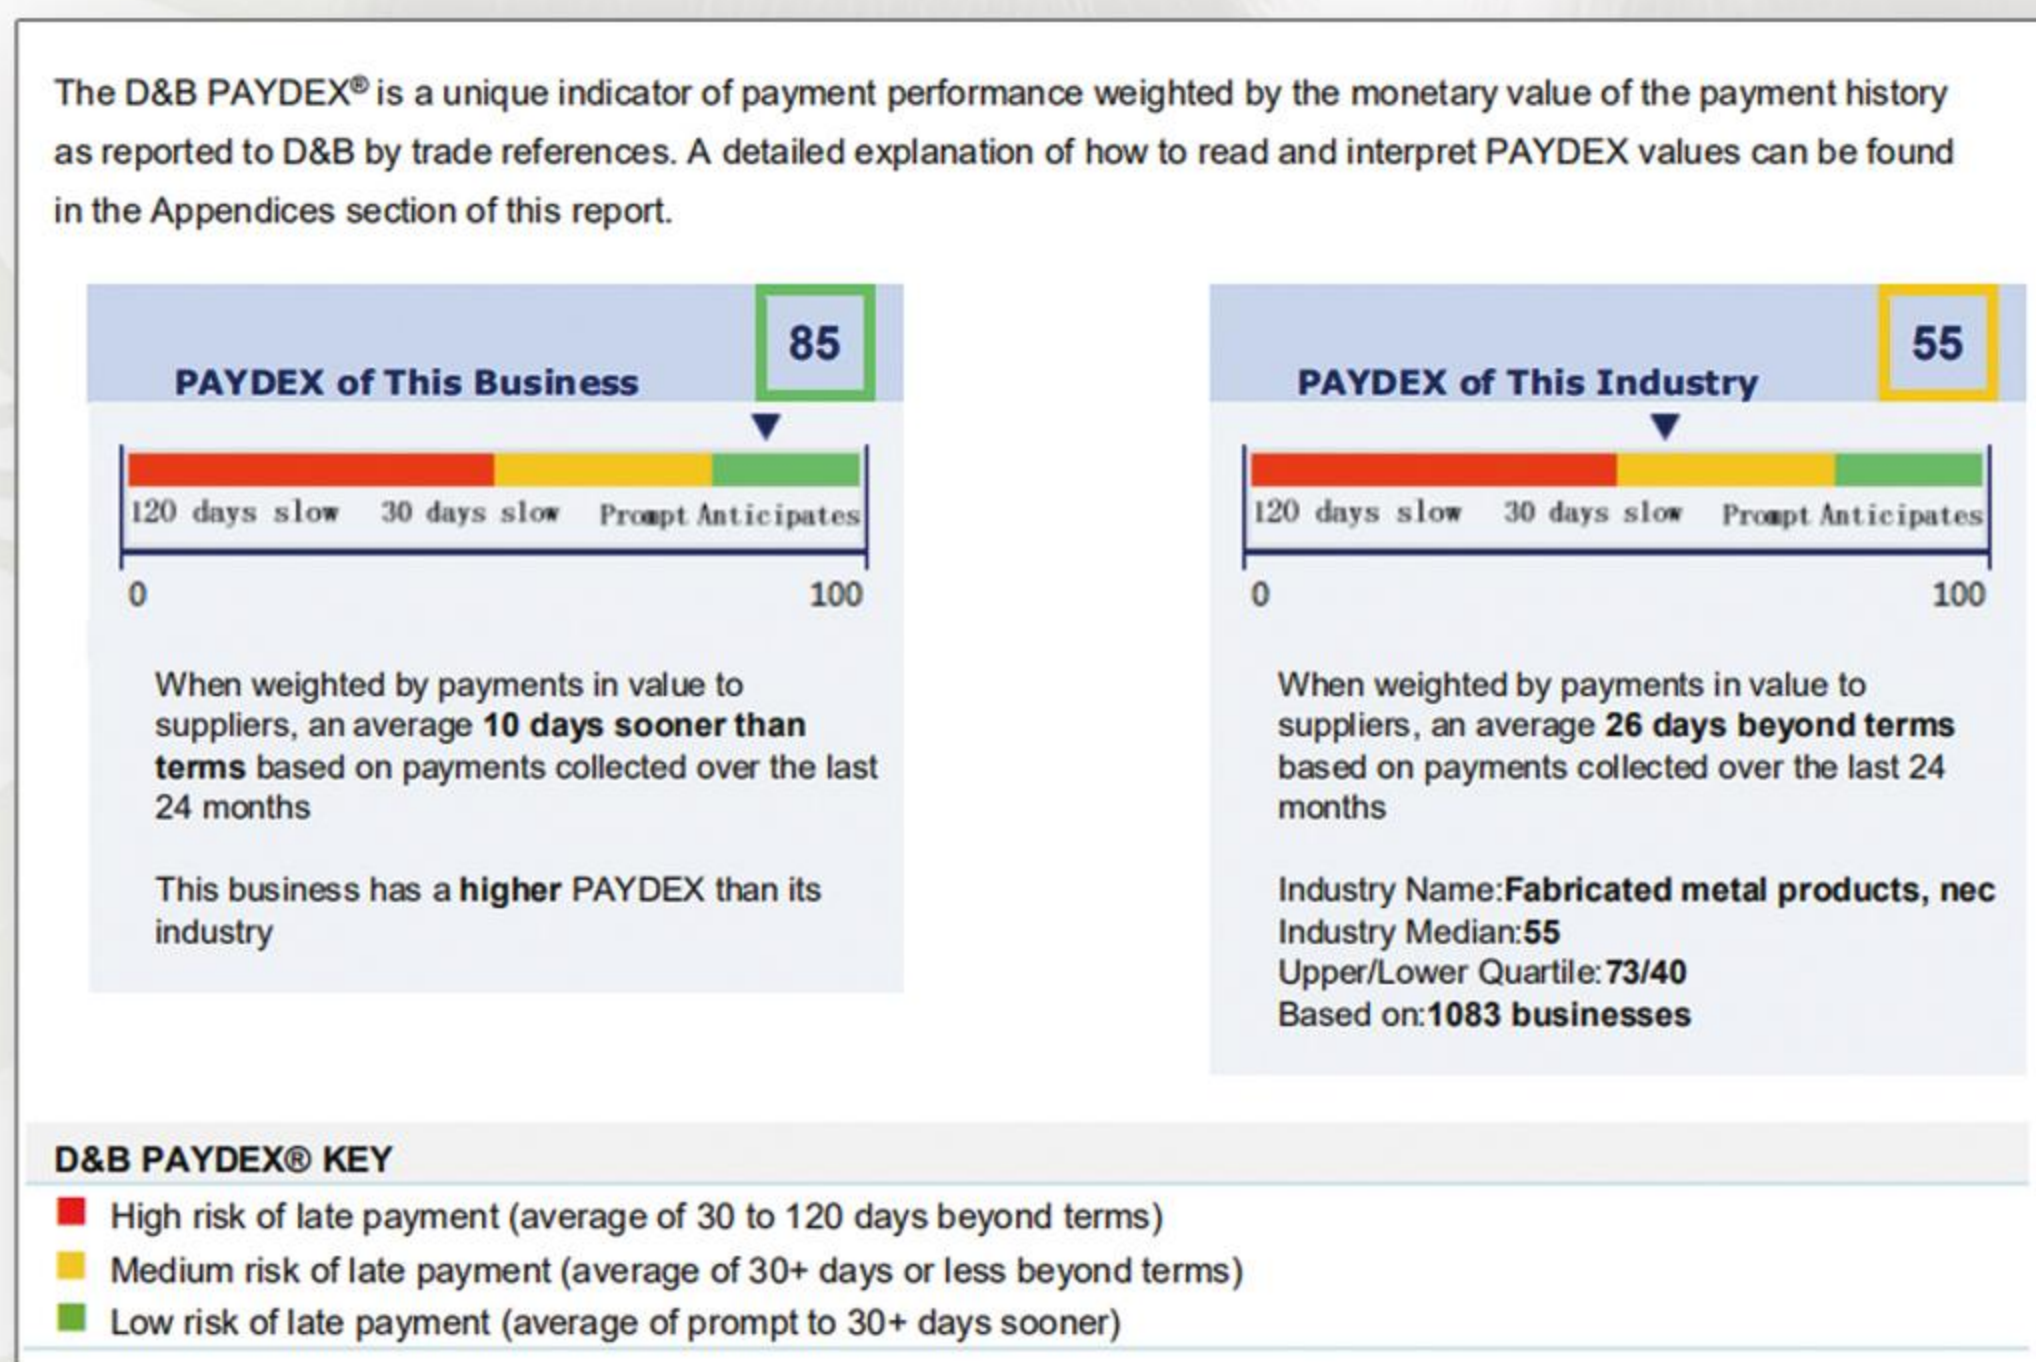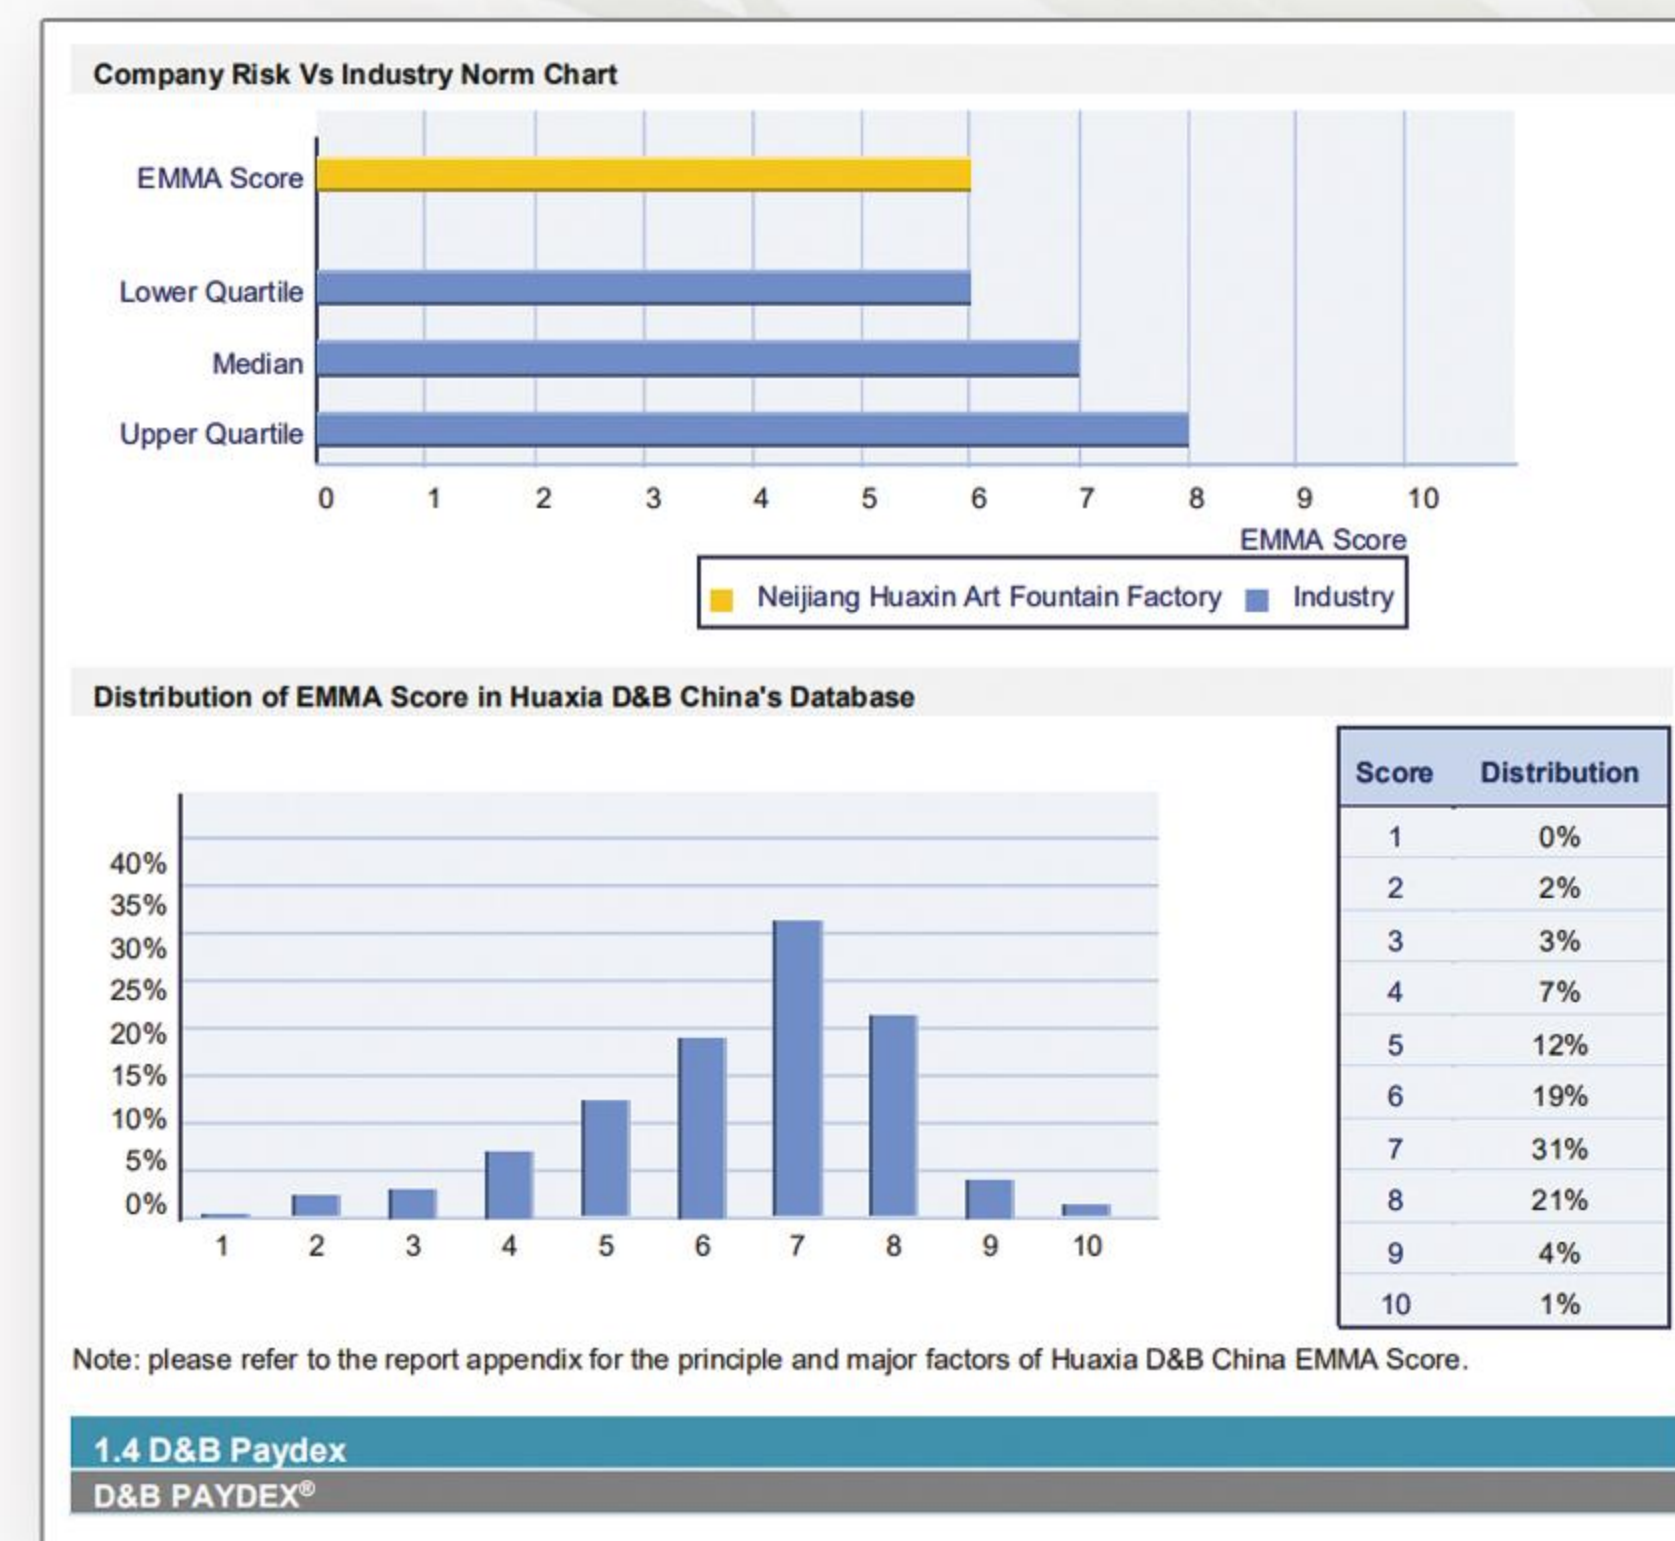

< HUAXIN CE RoHs Certificates >



< Huaxin Qualification Documents >



< AAA Certificates >



< Patent Certificates & Business License >



DIRECTORY

01 Project Cases

P01

- 01 Blvd Ruh City Dancing Fountain Project In Riyadh, Saudi Arabia
- 02 City Walk Dancing Fountain Project In Jeddah, Saudi Arabia
- 03 Dry Deck Fountain at Lenin Square, Baikonur, Kazakhstan
- 04 Dancing Water Fountain Project In Lahore, Pakistan
- 05 120*10 Meters Dancing Fountain Project In Erbil, Iraq
- 06 The Office Garden Dancing Fountain In Al Khobar, KSA
- 07 Ring Fountain Project In People' s Square Of Egypt' s New Capital
- 08 Musical Dancing Fountain At Red Castle In Tripoli Libya
- 09 31m Diameter Musical Dancing Fountain at Furat Mall, Najaf, Iraq
- 10 The Yilan International Children's Folklore & Folkgame Festival

- P01
- P02
- P03
- P04
- P05
- P06
- P07
- P08
- P09
- P10

02 Fountain Equipment

P11

- 01 1D Multi-Directional Drive (Regular version)
- 02 1D Multi-Directional Drive (DMX512)
- 03 2D Multi-Directional Drive (Regular version)
- 04 2D Multi-Directional Drive (DMX512)
- 05 2D Multi-Directional Drive (Built-in conductive slip ring)
- 06 Rotating Flower Basket Nozzle
- 07 Variable Nozzle
- 08 Tai Chi Fountain Equipment
- 09 Integrated Dry Fountain Device
- 10 Air Explosion Fountain Device
- 11 Flaming Fountain Device
- 12 Water And Flame Mixing Fountain Device
- 13 Laminar Fountain Jets
- 14 Jumping Fountain Jets

- P11
- P12
- P13
- P14
- P15
- P16
- P17
- P19
- P20
- P21
- P22
- P24
- P25
- P26

03 Lights

P27

- 01 Underwater Fountain Lights
- 02 Ring Fountain Lights
- 03 Recessed Underground Lights
- 04 Wall Washer Lights

- P27
- P27
- P28
- P28

04 Other Equipment

P29

- 01 Low Voltage Fountain Pump
- 02 Fountain Pump (Regular version)
- 03 Water Screen
- 04 Laser & Cold Mist Host

- P29
- P30
- P31
- P32



01 Blvd Ruh City Dancing Fountain
Project In Riyadh, Saudi Arabia

PROJECT ADDRESS: Riyadh, KSA
PROJECT OVERVIEW: The installation area of the fountain is about 750 square meters.
PROJECT SCALE: Including digital swing device, straight-up jets, running jets, changeable jets, swing head light show, sound reinforcement system, and control system.
DESIGN AND INSTALLATION METHOD: Pool fountain.

02 Jeddah Season 2022 City Walk
Fountain Project In Jeddah, KSA

PROJECT ADDRESS: Jeddah, Saudi Arabia
PROJECT OVERVIEW: The installation area of the fountain is about 500 square meters.
PROJECT SCALE: Including digital swing device, flaming fountains, straight-up jets, rotate basket, running jets, changeable jets, swing head light show, sound reinforcement system, and control system.
DESIGN AND INSTALLATION METHOD: Pool fountain.





03 Dry Deck Fountain at Lenin Square, Baikonur, Kazakhstan

PROJECT ADDRESS: Baikonur, Kazakhstan
PROJECT OVERVIEW: For this project, we designed and constructed a large fountain measuring 40 by 20 meters, equipped with a variety of nozzles, including high spray jets, 1D nozzles, variable nozzles, crown nozzles, and running nozzles, as well as a DMX lighting system.
PROJECT SCALE: 40m*20m
DESIGN AND INSTALLATION METHOD: Dry fountain.

04 Dancing Water Fountain Project In Lahore, Pakistan

PROJECT ADDRESS: Bismillah Housing Scheme Phase-2, Lahore, Pakistan
PROJECT OVERVIEW: Completed in February 2023. The fountain size is 52*20 meters, including central high jet, rainbow jets, 1D jets, vice jets, peacock jets, straight-up jets, running jets, DMX lights, water pumps, audio system, control system
DESIGN AND INSTALLATION METHOD: Pool fountain.






05 120*10 Meters Dancing Fountain Project In Erbil, Iraq

PROJECT ADDRESS: Erbil, Iraq
PROJECT OVERVIEW: 120*10 Meters.
PROJECT SCALE: Including digital swing device, straight-up jets, rotate basket, running jets, inward arching jets, laser show, sound reinforcement system, water treatment system, and control system.
DESIGN AND INSTALLATION METHOD: Pool fountain.

06 The Office Garden Dancing Fountain In Al Khobar, KSA

PROJECT ADDRESS: Al Khobar,KSA
PROJECT OVERVIEW: Irregular shaped pool,125*14M
PROJECT SCALE: Including 2D swing equipment, running fountains, foam nozzles, geyser nozzles, lighting system, sound system, fountain control system.
DESIGN AND INSTALLATION METHOD: Pool fountain & Dry fountain



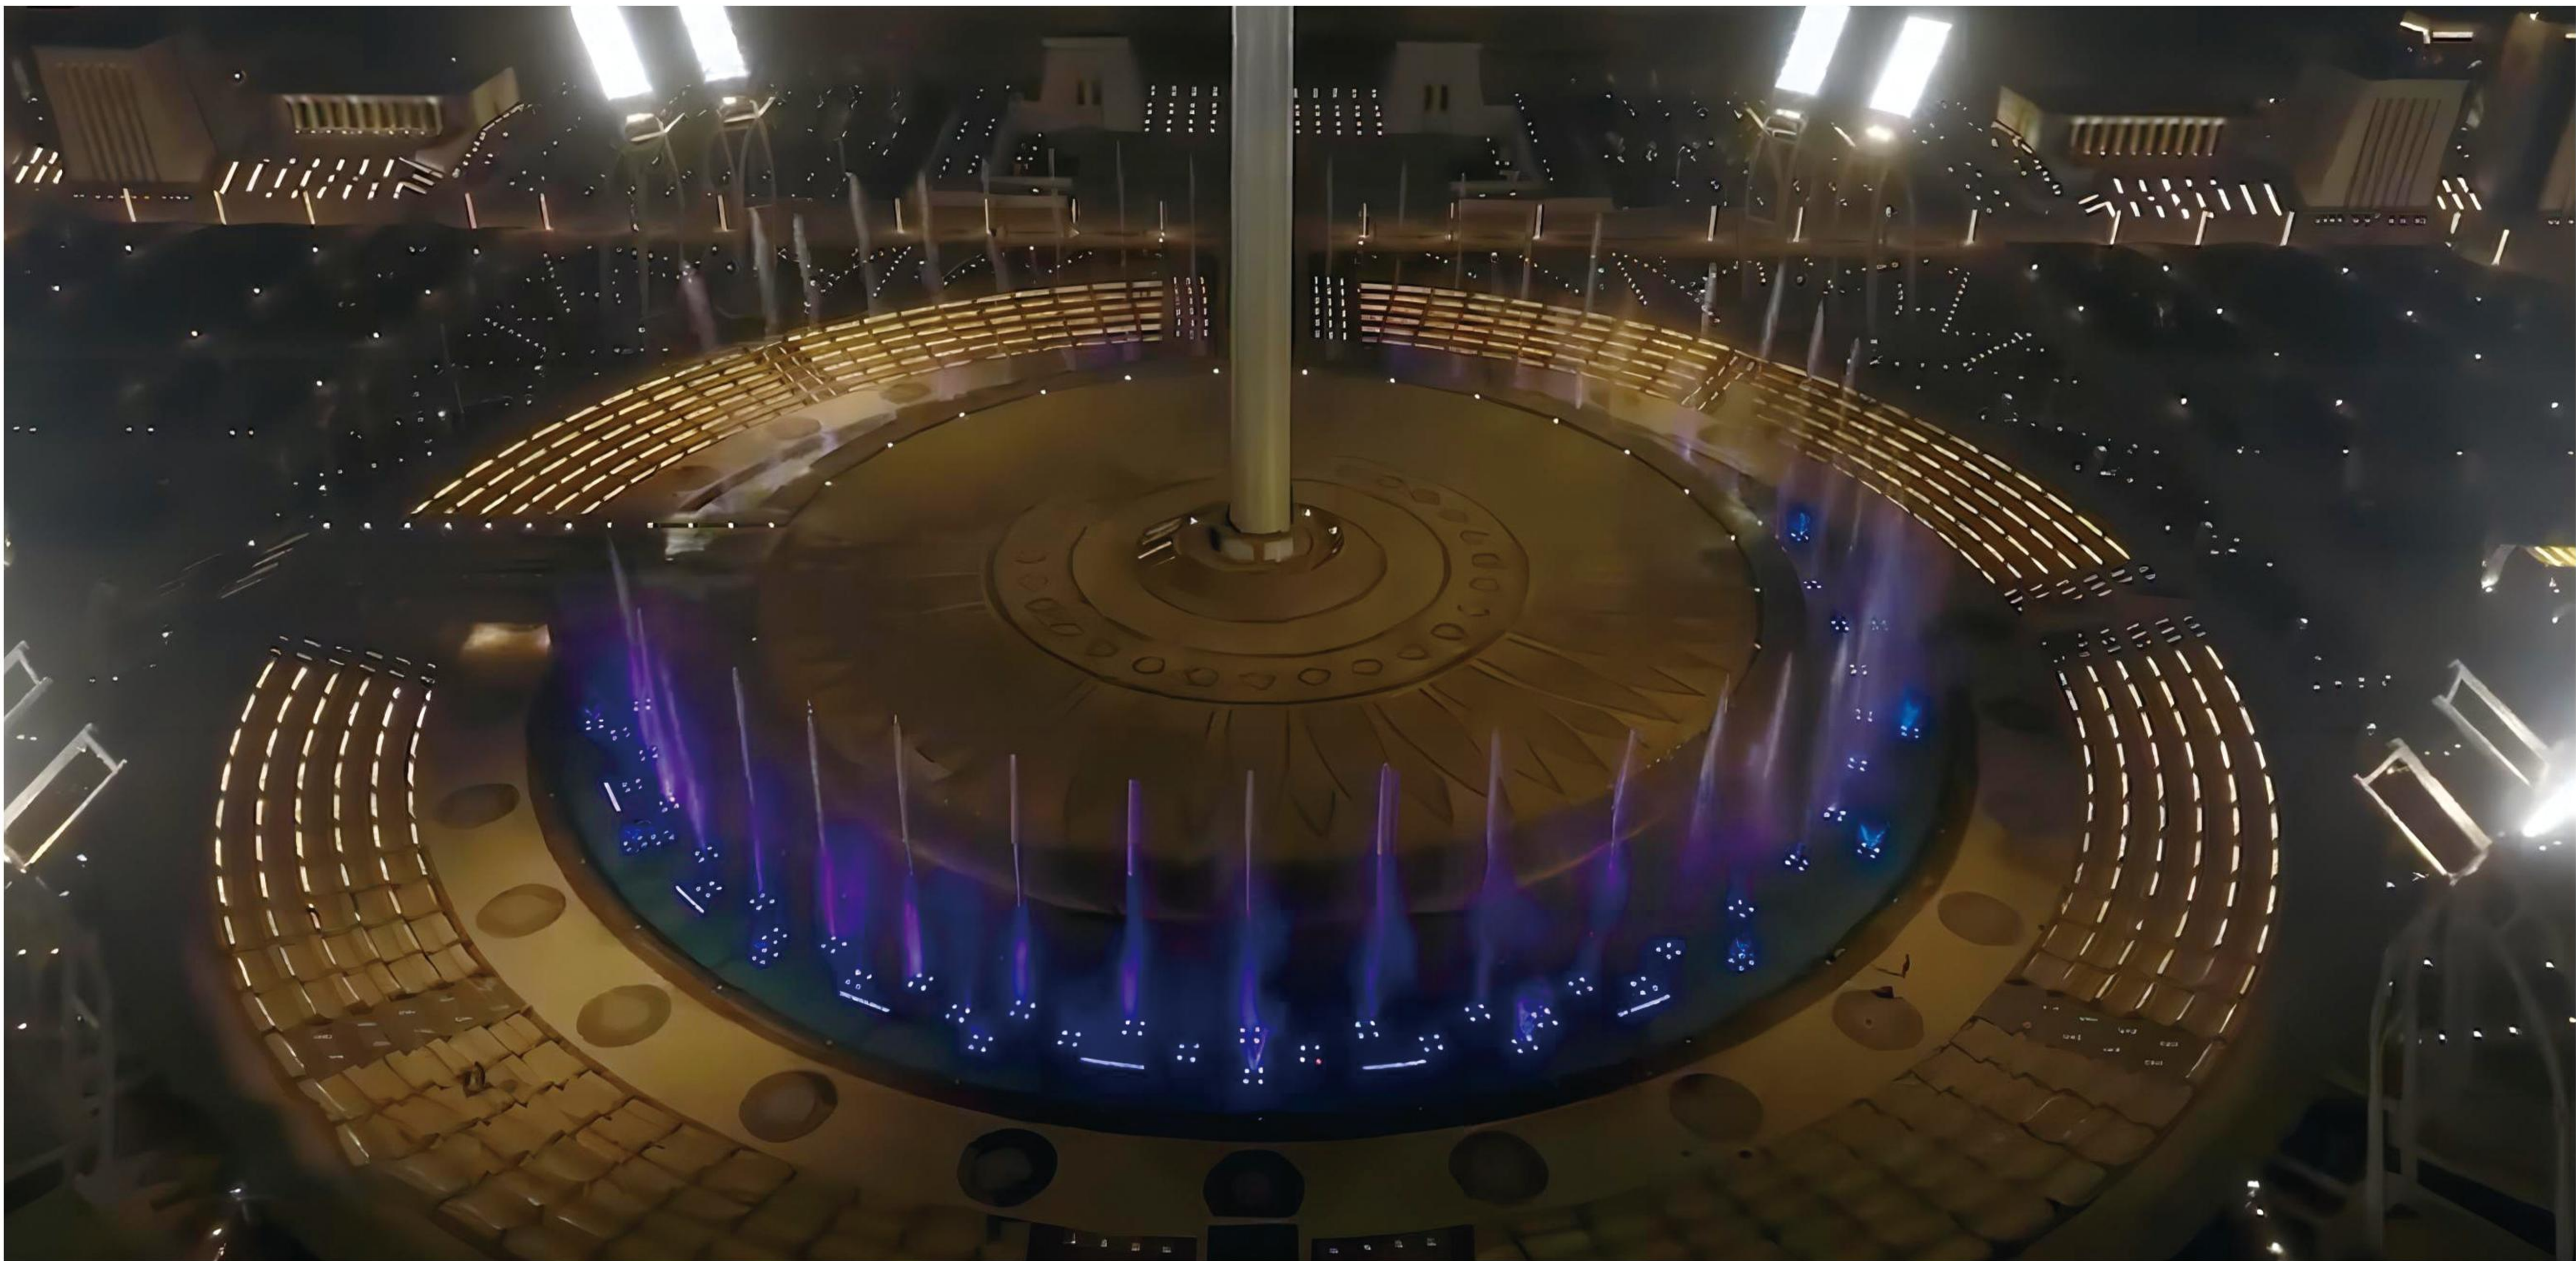

07 Ring Fountain Project In People ' s Square Of Egypt ' s New Capital

PROJECT ADDRESS: New Administrative Capital, Egypt
PROJECT OVERVIEW: The project is located in People' s Square, the New Administrative Capital of Egypt. The fountain is arranged in a ring around the world's tallest flagpole. This project mainly uses 2D swing equipment, Running Jets, Laminar Flow Jets, Peacock Shape Jets, Rotation Swing Flower Shape Jets, Air Explosion Jets, and so on.
PROJECT SCALE: 1600 m².
DESIGN AND INSTALLATION METHOD: Pool fountain.

08 Musical Dancing Fountain At Red Castle In Tripoli Libya

PROJECT ADDRESS: Tripoli, Libya
PROJECT OVERVIEW: The 100-meter-long dancing fountain at the Red Citadel in Tripoli combines 1D and 2D swing devices, air explosion fountains, variable fountain nozzles, laser effects, DMX512 underwater lighting, and so on. As the largest musical dancing fountain in North Africa, it delivers a breathtaking spectacle and serves as a new cultural landmark of the city.
PROJECT SCALE: 100m*10m.
DESIGN AND INSTALLATION METHOD: Seawater Fountain.





09 31m Diameter Musical Dancing Fountain at Furat Mall, Najaf, Iraq


PROJECT ADDRESS: Furat Mall, Najaf, Iraq
PROJECT OVERVIEW: The circular dancing fountain at Furat Mall in Najaf, Iraq, spans 31 meters in diameter and is composed of eight concentric layers: the swinging spotlight layer, finger nozzle layer, running fountain layers (2), variable nozzle layer, flame fountain layer, 2D swinging fountain layer, and the central main jet.
PROJECT SCALE: Dia. 31 m.
DESIGN AND INSTALLATION METHOD: Pool fountain.

10 The Yilan International Children's Folklore & Folkgame Festival Water Show In Taiwan

PROJECT ADDRESS: Yilan County, Taiwan
PROJECT OVERVIEW: The laser and water show in Yilan County, Taiwan, was specially created for the 2024 Yilan International Children' s Folklore & Folkgames Festival. The show combines swing laser lights, running fountains, 1D & 2D swing fountains, flame fountains, and rotating flower basket fountains, delivering a spectacular visual experience that has greatly enhanced Yilan' s nighttime tourism.
DESIGN AND INSTALLATION METHOD: Pool & Floor fountain.




1D Multi-Directional Drive (Regular version)

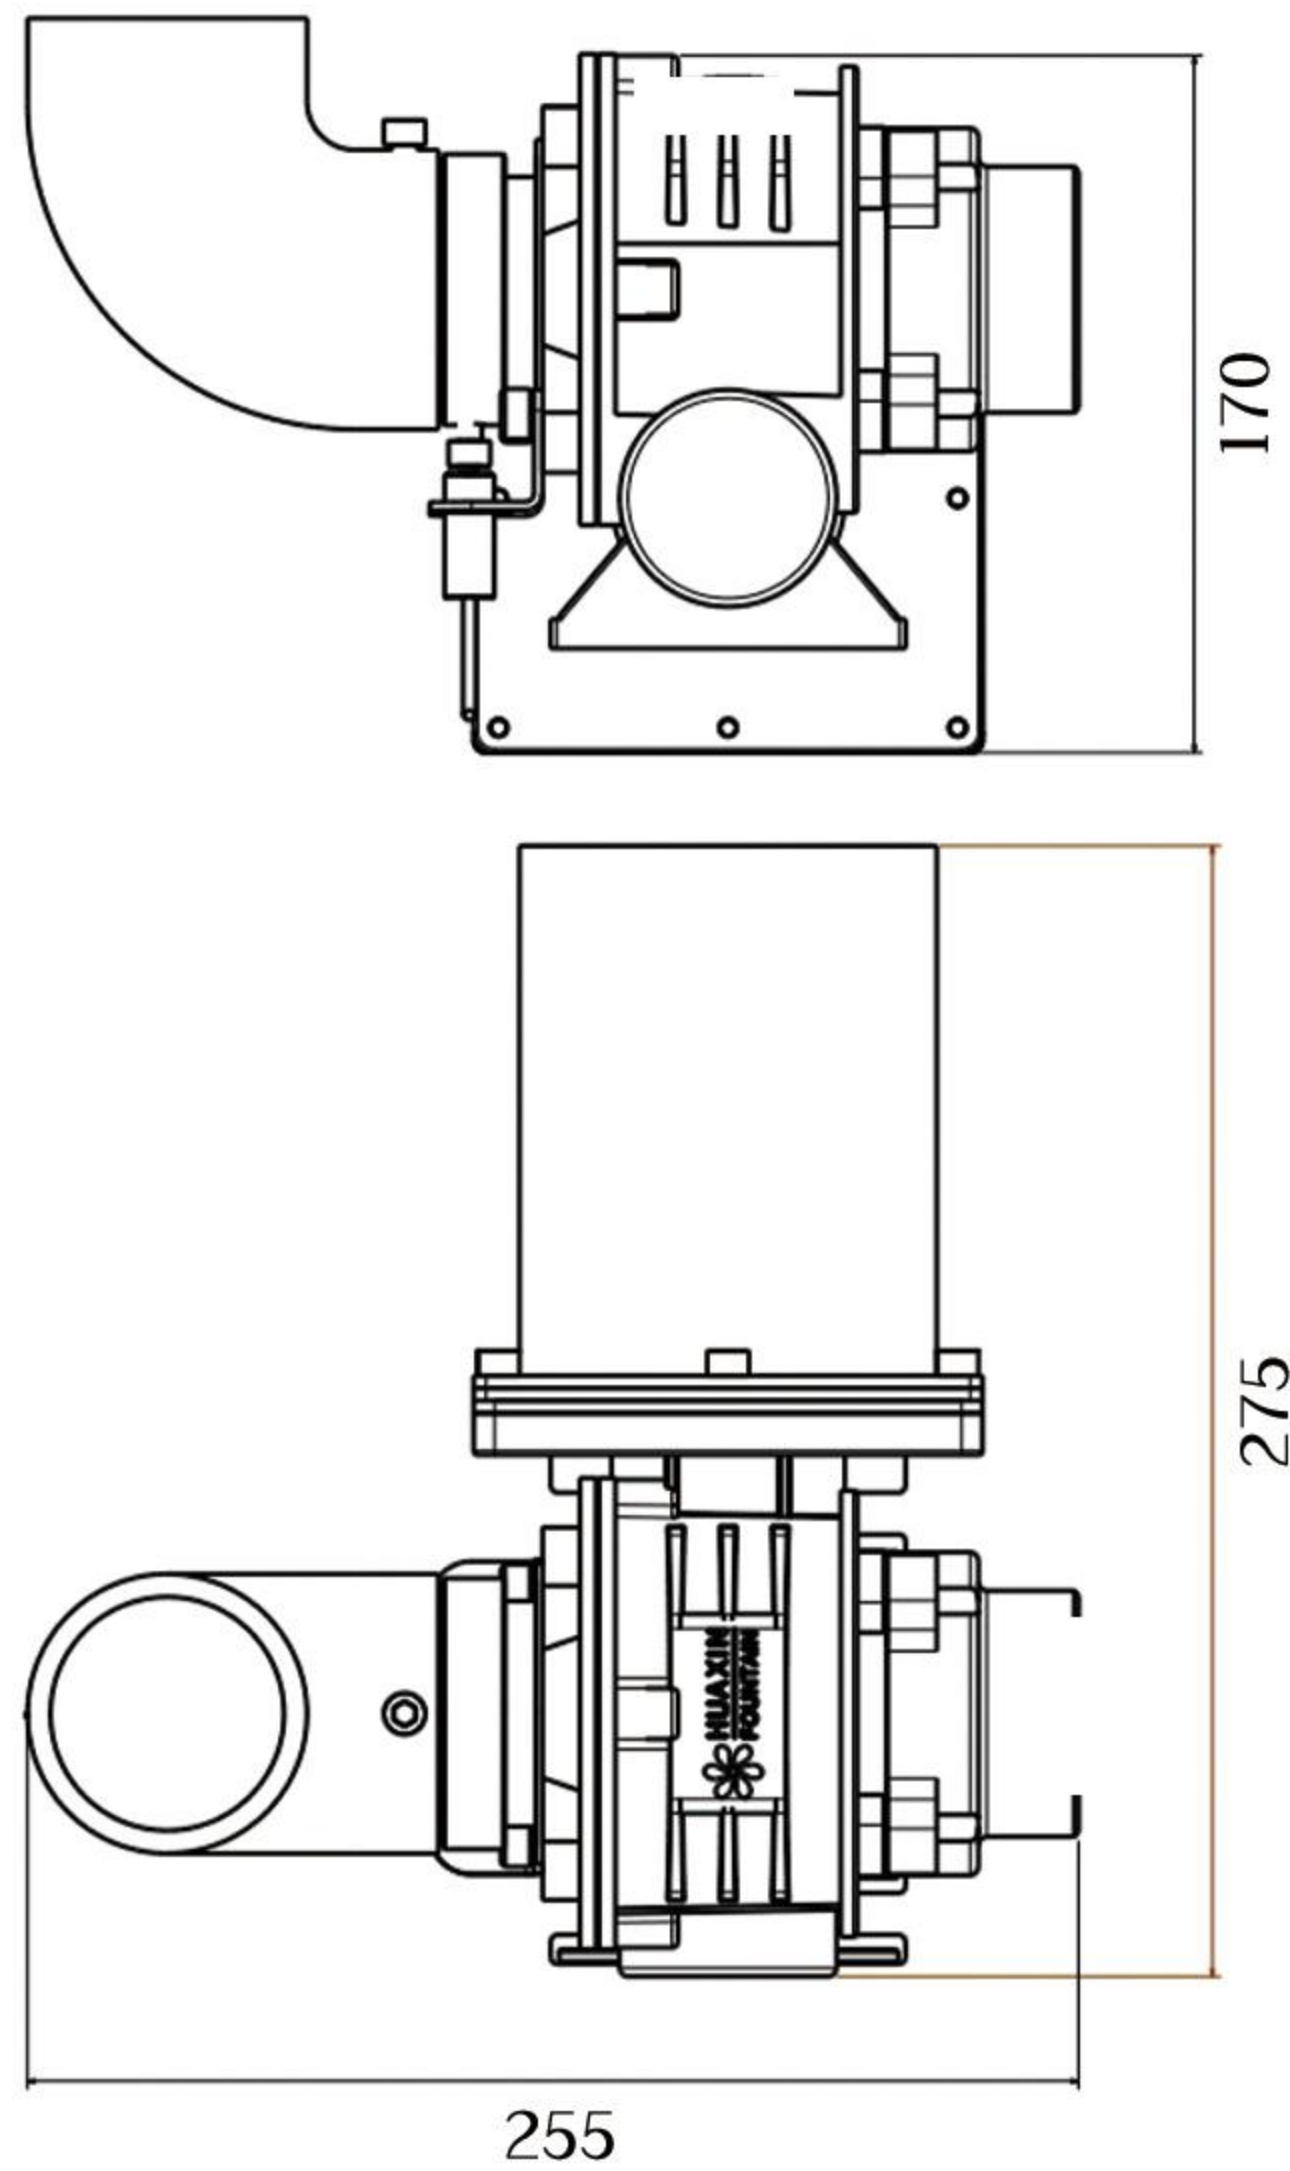


Technical Parameter

Material	Stainless Steel 304
Diameter (DN)	DN50
Size (mm)	L275*W255*H170
Total Weight	12kg
Reduction Ratio	1:10
Working Voltage Of Motor	AC55V-70V
Lift	10-15m
The Power Of The Motor	200W
The Number Of Phases Of The Motor	Two Phase
The Maximum Torque	85(N.M)
Sensor Voltage	DC24V
Sensor Line Color Separation	Brown-24v Blue-Gnd Black-Return To Zero Signal
Motor Line Color Separation	Red-A+ Green-A- Yellow-B+ Black-B-
Recommended Motor Mounting Cables	JHS 4*2.5mm²
Recommended Sensor Mounting Cable	PVVP 3*1.5mm²

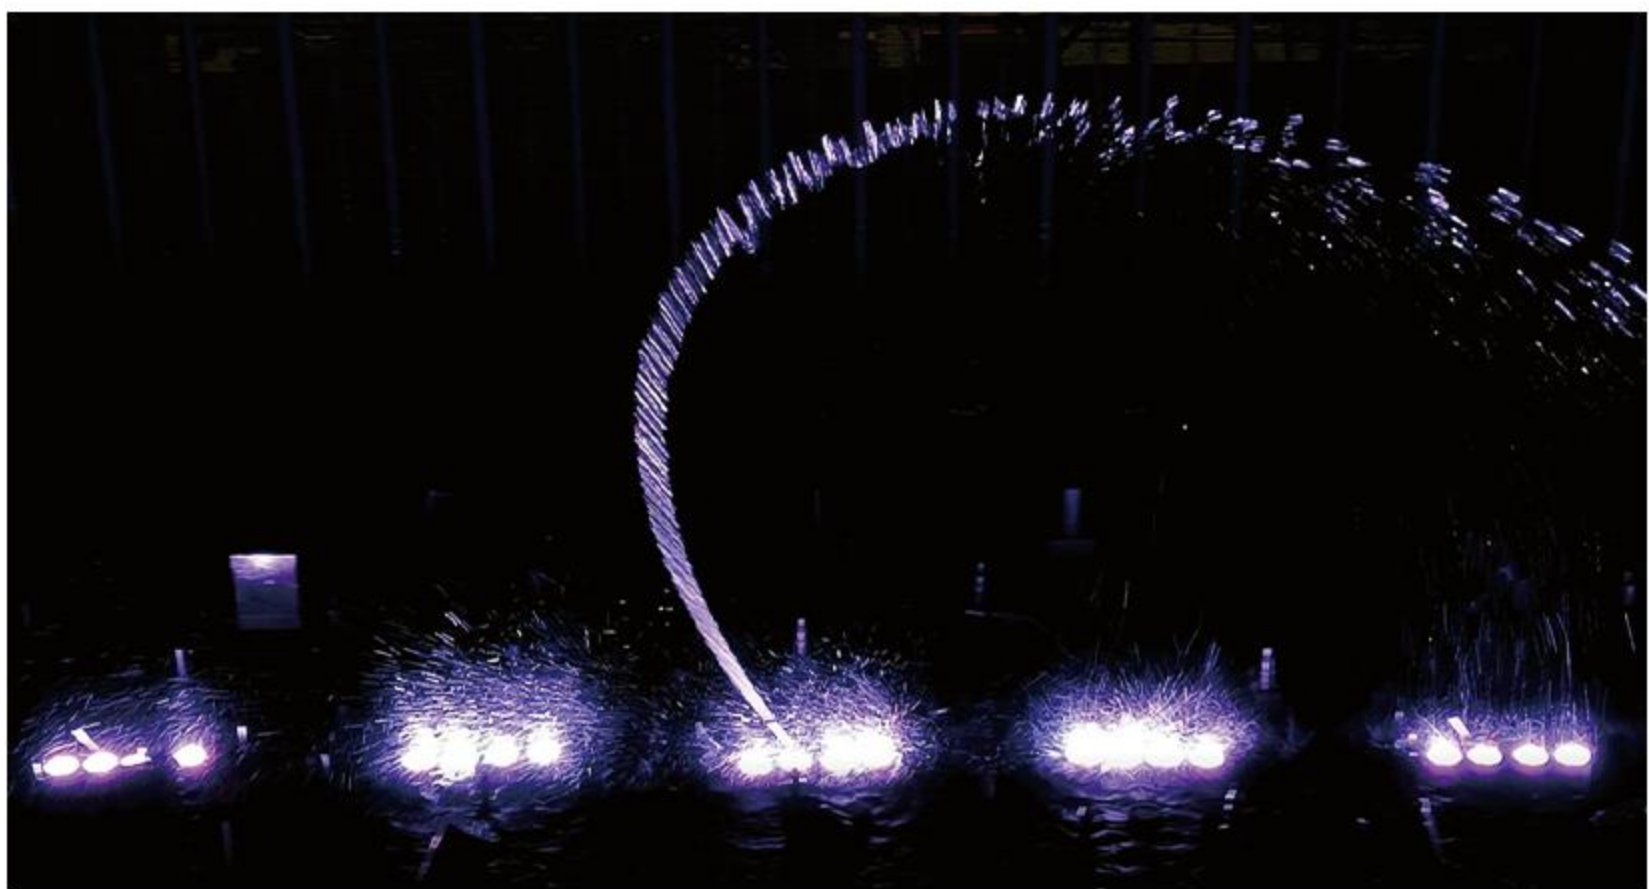


1D Multi-Directional Drive (Upgraded version)

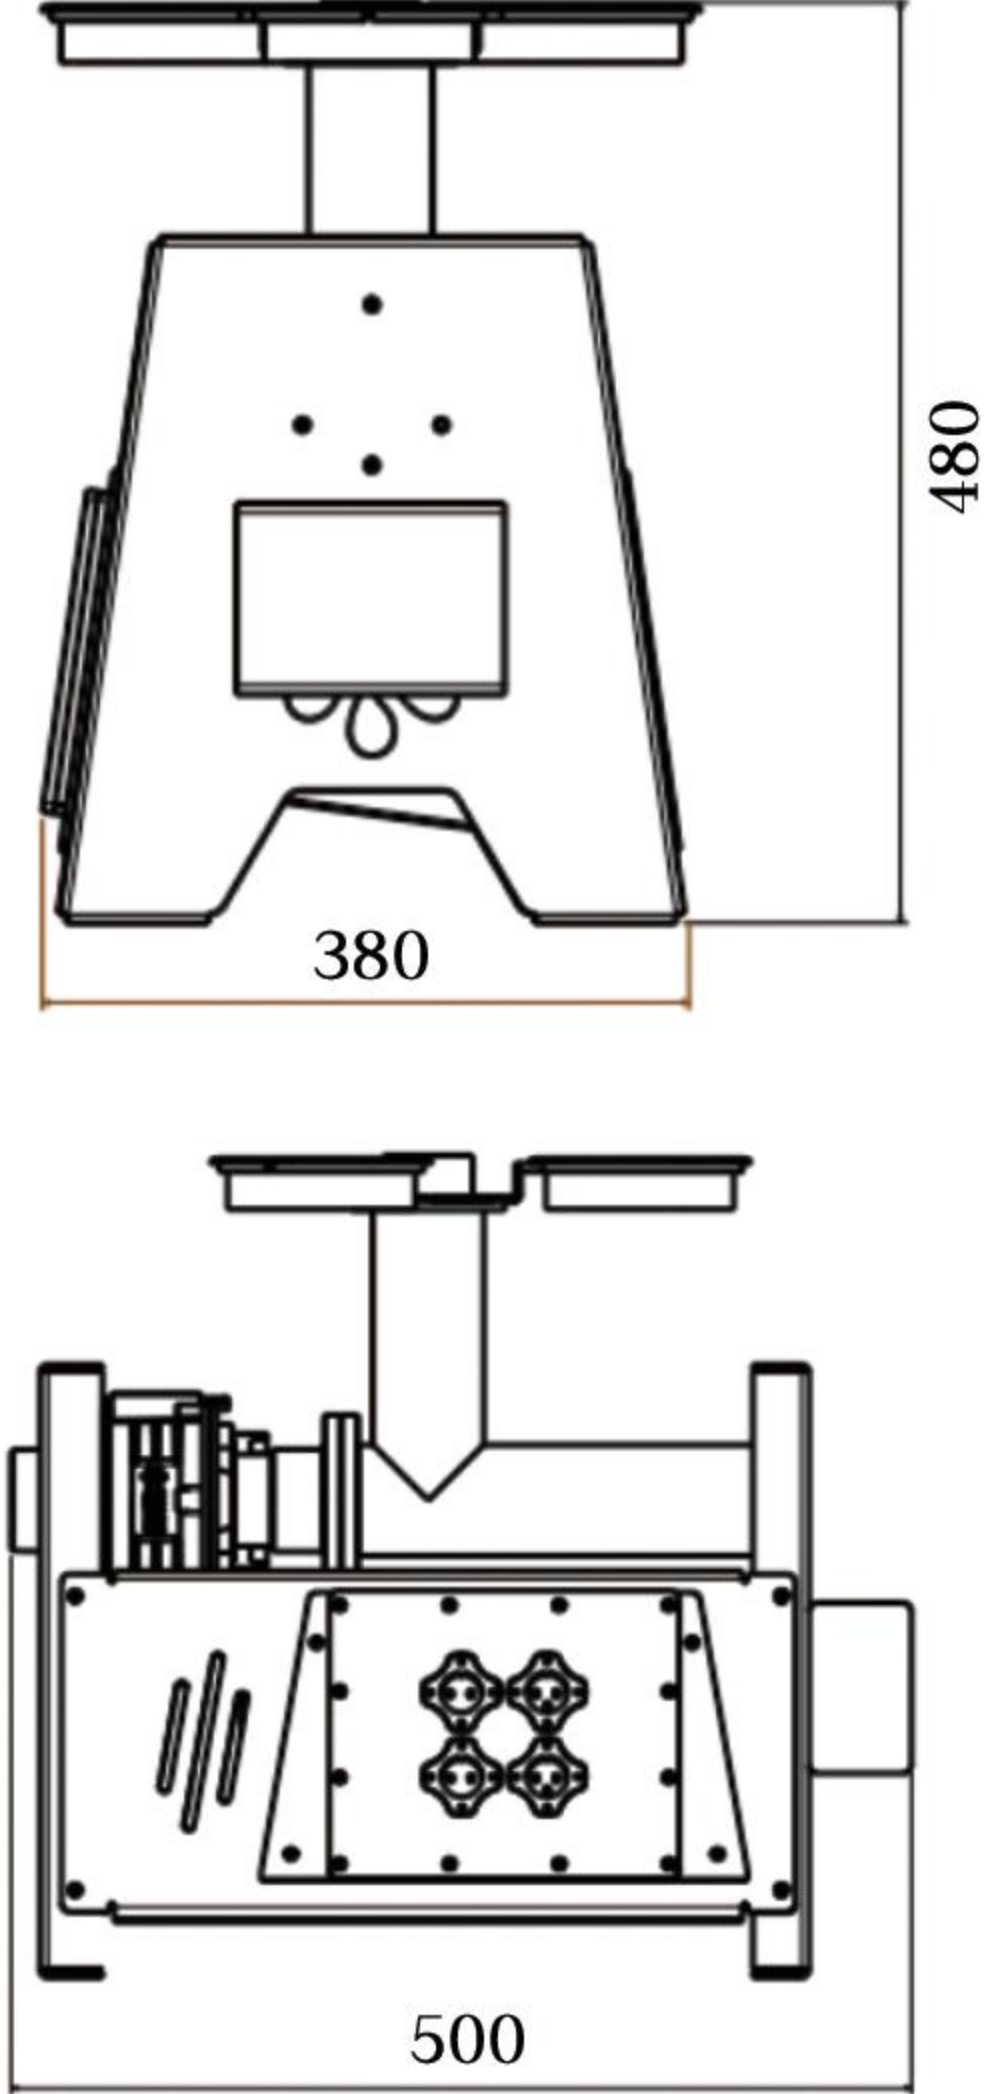

Technical Parameter

Material	Stainless Steel 304
Diameter (DN)	DN50
Size (mm)	L380*W480*H500
Total Weight	37.5kg
Reduction Ratio	1:10
Working Voltage Of Motor	DC60V-90V
Lift	8-15m
Motor Power	200W
Operating Angle	±60°
The Maximum Torque	85(N.M)
Sensor Voltage	DC24V
Recommended Working Cables	JHS 2*6mm²
Recommended Control Cable	PVVP 3*1.5mm²
Lighting Configuration	HX130GM-DC24V-DMX512 RGB-9W*3

2D Multi-Directional Drive (Regular version)

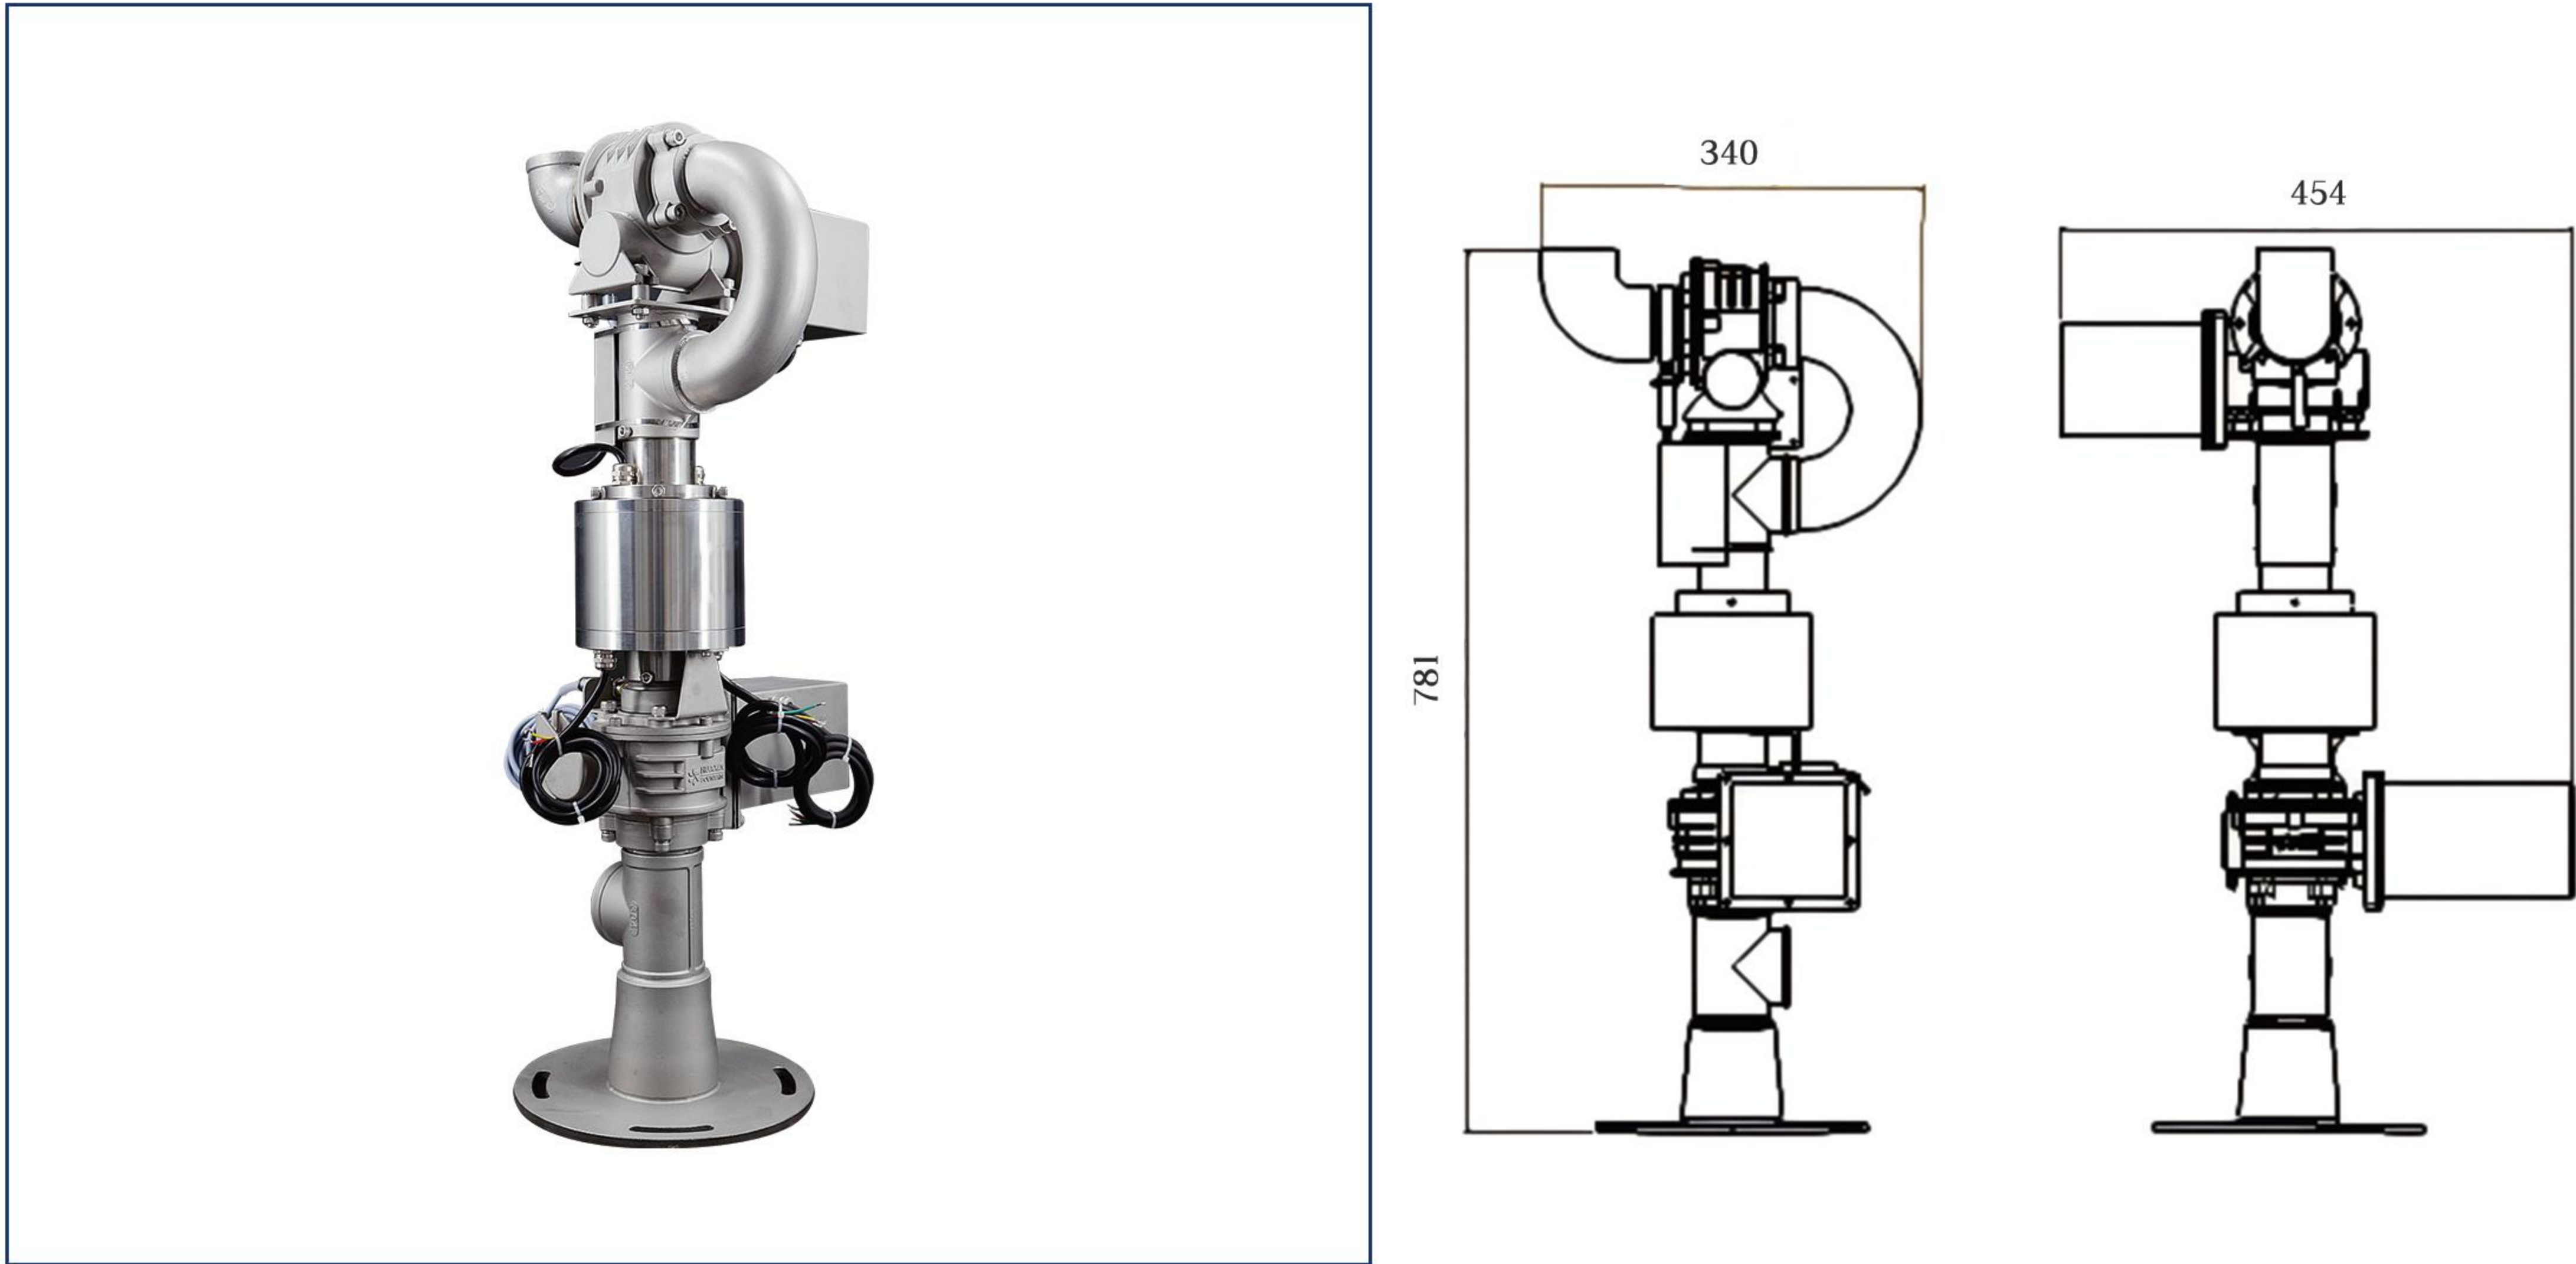

Technical Parameter

Material	Stainless Steel 304
Nozzle Diameter (mm)	DN50
Length*Width*Height (mm)	L454*W340*H781
Net Weight (Kg)	39.7
Upper Dimension Reduction Ratio	1:10
Lower Dimension Reduction Ratio	1:10
Motor Working Voltage	AC55V-70V
Motor Power	500W
Lift	40
Number Of Phases Of Motor	Two Phases
Upper Maximum Torque	85(N.M)
Lower Maximum Torque	120(N.M)
Sensor Voltage	DC24V
Upper (Lower) Dimensional Sensor Line Color Separation	Brown-24v Blue-Gnd Yellow-Return To Zero Signal
Upper (Lower) Dimensional Stepper Motor Line Color Separation	Red-A+ Green-A- Yellow-B+ Black-B-
Recommended Stepper Motor Mounting Cables	JHS 4*2.5mm²x2
Recommended Sensor Mounting Cable	PVVP 3*1.0mm²x2
Number Of Slip Ring Lines	7




2D Multi-Directional Drive (DMX512)



Material	Stainless Steel 304
Nozzle Diameter (mm)	DN50
Length*Width*Height (mm)	L600*W450*H650
Net Weight (Kg)	56.5
Upper Dimension Reduction Ratio	1:10
Lower Dimension Reduction Ratio	1:10
Stepping Motor Working Voltage	DC60V-90V
Motor Power	250W/200W
Water Spray Height	8-15m
Number Of Phases Of Stepper Motor	Two Phases
Upper Maximum Torque	85(N.M)
Lower Maximum Torque	120(N.M)
Sensor Voltage	DC24V
Recommended Working Cables	JHS 2*6mm²
Recommended Control Cables	PVVP 3*1.5mm²
Running Direction (up dimension)	+100°, -35°
Running Direction (down dimension)	±65°
Lighting Configuration	HX130GM-DC24V-3*9W-DMX512 RGB



2D Multi-Directional Drive (Built-in conductive slip ring)

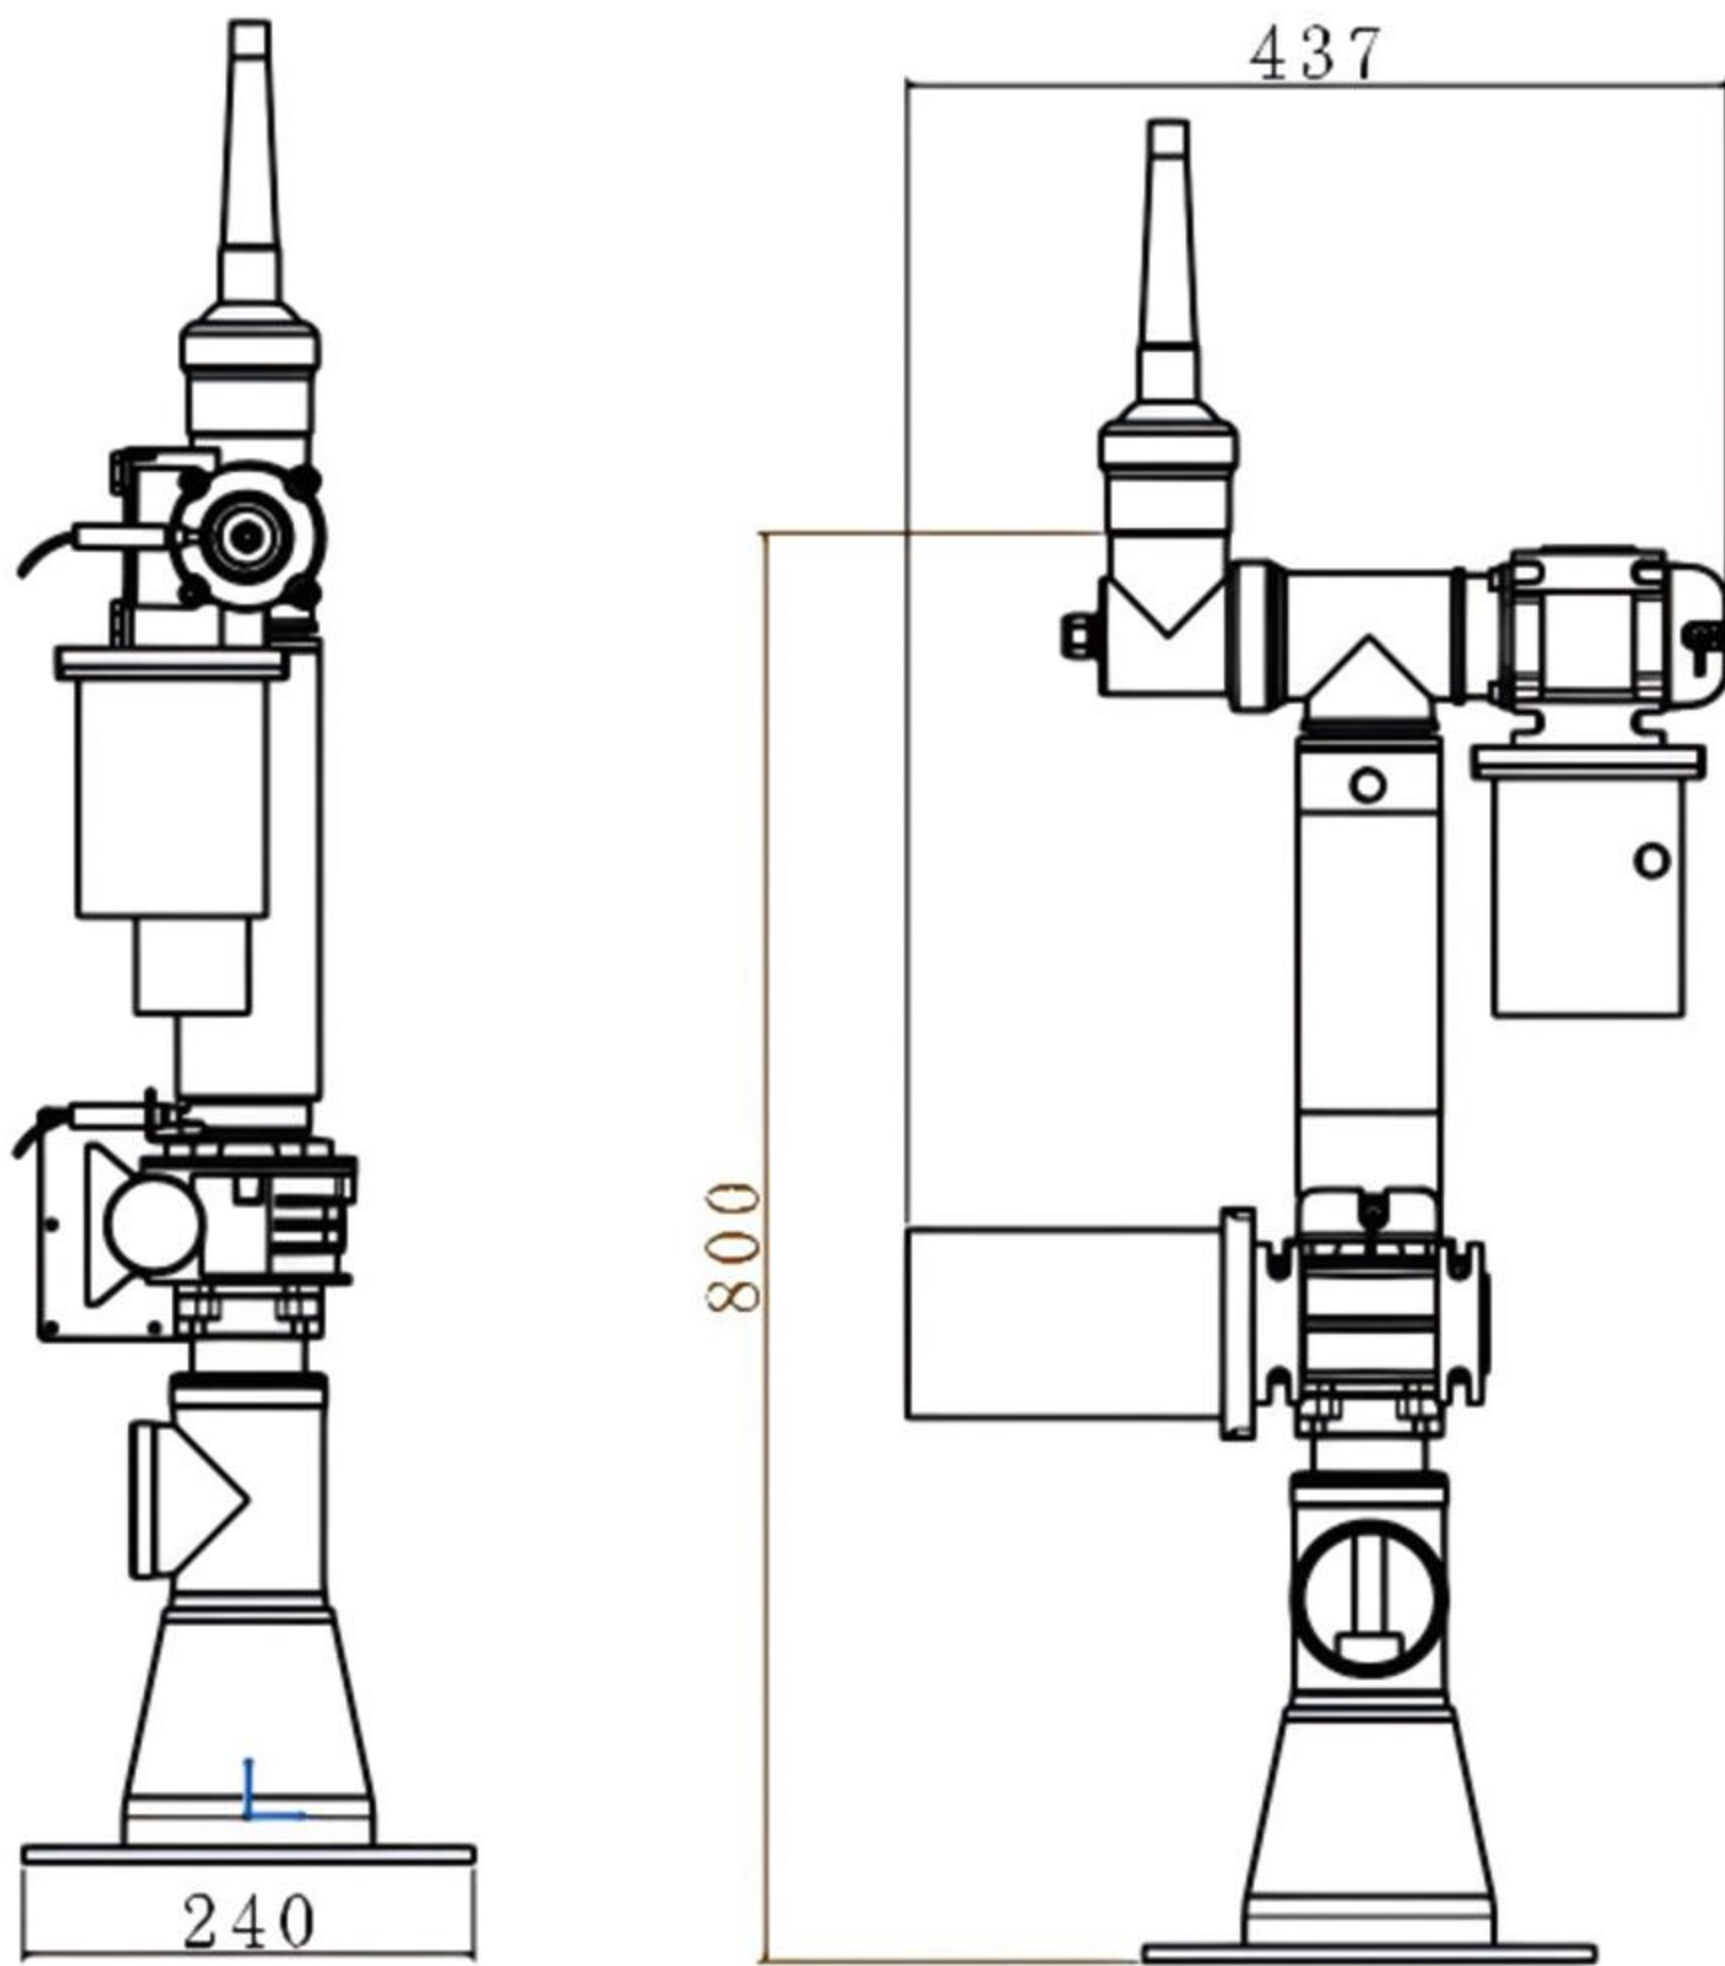

Material	Stainless Steel 304
Water Inlet Diameter	DN65
Nozzle Diameter	DN50
Length*Width*Height (mm)	L240*W437*H800
Net Weight (Kg)	33.7
Upper Dimension Reduction Ratio	1:10
Lower Dimension Reduction Ratio	1:10
Motor Working Voltage	AC55V-70V
Motor Power	500W
Number Of Phases Of Motor	Two Phases
Upper Maximum Torque	85(N.M)
Lower Maximum Torque	120(N.M)
Sensor Voltage	DC24V
Upper (Lower) Dimensional Sensor Line Color Separation	Brown-24v Blue-Gnd Yellow-Return To Zero Signal
Upper (Lower) Dimensional Motor Line Color Separation	Red-A+ Green-A- Yellow-B+ Black-B-
Recommended Motor Mounting Cables	JHS 4*2.5mm²x2
Recommended Sensor Mounting Cable	PVVP 3*1.5mm²x2
Number Of Built-In Slip Ring Lines	7
Running Angle	360°





Rotating Flower Basket Nozzle



Technical Parameter

Material	Stainless Steel 304
Through Hole Diameter	DN50
Movement Form	360° Rotation
Carrying Medium	Water
Input Pulse Ratio	Pulse/rev 400-25000
Reducer Speed Ratio	1:10
Equipment Weight(Kg)	46
Equipment Size	600*600*611
Package	Wooden Box
Operating Environment Temperature	0—40°
Water Temperature	0—40°
Voltage	70±10%VAC
Control Method	Digital Pulse
Protection Level	IP68
Insulation Level	B
Water Outlet Diameter	Ø6*12
Lamp	HX130GM-AC24V-3*3W/ RGB
Can It Be Trampled?	No
Flow	25
Lift	12

CNC Variable Nozzle (Regular version)

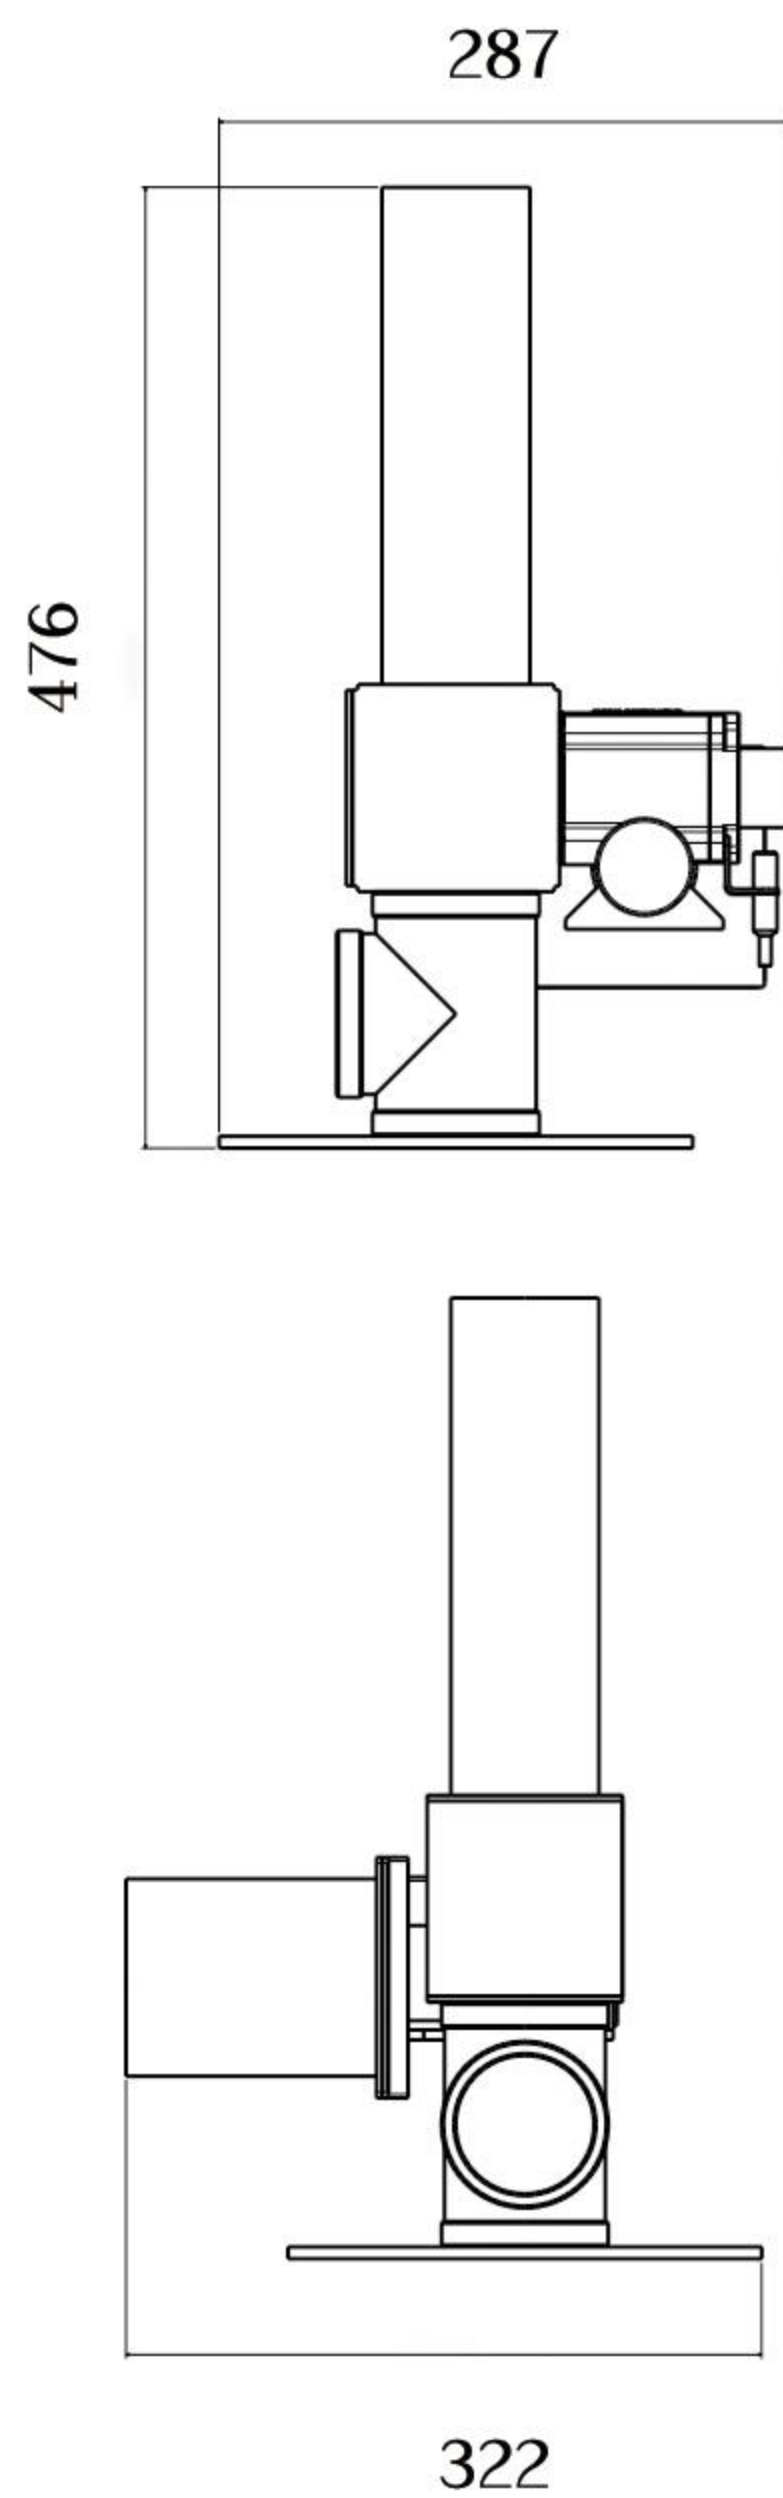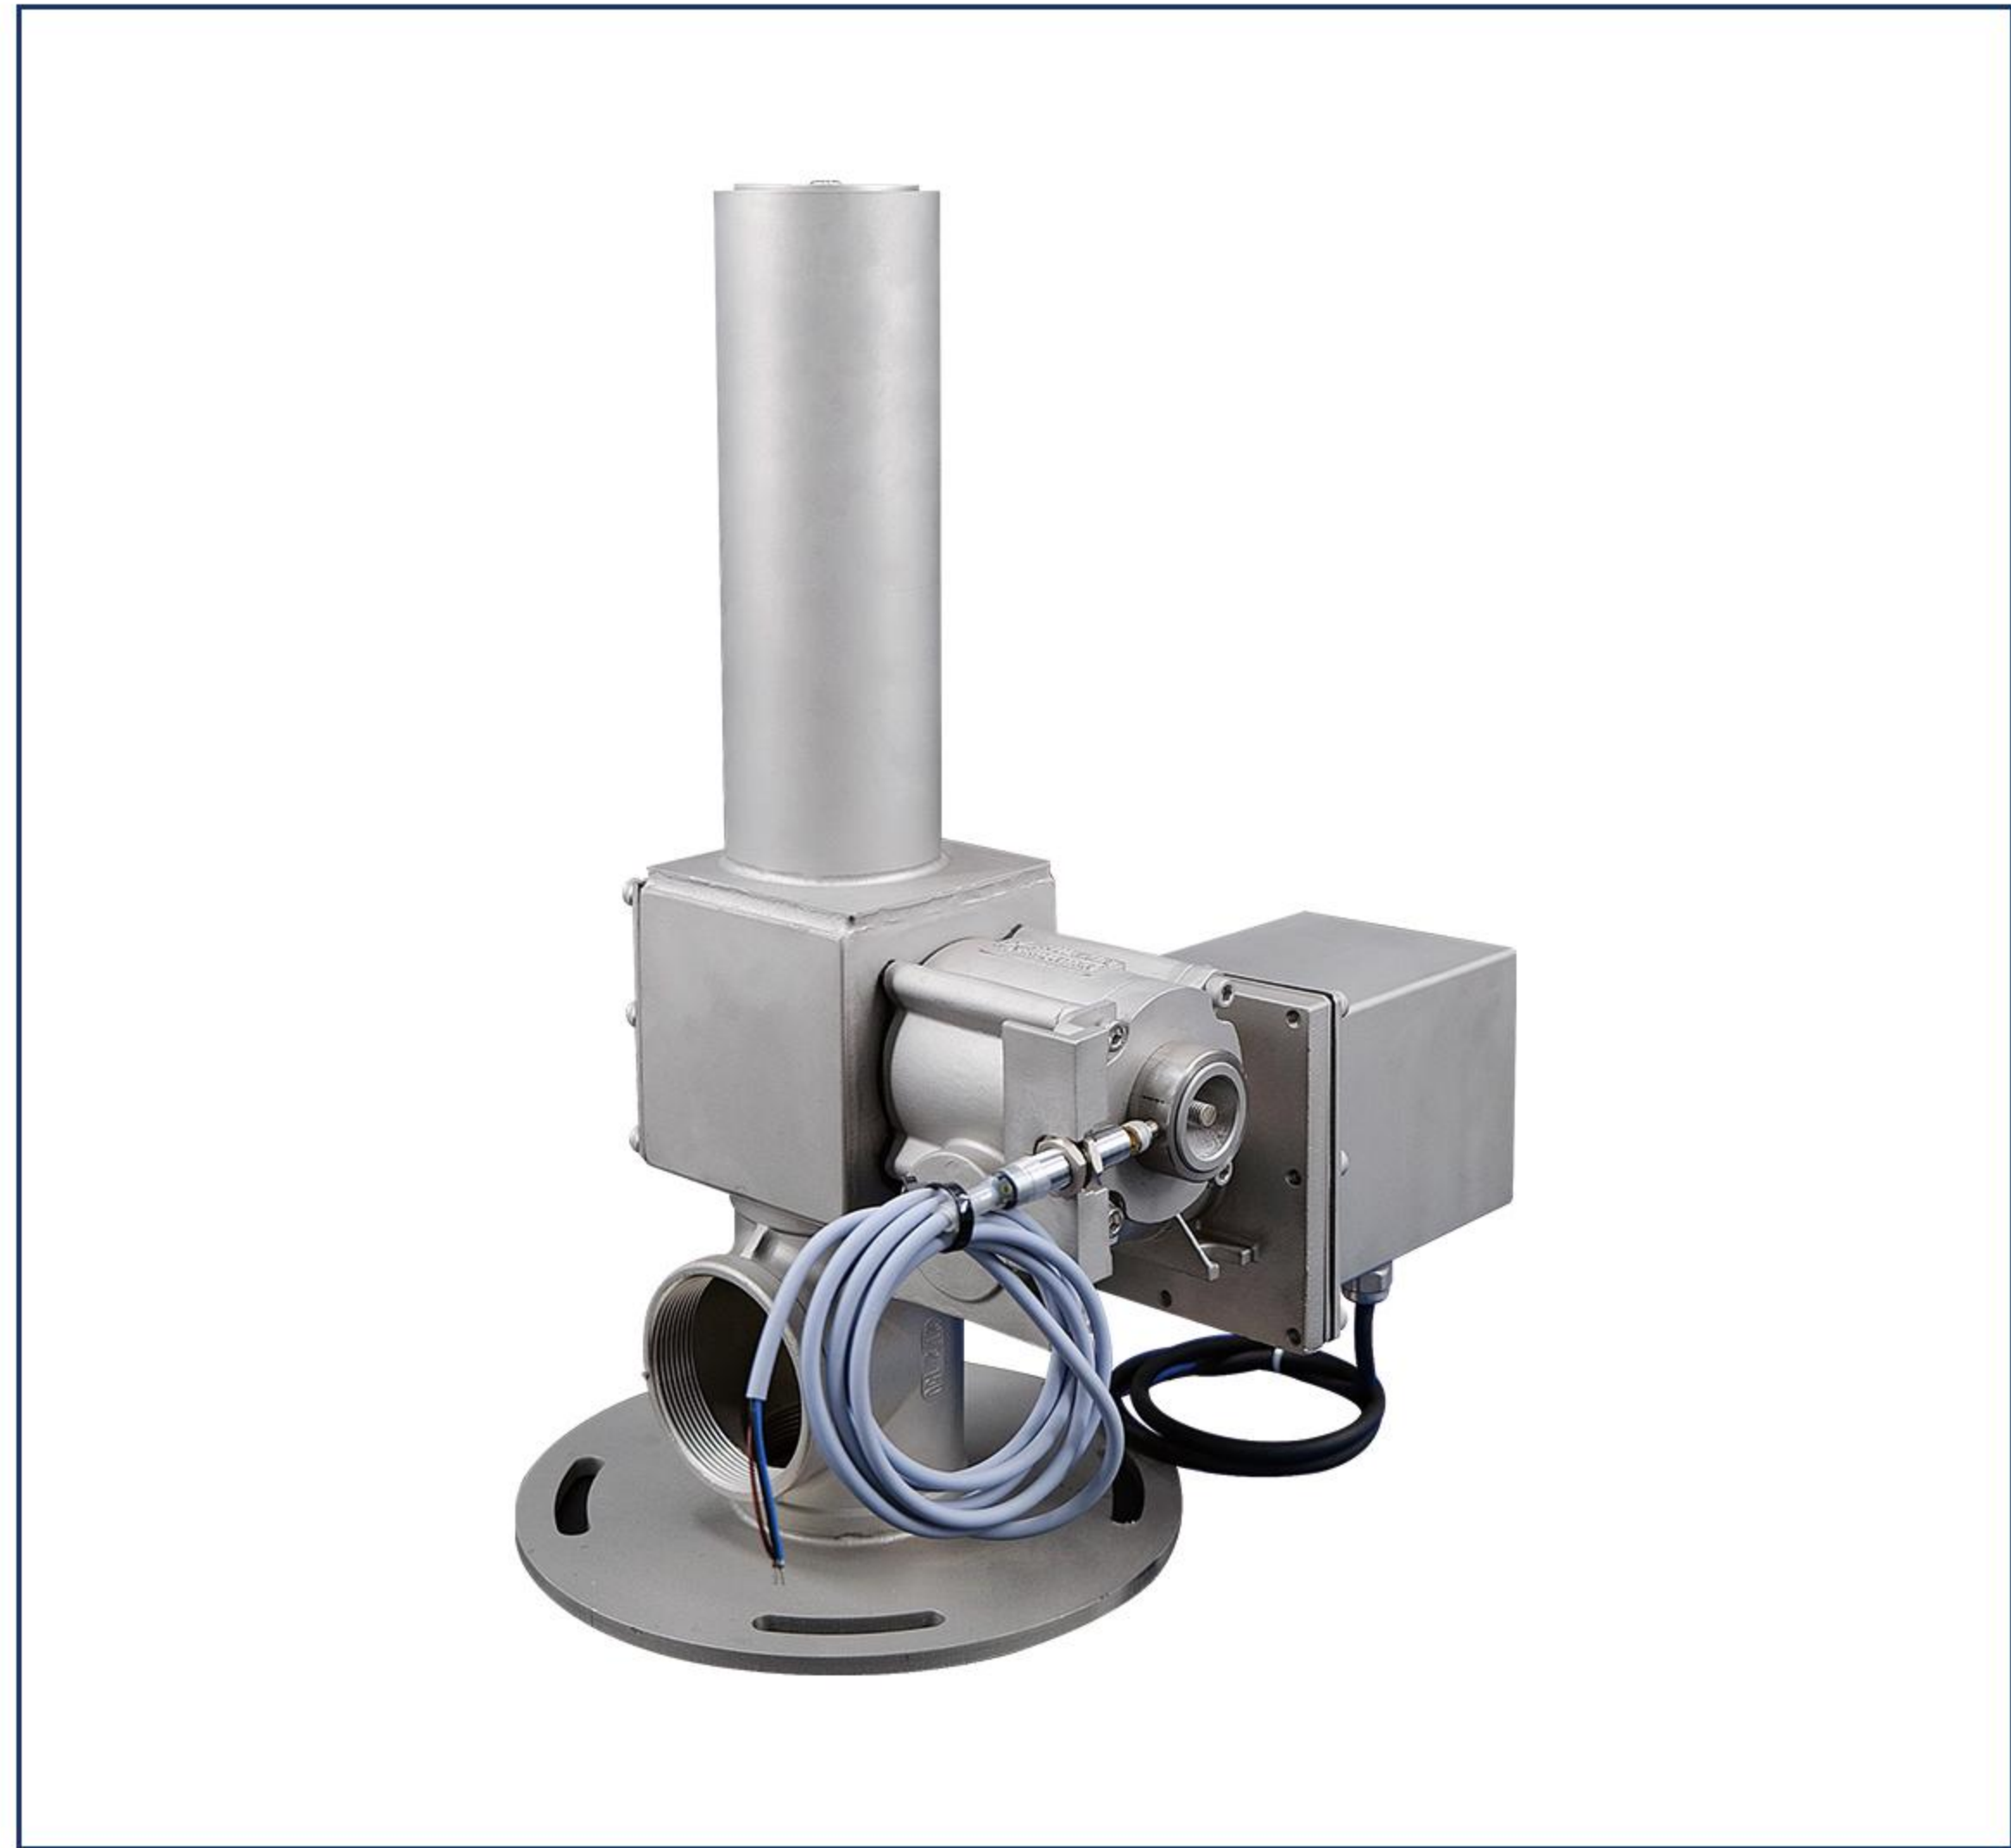


Technical Parameter

Material	Stainless Steel 304
Nozzle Diameter (mm)	DN50
Weight (kg)	17.8
Length*Width*Height (mm)	322*287*476
Water Spray Height (M)	8
Reduction Ratio	1:10
Motor Operating Voltage	AC55V-70V
Motor Power	200W
Motor Phase Number	Two Phases
Maximum Torque	85(N.M)
Sensor Voltage	DC24V
Sensor Line Color Separation	Brown-24V Blue-GND Black-Return to zero signal
Motor Wire Color Separation	Red-A+ Green-A- Yellow-B+ Black-B-
Recommended Motor Mounting Cables	JHS 4*2.5mm ²
Recommended Sensor Installation Cables	PVVP 3*1.5mm ²
Water Spray Range (M)	4



Variable Nozzle (DMX512)

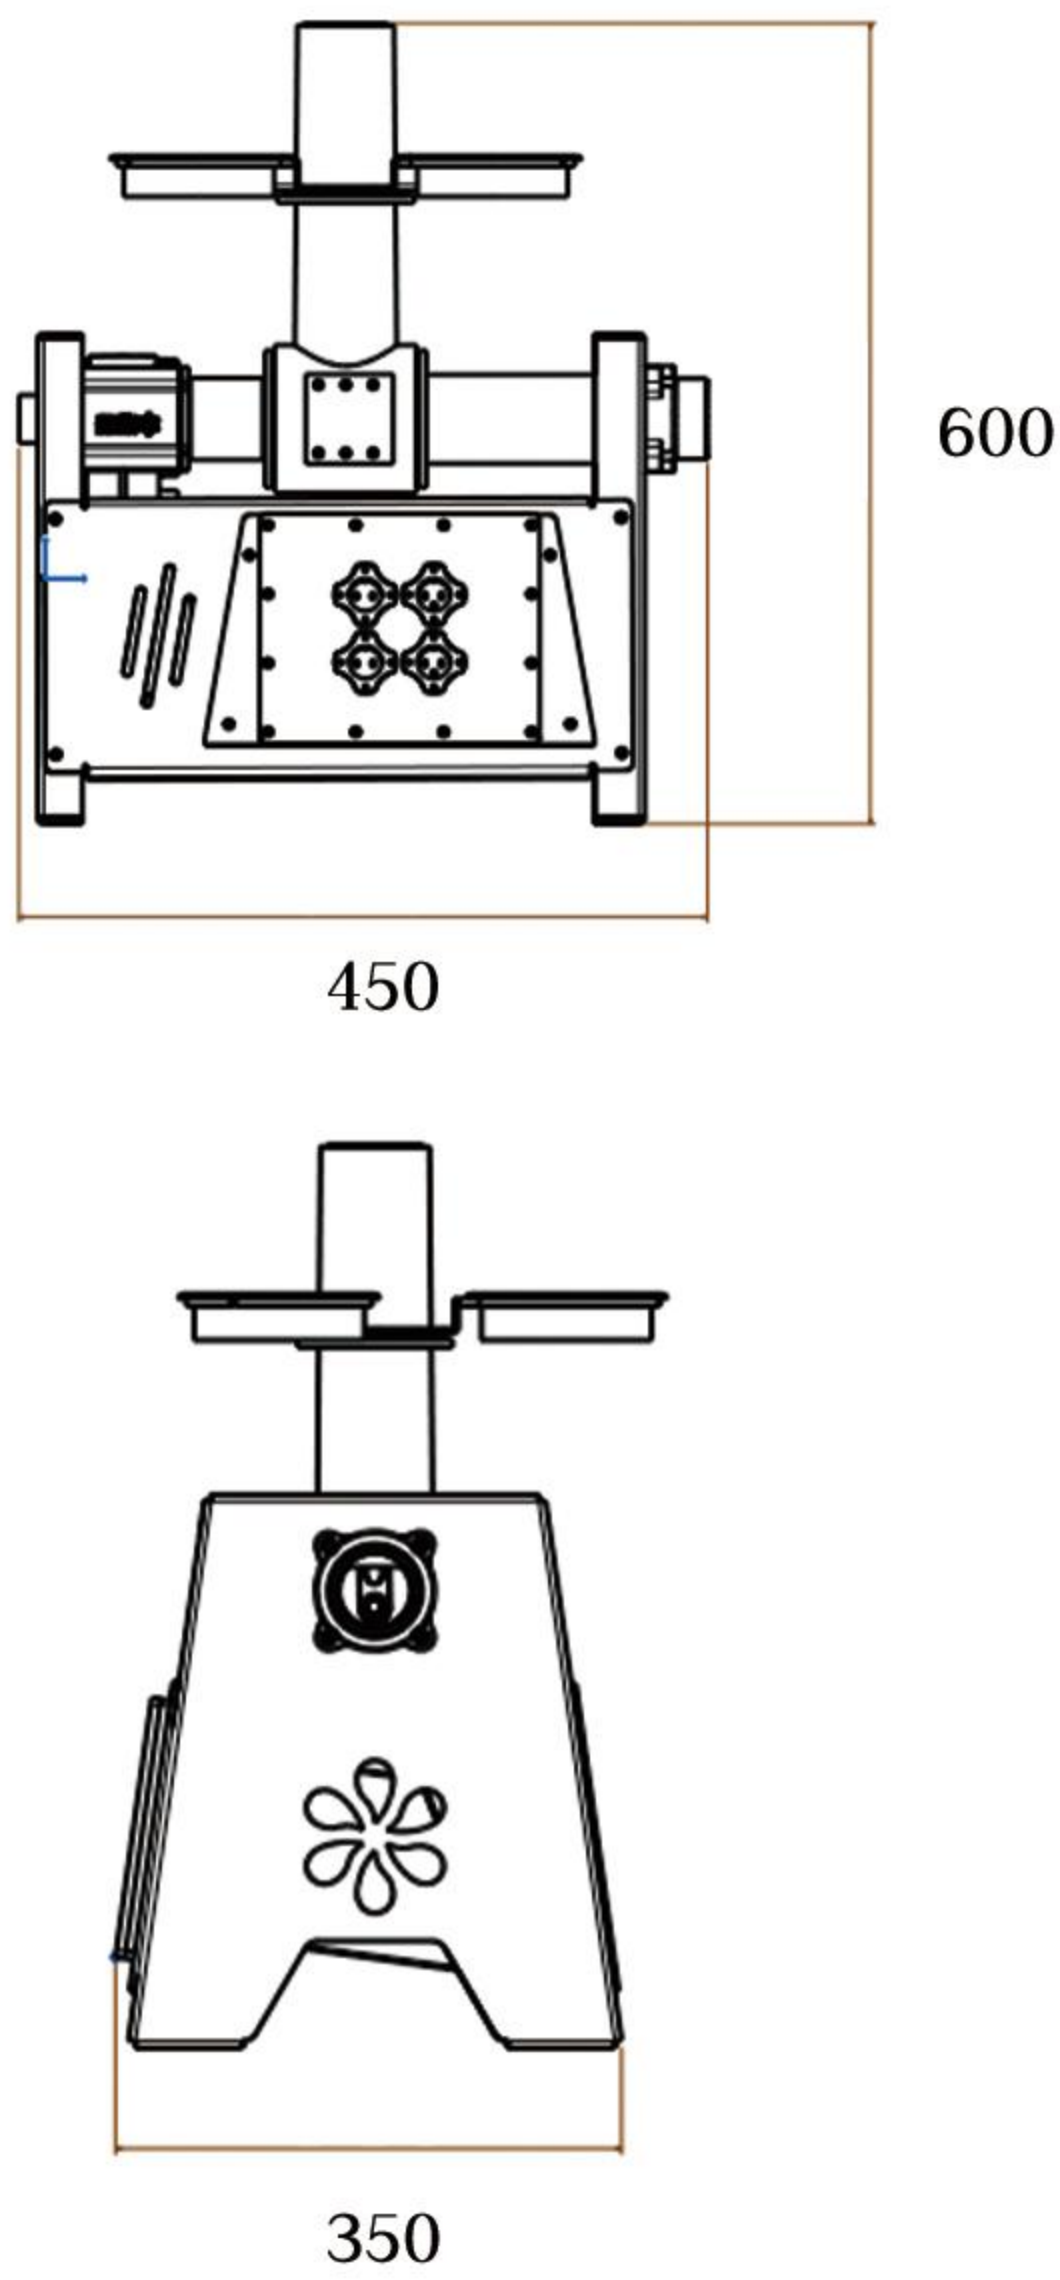


Technical Parameter

Material	Stainless Steel 304
Inlet And Outlet Connection Size	DN50
Weight (kg)	35.5
Length*Width*Height (mm)	350*450*600
Water Spray Height (M)	8-15
Reduction Ratio	1:10
Motor Operating Voltage	AC60V-90V
Motor Power	200W
Motor Phase Number	Two Phases
Maximum Torque	85(N.M)
Sensor Voltage	DC24V
Water Spray Range	8m
Flow (m³/h)	8.5
Recommended Working Cables	JHS 2*6mm ²
Recommended Control Cables	PVVP 3*1.5mm ²
Water Inlet Diameter	DN50
Lighting Configuration	HX130GM-DC24V-3*9W-DMX512 RGB




Tai Chi Fountain Equipment

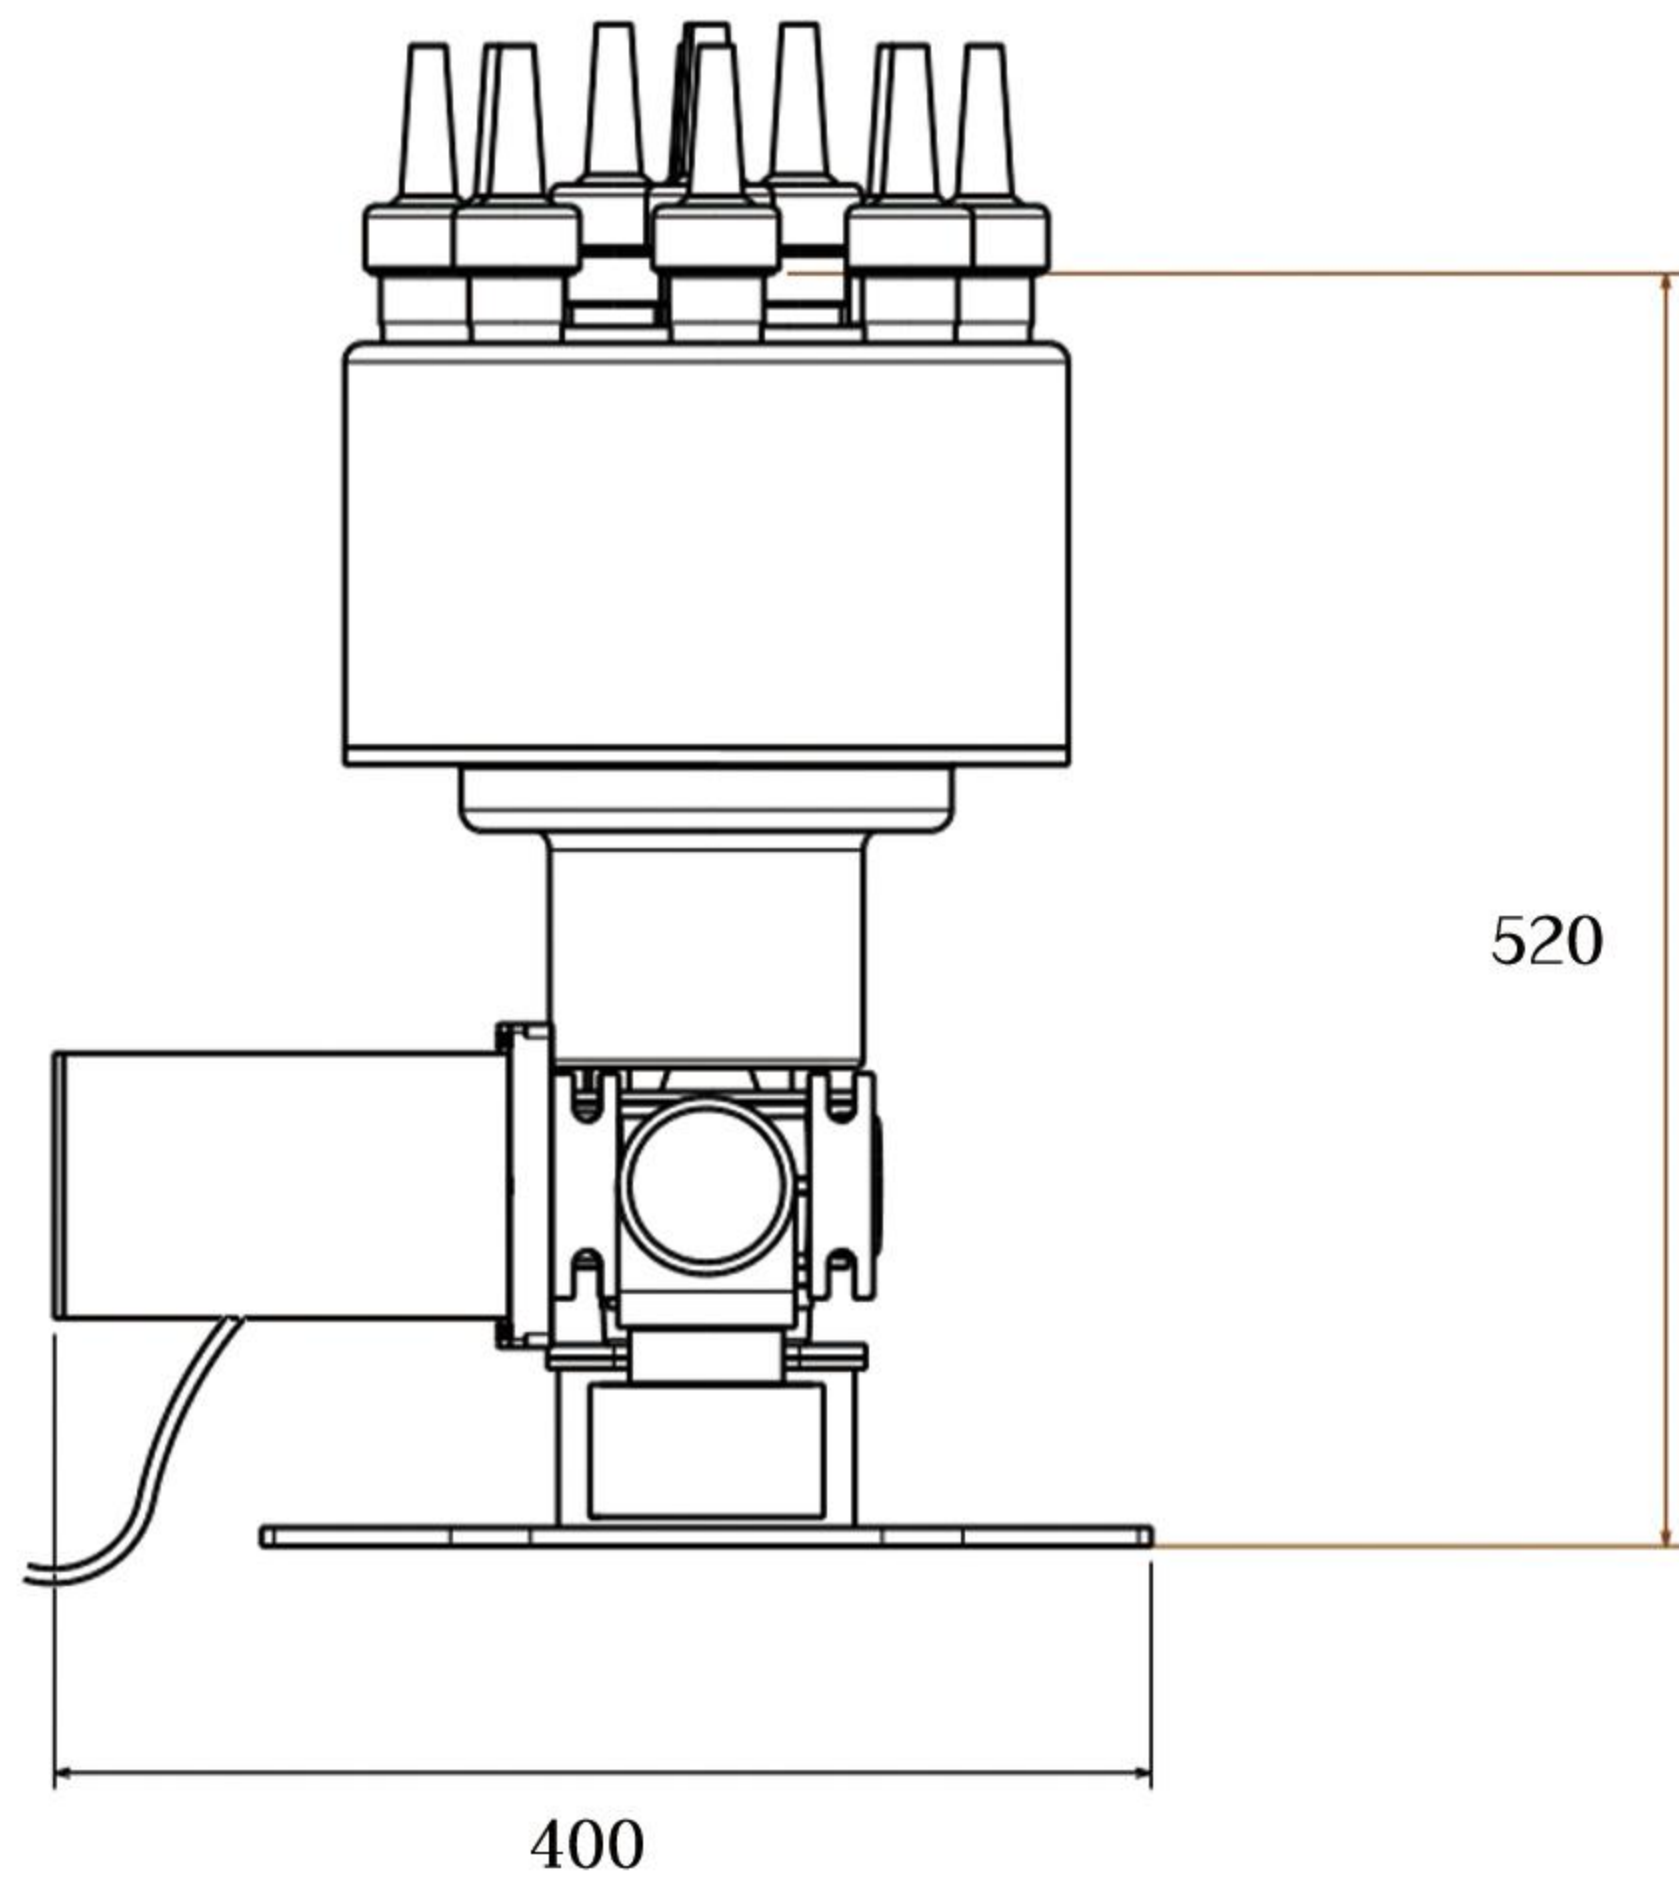


Technical Parameter

Material	Stainless Steel 304
Outlet Connection Size	DN25
Weight (kg)	43.8
Length*Width*Height (mm)	340*400*520
Water Spray Height (M)	8-15
Reduction Ratio	1:10
Motor Operating Voltage	AC55V-70V/DC60-90V
Motor Power	250W
Motor Phase Number	Two Phases
Equipment Torque	120 (N.M)
Recommended Motor Mounting Cables	JHS 4*2.5mm²
Running Direction	360-degree operation in both forward and reverse directions

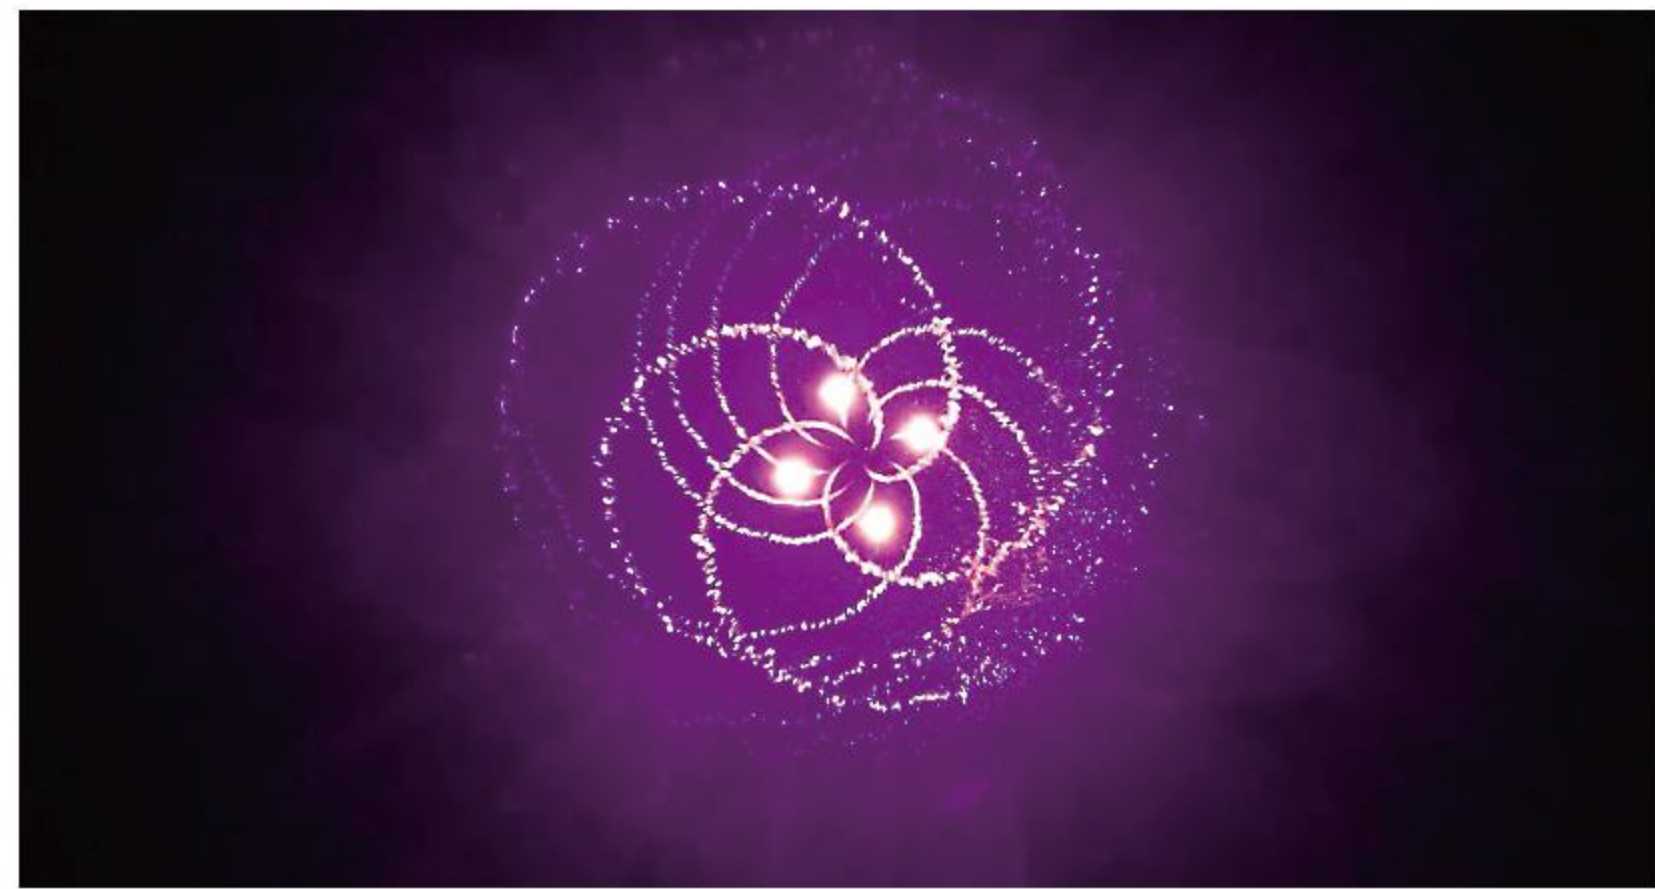

Integrated Dry Fountain Device

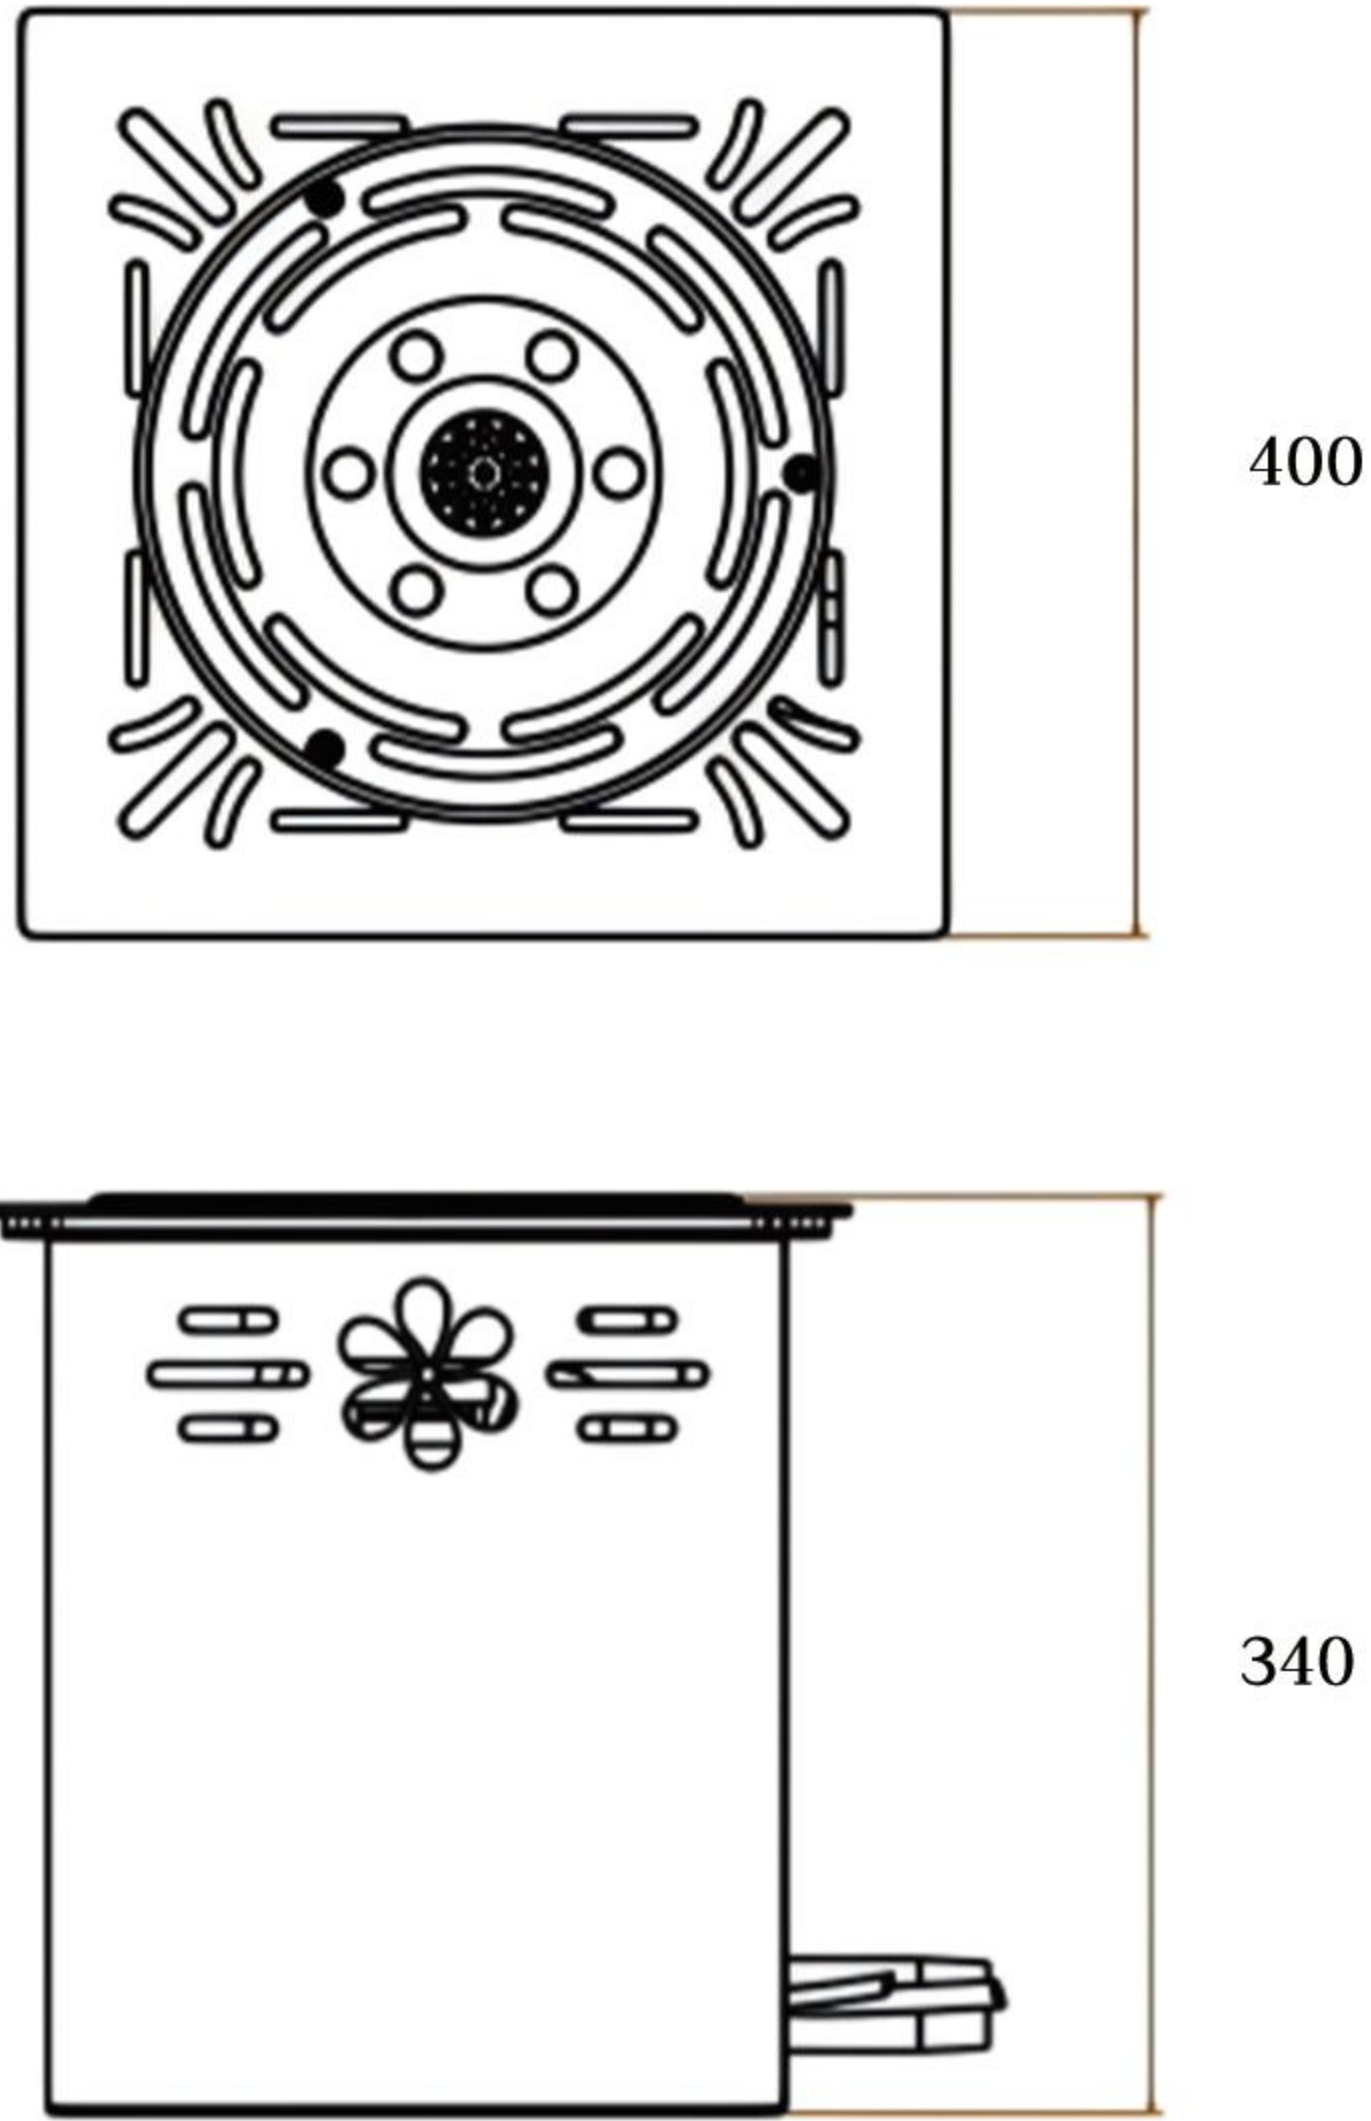

Technical Parameter

Material	Stainless Steel 304
Water Outlet	Φ5*13
Weight (kg)	20
Length*Width*Height (mm)	L400*W400*H340
Pump Power Supply	DC24V
Power	550W
Spray Height	0.3-3m
Power Cable	JHS 2*6mm²
Control Cable	JHSP 3*1.5mm²
Light Voltage	DC24V
Lighting Configuration	HX240GMKH-12*1W-DMX512 RGB



Air Explosion Fountain Device

Technical Parameter

Model	PG15	PG20	PG30	PG40	PG50	PG70
Material	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304
Dimensions (mm)	580*325*880	580*330*1110	580*330*1200	580*330*1350	860*430*1670	1410*720*1980
Weight (kg)	40.6	49	51	53.3	98	243
Spray Height (m)	15-16	20-22	30-33	40-42	50-55	70-78
Nozzle Diameter (mm)	31	31	31	31	31	47
Air Intake Diameter	DN25	DN25	DN25	DN25	DN40	DN40
Standard Pressure (mpa)	0.6	0.8	0.8	0.8	1.0	1.2

Equipment Exhibition



Effect




Flaming Fountain Device (oil)

Equipment Exhibition



Effect

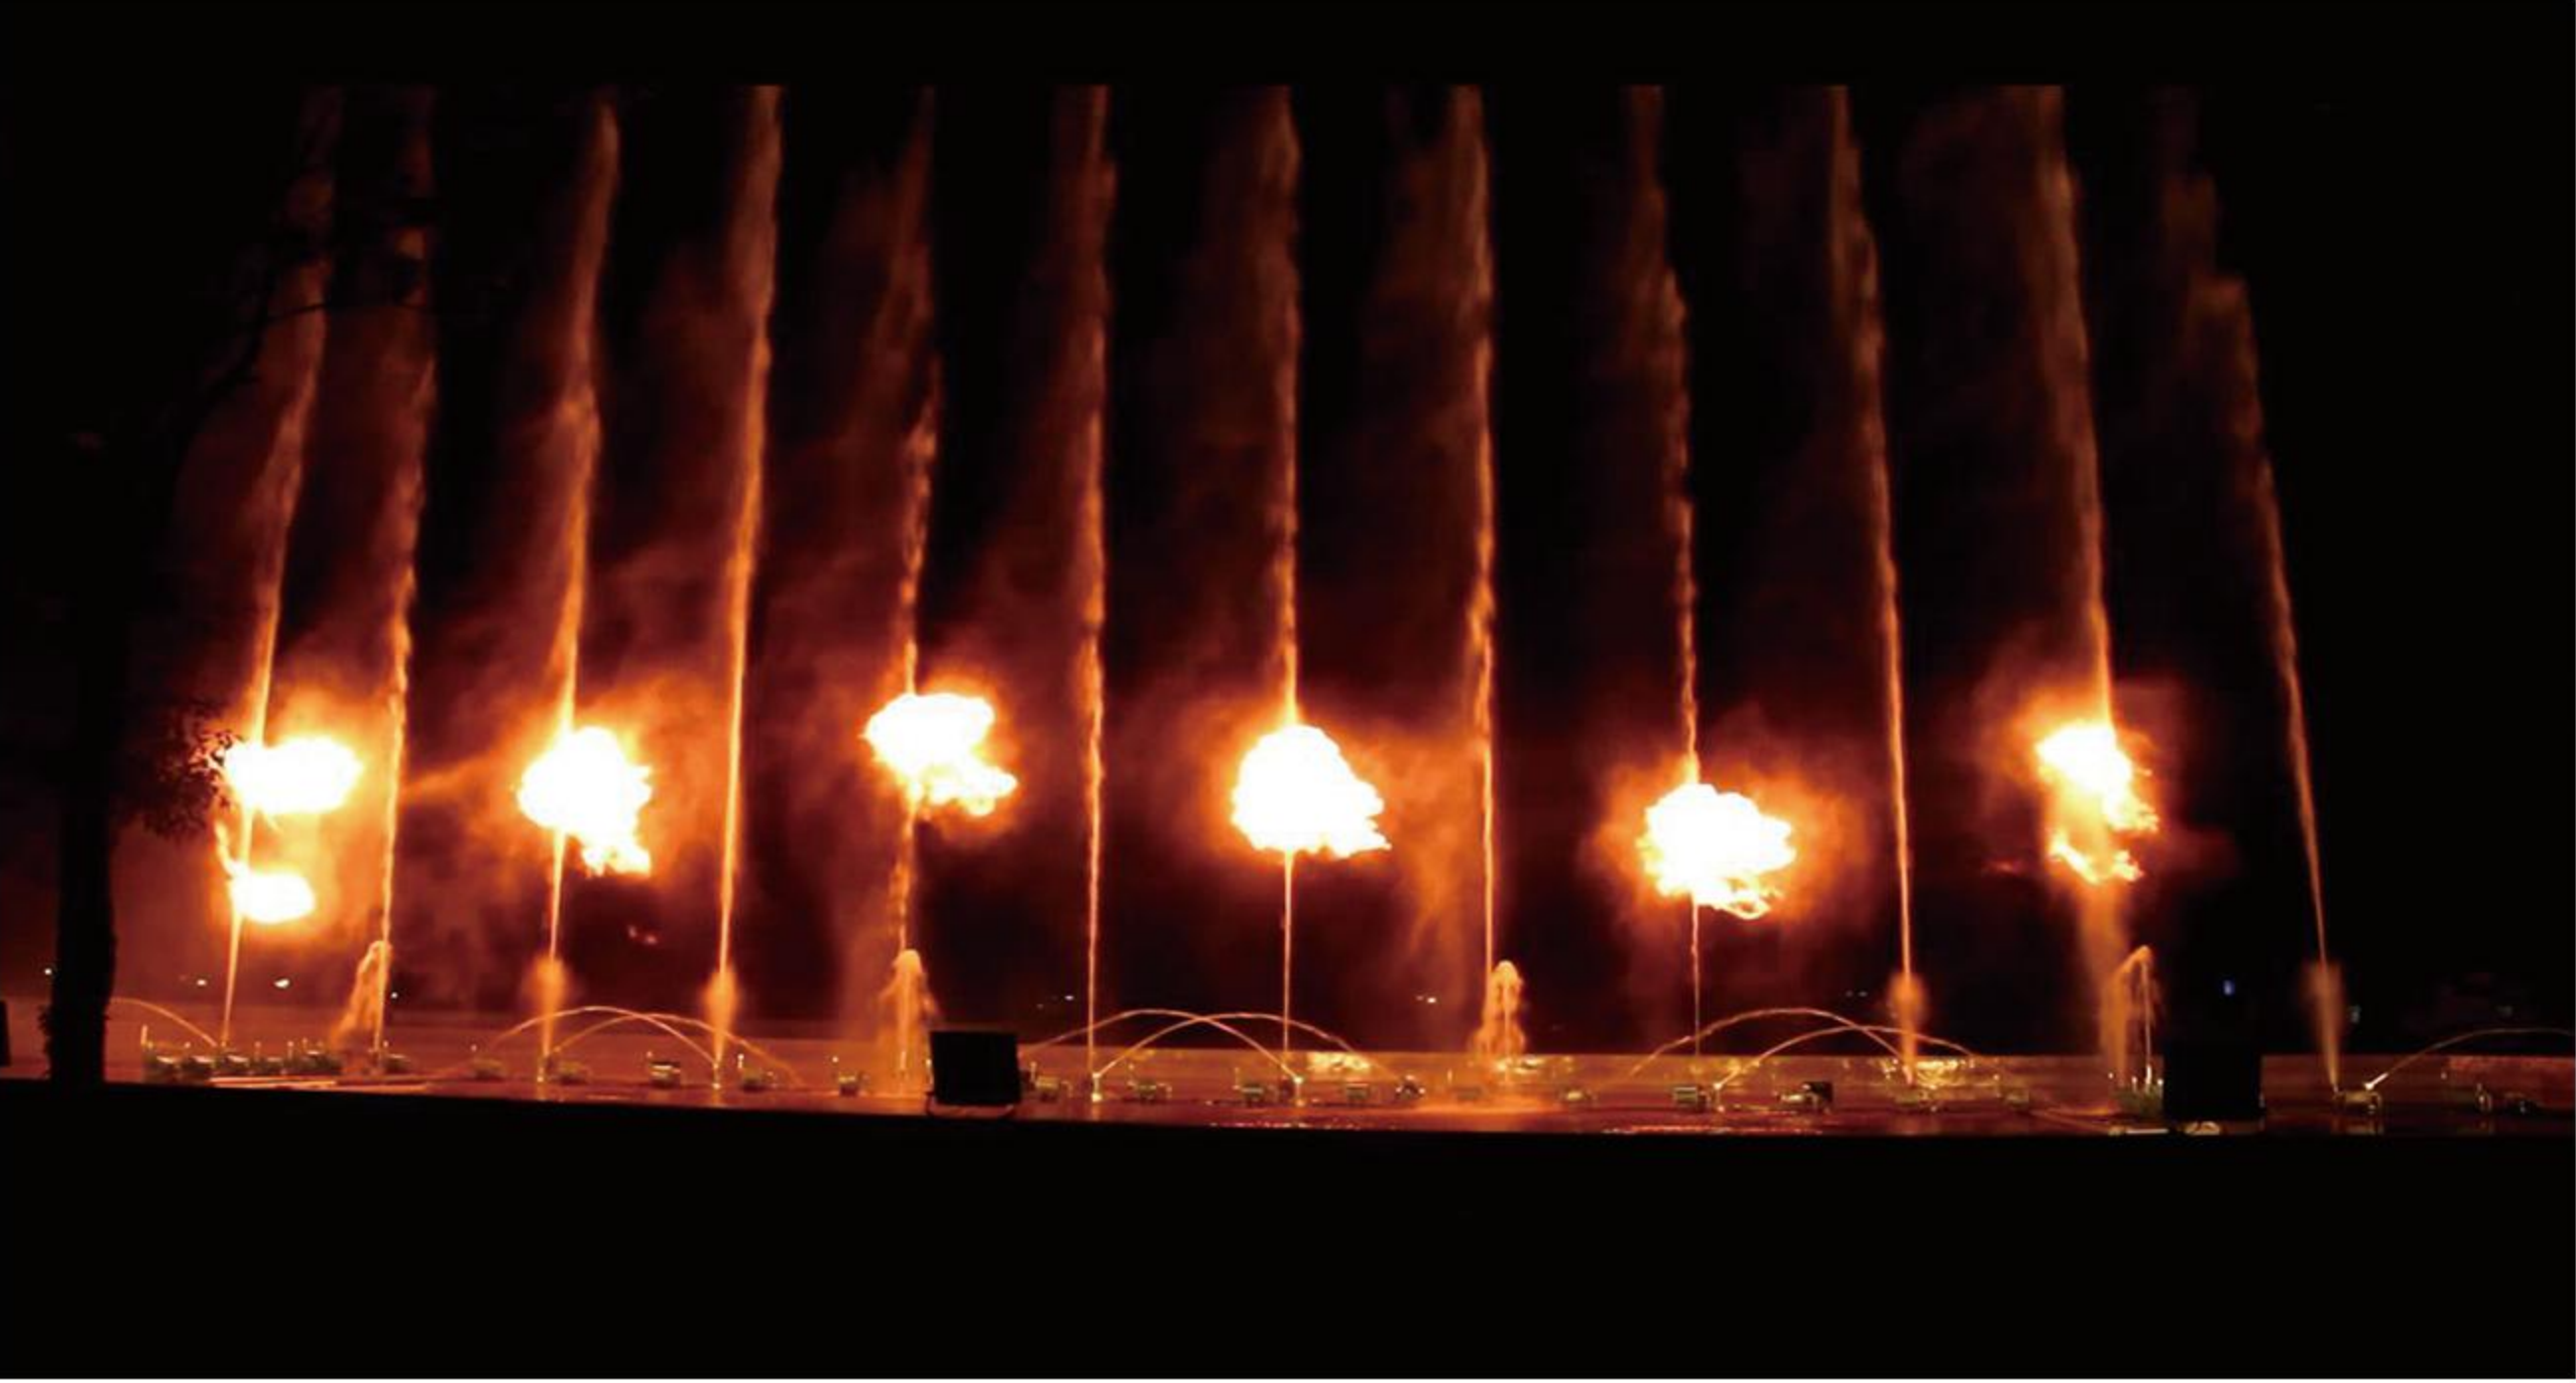

Technical Parameter

Fuel	Oil
Material	304 stainless steel
Size (mm)	600*280*810
Weight (KG)	23.5
Input Voltage (V)	220
Current (A)	2.5
Power (W)	550
Maximum Spray Height (m)	10
Nozzle Diameter (mm)	2.5
Pipe Material	304 stainless steel (seamless steel pipe)
Pipe Size	Main pipe size is determined by site conditions

Flaming Fountain Device (gas)

Equipment Exhibition



Effect



Technical Parameter

Fuel	Gas
Material	304 stainless steel
Size (mm)	Φ350*900
Weight (KG)	15
Input Voltage (V)	220
Current (A)	2.5
Power (W)	550
Maximum Spray Height (m)	3
Nozzle Diameter (mm)	8
Pipe Material	304 stainless steel (seamless steel pipe)
Pipe Size	Main pipe size is determined by site conditions



Water And Flame Mixing Fountain Device

Equipment Exhibition



Effect




Technical Parameter

Fuel	Gas
Material	304 stainless steel
Size (mm)	605*315*900
Weight (KG) (without water pump)	23.8
Ignition Coil Voltage (V)	220
Ignition Coil Current (A)	1.4
Ignition Coil Power (W)	300
Gas Supply Solenoid Valve Voltage (V)	200
Gas Supply Solenoid Valve Current (A)	0.2
Gas Supply Solenoid Valve Power (W)	50
Supply Solenoid Valve Maximum Pressure (mpa)	0.8
Pump Voltage (V)	380
Spray Height (m)	3-6
Pipe Material	304 stainless steel (seamless steel pipe)



Laminar Fountain Jets (Regular version)

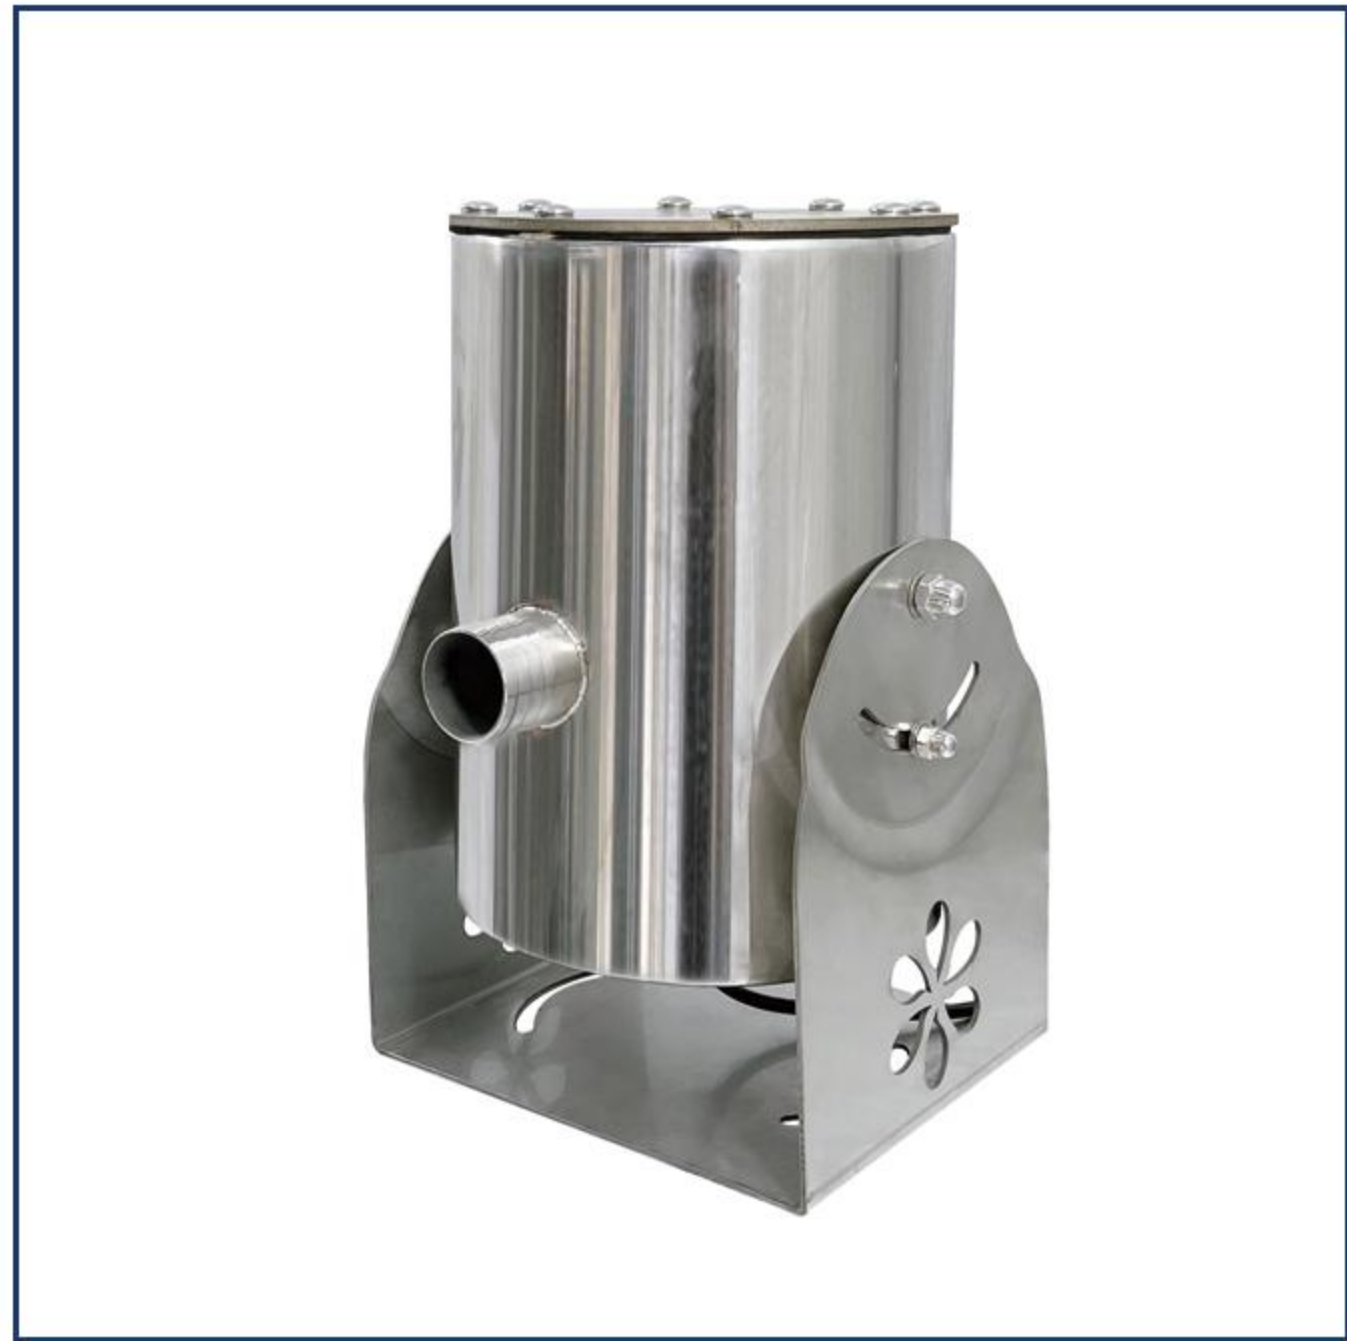

Technical Parameter

Model	S	M	L	XL
Material	SUS304	SUS304	SUS304	SUS304
Net Weight (KG)	7	12.6	17.4	23.3
Rectifier Barrel Size (mm)	L220*W200*H300	L270*W260*H380	L320*W310*H480	L400*W370*H500
Water Outlet (mm)	10	14	16	18
Water Inlet Diameter	DN25	DN40	DN40	DN40
Flow Rate (M3/H)	3	4	5	7
Lift (m)	4	10	12	14
Span (m)	2.2	3.2	4.7	5.5
Spray Height (m)	2.0	2.2	2.8	3.0
Standard Built-in Light	3W/Monochrome	3W/Monochrome	3W/Monochrome	3W/Monochrome


Jumping Fountain Jets (Regular version)



Technical Parameter

Model	S	M	L	XL
Material	SUS304	SUS304	SUS304	SUS304
Net Weight (KG)	11	17.1	23.8	31.0
Equipment Size (mm)	L240*W220*H430	L260*W240*H550	L320*W340*H630	L360*W400*H670
Water Outlet (mm)	10	14	16	18
Water Inlet Diameter	DN25	DN40	DN40	DN40
Flow Rate (M3/H)	3	4	5	7
Lift (m)	4	10	12	14
Span (m)	2.0	3.0	4.7	5.5
Spray Height (m)	2.0	2.2	2.8	3.0
Standard Built-in Light	3W/Monochrome	3W/Monochrome	3W/Monochrome	3W/Monochrome
Operating Angle	±30°	±30°	±30°	±30°


Laminar Fountain Jets (Underwater installation)

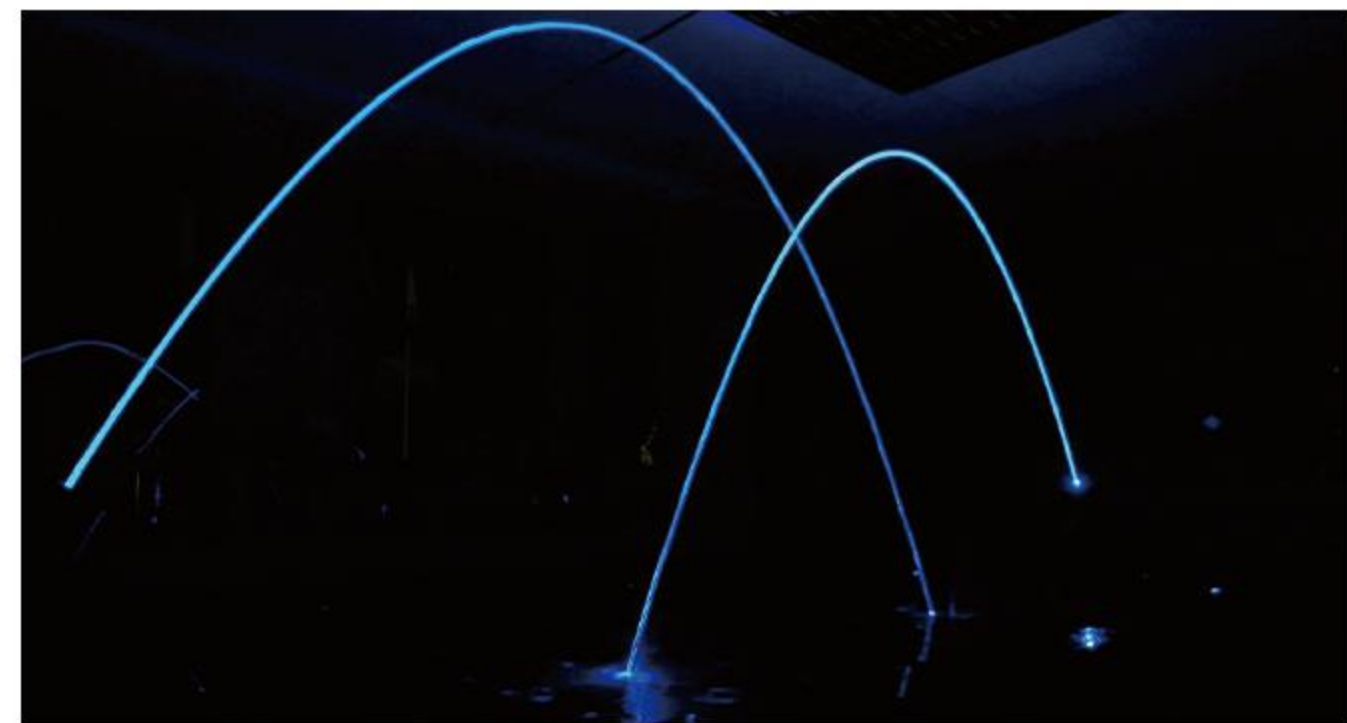

Technical Parameter

Model	S	M	L	XL
Material	SUS304	SUS304	SUS304	SUS304
Net Weight (KG)	7.5	13.0	18.0	24.5
Rectifier Barrel Size (mm)	L220*W200*H500	L270*W260*H580	L320*W310*H680	L400*W370*H700
Water Outlet (mm)	10	14	16	18
Water Inlet Diameter	DN25	DN40	DN40	DN40
Flow Rate (M3/H)	3	4	5	7
Lift (m)	4	10	12	14
Span (m)	1.9	2.8	4.1	5.2
Spray Height (m)	1.7	1.9	2.5	2.7
Standard Built-in Light	3W/Monochrome	3W/Monochrome	3W/Monochrome	3W/Monochrome

Jumping Fountain Jets (Underwater installation)

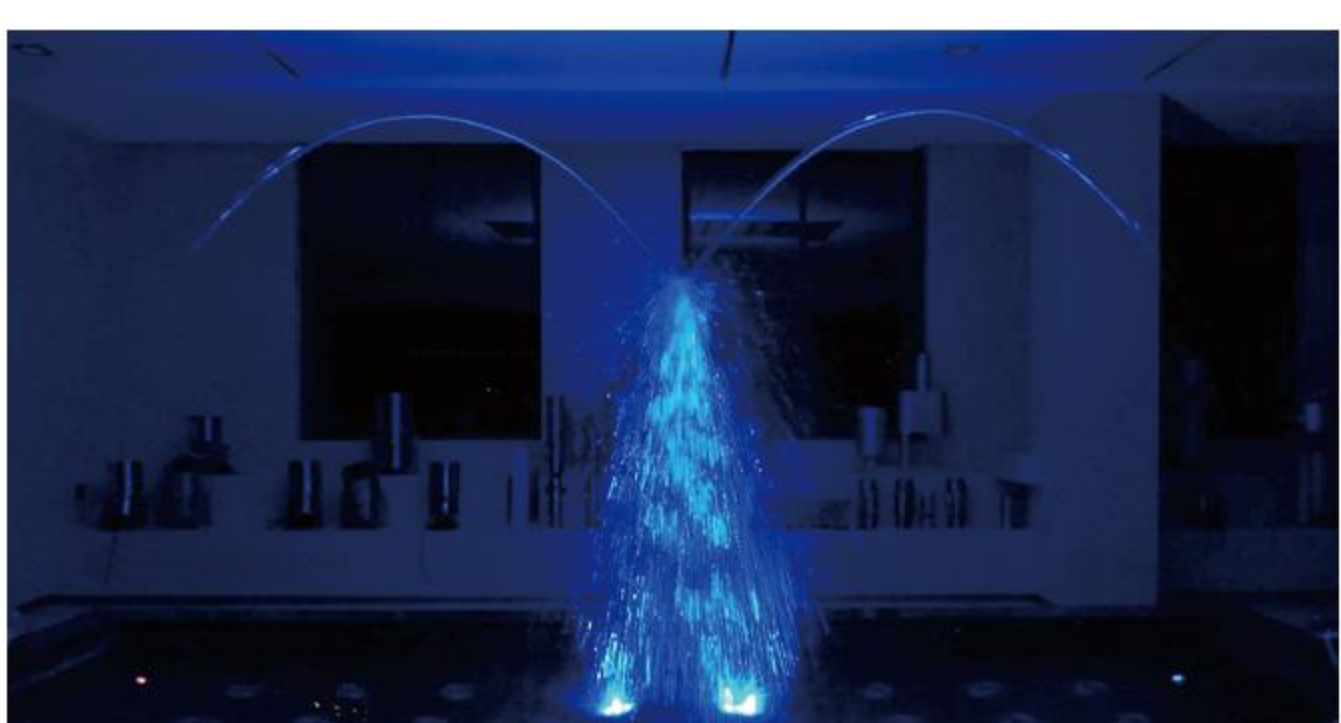

Technical Parameter

Model	S	M	L	XL
Material	SUS304	SUS304	SUS304	SUS304
Equipment Size (mm)	Customizable	Customizable	Customizable	Customizable
Water Outlet (mm)	10	14	16	18
Water Inlet Diameter	DN25	DN40	DN40	DN40
Flow Rate (M3/H)	3	4	5	7
Lift (m)	4	10	12	14
Span (m)	1.7	2.7	4.2	5.0
Spray Height (m)	1.6	1.8	2.4	2.8
Standard Built-in Light	3W/Monochrome	3W/Monochrome	3W/Monochrome	3W/Monochrome
Operating Angle	±30°	±30°	±30°	±30°

Underwater Lights



- **Shell Material:** SS304 stainless steel (standard), SS316 stainless steel (optional).
- **Tempered Heat-resistant Safety Glass:** High light transmittance tempered ultra-white glass, 94% light transmittance, high hardness, no fragile and more durable.
- **LED Light Source:** Cree/Osram/Lumileds/Epistar/Epileds.
- **Heat Dissipation Structure:** Integrated heat dissipation structure design, patented heat conduction system, built-in overload and overheat protection device, adaptive power output, high-quality high thermal conductivity PCB substrate, thermal conductivity $\geq 2.0\text{w/MK}$.
- **Waterproof Structure:** The sealing ring is made of anti-aging silicone rubber material, patented sealing technology, a special sealing structure to meet the requirements of long-term underwater use, and waterproof grade IP68.
- **Cable:** Underwater special JHS cable.

Ring Lights




- **Stainless Steel Light Body:** SS304 stainless steel.
- **Tempered Mirror Glass:** High light transmittance tempered glass, high light transmittance, and high hardness, are not easy to be broken and are more durable.
- **LED Light Source:** High-brightness LED light source, pure color, high brightness, energy saving and environmental protection, long service life, wide irradiation range.
- **Heat Dissipation:** The strict manufacturing process and water circulation heat dissipation, faster heat dissipation, and longer life.
- **Waterproof Connector:** High-grade waterproof wiring port, waterproof grade IP68.
- **Cable:** High-quality UL rubber wire, oil resistance, cold resistance, high-temperature resistance, UV resistance, good flexibility, and high strength.

Recessed Underground Lights



- **Stainless Steel Cover:** Thickened 304 stainless steel.
- **Tempered Mirror Glass:** High light transmittance tempered glass, high light transmittance, high hardness, not easy to be broken, more durable.
- **Embedded Parts:** Super-thick high-grade ABS flame retardant plastic embedded parts, pre-buried installation, to facilitate the installation of underground light in the later stage, protect the lamp body from corrosion, and prolong the service life of the lamps.
- **LED Light Source:** Imported high-brightness LED light source, pure color, high brightness, energy saving and environmental protection, long service life, and wide irradiation range.
- **Waterproof Connector:** High-grade waterproof wiring port, waterproof grade IP68.
- **Cable:** High-quality UL rubber wire, oil resistance, cold resistance, high-temperature resistance, UV resistance, good flexibility, and high strength.


Wall Washer Lights

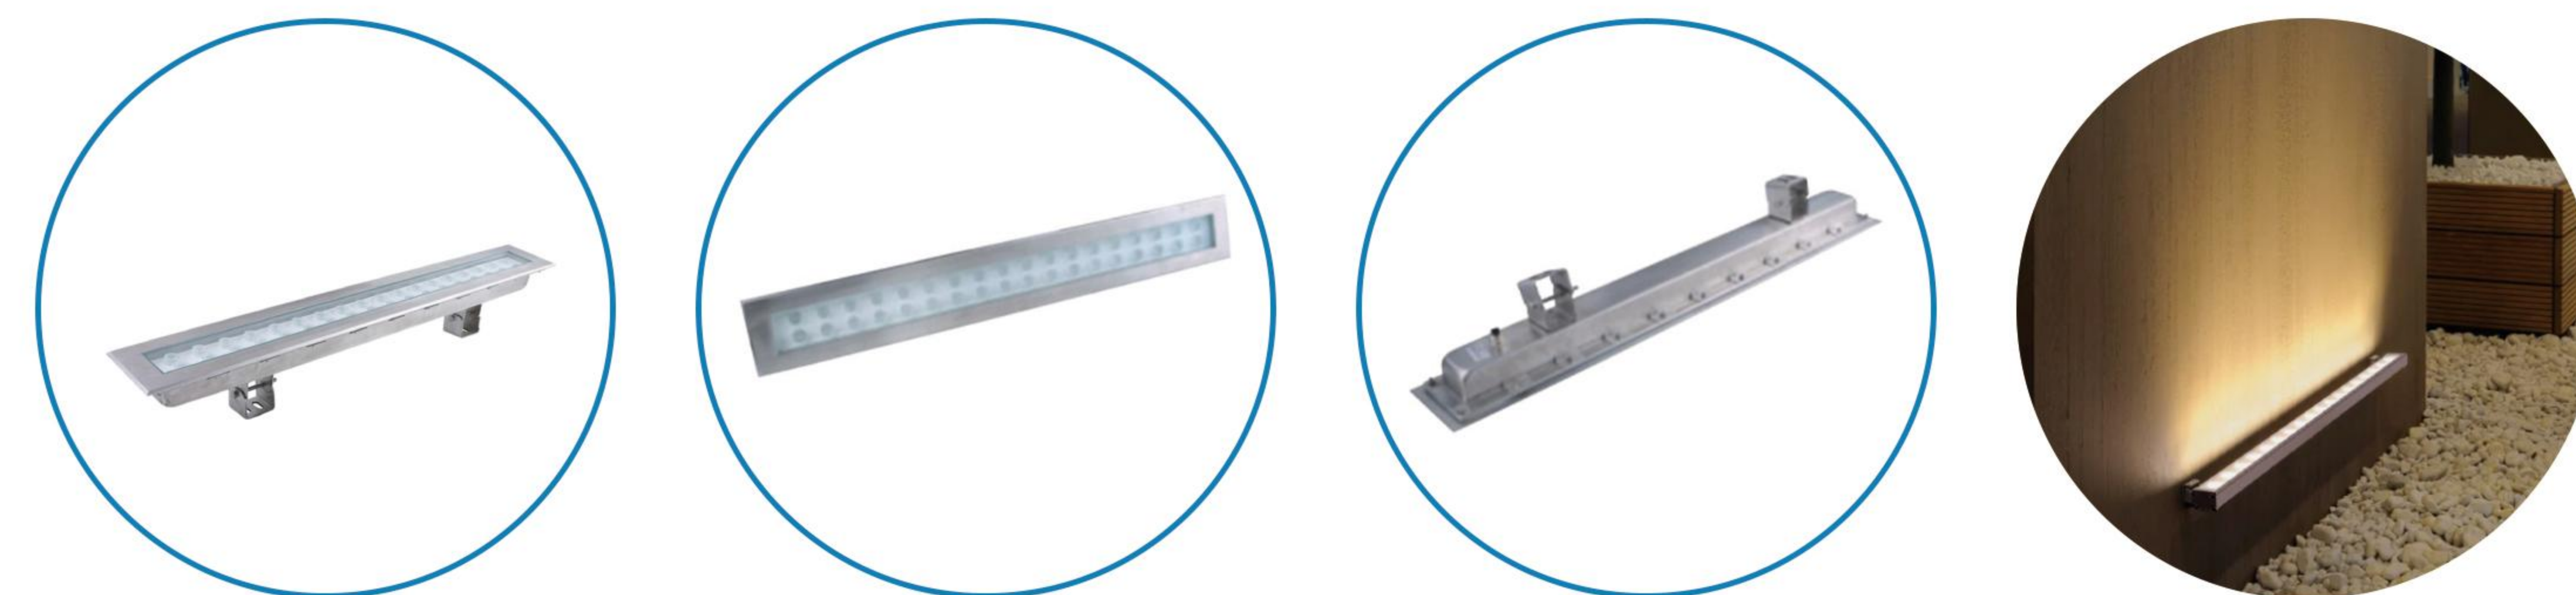

- **Stainless Steel Light Body:** Thickened 304 stainless steel, polished and sealed glaze, non-fading, anti-corrosion, anti-cracking, beautiful appearance, fashionable and generous.
- **Tempered Mirror Glass:** High light transmittance tempered glass, high light transmittance, high hardness, not easy to be broken, more durable.
- **LED Light Source:** Imported high-brightness LED light source, pure color, high brightness, energy saving and environmental protection, long service life, and wide irradiation range.
- **Heat Dissipation:** The strict manufacturing process and water circulation heat dissipation, faster heat dissipation, and longer life.
- **Waterproof Connector:** High-grade waterproof wiring port, waterproof grade IP68.
- **Cable:** High-quality UL rubber wire, oil resistance, cold resistance, high-temperature resistance, UV resistance, good flexibility, and high strength.

Low Voltage Fountain Pump

THE MEANING OF THE MODEL:

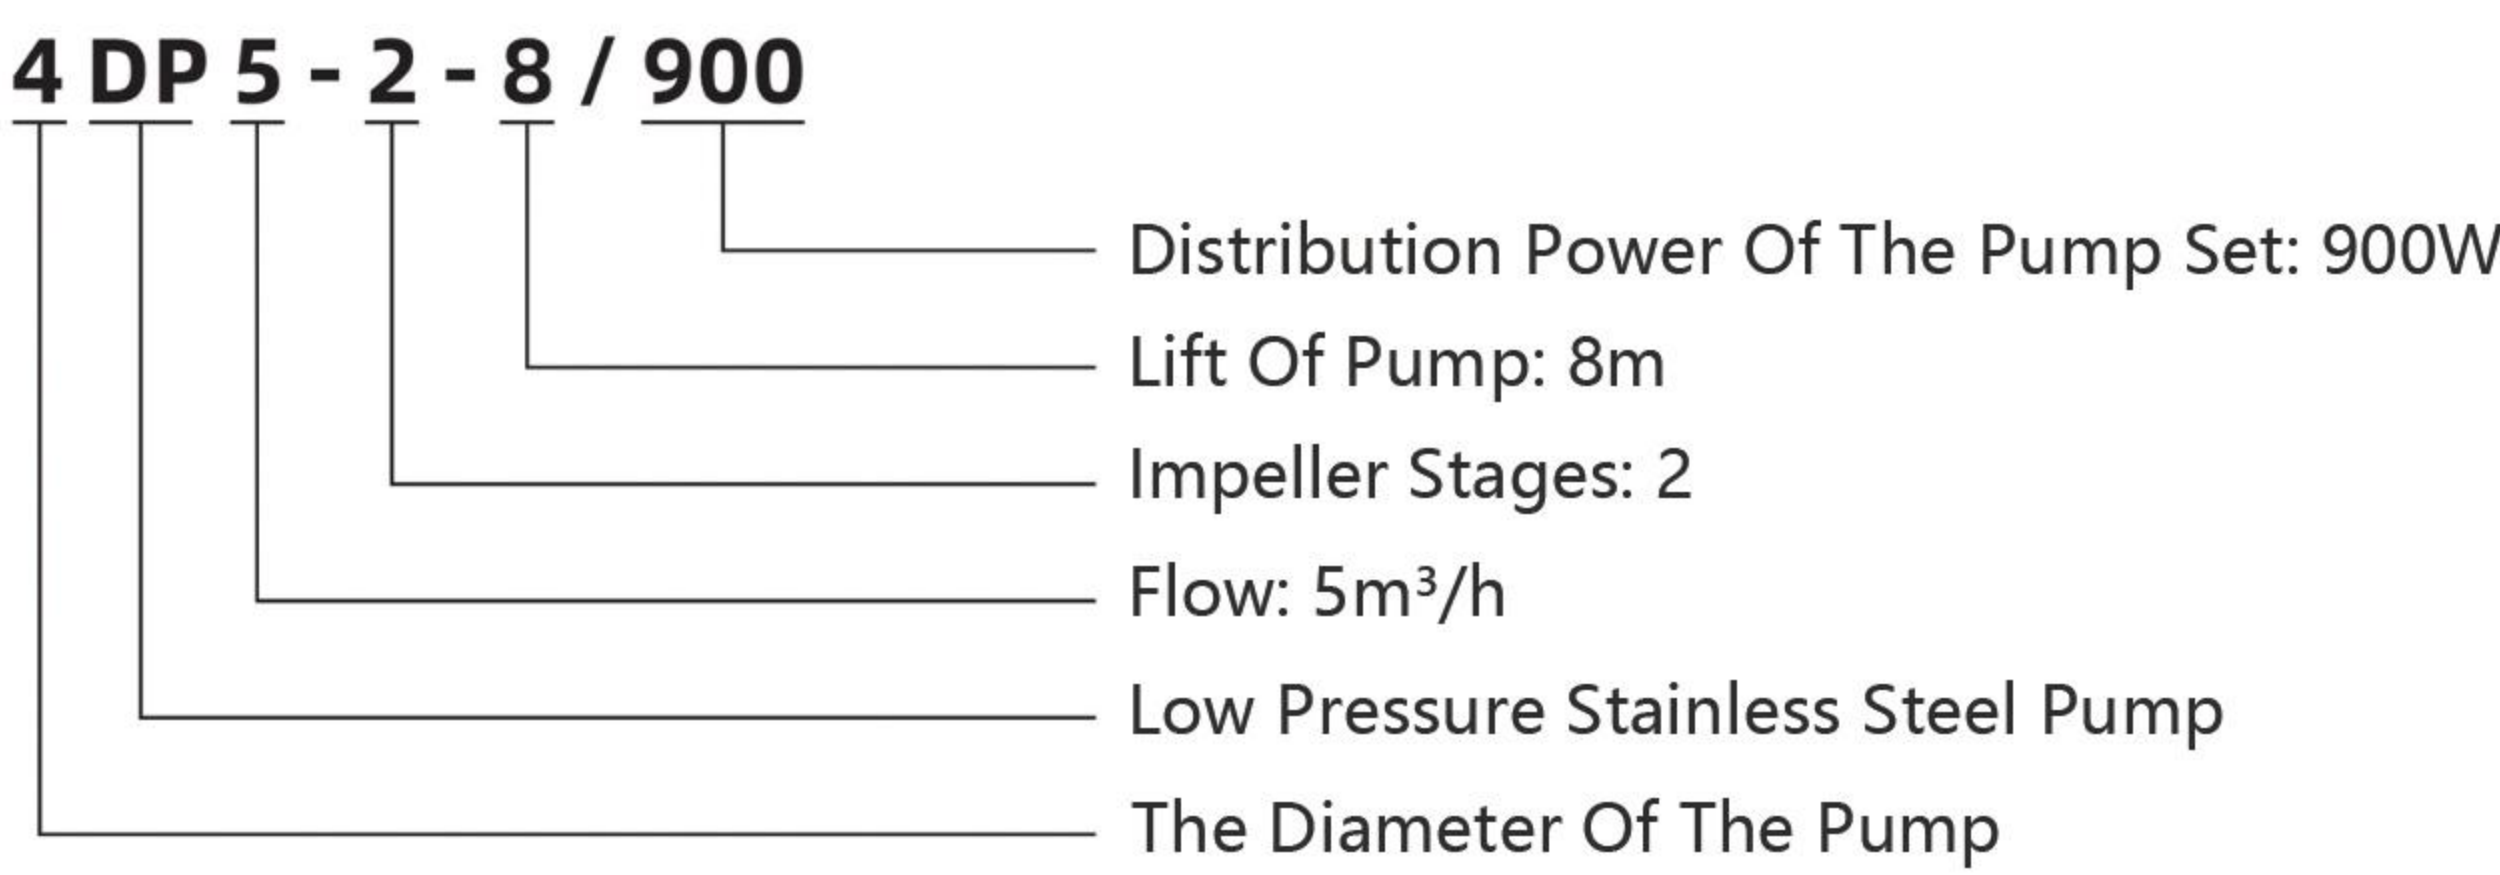

Model Selection Table

Model	Distribution Power Of The Pump Set	Motor Power	Voltage Of Switching Power Supply	The Working Voltage Of The Motor	Flow/Lift	Rotating Speed
	W	W	V	V	m³h/m	r/min
DP6-1-6/400 (Horizontal)	400	200	24 (21-36)	12/24	6/6	2850
4DP5-1-4/400	400	200	24 (21-36)	12/24	5/4	2850
4DP5-2-8/900	900	200	24 (21-36)	12/24	5/8	2850
4DP8-1-4.5/900	900	200	24 (21-36)	12/24	8/4.5	2850
4DP5-3-12/1200	1200	370	36 (30-48)	12/24	5/12	2850
4DP8-2-9/1200	1200	370	36 (30-48)	12/24	8/9	2850
4DP14-1-4/1200	1200	370	36 (30-48)	12/24	14/4	2850
4DP5-4-16/1400	1400	370	36 (30-48)	12/24	5/16	2850
4DP8-3-12/1600	1600	550	36 (30-48)	24/36	8/12	2850
4DP14-2-8/1600	1600	550	36 (30-48)	24/36	14/8	2850
4DP8-4-16/2500	2500	750	48 (42-60)	24/36	8/16	2850
6DP20-1-9/2500	2500	750	48 (42-60)	24/36	20/9	2850
4DP14-3-12/2500	2500	750	48 (42-60)	24/36	14/12	2850
6DP30-1-8/3500	3500	1100	48 (42-60)	36	30/8	2850

Fountain Pump (Regular version)




Applications



WATER SCREEN DEVICE

Equipment Exhibition

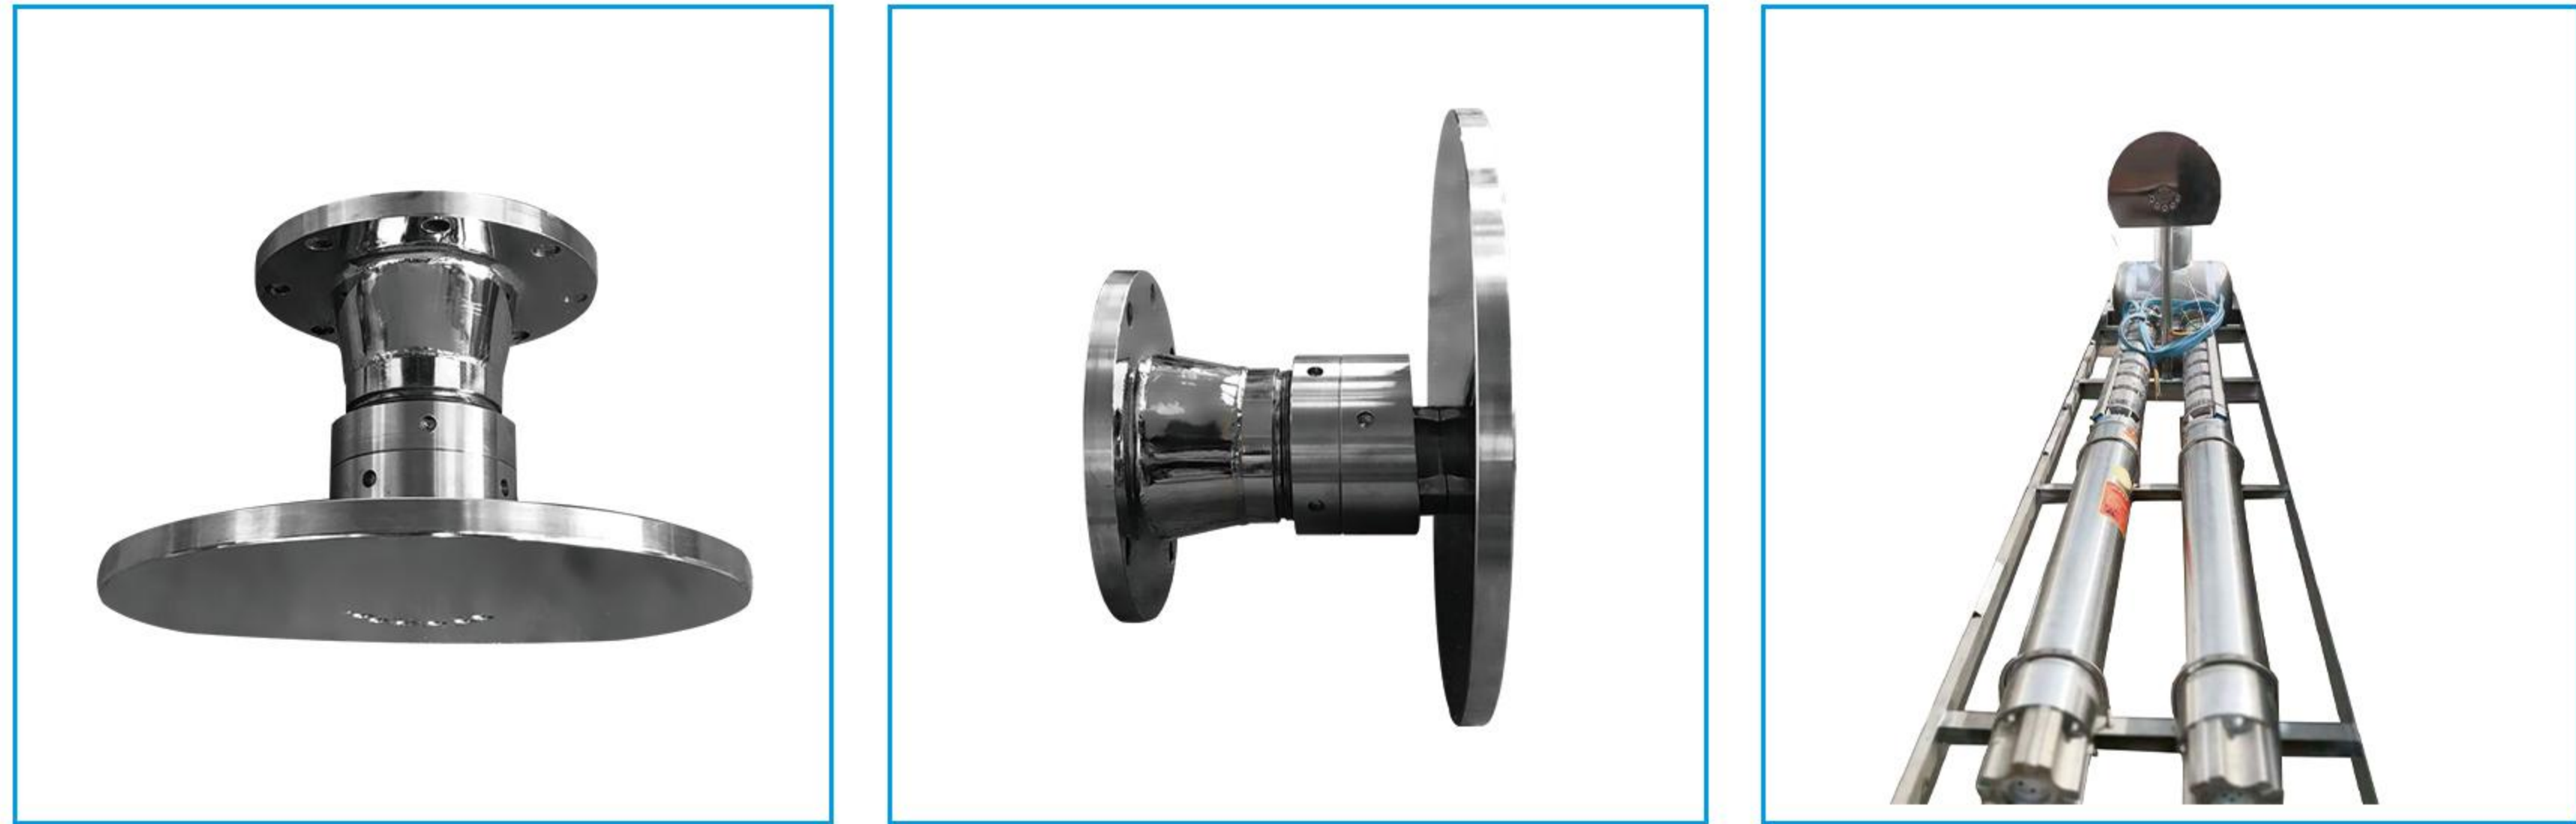

Parameters

No.	Items	Water Screen Device			
01	Material	SS304			
02	Model	DN100	DN150	DN100 (Baffle Style)	DN150 (Baffle Style)
03	Size	Φ255*180	Φ305*200	380*340*160	420*380*240
04	Weight	16.3KG	33KG	24KG	36.8KG
05	Scattering Angle	165°	165°	180°	180°
06	Scattering Radius	15m	20m	15m	20m



LASER

Equipment Exhibition



GREEN LASER

RGB ANIMATION LASER



COLD MIST HOST

