ZLX
Electrical Solution

ZLX TERMINALS



广州市众涞鑫科技发展有限公司
GUANGZHOU ZLX TERMINALS

广州市番禺区石楼镇嵩山路64号合裕工业园A1栋四层
http://www.gzzlx.com.cn
laixin_sales@163.com
18520217661 / 020-62680736

ZLX
Electrical Solution



产品手册2026

广州市众涞鑫科技发展有限公司
GUANGZHOU ZHONGLAIXIN TECHNOLOGY DEVELOPMENT CO., LTD

企业简介
Company Profile

广州市众涞鑫科技发展有限公司始创于2016年，是一家专业从事冷压端子设计、模具开发、制造、销售于一体的科技型企业，我们致力于为各行业客户提供优质的端子产品和线束压接解决方案，满足各客户的需求。

经过多年的发展，公司建立了一套完善、规范的管理体系：从来料、各生产工序、成品及包装出厂严格检验把关，顺利通过ISO9001质量管理体系。我们承诺交付的产品符合欧盟ROHS、REACH环保体系要求，并已通过欧盟CE认证。

公司的产品主要依据国标GB、日本JIS标准、美规AWG标准、德国DIN等标准设计生产，产品涵盖冷压铜板端子、铜管瑞子、公母端子、欧式端子、电力金具等，已有100多个系列，3000余个品种，我们可依据客户要求，提供个性化产品定制服务。

公司始终以创新为源动力，以质量求生存，以科技求发展，以管理取效益，以信誉赢客户，我们将持续提升工艺水平，加大研发投入，致力于成为行业一流的冷压端子供应商。

经营理念

我们视品质为生命——为客户提供优秀的产品

我们以客户为本——用心服务是永久的承诺

我们重视合作——友好合作是事业的基石

我们不断成长——动力来源于持续改进









ISO9001

1/3

目录
MODEL

P01 LYF
P02 LYF90
P03 LYF45
P03 C45N
P04 AWG
P117 DTLC
P117 OT
P118 绝缘软套管
P05 T
P08 T45
P09 T90
P10 HUP
P12 GPH90
P14 TLK
P16 GPH90
P18 X-SC
P19 SC
P21 A-SC
P23 SC-XB
P25 GC(喇叭口)
P27 GCL(喇叭口)
P29 FC(喇叭口)
P31 DT
P33 DIN
P35 CL-H
P37 CL-2H
P39 KRFS
P40 TT(喇叭口)
P41 TL
P42 TM
P42 CP
P43 AD
P43 TPE
P44 中接管
P47 PNT
P47 PVT
P48 BVT BNYT
P48 BHT
P49 EN
P51 ENY
P53 TENY
P60 OT
P62 RNB-PS
P68 SQNB
P71 SNB-PS
P90-93 德规系列
P114 闭端端子
P114 接线帽
P115 铜棒DT
P116 小头DT系列

2/3

目录 MODEL

圆形R系列	叉形S系列	板形DB系列	板形PT系列	锁式LS系列	
折弯	P55 P64 R折弯	P70 S折弯	P78 DB折弯	P83 PT折弯	P86 LS折弯
无绝缘	P57 R系列	P69 S系列	P77 DB系列	P82 PT系列	P86 LS系列
易进式绝缘		P72 SVE系列	P80 DBVE系列	P84 PTVE系列	P87 LSVE系列
PVC绝缘	P63 RV系列	P73 SV系列	P79 PIN系列	P84 PTV系列	P87 LSV系列
PVC绝缘加铜套	P65 RD加铜套	P74 SD加铜套	P80 DBD加铜套		P88 LSD加铜套
尼龙绝缘	P66 RNY系列	P76 SNY系列	P81 DBNY系列	P85 PTNY系列	P89 LSNY系列
尼龙绝缘加铜套	P67 RNYD加铜套	P75 SNYD加铜套	P81 DBNYD加铜套		P89 LSNYD加铜套

3/3

目录 MODEL

片行母插	片行公插	子弹形母插	子弹形公插	肩背形/旗形	
PVC 半绝缘	P95 VF	P103 VM		P108 VM	P110 VPB
PVC 半绝缘 加铜套	P96 VF 加铜套	P103 VM 加铜套		P108 VM 加铜套	P110 VPB 加铜套
PVC 全绝缘	P97 VF 全绝缘		P105 VF 全绝缘		
PVC 全绝缘 加铜套	P98 VF 全绝缘加铜套		P106 VF 全绝缘加铜套		
尼龙半绝缘	P99 AEF	P104 AEM		P108 AEM	P111 AEPB
尼龙半绝缘 加铜套	P100 AEF 加铜套	P104 AEM 加铜套		P109 AEM 加铜套	P111 AEPB 加铜套
尼龙全绝缘	P101 AEF 全绝缘	P105 AEM 全绝缘	P106 AEF 全绝缘	P109 AEM 全绝缘	P102 AEFF 全绝缘
尼龙全绝缘 加铜套	P101 AEF 全绝缘加铜套		P107 AEF 全绝缘加铜套	P109 AEM 全绝缘加铜套	





铜管成型系列
Copper Tube Forming Series

原材料材质 Material

电解铜加工成型T2紫铜管，比市场上同类产品(T3或更差材质)导电及散热等物理性能更好。

T2 copper tube processed by electrolytic copper has better physical properties such as conductivity and heat dissipation than similar products on the market(T3or worse material).



倒角或扩口 Chamfering or flaring

线端60度倒角比同类产品45度倒角更轻松的穿入电线，喇叭口类端子更适合柔性导线穿入。

The wire end of the 60-degree chamfer is easier to penetrate into the wire than similar products of the 45-degree chamfer.Bell type terminals are more suitable for flexible conductor penetration.



观察孔设计 Observation hole design

能直观的掌握导线与端子的结合状态，也可以通过观察孔对导体进行上锡加锡。

Can intuitively grasp the combination of wire and terminal state, can also carry on the conductor on tin and tin by observing hole.




异形及折弯 Special-shaped and bending

折弯等异形部位改进了结构设计及加工方式，是使用经过热处理的铜管通过连续成型的新型工艺完成，不裂不断，安全可靠。

Bending and other special-shaped parts, improving structure design and processing mode, is completed through the use of heat treatment of copper tube and continuous forming of the new technology. They don't split continuously with safety and reliability.








LYF 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：加厚 Special structure:Thicken
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
8 A.W.G. 10 mm²	5	#10	LYF10-5	5.3	11.5	28	8	5	9
	6	1/4"	LYF10-6	6.5	11.5	28			
	8	5/16"	LYF10-8	8.4	13.5	32			
	10	3/8"	LYF10-10	10.5	16	34			
	12	1/2"	LYF10-12	13	18	37			
6 A.W.G. 16 mm²	6	1/4"	LYF16-6	6.5	13	33	9	6	10
	8	5/16"	LYF16-8	8.4	13	33			
	8	5/16"	LYF16-8L	8.4	16	38			11.5
	10	3/8"	LYF16-10	10.5	16	38			10
	10	3/8"	LYF16-10L	10.5	16	43			11.5
	12	1/2"	LYF16-12	13	22	47			14
4 A.W.G. 25 mm²	6	1/4"	LYF25-6	6.5	16	37	11	8	11
	8	5/16"	LYF25-8	8.4	16	38			
	10	3/8"	LYF25-10	10.5	17	42			
	12	1/2"	LYF25-12	13	22	47			
2 A.W.G. 35 mm²	6	1/4"	LYF35-6	6.5	18	44	13	9	14
	8	5/16"	LYF35-8	8.4	18	44			
	10	3/8"	LYF35-10	10.5	18	44			
	12	1/2"	LYF35-12	13	22	52			
1/0 A.W.G. 50 mm²	6	1/4"	LYF50-6	6.5	21	50	14.5	11	17
	8	5/16"	LYF50-8	8.4	21	50			
	10	3/8"	LYF50-10	10.5	21	50			
	12	1/2"	LYF50-12	13	21	53			
2/0 A.W.G. 70 mm²	6	1/4"	LYF70-6	6.5	25	55	17	13	20
	8	5/16"	LYF70-8	8.4	25	55			
	10	3/8"	LYF70-10	10.5	25	55			
	12	1/2"	LYF70-12	13	25	58			
3/0 A.W.G. 95 mm²	6	1/4"	LYF95-6	6.5	29	69	20	15	26.5
	8	5/16"	LYF95-8	8.4	29	69			
	10	3/8"	LYF95-10	10.5	29	69			
	12	1/2"	LYF95-12	13	29	69			23
	14	9/16"	LYF95-14	15	29	69			
	16	5/8"	LYF95-16	17	29	69			
	10	3/8"	LYF95-10*	10.5	28	69	19.5	14.5	26.5
	12	1/2"	LYF95-12*	13	28	69			
	16	5/8"	LYF95-16*	17	28	69			
4/0 A.W.G. 120 mm²	8	5/16"	LYF120-8	8.4	32	73	22	17	25
	10	3/8"	LYF120-10	10.5	32	73			29.5
	12	1/2"	LYF120-12	13	32	73			25
	14	9/16"	LYF120-14	15	32	73			
	10	3/8"	LYF120-10*	10.5	31	73	21.5	16.5	29.5
	12	1/2"	LYF120-12*	13	31	73			
250/300 MCM 150 mm²	10	3/8"	LYF150-10	10.5	36	80	25	19	30
	12	1/2"	LYF150-12	13	36	80			
	16	5/8"	LYF150-16	17	36	80			
300/350 MCM 185 mm²	12	1/2"	LYF185-12	13	39	86	27	21	35
	16	5/8"	LYF185-16	17	39	86			
400/500 MCM 240 mm²	12	1/2"	LYF240-12	13	44	95	30	24	35
	16	5/8"	LYF240-16	17	44	95			


LYF90° 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：折弯90° Special structure:Bending 90°
. 可接受异形定制 Acceptable customization






接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
8 A.W.G. 10 mm²	4	#8	LYF90-10/4	4.3	13	18	8	5	18
	6	1/4"	LYF90-10/6	6.5	13	18			
	8	5/16"	LYF90-10/8	8.4	13.5	20.5			
6 A.W.G. 16 mm²	6	1/4"	LYF90-16/6	6.5	13	18	9	6	20
	8	5/16"	LYF90-16/8	8.4	13.5	20.5			
4 A.W.G. 25 mm²	6	1/4"	LYF90-25/6	6.5	16	18	11	8	21.5
	8	5/16"	LYF90-25/8	8.4	16	20.5			
	10	3/8"	LYF90-25/10	10.5	17	25			
2 A.W.G. 35 mm²	6	1/4"	LYF90-35/6	6.5	18	18	13	9	26.5
	8	5/16"	LYF90-35/8	8.4	17	20.5	12	8.5	
	10	3/8"	LYF90-35/10	10.5	18	25	13	9	
1/0 A.W.G. 50 mm²	6	1/4"	LYF90-50/6	6.5	21	26	14.5	11	34
	8	5/16"	LYF90-50/8	8.4	21	26			
	10	3/8"	LYF90-50/10	10.5	21	30			
	12	1/2"	LYF90-50/12	13	21	32			
2/0 A.W.G. 70 mm²	6	1/4"	LYF90-70/6	6.5	24	26	16.5	12	35.9
	8	5/16"	LYF90-70/8	8.4	24	26			
	10	3/8"	LYF90-70/10	10.5	24	30			
	12	1/2"	LYF90-70/12	13	24	32			
3/0 A.W.G. 95 mm²	8	5/16"	LYF90-95/8	8.4	29	26	20	15	37.5
	10	3/8"	LYF90-95/10	10.5	29	30			
	12	1/2"	LYF90-95/12	13	29	32			
	16	5/8"	LYF90-95/16	17	29	36			
	8	5/16"	LYF90-95/8*	8.4	28	26	19.5	14.5	
	10	3/8"	LYF90-95/10*	10.5	28	30			
4/0 A.W.G. 120 mm²	8	5/16"	LYF90-120/8	8.4	32	30	22	17	39.5
	10	3/8"	LYF90-120/10	10.5	32	30			
	12	1/2"	LYF90-120/12	13	32	32			
	16	5/8"	LYF90-120/16	17	32	36			
	10	3/8"	LYF90-120/10*	10.5	31	30	21.5	16.5	
300/350 MCM 185 mm²	10	3/8"	LYF90-185/10	10.5	38.5	31	27	21	41
	12	1/2"	LYF90-185/12	13					
	16	5/8"	LYF90-185/16	17					

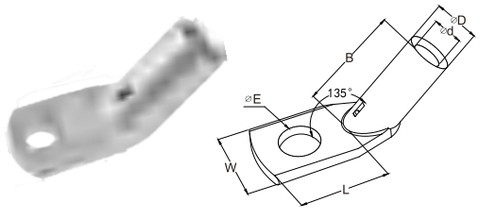

LYF45° 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：折弯45° Special structure:Bending 45°
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
8 A.W.G. 10 mm²	5	#10	LYF45-10/5	5.3	11.5	18	8	5	19
	6	1/4"	LYF45-10/6	6.5	13				
	8	5/16"	LYF45-10/8	8.4	13.3	20.5			
6 A.W.G. 16 mm²	6	1/4"	LYF45-16/6	6.5	13	18	9	6	23
	8	5/16"	LYF45-16/8	8.4	13.5	20.5			
4 A.W.G. 25 mm²	6	1/4"	LYF45-25/6	6.5	16	18	11	8	24
	8	5/16"	LYF45-25/8	8.4	16	20.5			
	10	3/8"	LYF45-25/10	10.5	17	25			
2 A.W.G. 35 mm²	6	1/4"	LYF45-35/6	6.5	18	18	13	9	30
	8	5/16"	LYF45-35/8	8.4		20.5			
	10	3/8"	LYF45-35/10	10.5		25			
1/0 A.W.G. 50 mm²	6	1/4"	LYF45-50/6	6.5	21	26	14.5	11	31
	8	5/16"	LYF45-50/8	8.4					
	10	3/8"	LYF45-50/10	10.5		30			
	12	1/2"	LYF45-50/12	13		32			
2/0 A.W.G. 70 mm²	6	1/4"	LYF45-70/6	6.5	25	26	17	13	35
	8	5/16"	LYF45-70/8	8.4					
	10	3/8"	LYF45-70/10	10.5		30			
	12	1/2"	LYF45-70/12	13		32			
3/0 A.W.G. 95 mm²	8	5/16"	LYF45-95/8	8.4	29	30	20	15	40
	10	3/8"	LYF45-95/10	10.5					
	12	1/2"	LYF45-95/12	13		32			
	10	3/8"	LYF45-95/10*	10.5	28	30	19.5	14.5	
	12	1/2"	LYF45-95/12*	13		32			
4/0 A.W.G. 120 mm²	8	5/16"	LYF45-120/8	8.4	32	30	22	17	43
	10	3/8"	LYF45-120/10	10.5					
	12	1/2"	LYF45-120/12	13		32			
	16	5/8"	LYF45-120/16	17		36			
	10	3/8"	LYF45-120/10*	10.5	31	30	21.5	16.5	
250/300 MCM 150 mm²	10	3/8"	LYF45-150/10	10.5	36	31	25	19	48
300/350 MCM 185 mm²	12	1/2"	LYF45-185/12	13	39	31	27	21	53

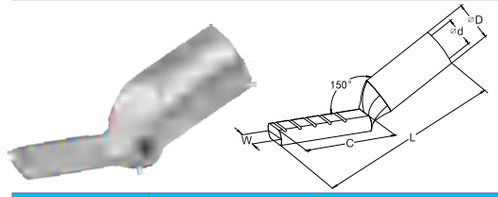

C45N 铜管端子
COPPER TUBE TERMINALS


. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：折弯 Special structure:Bending
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) W	L	C	⌀D	⌀d
14-12 A.W.G. 2.5-4 mm²	C45N4	6.6	24	12	5	3
12-10 A.W.G. 4-6 mm²	C45N6(5)	5	28	13	5.9	3.9
12-10 A.W.G. 4-6 mm²	C45N6	7	28	13	5.9	3.9
8 A.W.G. 10 mm²	C45N10(5)	5	28	13	6.9	4.9
8 A.W.G. 10 mm²	C45N10	7	28	13	6.9	4.9
6 A.W.G. 16 mm²	C45N16(5)	5	31	14	8.1	5.9
6 A.W.G. 16 mm²	C45N16	7	31	14	8.1	5.9
4 A.W.G. 25 mm²	C45N25	7	33	14	10	7.3
2 A.W.G. 35 mm²	C45N35	7	39	17	11.2	8.4
1/0 A.W.G. 50 mm²	C45N50	7	45	17	12.5	9.5
2/0 A.W.G. 70 mm²	C45N70	7	50	20	14.7	11.2

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

AWG 铜管端子
COPPER TUBE TERMINALS


. 端子材质：紫铜 Terminals material:Copper
. 表面处理：酸洗 Plating:Pickling
. 特殊结构：喇叭口 Special structure:Bell mouth
. 可接受异形定制 Acceptable customization





接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
8 A.W.G. 10 mm²	5	#10	8*10	5.1	11.8	33.3	7.1	4.8	13
	6	1/4"	8*1/4	6.8	11.8	33.3			
	8	5/16"	8*5/16	8.4	11.8	33.3			
	10	3/8"	8*3/8	10.4	14.5	33.3			
	12	1/2"	8*1/2	13.1	17	33.3			
6 A.W.G. 16 mm²	5	#10	6*10	5.1	11.8	37.3	8.1	5.9	15
	6	1/4"	6*1/4	6.8	13.7	37.3			
	8	5/16"	6*5/16	8.4	13.7	37.3			
	10	3/8"	6*3/8	10.4	13.7	37.3			
	12	1/2"	6*1/2	13.1	17	37.3			14
4 A.W.G. 25 mm²	5	#10	4*10	5.1	13.8	38.9	9.5	7.3	15.5
	6	1/4"	4*1/4	6.8	13.8	38.9			
	8	5/16"	4*5/16	8.4	13.8	38.9			
	10	3/8"	4*3/8	10.4	14.5	38.9			
	12	1/2"	4*1/2	13.1	17	38.9			15
2 A.W.G. 35 mm²	6	1/4"	2*1/4	6.8	16.5	41.1	11.1	8.5	16
	8	5/16"	2*5/16	8.4	16.5	41.1			
	10	3/8"	2*3/8	10.4	16.5	41.1			
	12	1/2"	2*1/2	13.1	17	41.1			15.3
1 A.W.G. 50 mm²	6	1/4"	1*1/4	6.8	16.4	43.6	11.7	9.1	16
	8	5/16"	1*5/16	8.4	16.4	43.6			
	10	3/8"	1*3/8	11.2	17	43.6			
	12	1/2"	1*1/2	13.1	19	43.6			
1/0 A.W.G. 60 mm²	6	1/4"	1/0*1/4	6.8	18.4	46.8	13	10.4	19
	8	5/16"	1/0*5/16	8.4	18.4	46.8			
	10	3/8"	1/0*3/8	10.4	18.4	46.8			
	12	1/2"	1/0*1/2	13.1	21	46.8			
2/0 A.W.G. 70 mm²	6	1/4"	2/0*1/4	6.8	21	52.4	14.2	11.7	22
	8	5/16"	2/0*5/16	8.4	21	52.4			
	10	3/8"	2/0*3/8	10.4	21	52.4			
	12	1/2"	2/0*1/2	13.1	21	52.4			21
3/0 A.W.G. 95 mm²	6	1/4"	3/0*1/4	6.8	23.1	55.9	15.7	13	22.5
	8	5/16"	3/0*5/16	8.4	23.1	55.9			
	10	3/8"	3/0*3/8	10.4	23.1	55.9			
	12	1/2"	3/0*1/2	13.1	23.1	55.9			
4/0 A.W.G. 120 mm²	6	1/4"	4/0*1/4	6.8	25.8	60.4	17.2	14.2	24
	8	5/16"	4/0*5/16	8.4	25.8	60.5			
	10	3/8"	4/0*3/8	10.4	25.8	60.5			
	12	1/2"	4/0*1/2	13.1	25.8	60.5			

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.

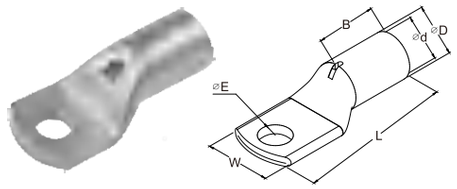


T 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：观察孔 Special structure:Observation hole
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
22-16 A.W.G. 0.5-1.5 mm²	4	#8	T1.5-4	4.3	8.7	19	4	2.4	7
	5	#10	T1.5-5	5.3	8.7	19			
	6	1/4"	T1.5-6	6.4	10	20			
16-14 A.W.G. 1.5-2.5 mm²	4	#8	T2.5-4	4.3	8.7	19	4.3	2.7	7
	5	#10	T2.5-5	5.3	8.7	19			
	6	1/4"	T2.5-6	6.4	10.3	21			
	8	5/16"	T2.5-8	8.3	12	23			
14-12 A.W.G. 2.5-4 mm²	4	#8	T4-4	4.3	8.7	21.5	4.8	3.1	9.5
	5	#10	T4-5	5.3	8.7	21.5			
	6	1/4"	T4-6	6.4	10.3	23.5			
	8	5/16"	T4-8	8.3	12.5	28.5			
12-10 A.W.G. 4-6 mm²	4	#8	T6-4	4.3	10.3	26	5.5	3.8	10
	5	#10	T6-5	5.3	10.3	26			
	6	1/4"	T6-6	6.4	10.3	26			
	8	5/16"	T6-8	8.3	13.9	29			
	10	3/8"	T6-10	10.5	13.9	29			
	12	1/2"	T6-12	13	16.5	30	6.2	4	9
8 A.W.G. 10 mm²	4	#8	T10-4	4.3	11.9	27.5	6.9	4.7	11.5
	5	#10	T10-5	5.3	11.9	27.5			
	6	1/4"	T10-6	6.4	11.9	27.5			
	8	5/16"	T10-8	8.3	13.5	30.5			
	10	3/8"	T10-10	10.5	15	30.5			
	12	1/2"	T10-12	13.2	17	34			
6 A.W.G. 16 mm²	4	#8	T16-4	4.3	11.9	27.5	7.8	5.6	12
	5	#10	T16-5	5.3	11.9	27.5			
	6	1/4"	T16-6	6.4	11.9	27.5			
	8	5/16"	T16-8	8.3	13.5	31			
	10	3/8"	T16-10	10.5	16	32			
	12	1/2"	T16-12	13.2	17	37.5			
4 A.W.G. 25 mm²	5	#10	T25-5	5.3	14	34	9.5	7.1	13.5
	6	1/4"	T25-6	6.4	14	34			
	8	5/16"	T25-8	8.3	14	34			
	10	3/8"	T25-10	10.5	16	37			
	12	1/2"	T25-12	13.2	18	40			
2 A.W.G. 35 mm²	5	#10	T35-5	5.3	16.5	39	11	8.2	16
	6	1/4"	T35-6	6.4	16.5	39			
	8	5/16"	T35-8	8.3	16.5	39			
	10	3/8"	T35-10	10.5	16.5	43			
	12	1/2"	T35-12	13.2	18	43			
	14	9/16"	T35-14	14.5	20	48			
	16	5/8"	T35-16	16.5	23	48			
1A.W.G. 40 mm²	6	1/4"	T40-6	6.4	16.3	44	11.2	9	17
	8	5/16"	T40-8	8.3	16.3	44			
	10	3/8"	T40-10	10.5	16.3	44			
	12	1/2"	T40-12	13.2	18	44			


T 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：观察孔 Special structure:Observation hole
. 可接受异形定制 Acceptable customization





接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
1/0 A.W.G. 50 mm²	6	1/4"	T50-6	6.4	18	45	12.5	9.5	20
	8	5/16"	T50-8	8.3					
	10	3/8"	T50-10	10.5		49			
	12	1/2"	T50-12	13.2					
	14	9/16"	T50-14	14.5	22	54			
	16	5/8"	T50-16	16.5	25	62	14	9.5	23
	20	3/4"	T50-20	21	28	68			
2/0 A.W.G. 70 mm²	6	1/4"	T70-6	6.4	21.5	47.6	15	11.5	20
	8	5/16"	T70-8	8.3					
	10	3/8"	T70-10	10.5		51.6			
	12	1/2"	T70-12	13.2					
	14	9/16"	T70-14	14.5		62.6			
	16	5/8"	T70-16	16.5					
	20	3/4"	T70-20	21	30				
3/0 A.W.G. 95 mm²	6	1/4"	T95-6	6.4	24.7	55.8	17	13.5	22
	8	5/16"	T95-8	8.3					
	10	3/8"	T95-10	10.5					
	12	1/2"	T95-12	13.2					
	14	9/16"	T95-14	14.5		66.8			
	16	5/8"	T95-16	16.5					
	20	3/4"	T95-20	21	30				
4/0 A.W.G. 120 mm²	6	1/4"	T120-6	6.4	29	71.5	20	15.6	27
	8	5/16"	T120-8	8.3					
	10	3/8"	T120-10	10.5					
	12	1/2"	T120-12	13.2					
	14	9/16"	T120-14	14.5					
	16	5/8"	T120-16	16.5					
	20	3/4"	T120-20	21					
250/300 MCM 150 mm²	8	5/16"	T150-8	8.3	30.4	78	21	16.5	32
	10	3/8"	T150-10	10.5					
	12	1/2"	T150-12	13.2					
	14	9/16"	T150-14	14.5					
	16	5/8"	T150-16	16.5					
	20	3/4"	T150-20	21					
300/350 MCM 185 mm²	8	5/16"	T185-8	8.3	34	84	23.6	18.4	34
	10	3/8"	T185-10	10.5					
	12	1/2"	T185-12	13.2					
	14	9/16"	T185-14	14.5					
	16	5/8"	T185-16	16.5					
	18	11/16"	T185-18	19					
	20	3/4"	T185-20	21					
400/500 MCM 240 mm²	10	3/8"	T240-10	10.5	38.5	90	26.4	21.2	37
	12	1/2"	T240-12	13.2					
	14	9/16"	T240-14	14.5					
	16	5/8"	T240-16	16.5					
	18	11/16"	T240-18	19					
	20	3/4"	T240-20	21					

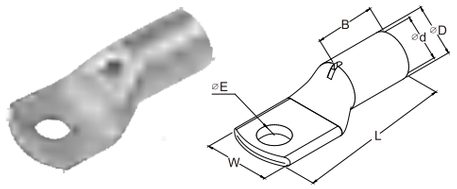

T 铜管端子
COPPER TUBE TERMINALS


. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 特殊结构：观察孔　Special structure:Observation hole
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
500/600 MCM 300 mm²	10	3/8"	T300-10	10.5	41.7	96	28.6	23.4	40
	12	1/2"	T300-12	13.2					
	14	9/16"	T300-14	14.5					
	16	5/8"	T300-16	16.5					
	20	3/4"	T300-20	21					
600/750 MCM 400 mm²	10	3/8"	T400-10	10.5	47.8	104.7	32.8	26.8	37
	12	1/2"	T400-12	13.2					
	14	9/16"	T400-14	14.5					
	16	5/8"	T400-16	17					
	18	11/16"	T400-18	19					
	20	3/4"	T400-20	21					
800/1000 MCM 500 mm²	10	3/8"	T500-10	10.5	54.8	115.5	38.4	29.8	46.5
	12	1/2"	T500-12	13.2					
	14	9/16"	T500-14	14.5					
	16	5/8"	T500-16	16.5					
	20	3/4"	T500-20	21					
1000/1250 MCM 630 mm²	10	3/8"	T630-10	10.5	64	133.1	44.7	34.5	50
	12	1/2"	T630-12	13					
	14	9/16"	T630-14	14.5					
	16	5/8"	T630-16	16.5					
	20	3/4"	T630-20	21					

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

T45° 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 特殊结构：折弯45°　Special structure:Bending 45°
. 可接受异形定制　Acceptable customization






接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
8 A.W.G. 10 mm²	5	#10	T45-10/5	5.3	11.9	12.5	6.9	4.7	11.5
	6	1/4"	T45-10/6	6.4					11
	8	5/16"	T45-10/8	8.3	13.5	15.5			
	10	3/8"	T45-10/10	10.5	15				11.5
6 A.W.G. 16 mm²	5	#10	T45-16/5	5.3	11.9	11.5	7.8	5.6	12
	6	1/4"	T45-16/6	6.4					
	8	5/16"	T45-16/8	8.3	13.5	15			
	10	3/8"	T45-16/10	10.5	16	16			
4 A.W.G. 25 mm²	6	1/4"	T45-25/6	6.4	14	16	9.5	7.1	13
	8	5/16"	T45-25/8	8.3					
	10	3/8"	T45-25/10	10.5	16	19			
2 A.W.G. 35 mm²	6	1/4"	T45-35/6	6.4	16.5	18	11	8.2	16
	8	5/16"	T45-35/8	8.3					
	10	3/8"	T45-35/10	10.5		22			
1/0 A.W.G. 50 mm²	6	1/4"	T45-50/6	6.4	18	18	12.5	9.5	20
	8	5/16"	T45-50/8	8.3					
	10	3/8"	T45-50/10	10.5		22			19
	12	1/2"	T45-50/12	13.2					20
2/0 A.W.G. 70 mm²	8	5/16"	T45-70/8	8.3	21.5	18	15	11.5	20
	10	3/8"	T45-70/10	10.5		22			
	12	1/2"	T45-70/12	13					
3/0 A.W.G. 95 mm²	8	5/16"	T45-95/8	8.3	24.7	21.8	17	13.5	22
	10	3/8"	T45-95/10	10.5					
	12	1/2"	T45-95/12	13.2					
	14	9/16"	T45-95/14	14.5		32.8			
	16	5/8"	T45-95/16	16.5					
4/0 A.W.G. 120 mm²	10	3/8"	T45-120/10	10.5	29	32.5	20	15.6	27
	12	1/2"	T45-120/12	13.2					
	14	9/16"	T45-120/14	14.5					
	16	5/8"	T45-120/16	16.5					
250/300 MCM 150 mm²	10	3/8"	T45-150/10	10.5	30.4	33	21	16.5	32
	12	1/2"	T45-150/12	13					
	14	9/16"	T45-150/14	14.5					
	16	5/8"	T45-150/16	16.5					
300/350 MCM 185 mm²	8	5/16"	T45-185/8	8.3	34	35	23.6	18.4	34
	10	3/8"	T45-185/10	10.5					
	12	1/2"	T45-185/12	13.2					
	14	9/16"	T45-185/14	14.5					
	16	5/8"	T45-185/16	16.5					
400/500 MCM 240 mm²	12	1/2"	T45-240/12	13.2	38.5	35	26.4	21.2	37
	14	9/16"	T45-240/14	14.5					
	16	5/8"	T45-240/16	16.5					38
500/600 MCM 300 mm²	12	1/2"	T45-300/12	13.2	41.7	36	28.6	23.4	40
	14	9/16"	T45-300/14	14.5					

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.





T90° 铜管端子
COPPER TUBE TERMINALS


. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：折弯90° Special structure:Bending 90°
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
12-10 A.W.G. 4-6 mm²	4	#8	T90-6/4	4.2	10.3	13	5.5	3.8	10
	5	#10	T90-6/5	5.3					
	6	1/4"	T90-6/6	6.4					
	8	5/16"	T90-6/8	8.3	13.9	16			
8 A.W.G. 10 mm²	5	#10	T90-10/5	5.3	11.9	12.5	6.9	4.7	10.5
	6	1/4"	T90-10/6	6.4					
	8	5/16"	T90-10/8	8.3	13.5	15.5			
	10	3/8"	T90-10/10	10.5	15				
6 A.W.G. 16 mm²	5	#10	T90-16/5	5.3	11.9	11.5	7.8	5.6	11
	6	1/4"	T90-16/6	6.4					
	8	5/16"	T90-16/8	8.3	13.5	15.5			
	10	3/8"	T90-16/10	10.5	16	16			
	12	1/2"	T90-16/12	13.2	17	21.5			
4 A.W.G. 25 mm²	5	#10	T90-25/5	5.3	14	16	9.5	7.1	13
	6	1/4"	T90-25/6	6.4					
	8	5/16"	T90-25/8	8.3					
	10	3/8"	T90-25/10	10.5	16	19			
	12	1/2"	T90-25/12	13.2	18	22			
2 A.W.G. 35 mm²	6	1/4"	T90-35/6	6.4	16.5	18	11	8.2	16
	8	5/16"	T90-35/8	8.3					
	10	3/8"	T90-35/10	10.5		22			
	12	1/2"	T90-35/12	13.2	18				
	14	9/16"	T90-35/14	14.5	20	27			
1/0 A.W.G. 50 mm²	6	1/4"	T90-50/6	6.4	18	18	12.5	9.5	20
	8	5/16"	T90-50/8	8.3		22			19
	10	3/8"	T90-50/10	10.5					
	12	1/2"	T90-50/12	13					
2/0 A.W.G. 70 mm²	6	1/4"	T90-70/6	6.4	21.5	22	15	11.5	21
	8	5/16"	T90-70/8	8.3					
	10	3/8"	T90-70/10	10.5					
	12	1/2"	T90-70/12	13					
	14	9/16"	T90-70/14	14.5		28			
3/0 A.W.G. 95 mm²	8	5/16"	T90-95/8	8.3	24.7	21.8	17	13.5	22
	10	3/8"	T90-95/10	10.5					
	12	1/2"	T90-95/12	13.2					
	14	9/16"	T90-95/14	14.5		32.8			24
	16	5/8"	T90-95/16	17					
4/0 A.W.G. 120 mm²	8	5/16"	T90-120/8	8.3	29	32.5	20	15.6	27
	10	3/8"	T90-120/10	10.5					
	12	1/2"	T90-240/12	13					
	14	9/16"	T90-240/14	14.5					
	16	5/8"	T90-240/16	16.5					
200/300 MCM 150 mm²	8	5/16"	T90-150/8	8.3	30.4	33	21	16.5	32
	10	3/8"	T90-150/10	10.5					
	12	1/2"	T90-150/12	13.2					
	14	9/16"	T90-150/14	14.5					
	16	5/8"	T90-150/16	16.5					
300/350 MCM 185 mm²	10	3/8"	T90-185/10	10.5	34	35	23.6	18.4	34
	12	1/2"	T90-185/12	13					
	14	9/16"	T90-185/14	14.5					
	16	5/8"	T90-185/16	16.5					
	20	3/4"	T90-185/20	21					
400/500 MCM 240 mm²	10	3/8"	T90-240/10	10.5	38.5	35	26.4	21.2	37
	12	1/2"	T90-240/12	13.2					
	14	9/16"	T90-240/14	14.5					38
	16	5/8"	T90-240/16	17					

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

HUP 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：加厚 Special structure:Thicken
. 可接受异形定制 Acceptable customization






接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
22-18 A.W.G. 0.5-0.75 mm²	3	#4	HUP0.75-3	3.2	6	15.3	2.8	1.3	6
	4	#8	HUP0.75-4	4.3	6.5	17			
	5	#10	HUP0.75-5	5.3	9	19			
22-16 A.W.G. 0.5-1.5 mm²	3	#4	HUP1.5-3	3.2	6.5	15.3	3.3	1.8	6
	4	#8	HUP1.5-4	4.3	6.5	17			
	5	#10	HUP1.5-5	5.3	7.5	18.8			
	6	1/4"	HUP1.5-6	6.5	9	22.5			
16-14 A.W.G. 1.5-2.5 mm²	3	#4	HUP2.5-3	3.2	7.5	15.3	4.2	2.3	6
	4	#8	HUP2.5-4	4.3	7.5	17			
	5	#10	HUP2.5-5	5.3	8.5	18.8			
	6	1/4"	HUP2.5-6	6.5	9.5	22.5			
	8	5/16"	HUP2.5-8	8.5	13	27.8			
14-12 A.W.G. 2.5-4 mm²	4	#8	HUP4-4	4.3	8.5	21.8	5	3	8
	5	#10	HUP4-5	5.3	9	21.8			
	6	1/4"	HUP4-6	6.5	10	25.5			
	8	5/16"	HUP4-8	8.5	13	30.5			
12-10 A.W.G. 4-6 mm²	4	#8	HUP6-4	4.3	8.5	23	6.5	3.5	9
	5	#10	HUP6-5	5.3	10	27.5			
	6	1/4"	HUP6-6	6.5	12	27.5			
	8	5/16"	HUP6-8	8.5	15	33			
	10	3/8"	HUP6-10	10.5	17	37			
	12	1/2"	HUP6-12	13	19	41			
8 A.W.G. 10 mm²	4	#8	HUP10-4	4.3	12	28.5	7	4.5	10
	5	#10	HUP10-5	5.3	12	28.5			
	6	1/4"	HUP10-6	6.5	12	28.5			
	8	5/16"	HUP10-8	8.5	15	35			
	10	3/8"	HUP10-10	10.5	17	39			
	12	1/2"	HUP10-12	13	19	42			
6 A.W.G. 16 mm²	4	#8	HUP16-4	4.3	12	32.5	8.5	5.5	13
	5	#10	HUP16-5	5.3	12	32.5			
	6	1/4"	HUP16-6	6.5	12	33.3			
	8	5/16"	HUP16-8	8.5	15	37.5			
	10	3/8"	HUP16-10	10.5	17	41.5			
	12	1/2"	HUP16-12	13	19	45			
4 A.W.G. 25 mm²	5	#10	HUP25-5	5.3	14	37.5	10	7	15
	6	1/4"	HUP25-6	6.5	14	37.5			
	8	5/16"	HUP25-8	8.5	16	42			
	10	3/8"	HUP25-10	10.5	18	46			
	12	1/2"	HUP25-12	13	19	48			
	16	5/8"	HUP25-16	17	23	52.5			
2 A.W.G. 35 mm²	6	1/4"	HUP35-6	6.5	17	39.5	12	8.5	17
	8	5/16"	HUP35-8	8.5	17	44			
	10	3/8"	HUP35-10	10.5	19	49			
	12	1/2"	HUP35-12	13	21	51			
	14	9/16"	HUP35-14	15	21	54.5			
	16	5/8"	HUP35-16	17	26	58			
1/0 A.W.G. 50 mm²	6	1/4"	HUP50-6	6.5	20	47	14	10	19
	8	5/16"	HUP50-8	8.5	20	47			
	10	3/8"	HUP50-10	10.5	20	51			
	12	1/2"	HUP50-12	13	23	56			

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.





HUP 铜管端子
COPPER TUBE TERMINALS


. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：加厚 Special structure:Thicken
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
1/0 A.W.G. 50 mm²	14	9/16"	HUP50-14	15	23	59.5	14	10	19
	16	5/8"	HUP50-16	17	28	62			
	20	3/4"	HUP50-20	21	30	67			
2/0 A.W.G. 70 mm²	6	1/4"	HUP70-6	6.5	23.5	53	16.5	12	21
	8	5/16"	HUP70-8	8.5	23.5	53			
	10	3/8"	HUP70-10	10.5	23.5	56			
	12	1/2"	HUP70-12	13	23.5	59			
	14	9/16"	HUP70-14	15	23.5	62.5			
	16	5/8"	HUP70-16	17	28	66			
	20	3/4"	HUP70-20	21	30	72			
3/0 A.W.G. 95 mm²	6	1/4"	HUP95-6	6.5	26	60	18	13.5	25
	8	5/16"	HUP95-8	8.5	26	60			
	10	3/8"	HUP95-10	10.5	26	60			
	12	1/2"	HUP95-12	13	26	62			
	14	9/16"	HUP95-14	15	26	65.5			
	16	5/8"	HUP95-16	17	28	70			
	20	3/4"	HUP95-20	21	36	82			
4/0 A.W.G. 120 mm²	6	1/4"	HUP120-6	6.5	28	65	19.5	15	26
	8	5/16"	HUP120-8	8.5	28	65			
	10	3/8"	HUP120-10	10.5	28	65			
	12	1/2"	HUP120-12	13	28	65			
	14	9/16"	HUP120-14	15	28	67			
	16	5/8"	HUP120-16	17	30	70			
	20	3/4"	HUP120-20	21	36	85			
250/300 MCM 150 mm²	8	5/16"	HUP150-8	8.5	30.5	70	21	16.5	30
	10	3/8"	HUP150-10	10.5	30.5	72			
	12	1/2"	HUP150-12	13	30.5	72			
	14	9/16"	HUP150-14	15	30.5	72			
	16	5/8"	HUP150-16	17	30.5	74			
	20	3/4"	HUP150-20	21	36	88			
300/350 MCM 185 mm²	10	3/8"	HUP185-10	10.5	35	83	24	19	30
	12	1/2"	HUP185-12	13	35	83			
	14	9/16"	HUP185-14	15	35	83			
	16	5/8"	HUP185-16	17	35	83			
	20	3/4"	HUP185-20	21	39	91			
400/500 MCM 240 mm²	10	3/8"	HUP240-10	10.5	38	93.5	26	21	35
	12	1/2"	HUP240-12	13	38	93.5			
	14	9/16"	HUP240-14	15	38	93.5			
	16	5/8"	HUP240-16	17	38	93.5			
	20	3/4"	HUP240-20	21	38	93.5			
500/600 MCM 300 mm²	12	1/2"	HUP300-12	13	43	111	29.5	23.5	44
	14	9/16"	HUP300-14	15	43	111			
	16	5/8"	HUP300-16	17	43	111			
	20	3/4"	HUP300-20	21	43	111			
600/750 MCM 400 mm²	14	9/16"	HUP400-14	15	49	114	34	27	44
	16	5/8"	HUP400-16	17	49	114			
	20	3/4"	HUP400-20	21	49	114			
800/1000 MCM 500 mm²	16	5/8"	HUP500-16	17	59	150	42	31	70
	20	3/4"	HUP500-20	21	59	150			
1000/1250 MCM 630 mm²	16	5/8"	HUP630-16	17	63.5	170	44	34.5	80
	20	3/4"	HUP630-20	21	63.5	170			

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

GPH90° 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：折弯90° Special structure:Bending 90°
. 可接受异形定制 Acceptable customization






接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
12-10 A.W.G. 4-6 mm²	4	#8	GPH90-6/4	4.3	10	22.5	6.5	3.5	14
	5	#10	GPH90-6/5	5.3	10	22.5			
	6	1/4"	GPH90-6/6	6.4	12	24.5			
	8	5/16"	GPH90-6/8	8.4	15	27.5			
	10	3/8"	GPH90-6/10	10.5	16	29.5			
8 A.W.G. 10 mm²	5	#10	GPH90-10/5	5.3	12	23	7	4.5	16
	6	1/4"	GPH90-10/6	6.4	12	24			
	8	5/16"	GPH90-10/8	8.4	15	28			
	10	3/8"	GPH90-10/10	10.5	18	29.5			
6 A.W.G. 16 mm²	5	#10	GPH90-16/5	5.3	12	22.5	8.5	5.5	20
	6	1/4"	GPH90-16/6	6.4	14	24			
	8	5/16"	GPH90-16/8	8.4	15	28			
	10	3/8"	GPH90-16/10	10.5	18	31			
	12	1/2"	GPH90-16/12	13	19	32			
4 A.W.G. 25 mm²	5	#10	GPH90-25/5	5.3	14	27.5	10	6.9	21
	6	1/4"	GPH90-25/6	6.4	15	27.5			
	8	5/16"	GPH90-25/8	8.4	16	32.5			
	10	3/8"	GPH90-25/10	10.5	18	32.5			
	12	1/2"	GPH90-25/12	13	19	33.5			
2 A.W.G. 35 mm²	6	1/4"	GPH90-35/6	6.4	17	28.5	12	8.5	24
	8	5/16"	GPH90-35/8	8.4	17	34			
	10	3/8"	GPH90-35/10	10.5	20	34			
	12	1/2"	GPH90-35/12	13	22	40.5			
1/0 A.W.G. 50 mm²	6	1/4"	GPH90-50/6	6.4	20	37	14	10	28.5
	8	5/16"	GPH90-50/8	8.4	20	40.5			
	10	3/8"	GPH90-50/10	10.5	20	40.5			
	12	1/2"	GPH90-50/12	13	23	42.5			
	16	5/8"	GPH90-50/16	17	28	50.5			
2/0 A.W.G. 70 mm²	6	1/4"	GPH90-70/6	6.4	24	43	16.5	12	31
	8	5/16"	GPH90-70/8	8.4	24	43			
	10	3/8"	GPH90-70/10	10.5	24	43			
	12	1/2"	GPH90-70/12	13	24	44.5			
	16	5/8"	GPH90-70/16	17	28	53			
	20	3/4"	GPH90-70/20	21	30	59			
3/0 A.W.G. 95 mm²	8	5/16"	GPH90-95/8	8.4	26	44.5	18	13.5	35
	10	3/8"	GPH90-95/10	10.5	26	44.5			
	12	1/2"	GPH90-95/12	13	26	46.5			
	14	9/16"	GPH90-95/14	15	28	52			
	16	5/8"	GPH90-95/16	17	28	52			
	20	3/4"	GPH90-95/20	21	30.5	59			
4/0 A.W.G. 120 mm²	8	5/16"	GPH90-120/8	8.4	29	49	19.5	15	35.5
	10	3/8"	GPH90-120/10	10.5	29	49			
	12	1/2"	GPH90-120/12	13	29	49			
	14	9/16"	GPH90-120/14	15	29	52			
	16	5/8"	GPH90-120/16	17	29	55			
	20	3/4"	GPH90-120/20	21	30.5	61			

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.






GPH90° 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 特殊结构：折弯90°　Special structure:Bending 90°
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
250/300 MCM 150 mm²	8	5/16"	GPH90-150/8	8.4	31	48	21	16.5	40
	10	3/8"	GPH90-150/10	10.5	31	48			
	12	1/2"	GPH90-150/12	13	31	51			
	14	9/16"	GPH90-150/14	15	31	51			
	16	5/8"	GPH90-150/16	17	31	56			
	20	3/4"	GPH90-150/20	21	34	61.5			
300/350 MCM 185 mm²	10	3/8"	GPH90-185/10	10.5	35	58.5	24	19	46
	12	1/2"	GPH90-185/12	13	35	58.5			
	16	5/8"	GPH90-185/16	17	35	58.5			
	20	3/4"	GPH90-185/20	21	35	65			
400/500 MCM 240 mm²	12	1/2"	GPH90-240/12	13	40	54	26	21	50
	16	5/8"	GPH90-240/16	17	40	60			
	20	3/4"	GPH90-240/20	21	40	67.8			
500/600 MCM 300 mm²	12	1/2"	GPH90-300/12	13	43	74.5	29.5	23.5	59
	16	5/8"	GPH90-300/16	17	43	64			
	20	3/4"	GPH90-300/20	21	43	70.5			
600/750 MCM 400 mm²	12	1/2"	GPH90-400/12	13	49	79	34	27	62
	16	5/8"	GPH90-400/16	17	49	79			
	20	3/4"	GPH90-400/20	21	49	79			

TLK 铜管端子
COPPER TUBE TERMINALS


. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 特殊结构：加厚　Special structure:Thicken
. 可接受异形定制　Acceptable customization





接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
12-10 A.W.G. 4-6 mm²	5	#10	TLK6-5	5.5	10	27.5	6.5	3.5	9
	6	1/4"	TLK6-6	6.5	12	27.5			
	8	5/16"	TLK6-8	8.4	15	33			
	10	3/8"	TLK6-10	10.5	17	37			
	12	1/2"	TLK6-12	13	19	41			
8 A.W.G. 10 mm²	5	#10	TLK10-5	5.5	12	28.5	7	4.6	10
	6	1/4"	TLK10-6	6.5	12	28.5			
	8	5/16"	TLK10-8	8.4	15	35			
	10	3/8"	TLK10-10	10.5	17	39			
	12	1/2"	TLK10-12	13	19	42			
6 A.W.G. 16 mm²	5	#10	TLK16-5	5.5	12	31.5	8.5	5.5	13
	6	1/4"	TLK16-6	6.5	12	33.5			
	8	5/16"	TLK16-8	8.4	15	37.5			
	10	3/8"	TLK16-10	10.5	17	41.5			
	12	1/2"	TLK16-12	13	19	45			
4 A.W.G. 25 mm²	5	#10	TLK25-5	5.5	14	37.5	10	7	15
	6	1/4"	TLK25-6	6.5	14	37.5			
	8	5/16"	TLK25-8	8.4	16	42			
	10	3/8"	TLK25-10	10.5	18	46			
	12	1/2"	TLK25-12	13	19	48			
	14	9/16"	TLK25-14	15	21	52.5			
2 A.W.G. 35 mm²	6	1/4"	TLK35-6	6.5	17	39.5	12	8.5	17
	8	5/16"	TLK35-8	8.4	17	44			
	10	3/8"	TLK35-10	10.5	19	49			
	12	1/2"	TLK35-12	13	21	51			
	14	9/16"	TLK35-14	15	21	54.5			
	16	5/8"	TLK35-16	17	26	58			
1/0 A.W.G. 50 mm²	6	1/4"	TLK50-6	6.5	19.7	47	14	10	19
	8	5/16"	TLK50-8	8.4	19.7	47			
	10	3/8"	TLK50-10	10.5	19.7	51			
	12	1/2"	TLK50-12	13	23	56			
	14	9/16"	TLK50-14	15	23	59.5			
	16	5/8"	TLK50-16	17	28	62			
	20	3/4"	TLK50-20	21	30	67			
2/0 A.W.G. 70 mm²	6	1/4"	TLK70-6	6.5	23.3	53	16.5	12	21
	8	5/16"	TLK70-8	8.4	23.3	53			
	10	3/8"	TLK70-10	10.5	23.3	56			
	12	1/2"	TLK70-12	13	23.3	59			
	14	9/16"	TLK70-14	15	23.3	62.5			
	16	5/8"	TLK70-16	17	28	66			
	20	3/4"	TLK70-20	21	30	72			
3/0 A.W.G. 95 mm²	8	5/16"	TLK95-8	8.4	25.7	60	18	13.5	25
	10	3/8"	TLK95-10	10.5	25.7	60			
	12	1/2"	TLK95-12	13	25.7	62			
	14	9/16"	TLK95-14	15	25.7	65.5			
	16	5/8"	TLK95-16	17	28	70			
	20	3/4"	TLK95-20	21	36	82			





TLK 铜管端子
COPPER TUBE TERMINALS


. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：加厚 Special structure:Thicken
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
4/0 A.W.G. 120 mm²	8	5/16"	TLK120-8	8.4	28	65	19.5	15	26
	10	3/8"	TLK120-10	10.5	28	65			
	12	1/2"	TLK120-12	13	28	65			
	14	9/16"	TLK120-14	15	28	67			
	16	5/8"	TLK120-16	17	30	70			
	20	3/4"	TLK120-20	21	36	85			
250/300 MCM 150 mm²	8	5/16"	TLK150-8	8.4	30.4	70	21	16.5	30
	10	3/8"	TLK150-10	10.5	30.4	70			
	12	1/2"	TLK150-12	13	30.4	72			
	14	9/16"	TLK150-14	15	30.4	72			
	16	5/8"	TLK150-16	17	30.4	74			
	20	3/4"	TLK150-20	21	36	88			
300/350 MCM 185 mm²	10	3/8"	TLK185-10	10.5	34.7	83	24	19	30
	12	1/2"	TLK185-12	13	34.7	83			
	14	9/16"	TLK185-14	15	34.7	83			
	16	5/8"	TLK185-16	17	34.7	83			
	20	3/4"	TLK185-20	21	39	91			
400/500 MCM 240 mm²	10	3/8"	TLK240-10	10.5	37.8	93.5	26	21	35
	12	1/2"	TLK240-12	13	37.8	93.5			
	14	9/16"	TLK240-14	15	37.8	93.5			
	16	5/8"	TLK240-16	17	37.8	93.5			
	20	3/4"	TLK240-20	21	37.8	93.5			
500/600 MCM 300 mm²	12	1/2"	TLK300-12	13	42.7	111	29.5	23.5	44
	14	9/16"	TLK300-14	15	42.7	111			
	16	5/8"	TLK300-16	17	42.7	111			
	20	3/4"	TLK300-20	21	42.7	111			
600/750 MCM 400 mm²	12	1/2"	TLK400-12	13	49	114	34	27	44
	14	9/16"	TLK400-14	15	49	114			
	16	5/8"	TLK400-16	17	49	114			
	20	3/4"	TLK400-20	21	49	114			

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

TLK90° 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：折弯90° Special structure:Bending 90°
. 可接受异形定制 Acceptable customization






接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
12-10 A.W.G. 4-6 mm²	5	#10	TLK90-6/5	5.3	10	22.5	6.5	3.5	14
	6	1/4"	TLK90-6/6	6.4	12	24			
	8	5/16"	TLK90-6/8	8.5	15	27.5			
	10	3/8"	TLK90-6/10	10.5	16	29.5			
8 A.W.G. 10 mm²	5	#10	TLK90-10/5	5.3	12	23	7	4.5	16
	6	1/4"	TLK90-10/6	6.4	12	24			
	8	5/16"	TLK90-10/8	8.5	15	28			
	10	3/8"	TLK90-10/10	10.5	17	29.5			
6 A.W.G. 16 mm²	5	#10	TLK90-16/5	5.3	12	22.5	8.5	5.5	20
	6	1/4"	TLK90-16/6	6.4	14	24			
	8	5/16"	TLK90-16/8	8.5	15	28			
	10	3/8"	TLK90-16/10	10.5	17	31			
	12	1/2"	TLK90-16/12	13	18	32			
4 A.W.G. 25 mm²	6	1/4"	TLK90-25/6	6.4	15	27.5	10	7	21
	8	5/16"	TLK90-25/8	8.4	16	32.5			
	10	3/8"	TLK90-25/10	10.5	18	32.5			
	12	1/2"	TLK90-25/12	13	19	34			
2 A.W.G. 35 mm²	6	1/4"	TLK90-35/6	6.4	17	28.5	12	8.5	24
	8	5/16"	TLK90-35/8	8.5	17	34			
	10	3/8"	TLK90-35/10	10.5	20	34			
	12	1/2"	TLK90-35/12	13	22	40.5			
1/0 A.W.G. 50 mm²	6	1/4"	TLK90-50/6	6.4	20	37	14	10	28.5
	8	5/16"	TLK90-50/8	8.4	20	40.5			
	10	3/8"	TLK90-50/10	10.5	20	40.5			
	12	1/2"	TLK90-50/12	13	23	42.5			
	16	5/8"	TLK90-50/16	17	28	50.5			
2/0 A.W.G. 70 mm²	8	5/16"	TLK90-70/8	8.5	23.5	43	16.5	12	31
	10	3/8"	TLK90-70/10	10.5	23.5	43			
	12	1/2"	TLK90-70/12	13	25.7	44.5			
	16	5/8"	TLK90-70/16	17	28	53			
	20	3/4"	TLK90-70/20	21	30	59			
3/0 A.W.G. 95 mm²	8	5/16"	TLK90-95/8	8.5	25.7	44.5	18	13.5	35
	10	3/8"	TLK90-95/10	10.5	25.7	44.5			
	12	1/2"	TLK90-95/12	13	25.7	46.5			
	16	5/8"	TLK90-95/16	17	28	52			
	20	3/4"	TLK90-95/20	21	30.5	59			
4/0 A.W.G. 120 mm²	10	3/8"	TLK90-120/10	10.5	28	49	19.5	15	35.5
	12	1/2"	TLK90-120/12	13	28	49			
	16	5/8"	TLK90-120/16	17	28	55			
	20	3/4"	TLK90-120/20	21	30.5	61			

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.






TLK90° 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 特殊结构：折弯90°　Special structure:Bending 90°
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
250/300 MCM 150 mm²	10	3/8"	TLK90-150/10	10.5	30.4	51	21	16.5	40
	12	1/2"	TLK90-150/12	13	30.4	51			
	16	5/8"	TLK90-150/16	17	30.4	56			
	20	3/4"	TLK90-150/20	21	34	61.5			
300/350 MCM 185 mm²	12	1/2"	TLK90-185/12	13	34.7	58.5	24	19	46
	16	5/8"	TLK90-185/16	17	34.7	58.5			
	20	3/4"	TLK90-185/20	21	34.7	65			
400/500 MCM 240 mm²	12	1/2"	TLK90-240/12	13	37.8	60	26	21	50
	16	5/8"	TLK90-240/16	17	37.8	60			
	20	3/4"	TLK90-240/20	21	37.8	68			
500/600 MCM 300 mm²	12	1/2"	TLK90-300/12	13	42.7	64	29.5	23.5	59
	16	5/8"	TLK90-300/16	17	42.7	64			
	20	3/4"	TLK90-300/20	21	42.7	70.5			
600/750 MCM 400 mm²	12	1/2"	TLK90-400/12	13	49	68.5	34	27	62
	16	5/8"	TLK90-400/16	17	49	68.5			
	20	3/4"	TLK90-400/20	21	49	75			


X-SC 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 特殊结构：加厚　Special structure:Thicken
. 可接受异形定制　Acceptable customization





接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
22-16 A.W.G. 0.5-1.5 mm²	4	#8	X-SC1.5-4	4.3	7.5	18	3.1	1.9	6.5
	5	#10	X-SC1.5-5	5.2	8	18			
	6	1/4"	X-SC1.5-6	6.5	9.2	18	3.4		
16-14 A.W.G. 1.5-2.5 mm²	4	#8	X-SC2.5-4	4.3	8	19	4	2.8	7
	5	#10	X-SC2.5-5	5.2	8	20			
	6	1/4"	X-SC2.5-6	6.5	9.2	20	4	2.6	
14-12 A.W.G. 2.5-4 mm²	4	#8	X-SC4-4	4.3	8	19.5	4.5	3.2	7.5
	5	#10	X-SC4-5	5.2	8	20.5			
	6	1/4"	X-SC4-6	6.5	9.2	22			
	8	5/16"	X-SC4-8	8.5	12	23.5	4.8		
12-10 A.W.G. 4-6 mm²	5	#10	X-SC6-5	5.2	10.3	26	5.5	3.8	10
	6	1/4"	X-SC6-6	6.5	10.3	26			
	8	5/16"	X-SC6-8	8.5	13.9	29			
	10	3/8"	X-SC6-10	10.3	13.9	29			
8 A.W.G. 10 mm²	5	#10	X-SC10-5	5.2	11.9	27.5	6.9	4.7	11.5
	6	1/4"	X-SC10-6	6.5	11.9	27.5			
	8	5/16"	X-SC10-8	8.5	13.5	30.5			
	10	3/8"	X-SC10-10	10.3	15	30.5			
6 A.W.G. 16 mm²	6	1/4"	X-SC16-6	6.5	12.2	31.5	8	6	11
	8	5/16"	X-SC16-8	8.5	12.2	31.5			
	10	3/8"	X-SC16-10	10.5	15	32.5			
4 A.W.G. 25 mm²	6	1/4"	X-SC25-6	6.5	13.5	35.8	9.4	7	16.6
	8	5/16"	X-SC25-8	8.5	13.5	35.8			
	10	3/8"	X-SC25-10	10.5	14.5	36.8			
	12	1/2"	X-SC25-12	13	17	37.8			
2 A.W.G. 35 mm²	6	1/4"	X-SC35-6	6.5	16.4	40.3	11.5	8.6	16.5
	8	5/16"	X-SC35-8	8.5	16.4	40.3			
	10	3/8"	X-SC35-10	10.5	16.4	40.3			
	12	1/2"	X-SC35-12	13	19	43.3			
1/0 A.W.G. 50 mm²	6	1/4"	X-SC50-6	6.5	19.5	46.5	13.5	10.5	18.5
	8	5/16"	X-SC50-8	8.5	19.5	46.5			
	10	3/8"	X-SC50-10	10.5	19.5	46.5			
	12	1/2"	X-SC50-12	13	19.5	46.5			
2/0 A.W.G. 70 mm²	6	1/4"	X-SC70-6	6.5	21.8	52.3	15	12	20.5
	8	5/16"	X-SC70-8	8.5	21.8	52.3			
	10	3/8"	X-SC70-10	10.5	21.8	52.3			
	12	1/2"	X-SC70-12	13	21.8	52.3			
	14	9/16"	X-SC70-14	15	21.8	52.3			
	16	5/8"	X-SC70-16	17	26	56			
3/0 A.W.G. 95 mm²	8	5/16"	X-SC95-8	8.5	25.3	57	17.5	13.9	22
	10	3/8"	X-SC95-10	10.5	25.3	57			
	12	1/2"	X-SC95-12	13	25.3	57			
	14	9/16"	X-SC95-14	15	25.3	57			

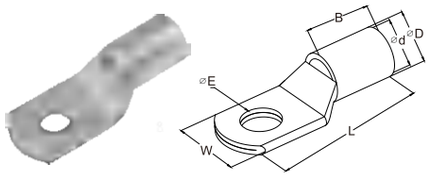


SC 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜	Terminals material:Copper
. 表面处理：镀锡	Plating:Tin plated
. 特殊结构：观察孔	Special structure:Observation hole
. 可接受异形定制	Acceptable customization

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					
mm^2 (A.W.G.)	Metrie	American		⌀E	W	L	⌀D	⌀d	B
22-16 A.W.G. 0.5-1.5 mm^2	3	#4	SC1.5-3	3.2	8	16	3.7	1.8	5
	4	#8	SC1.5-4	4.2	8	16			
	5	#10	SC1.5-5	5.2	10	17			
	6	1/4"	SC1.5-6	6.5	10	18			
16-14 A.W.G. 1.5-2.5 mm^2	3	#4	SC2.5-3	3.2	8	18	4	2.4	7
	4	#8	SC2.5-4	4.2	8	18			
	5	#10	SC2.5-5	5.2	10	20			
	6	1/4"	SC2.5-6	6.5	10	20			
	8	5/16"	SC2.5-8	8.4	12.5	23			
14-12 A.W.G. 2.5-4 mm^2	4	#8	SC4-4	4.2	10	20	4.8	3.1	7
	5	#10	SC4-5	5.2	10	20			
	6	1/4"	SC4-6	6.5	10	20			
	8	5/16"	SC4-8	8.4	12.5	23			
12-10 A.W.G. 4-6 mm^2	4	#8	SC6-4	4.2	10	24	5.5	3.8	9
	5	#10	SC6-5	5.2	10	24			
	6	1/4"	SC6-6	6.5	12	24			
	8	5/16"	SC6-8	8.4	12.5	26			
	10	3/8"	SC6-10	10.5	15	28	6.2	4	
8 A.W.G. 10 mm^2	4	#8	SC10-4	4.2	12	25	6.2	4.5	9
	5	#10	SC10-5	5.2	12	25			
	6	1/4"	SC10-6	6.5	12	25			
	8	5/16"	SC10-8	8.4	12.5	27			
	10	3/8"	SC10-10	10.5	15	29			
	12	1/2"	SC10-12	13	17	31			
6 A.W.G. 16 mm^2	5	#10	SC16-5	5.2	12	30	7.1	5.4	12
	6	1/4"	SC16-6	6.5	12	30			
	8	5/16"	SC16-8	8.4	12	30			
	10	3/8"	SC16-10	10.5	16	33			
	12	1/2"	SC16-12	13	17	35			
4 A.W.G. 25 mm^2	4	#8	SC25-4	4.3	13	33	8.8	6.8	12
	5	#10	SC25-5	5.2	13	33			
	6	1/4"	SC25-6	6.5	13	33			
	8	5/16"	SC25-8	8.4	15	33			
	10	3/8"	SC25-10	10.5	15	33			
	12	1/2"	SC25-12	13	18	35			
	14	9/16"	SC25-14	15	20	38			
2 A.W.G. 35 mm^2	5	#10	SC35-5	5.2	16	38	10.6	8.2	14
	6	1/4"	SC35-6	6.5	16	38			
	8	5/16"	SC35-8	8.4	16	38			
	10	3/8"	SC35-10	10.5	16	38			
	12	1/2"	SC35-12	13	19	40.5			
	14	9/16"	SC35-14	15	20	42			
1/0 A.W.G. 50 mm^2	6	1/4"	SC50-6	6.5	17.8	45	12.4	9.5	16
	8	5/16"	SC50-8	8.4	17.8	45			
	10	3/8"	SC50-10	10.5	17.8	45			
	12	1/2"	SC50-12	13	20	45			
	14	9/16"	SC50-14	15	22	46			
	16	5/8"	SC50-16	17	24	47			


SC 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：观察孔 Special structure:Observation hole
. 可接受异形定制 Acceptable customization





接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					
mm^2 (A.W.G.)	Metrie	American		⌀E	W	L	⌀D	⌀d	B
2/0 A.W.G. 70 mm^2	6	1/4"	SC70-6	6.5	21	52	14.7	11.2	20
	8	5/16"	SC70-8	8.4	21	52			
	10	3/8"	SC70-10	10.5	21	52			
	12	1/2"	SC70-12	13	21	52			
	14	9/16"	SC70-14	15	21	52			
	16	5/8"	SC70-16	17	25	53			
3/0 A.W.G. 95 mm^2	6	1/4"	SC95-6	6.5	25	58	17.4	13.5	23
	8	5/16"	SC95-8	8.4	25	58			
	10	3/8"	SC95-10	10.5	25	58			
	12	1/2"	SC95-12	13	25	58			
	14	9/16"	SC95-14	15	25	58			
	16	5/8"	SC95-16	17	25	58			
4/0 A.W.G. 120 mm^2	6	1/4"	SC120-6	6.5	28	63	19.4	15	22
	8	5/16"	SC120-8	8.4	28	63			
	10	3/8"	SC120-10	10.5	28	63			
	12	1/2"	SC120-12	13	28	63			
	14	9/16"	SC120-14	15	28	63			
	16	5/8"	SC120-16	17	28	63			
	20	3/4"	SC120-20	21	28	63			
250/300 MCM 150 mm^2	8	5/16"	SC150-8	8.4	30.5	70	21.2	16.5	26
	10	3/8"	SC150-10	10.5	30.5	70			
	12	1/2"	SC150-12	13	30.5	70			
	14	9/16"	SC150-14	15	30.5	70			
	16	5/8"	SC150-16	17	30.5	70			
	20	3/4"	SC150-20	21	30.5	70			
300/350 MCM 185 mm^2	10	3/8"	SC185-10	10.5	34	75	23.5	18.5	32
	12	1/2"	SC185-12	13	34	75			
	14	9/16"	SC185-14	15	34	75			
	16	5/8"	SC185-16	17	34	75			
	20	3/4"	SC185-20	21	34	75			
400/500 MCM 240 mm^2	10	3/8"	SC240-10	10.5	38.5	90	26.5	21	38
	12	1/2"	SC240-12	13	38.5	90			
	14	9/16"	SC240-14	15	38.5	90			
	16	5/8"	SC240-16	17	38.5	90			
	18	11/16"	SC240-18	19	38.5	90			
	20	3/4"	SC240-20	21	38.5	90			
500/600 MCM 300 mm^2	10	3/8"	SC300-10	10.5	43	98	30	23.5	42
	12	1/2"	SC300-12	13	43	98			
	14	9/16"	SC300-14	15	43	98			
	16	5/8"	SC300-16	17	43	98			
	20	3/4"	SC300-20	21	43	98			
600/750 MCM 400 mm^2	10	3/8"	SC400-10	10.5	52.5	110	36.5	28.5	44
	12	1/2"	SC400-12	13	52.5	110			
	14	9/16"	SC400-14	15	52.5	110			
	16	5/8"	SC400-16	17	52.5	110			
	20	3/4"	SC400-20	21	52.5	110			

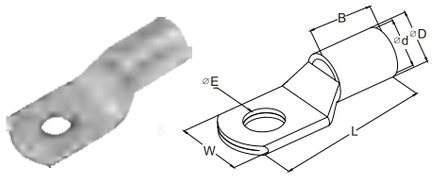


A-SC 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：观察孔 Special structure:Observation hole
. 可接受异形定制 Acceptable customization


接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
22-16 A.W.G. 0.5-1.5 mm²	4	#8	A-SC1.5-4	4.3	7.5	18	3.1	1.9	6.5
	5	#10	A-SC1.5-5	5.2	8	18			
	6	1/4"	A-SC1.5-6	6.5	9.2	18	3.4		
16-14 A.W.G. 1.5-2.5 mm²	4	#8	A-SC2.5-4	4.3	8	19	4	2.8	7
	5	#10	A-SC2.5-5	5.2	8	20			
	6	1/4"	A-SC2.5-6	6.5	9.2	20	4	2.6	
14-12 A.W.G. 2.5-4 mm²	4	#8	A-SC4-4	4.3	8	19.5	4.5	3.2	7.5
	5	#10	A-SC4-5	5.2	8	20.5			
	6	1/4"	A-SC4-6	6.5	9.2	22			
	8	5/16"	A-SC4-8	8.5	12	23.5	4.8		
12-10 A.W.G. 4-6 mm²	5	#10	A-SC6-5	5.2	9.2	22	5.1	3.7	8
	6	1/4"	A-SC6-6	6.5	9.8	23			
	8	5/16"	A-SC6-8	8.5	12	24	5.3		
	10	3/8"	A-SC6-10	10.3	12.8	24			
8 A.W.G. 10 mm²	5	#10	A-SC10-5	5.2	10.3	24	6.1	4.5	9
	6	1/4"	A-SC10-6	6.5	10.3	24			
	8	5/16"	A-SC10-8	8.5	12	25			
	10	3/8"	A-SC10-10	10.3	13.2	26.5	6.3		
6 A.W.G. 16 mm²	6	1/4"	A-SC16-6	6.5	11	27.5	7.3	5.7	11
	8	5/16"	A-SC16-8	8.5	12.5	29.5			
	10	3/8"	A-SC16-10	10.5	14	30	7.5		
4 A.W.G. 25 mm²	6	1/4"	A-SC25-6	6.5	13.1	32.5	9	7.2	13.5
	8	5/16"	A-SC25-8	8.5	13.1	33			
	10	3/8"	A-SC25-10	10.5	14.5	34			
	12	1/2"	A-SC25-12	13	16.5	37			
2 A.W.G. 35 mm²	6	1/4"	A-SC35-6	6.5	15.8	36	10.8	8.5	14.5
	8	5/16"	A-SC35-8	8.5	15.8	37			
	10	3/8"	A-SC35-10	10.5	15.8	38			
	12	1/2"	A-SC35-12	13	17.4	38			
1/0 A.W.G. 50 mm²	6	1/4"	A-SC50-6	6.5	18.1	41	12.5	9.8	17
	8	5/16"	A-SC50-8	8.5	18.1	42.5			
	10	3/8"	A-SC50-10	10.5	18.2	44			
	12	1/2"	A-SC50-12	13	18.2	44			
2/0 A.W.G. 70 mm²	6	1/4"	A-SC70-6	6.5	21	48.5	14.5	11.5	19.5
	8	5/16"	A-SC70-8	8.5	21	48.5			
	10	3/8"	A-SC70-10	10.5	21	50			
	12	1/2"	A-SC70-12	13	21	50			
	14	9/16"	A-SC70-14	15	21	50			
	16	5/8"	A-SC70-16	17	23	51			
3/0 A.W.G. 95 mm²	8	5/16"	A-SC95-8	8.5	24.8	57	17	13.7	23.5
	10	3/8"	A-SC95-10	10.5	24.8	57			
	12	1/2"	A-SC95-12	13	24.8	57			
	14	9/16"	A-SC95-14	15	24.8	57			
	16	5/8"	A-SC95-16	17	26	57			

A-SC 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：观察孔 Special structure:Observation hole
. 可接受异形定制 Acceptable customization

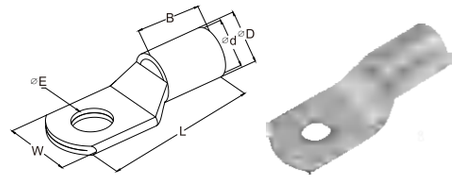

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
4/0 A.W.G. 120 mm²	8	5/16"	A-SC120-8	8.5	27.6	63	19	15	25.5
	10	3/8"	A-SC120-10	10.5	27.6				
	12	1/2"	A-SC120-12	13	27.6				
	14	9/16"	A-SC120-14	15	27.6				
	16	5/8"	A-SC120-16	17	27.6				
	20	3/4"	A-SC120-20	21	30	67			
250/300 MCM 150 mm²	8	5/16"	A-SC150-8	8.5	30.5	70.5	21	16.7	29
	10	3/8"	A-SC150-10	10.5	30.5				
	12	1/2"	A-SC150-12	13	30.5				
	14	9/16"	A-SC150-14	15	30.5				
	16	5/8"	A-SC150-16	17	30.5				
	20	3/4"	A-SC150-20	21	30.5	72.5			
300/350 MCM 185 mm²	10	3/8"	A-SC185-10	10.5	34.5	77	23.5	19.5	32
	12	1/2"	A-SC185-12	13	34.5				
	14	9/16"	A-SC185-14	15	34.5				
	16	5/8"	A-SC185-16	17	34.5				
	20	3/4"	A-SC185-20	21	34.5	79			
400/500 MCM 240 mm²	10	3/8"	A-SC240-10	10.5	38	90.5	26	21	39
	12	1/2"	A-SC240-12	13	38				
	14	9/16"	A-SC240-14	15	38				
	16	5/8"	A-SC240-16	17	38				
	18	11/16"	A-SC240-18	19	38				
	20	3/4"	A-SC240-20	21	38				
500/600 MCM 300 mm²	10	3/8"	A-SC300-10	10.5	43.7	100	30	24	43.5
	12	1/2"	A-SC300-12	13	43.7				
	14	9/16"	A-SC300-14	15	43.7				
	16	5/8"	A-SC300-16	17	43.7				
	20	3/4"	A-SC300-20	21	43.7				
600/750 MCM 400 mm²	10	3/8"	A-SC400-10	10.5	49.5	110	34	27	46
	12	1/2"	A-SC400-12	13	49.5				
	14	9/16"	A-SC400-14	15	49.5				
	16	5/8"	A-SC400-16	17	49.5				
	20	3/4"	A-SC400-20	21	49.5				
800/1000 MCM 500 mm²	10	3/8"	A-SC500-10	10.5	55	123	38	30	50
	12	1/2"	A-SC500-12	13	55				
	14	9/16"	A-SC500-14	15	55				
	16	5/8"	A-SC500-16	17	55				
	20	3/4"	A-SC500-20	21	55				
1000/1250 MCM 630 mm²	10	3/8"	A-SC630-10	10.5	65	135	45	35	56
	12	1/2"	A-SC630-12	13	65				
	14	9/16"	A-SC630-14	15	65				
	16	5/8"	A-SC630-16	17	65				
	20	3/4"	A-SC630-20	21	65				
800 mm²	20	3/4"	A-SC800-20	21	72	170	50	39	60
1000 mm²	22	7/8"	A-SC1000-22	23	81	200	56	44	87

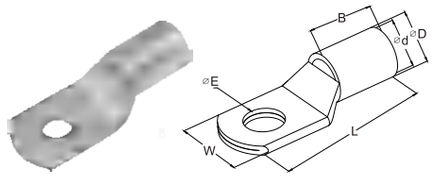


SC-XB 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：观察孔 Special structure:Observation hole
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
22-16 A.W.G. 0.5-1.5 mm²	4	#8	SC-XB1.5-4	4.3	8	16.5	4	2.2	5
	5	#10	SC-XB1.5-5	5.3	8	16.5			
16-14 A.W.G. 1.5-2.5 mm²	4	#8	SC-XB2.5-4	4.3	8	19	4.5	2.9	7
	5	#10	SC-XB2.5-5	5.3	8	21			
	6	1/4"	SC-XB2.5-6	6.4	10	21			
	8	5/16"	SC-XB2.5-8	8.4	13	23			
14-12 A.W.G. 2.5-4 mm²	4	#8	SC-XB4-4	4.3	10	21	5.2	3.6	7
	5	#10	SC-XB4-5	5.3	10	21			
	6	1/4"	SC-XB4-6	6.4	10	21			
	8	5/16"	SC-XB4-8	8.4	13	24			
12-10 A.W.G. 4-6 mm²	4	#8	SC-XB6-4	4.3	10	23	6	4.2	9
	5	#10	SC-XB6-5	5.3	10	23			
	6	1/4"	SC-XB6-6	6.4	10	26			
	8	5/16"	SC-XB6-8	8.4	12	26			
	10	3/8"	SC-XB6-10	10.5	16	34			
8 A.W.G. 10 mm²	4	#8	SC-XB10-4	4.3	12.4	27	7	5	9
	5	#10	SC-XB10-5	5.3	12.4	27			
	6	1/4"	SC-XB10-6	6.4	12.4	27			
	8	5/16"	SC-XB10-8	8.4	12.4	28			
	10	3/8"	SC-XB10-10	10.5	18	34.5			
	12	1/2"	SC-XB10-12	13	18.5	39.5			
6 A.W.G. 16 mm²	4	#8	SC-XB16-4	4.3	12.4	31	7.8	5.8	12
	5	#10	SC-XB16-5	5.3	12.4	31			
	6	1/4"	SC-XB16-6	6.4	12.4	31			
	8	5/16"	SC-XB16-8	8.4	12.4	31			
	10	3/8"	SC-XB16-10	10.5	16	34			
	12	1/2"	SC-XB16-12	13	19.5	42			
4 A.W.G. 25 mm²	5	#10	SC-XB25-5	5.3	14	32	9.5	7.5	12
	6	1/4"	SC-XB25-6	6.4	14	32			
	8	5/16"	SC-XB25-8	8.4	18	34			
	10	3/8"	SC-XB25-10	10.5	17.5	37			
	12	1/2"	SC-XB25-12	13	20.5	45			
2 A.W.G. 35 mm²	6	1/4"	SC-XB35-6	6.4	16.5	38	11.4	8.6	15
	8	5/16"	SC-XB35-8	8.4	16.5	38			
	10	3/8"	SC-XB35-10	10.5	17.5	41			
	12	1/2"	SC-XB35-12	13	18	47.5			
1/0 A.W.G. 50 mm²	6	1/4"	SC-XB50-6	6.4	18	43.5	12.6	9.6	16
	8	5/16"	SC-XB50-8	8.4	18	44			
	10	3/8"	SC-XB50-10	10.5	18	44			
	12	1/2"	SC-XB50-12	13	18	44			
	14	9/16"	SC-XB50-14	15	25	55.5			
	16	5/8"	SC-XB50-16	17	26	60			
2/0 A.W.G. 70 mm²	6	1/4"	SC-XB70-6	6.4	21.8	50	15	12	18
	8	5/16"	SC-XB70-8	8.4	21.8	50			
	10	3/8"	SC-XB70-10	10.5	21.8	50			
	12	1/2"	SC-XB70-12	13	21.8	50			
	14	9/16"	SC-XB70-14	15	21.8	59			
	16	5/8"	SC-XB70-16	17	26	63			


SC-XB 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：观察孔 Special structure:Observation hole
. 可接受异形定制 Acceptable customization





接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
3/0 A.W.G. 95 mm²	5	#10	SC-XB95-5	5.3	25	55.5	17.4	13.5	20
	6	1/4"	SC-XB95-6	6.4	25	55.5			
	8	5/16"	SC-XB95-8	8.4	25	55.5			
	10	3/8"	SC-XB95-10	10.5	25	55			
	12	1/2"	SC-XB95-12	13	25	55.5			
	14	9/16"	SC-XB95-14	15	25	65			
	16	5/8"	SC-XB95-16	17	27	69.5			
	20	3/4"	SC-XB95-20	21	29	77.5			
4/0 A.W.G. 120 mm²	8	5/16"	SC-XB120-8	8.4	28.4	60	19.8	15	22
	10	3/8"	SC-XB120-10	10.5	28.4	60			
	12	1/2"	SC-XB120-12	13	28.4	60			
	14	9/16"	SC-XB120-14	15	28.4	64			
	16	5/8"	SC-XB120-16	17	28.4	64			
250/300 MCM 150 mm²	6	1/4"	SC-XB150-6	6.4	30.5	69	21.2	16.5	26
	8	5/16"	SC-XB150-8	8.4	30.5	69			
	10	3/8"	SC-XB150-10	10.5	30.5	69			
	12	1/2"	SC-XB150-12	13	30.5	69			
	14	9/16"	SC-XB150-14	15	30.5	69			
	16	5/8"	SC-XB150-16	17	30.5	69			
	20	3/4"	SC-XB150-20	21	30.5	69			
300/350 MCM 185 mm²	10	3/8"	SC-XB185-10	10.5	34	78	23.5	18.5	32
	12	1/2"	SC-XB185-12	13	34	78			
	14	9/16"	SC-XB185-14	15	34	78			
	16	5/8"	SC-XB185-16	17	34	78			
	20	3/4"	SC-XB185-20	21	34	78			
400/500 MCM 240 mm²	10	3/8"	SC-XB240-10	10.5	38.5	92	26.5	21.5	38
	12	1/2"	SC-XB240-12	13	38.5	92			
	14	9/16"	SC-XB240-14	15	38.5	92			
	16	5/8"	SC-XB240-16	17	38.5	92			
	20	3/4"	SC-XB240-20	21	38.5	92			
500/600 MCM 300 mm²	12	1/2"	SC-XB300-12	13	43	101	30	23.5	42
	14	9/16"	SC-XB300-14	15	43	101			
	16	5/8"	SC-XB300-16	17	43	101			
	18	11/16"	SC-XB300-18	19	43	101			
	20	3/4"	SC-XB300-20	21	43	101			
600/750 MCM 400 mm²	12	1/2"	SC-XB400-12	13	52.5	114	36.5	28.5	44
	14	9/16"	SC-XB400-14	15	52.5	114			
	16	5/8"	SC-XB400-16	17	52.5	114			
	18	11/16"	SC-XB400-18	19	52.5	114			
	20	3/4"	SC-XB400-20	21	52.5	114			
800/1000 MCM 500 mm²	16	5/8"	SC-XB500-16	17	56	124	39	30.5	48
	18	11/16"	SC-XB500-18	19	56	124			
	20	3/4"	SC-XB500-20	21	56	124			

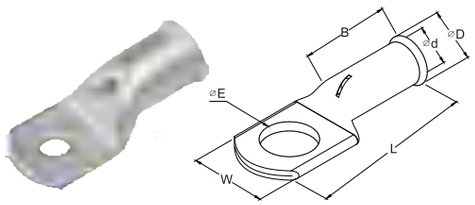


GC喇叭口 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：喇叭口 Special structure:Bell mouth
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
22-16 A.W.G. 0.5-1.5 mm²	3	#4	GC1.5-3	3.2	8	16	3.7	1.8	6
	4	#8	GC1.5-4	4.3	8	17			
	5	#10	GC1.5-5	5.3	10	19			7
	6	1/4"	GC1.5-6	6.5	10	20			
16-14 A.W.G. 1.5-2.5 mm²	3	#4	GC2.5-3	3.2	8	17	3.9	2.3	7
	4	#8	GC2.5-4	4.3	8	18			
	5	#10	GC2.5-5	5.3	10	20			
	6	1/4"	GC2.5-6	6.5	10	20			
	8	5/16"	GC2.5-8	8.3	12.5	22.5	4.3		
14-12 A.W.G. 2.5-4 mm²	4	#8	GC4-4	4.3	10	21	4.7	3	8
	5	#10	GC4-5	5.3	10	22			
	6	1/4"	GC4-6	6.5	10	23			
	8	5/16"	GC4-8	8.3	12.5	24			
12-10 A.W.G. 4-6 mm²	4	#8	GC6-4	4.3	10	24.6	5.9	4	9.5
	5	#10	GC6-5	5.3	10	24.6			
	6	1/4"	GC6-6	6.5	11	24.6			
	8	5/16"	GC6-8	8.3	12.5	27.3			
	10	3/8"	GC6-10	10.3	15	28.3	6.2		
8 A.W.G. 10 mm²	4	#8	GC10-4	4.3	11	30	6.6	4.5	13
	5	#10	GC10-5	5.3	11	30			
	6	1/4"	GC10-6	6.5	11	30			
	8	5/16"	GC10-8	8.3	12.5	30			
	10	3/8"	GC10-10	10.3	16	34.1	6.9		
	12	1/2"	GC10-12	12.7	18	34.1			12
6 A.W.G. 16 mm²	5	#10	GC16-5	5.3	11	30.7	7.5	5.5	14
	6	1/4"	GC16-6	6.5	11	30.7			
	8	5/16"	GC16-8	8.3	12.5	30.7			13
	10	3/8"	GC16-10	10.3	16	35.9			14
	12	1/2"	GC16-12	12.7	18	35.9	8.1		13
	14	9/16"	GC16-14	14.8	20	37.9			
4 A.W.G. 25 mm²	5	#10	GC25-5	5.3	13	32.2	9.1	6.7	13
	6	1/4"	GC25-6	6.5	13	32.2			
	8	5/16"	GC25-8	8.3	13	32.2			
	10	3/8"	GC25-10	10.3	16	36.9			14
	12	1/2"	GC25-12	12.7	18	36.9			13
	14	9/16"	GC25-14	14.8	20	38.9			
2 A.W.G. 35 mm²	5	#10	GC35-5	5.3	16	37.6	11	8.6	16
	6	1/4"	GC35-6	6.5	16	37.6			
	8	5/16"	GC35-8	8.3	16	37.6			
	10	3/8"	GC35-10	10.3	17	41.5			
	12	1/2"	GC35-12	12.7	18	41.5			
	14	9/16"	GC35-14	14.8	20	43.5			
	16	5/8"	GC35-16	16.5	23	45.5			
1/0 A.W.G. 50 mm²	5	#10	GC50-5	5.3	18	41	12.4	9.5	17
	6	1/4"	GC50-6	6.5	18	41			
	8	5/16"	GC50-8	8.3	18	41			
	10	3/8"	GC50-10	10.3	18	44			
	12	1/2"	GC50-12	12.7	19	44			
	14	9/16"	GC50-14	14.8	21	52.8			19
	16	5/8"	GC50-16	16.5	23	52.8			


GC喇叭口 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：喇叭口 Special structure:Bell mouth
. 可接受异形定制 Acceptable customization





接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
2/0 A.W.G. 70 mm²	5	#10	GC70-5	5.3	22	52.4	15	12	21.5
	6	1/4"	GC70-6	6.5	22	52.4			
	8	5/16"	GC70-8	8.3	22	52.4			
	10	3/8"	GC70-10	10.3	22	52.4			
	12	1/2"	GC70-12	12.7	22	52.4			
	14	9/16"	GC70-14	14.8	22	55			
	16	5/8"	GC70-16	16.5	24	55			20
	20	3/4"	GC70-20	20.9	30	60			
3/0 A.W.G. 95 mm²	6	1/4"	GC95-6	6.3	25	54.7	17	13.4	22.5
	8	5/16"	GC95-8	8.3	25	54.7			
	10	3/8"	GC95-10	10.3	25	54.7			
	12	1/2"	GC95-12	12.7	25	54.7			
	14	9/16"	GC95-14	14.8	25	58.3			
	16	5/8"	GC95-16	16.5	25	58.3			
	20	3/4"	GC95-20	20.9	28	61.3			
4/0 A.W.G. 120 mm²	8	5/16"	GC120-8	8.3	27.5	60	19	15	23
	10	3/8"	GC120-10	10.3	27.5	60			
	12	1/2"	GC120-12	12.7	27.5	60			
	14	9/16"	GC120-14	14.8	27.5	64			
	16	5/8"	GC120-16	16.5	27.5	64			
	20	3/4"	GC120-20	20.9	27.5	64			
250/300 MCM 150 mm²	8	5/16"	GC150-8	8.3	30.5	67	21.2	16.5	27
	10	3/8"	GC150-10	10.3	30.5	67			
	12	1/2"	GC150-12	12.7	30.5	67			
	14	9/16"	GC150-14	14.8	30.5	67			
	16	5/8"	GC150-16	16.5	30.5	71.4			
	20	3/4"	GC150-20	20.9	30.5	71.4			
300/350 MCM 185 mm²	10	3/8"	GC185-10	10.3	34	73	23	19	30
	12	1/2"	GC185-12	12.7	34	73			
	14	9/16"	GC185-14	14.8	34	73			
	16	5/8"	GC185-16	16.5	34	76.2			
	20	3/4"	GC185-20	20.9	34	76.2			
400/500 MCM 240 mm²	10	3/8"	GC240-10	10.3	38.6	91.4	26.5	21	38
	12	1/2"	GC240-12	12.7	38.6	91.4			
	14	9/16"	GC240-14	14.8	38.6	91.4			
	16	5/8"	GC240-16	16.5	38.6	91.4			
	20	3/4"	GC240-20	20.9	38.6	91.4			
500/600 MCM 300 mm²	10	3/8"	GC300-10	10.3	43.8	98	30	24.5	42
	12	1/2"	GC300-12	12.7	43.8	98			
	14	9/16"	GC300-14	14.8	43.8	98			
	16	5/8"	GC300-16	16.5	43.8	98			
	20	3/4"	GC300-20	20.9	43.8	98			
600/750 MCM 400 mm²	10	3/8"	GC400-10	10.3	50	104	35	27	44
	12	1/2"	GC400-12	12.7	50	104			
	14	9/16"	GC400-14	14.8	50	104			
	16	5/8"	GC400-16	16.5	50	104			
	20	3/4"	GC400-20	20.9	50	104			

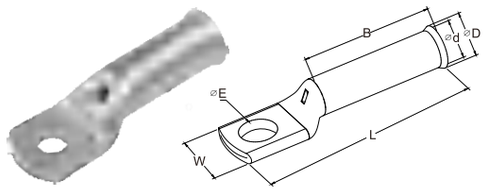

GCL喇叭口 铜管端子
COPPER TUBE TERMINALS


. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：喇叭口 Special structure:Bell mouth
. 可接受异形定制 Acceptable customization

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					
mm² (A.W.G.)	Metrie	American		⌀E	W	L	⌀D	⌀d	B
22-16 A.W.G. 0.5-1.5 mm²	3	#4	GCL1.5-3	3.2	8	21	3.7	1.8	11
	4	#8	GCL1.5-4	4.3	8	22			
	5	#10	GCL1.5-5	5.3	10	24			12
	6	1/4"	GCL1.5-6	6.5	10	25			
16-14 A.W.G. 1.5-2.5 mm²	3	#4	GCL2.5-3	3.2	8	22	3.9	2.3	12
	4	#8	GCL2.5-4	4.3	8	23			
	5	#10	GCL2.5-5	5.3	10	25			
	6	1/4"	GCL2.5-6	6.5	10	25			
	8	5/16"	GCL2.5-8	8.3	12.5	27.5	4.3		
14-12 A.W.G. 2.5-4 mm²	4	#8	GCL4-4	4.3	10	26	4.7	3	13
	5	#10	GCL4-5	5.3	10	27			
	6	1/4"	GCL4-6	6.5	10	28			
	8	5/16"	GCL4-8	8.3	12.5	29			
12-10 A.W.G. 4-6 mm²	4	#8	GCL6-4	4.3	10	33.6	5.9	4	18.5
	5	#10	GCL6-5	5.3	10	33.6			
	6	1/4"	GCL6-6	6.5	11	33.6			
	8	5/16"	GCL6-8	8.3	12.5	36.3			
	10	3/8"	GCL6-10	10.3	15	37.3	6.2		
8 A.W.G. 10 mm²	5	#10	GCL10-5	5.3	11	39	6.6	4.5	22
	6	1/4"	GCL10-6	6.5	11	39			
	8	5/16"	GCL10-8	8.3	12.5	39			
	10	3/8"	GCL10-10	10.3	16	43.1	6.9		
	12	1/2"	GCL10-12	12.7	18	43.1			21
6 A.W.G. 16 mm²	5	#10	GCL16-5	5.3	11	39.7	7.5	5.5	23
	6	1/4"	GCL16-6	6.5	11	39.7			
	8	5/16"	GCL16-8	8.3	12.5	39.7			22
	10	3/8"	GCL16-10	10.3	16	44.9			23
	12	1/2"	GCL16-12	12.7	18	44.9	8.1		22
4 A.W.G. 25 mm²	5	#10	GCL25-5	5.3	13	47.2	9.1	6.7	28
	6	1/4"	GCL25-6	6.5	13	47.2			
	8	5/16"	GCL25-8	8.3	13	47.2			
	10	3/8"	GCL25-10	10.3	16	51.9			29
	12	1/2"	GCL25-12	12.7	18	51.9			28
	14	9/16"	GCL25-14	14.8	20	53.9			
2 A.W.G. 35 mm²	5	#10	GCL35-5	5.3	16	52.6	11	8.6	31
	6	1/4"	GCL35-6	6.5	16	52.6			
	8	5/16"	GCL35-8	8.3	16	52.6			
	10	3/8"	GCL35-10	10.3	16.7	56.5			
	12	1/2"	GCL35-12	12.7	18	56.5			
	14	9/16"	GCL35-14	14.8	20	58.5			
	16	5/8"	GCL35-16	16.5	23	60.5			
1/0 A.W.G. 50 mm²	5	#10	GCL50-5	5.3	18	56	12.4	9.5	32
	6	1/4"	GCL50-6	6.5	18	56			
	8	5/16"	GCL50-8	8.3	18	56			
	10	3/8"	GCL50-10	10.3	18	59			
	12	1/2"	GCL50-12	12.7	19	59			
	14	9/16"	GCL50-14	14.8	21	67.8			34
	16	5/8"	GCL50-16	16.5	23	67.8			

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。


GCL喇叭口 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：喇叭口 Special structure:Bell mouth
. 可接受异形定制 Acceptable customization

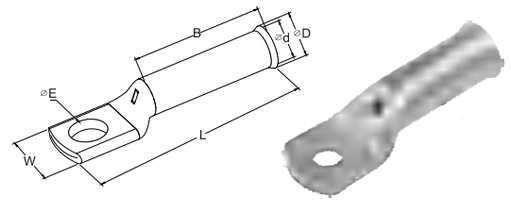

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					
mm² (A.W.G.)	Metrie	American		⌀E	W	L	⌀D	⌀d	B
2/0 A.W.G. 70 mm²	5	#10	GCL70-5	5.3	22	67.4	15	12	36.5
	6	1/4"	GCL70-6	6.5	22	67.4			
	8	5/16"	GCL70-8	8.3	22	67.4			
	10	3/8"	GCL70-10	10.3	22	67.4			
	12	1/2"	GCL70-12	12.7	22	67.4			
	14	9/16"	GCL70-14	14.8	22	70			
	16	5/8"	GCL70-16	16.5	24	70			35
3/0 A.W.G. 95 mm²	8	5/16"	GCL95-8	8.3	25	69.7	17	13.4	37.5
	10	3/8"	GCL95-10	10.3	25	69.7			
	12	1/2"	GCL95-12	12.7	25	69.7			
	14	9/16"	GCL95-14	14.8	25	73.3			
	16	5/8"	GCL95-16	16.5	25	73.3			
	20	3/4"	GCL95-20	20.9	28	73.3			34.5
4/0 A.W.G. 120 mm²	8	5/16"	GCL120-8	8.3	27.5	75	19	15	38
	10	3/8"	GCL120-10	10.3	27.5	75			
	12	1/2"	GCL120-12	12.7	27.5	75			
	14	9/16"	GCL120-14	14.8	27.5	79			
	16	5/8"	GCL120-16	16.5	27.5	79			
	20	3/4"	GCL120-20	20.9	27.5	79			
250/300 MCM 150 mm²	10	3/8"	GCL150-10	10.3	30.5	82	21.2	16.5	42
	12	1/2"	GCL150-12	12.7	30.5	82			
	14	9/16"	GCL150-14	14.8	30.5	82			
	16	5/8"	GCL150-16	16.5	30.5	86.4			
	20	3/4"	GCL150-20	20.9	30.5	86.4			
300/350 MCM 185 mm²	10	3/8"	GCL185-10	10.3	34	88	23	19	45
	12	1/2"	GCL185-12	12.7	34	88			
	14	9/16"	GCL185-14	14.8	34	88			
	16	5/8"	GCL185-16	16.5	34	91.2			
	20	3/4"	GCL185-20	20.9	34	91.2			
400/500 MCM 240 mm²	10	3/8"	GCL240-10	10.3	38.6	106.4	26.5	21	53
	12	1/2"	GCL240-12	12.7	38.6	106.4			
	14	9/16"	GCL240-14	14.8	38.6	106.4			
	16	5/8"	GCL240-16	16.5	38.6	106.4			
	20	3/4"	GCL240-20	20.9	38.6	106.4			
500/600 MCM 300 mm²	10	3/8"	GCL300-10	10.3	43.8	113	30	24.5	57
	12	1/2"	GCL300-12	12.7	43.8	113			
	14	9/16"	GCL300-14	14.8	43.8	113			
	16	5/8"	GCL300-16	16.5	43.8	113			
	20	3/4"	GCL300-20	20.9	43.8	113			
600/750 MCM 400 mm²	10	3/8"	GCL400-10	10.3	50	119	35	27	59
	12	1/2"	GCL400-12	12.7	50	119			
	14	9/16"	GCL400-14	14.8	50	119			
	16	5/8"	GCL400-16	16.5	50	119			
	20	3/4"	GCL400-20	20.9	50	119			

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.

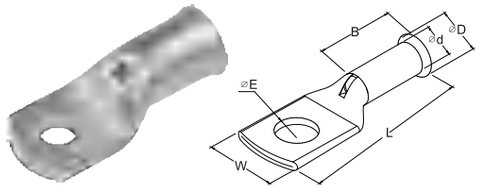


FC 喇叭口 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：喇叭口 Special structure:Bell mouth
. 可接受异形定制 Acceptable customization


接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
14-12 A.W.G. 2.5-4 mm²	4	#8	FC4-4	4.3	9	25.7	5	2.7	8.7
	5	#10	FC4-5	5.3					
	6	1/4"	FC4-6	6.5	12				
	8	5/16"	FC4-8	8.5		29.7			
12-10 A.W.G. 4-6 mm²	4	#8	FC6-4	4.2	10	27.7	5.5	3.3	10.7
	5	#10	FC6-5	5.3	13	31.5			
	6	1/4"	FC6-6	6.5					
	8	5/16"	FC6-8	8.3					
8 A.W.G. 10 mm²	4	#8	FC10-4	4.3	12	30.5	6.8	4.3	12
	5	#10	FC10-5	5.3					
	6	1/4"	FC10-6	6.5					
	8	5/16"	FC10-8	8.5	15	37			
	10	3/8"	FC10-10	10.5	16	41			
	12	1/2"	FC10-12	13	19	44			
6 A.W.G. 16 mm²	5	#10	FC16-5	5.3	12	33.25	8	5.3	14
	6	1/4"	FC16-6	6.5					
	8	5/16"	FC16-8	8.5	16	37.5			
	10	3/8"	FC16-10	10.5		41			
	12	1/2"	FC16-12	13	19	44			
4 A.W.G. 25 mm²	6	1/4"	FC25-6	6.5	13.5	36.25	9.5	6.6	15
	8	5/16"	FC25-8	8.4	18	42			
	10	3/8"	FC25-10	10.5		46			
	12	1/2"	FC25-12	13		48			
	14	9/16"	FC25-14	15	20	52.5			
2 A.W.G. 35 mm²	6	1/4"	FC35-6	6.5	15.5	39.5	11	7.9	17
	8	5/16"	FC35-8	8.4	17	44			
	10	3/8"	FC35-10	10.5		49			
	12	1/2"	FC35-12	13	19	51			
	14	9/16"	FC35-14	15	21	53.5			
1/0 A.W.G. 50 mm²	6	1/4"	FC50-6	6.5	18	42.5	12.5	9.2	19
	8	5/16"	FC50-8	8.5		47			
	10	3/8"	FC50-10	10.5		52			
	12	1/2"	FC50-12	13	19	54			
	14	9/16"	FC50-14	15	21	57.5			
	16	5/8"	FC50-16	17	26	61			
2/0 A.W.G. 70 mm²	6	1/4"	FC70-6	6.5	21	51	15	11	21
	8	5/16"	FC70-8	8.5					
	10	3/8"	FC70-10	10.5		55			
	12	1/2"	FC70-12	13	22	59			
	14	9/16"	FC70-14	15	23	62.5			
	16	5/8"	FC70-16	17	28	66			
	20	3/4"	FC70-20	21	30	72			
3/0 A.W.G. 95 mm²	8	5/16"	FC95-8	8.5	25	56	17	13.1	25
	10	3/8"	FC95-10	10.5		60			
	12	1/2"	FC95-12	13		62			
	14	9/16"	FC95-14	15		66.5			
	16	5/8"	FC95-16	17		70			
	20	3/4"	FC95-20	21	30	76			

FC 喇叭口 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：喇叭口 Special structure:Bell mouth
. 可接受异形定制 Acceptable customization

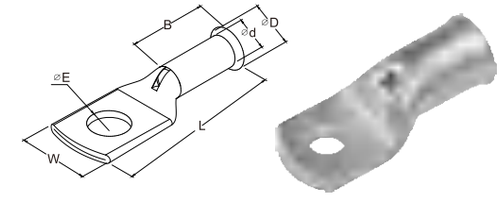

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
4/0 A.W.G. 120 mm²	8	5/16"	FC120-8	8.5	28	64	19	14.5	26
	10	3/8"	FC120-10	10.5					
	12	1/2"	FC120-12	13		66			
	14	9/16"	FC120-14	15		69.5			
	16	5/8"	FC120-16	17		72			
	20	3/4"	FC120-20	21	30				
250/300 MCM 150 mm²	10	3/8"	FC150-10	10.5	30	71	21	16.2	30
	12	1/2"	FC150-12	13		73			
	14	9/16"	FC150-14	15					
	16	5/8"	FC150-16	17		75			
	20	3/4"	FC150-20	21		79			
300/350 MCM 185 mm²	10	3/8"	FC185-10	10.5	33.5	81	23	18	32
	12	1/2"	FC185-12	13					
	14	9/16"	FC185-14	15		85			
	16	5/8"	FC185-16	17		87			
	20	3/4"	FC185-20	21		91			
400/500 MCM 240 mm²	10	3/8"	FC240-10	10.5	38	93.5	26	20.6	35
	12	1/2"	FC240-12	13					
	14	9/16"	FC240-14	15					
	16	5/8"	FC240-16	17					
	20	3/4"	FC240-20	21					
500/600 MCM 300 mm²	10	3/8"	FC300-10	10.5	41	96	28	23	44
	12	1/2"	FC300-12	13					
	14	9/16"	FC300-14	15		102			
	16	5/8"	FC300-16	17					
	20	3/4"	FC300-20	21		106			
600/750 MCM 400 mm²	10	3/8"	FC400-10	10.5	46.5	115	32	26	44
	12	1/2"	FC400-12	13					
	14	9/16"	FC400-14	15					
	16	5/8"	FC400-16	17					
	20	3/4"	FC400-20	21		118			

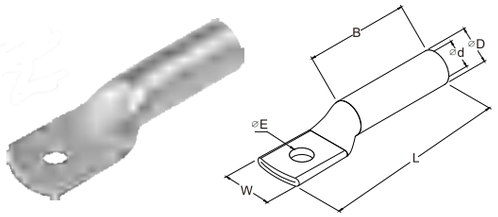


DT 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：加长 Special structure:Lengthen
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
22-16 A.W.G. 0.5-1.5 mm²	5	#10	DT1.5-5	5.2	8	23	4	2.2	10
16-14 A.W.G. 1.5-2.5 mm²	4	#8	DT2.5-4	4.2	8	27	4.5	2.9	13
	5	#10	DT2.5-5	5.2	8	27			
	6	1/4"	DT2.5-6	6.4	10	27			
14-12 A.W.G. 2.5-4 mm²	5	#10	DT4-5	5.2	10	28	5.2	3.6	13
	6	1/4"	DT4-6	6.4	10	28			
12-10 A.W.G. 4-6 mm²	5	#10	DT6-5	5.2	10	35	6	4.2	17
	6	1/4"	DT6-6	6.4	10	35			
	8	5/16"	DT6-8	8.4	12	35			
8 A.W.G. 10 mm²	6	1/4"	DT10-6	6.4	12.4	36	7	5	17
	8	5/16"	DT10-8	8.4	12.4	36			
6 A.W.G. 16 mm²	4	#8	DT16-4	4.2	12.8	58	9	6	32
	6	1/4"	DT16-6	6.4	14	58			
	8	5/16"	DT16-8	8.4	14	58			
	10	3/8"	DT16-10	10.5	16	58			
	12	1/2"	DT16-12	13	17	58			
4 A.W.G. 25 mm²	6	1/4"	DT25-6	6.4	15	58	10	7	32
	8	5/16"	DT25-8	8.4	15	58			
	10	3/8"	DT25-10	10.5	17.5	58			
	12	1/2"	DT25-12	13	17.5	58			
2 A.W.G. 35 mm²	6	1/4"	DT35-6	6.4	17.1	62	12	9	36
	8	5/16"	DT35-8	8.4	17.1	62			
	10	3/8"	DT35-10	10.5	18	62			
	12	1/2"	DT35-12	13	19	62			
	16	5/8"	DT35-16	17	25	62			32
1/0 A.W.G. 50 mm²	8	5/16"	DT50-8	8.4	20	72	14	10	40
	10	3/8"	DT50-10	10.5	20	72			
	12	1/2"	DT50-12	13	20	72			
	14	9/16"	DT50-14	15	20	72			
	16	5/8"	DT50-16	17	26	75			
2/0 A.W.G. 70 mm²	8	5/16"	DT70-8	8.4	23	76	16	12	42
	10	3/8"	DT70-10	10.5	23	76			
	12	1/2"	DT70-12	13	23	76			
	14	9/16"	DT70-14	15	23	76			
3/0 A.W.G. 95 mm²	8	5/16"	DT95-8	8.4	26	84	18	14	44
	10	3/8"	DT95-10	10.5	26	84			
	12	1/2"	DT95-12	13	26	84			
	14	9/16"	DT95-14	15	26	84			
	16	5/8"	DT95-16	17	26	84			
4/0 A.W.G. 120 mm²	8	5/16"	DT120-8	8.4	30	90	21	16	46
	10	3/8"	DT120-10	10.5	30	90			
	12	1/2"	DT120-12	13	30	90			
	14	9/16"	DT120-14	15	30	90			
	16	5/8"	DT120-16	17	30	90			
	20	3/4"	DT120-20	21	30	94			
250/300 MCM 150 mm²	6	1/4"	DT150-6	6.4	33	98	23	17	50
	10	3/8"	DT150-10	10.5	33	98			
	12	1/2"	DT150-12	13	33	98			
	14	9/16"	DT150-14	15	33	98			
	16	5/8"	DT150-16	17	33	98			


DT 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：加长 Special structure:Lengthen
. 可接受异形定制 Acceptable customization






接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
300/350 MCM 185 mm²	8	5/16"	DT185-8	8.4	36	101	25	19	52
	10	3/8"	DT185-10	10.5					
	12	1/2"	DT185-12	13					
	14	9/16"	DT185-14	15					
	16	5/8"	DT185-16	17					
400/500 MCM 240 mm²	8	5/16"	DT240-8	8.4	40	110	28	21.6	52
	10	3/8"	DT240-10	10.5					
	12	1/2"	DT240-12	13					
	14	9/16"	DT240-14	15					
	16	5/8"	DT240-16	17		112			
	20	3/4"	DT240-20	21					
500/600 MCM 300 mm²	12	1/2"	DT300-12	13	45	116	31	24	58
	14	9/16"	DT300-14	15					
	16	5/8"	DT300-16	17					
	20	3/4"	DT300-20	21					
600/750 MCM 400 mm²	12	1/2"	DT400-12	13	52	126	36.5	28.5	66
	14	9/16"	DT400-14	15					
	16	5/8"	DT400-16	17					
	20	3/4"	DT400-20	21		131			
800/1000 MCM 500 mm²	16	5/8"	DT500-16	17	56	141	39	30.5	70
	20	3/4"	DT500-20	21					
	22	7/8"	DT500-22	23					
1000-1250 MCM 630 mm²	20	3/4"	DT630-20	21	65	168	45	35.5	80

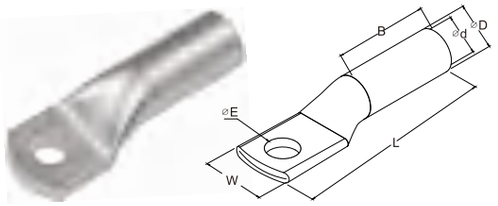

DIN 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：加厚 Special structure:Thicken
. 可接受异形定制 Acceptable customization


接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
12-10 A.W.G. 4-6 mm²	5	#10	DIN6-5	5.3	8.5	30.5	5.5	3.8	10
	6	1/4"	DIN6-6	6.4		31.5			
	8	5/16"	DIN6-8	8.4	13	34			
	10	3/8"	DIN6-10	10.5	14	36			
8 A.W.G. 10 mm²	5	#10	DIN10-5	5.3	9	34	6	4.5	10
	6	1/4"	DIN10-6	6.4		34.5			
	8	5/16"	DIN10-8	8.4	13	37			
	10	3/8"	DIN10-10	10.5	15	39			
6 A.W.G. 16 mm²	6	1/4"	DIN16-6	6.4	13	43.5	8.5	5.5	20
	8	5/16"	DIN16-8	8.4		46			
	10	3/8"	DIN16-10	10.5	17	48			
	12	1/2"	DIN16-12	13	18	49			
4 A.W.G. 25 mm²	6	1/4"	DIN25-6	6.4	14	45.5	10	7	20
	8	5/16"	DIN25-8	8.4	16	48			
	10	3/8"	DIN25-10	10.5	17	50			
	12	1/2"	DIN25-12	13	19	51			
2 A.W.G. 35 mm²	6	1/4"	DIN35-6	6.4	17.5	49.5	12.5	8.2	20
	8	5/16"	DIN35-8	8.4		52			
	10	3/8"	DIN35-10	10.5	19	54			
	12	1/2"	DIN35-12	13	21	55			
	14	9/16"	DIN35-14	15		56.5			
1/0 A.W.G. 50 mm²	6	1/4"	DIN50-6	6.4	20.3	62	14.5	10	28
	8	5/16"	DIN50-8	8.4					
	10	3/8"	DIN50-10	10.5	22	64			
	12	1/2"	DIN50-12	13	24	65			
	16	5/8"	DIN50-16	17	28	68			
2/0 A.W.G. 70 mm²	8	5/16"	DIN70-8	8.4	23.4	65	16.5	11.5	28
	10	3/8"	DIN70-10	10.5		67			
	12	1/2"	DIN70-12	13		68			
	14	9/16"	DIN70-14	15		69.5			
	16	5/8"	DIN70-16	17	30	71			
3/0 A.W.G. 95 mm²	8	5/16"	DIN95-8	8.4	28	77	19	13.5	35
	10	3/8"	DIN95-10	10.5					
	12	1/2"	DIN95-12	13		78			
	14	9/16"	DIN95-14	15		79.5			
	16	5/8"	DIN95-16	17	32	81			
4/0 A.W.G. 120 mm²	8	5/16"	DIN120-8	8.4	30	85	21	15.5	35
	10	3/8"	DIN120-10	10.5					
	12	1/2"	DIN120-12	13		86			
	14	9/16"	DIN120-14	15		88			
	16	5/8"	DIN120-16	17		89			
	20	3/4"	DIN120-20	21	38	91			
250/300 MCM 150 mm²	8	5/16"	DIN150-8	8.4	33.6	93	23.5	17	35
	10	3/8"	DIN150-10	10.5					
	12	1/2"	DIN150-12	13		94			
	14	9/16"	DIN150-14	15		97			
	16	5/8"	DIN150-16	17					
	20	3/4"	DIN150-20	21	40	99			



DIN 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：加厚 Special structure:Thicken
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
300/350 MCM 185 mm²	10	3/8"	DIN185-10	10.5	36.6	97	25.5	19	40
	12	1/2"	DIN185-12	13		98			
	14	9/16"	DIN185-14	15		101			
	16	5/8"	DIN185-16	17					
	20	3/4"	DIN185-20	21	40	103			
400/500 MCM 240 mm²	10	3/8"	DIN240-10	10.5	42	108	29	21.5	40
	12	1/2"	DIN240-12	13					
	14	9/16"	DIN240-14	15					
	16	5/8"	DIN240-16	17		111			
	20	3/4"	DIN240-20	21		113			
500/600 MCM 300 mm²	12	1/2"	DIN300-12	13	46	119	32	24.5	50
	16	5/8"	DIN300-16	17					
600/750 MCM 400 mm²	12	1/2"	DIN400-12	13	54	140	38.5	27.5	70
	14	9/16"	DIN400-14	15					

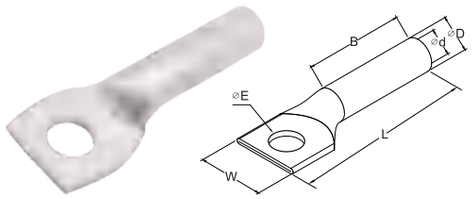


CL-H 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：加长 Special structure:Lengthen
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
6 A.W.G. 16 mm²	6	1/4"	CL14-H-6	6.4	18.3	50	8.8	5.8	28.5
	8	5/16"	CL14-H-8	8.4					
	10	3/8"	CL14-H-10	10.5					
4 A.W.G. 25 mm²	8	5/16"	CL22-H-8	8.4	18.3	52	11.3	7.7	28.5
	10	3/8"	CL22-H-10	10.5					
2 A.W.G. 35 mm²	10	3/8"	CL38-H-10	10.5	18.3	64	12.4	9.8	34
	12	1/2"	CL38-H-12	13					
1/0 A.W.G. 60 mm²	10	3/8"	CL60-H-10	10.5	20.5	70	14	11	36
	12	1/2"	CL60-H-12	13					
2/0 A.W.G. 70 mm²	10	3/8"	CL70-H-10	10.5	21.4	72	15	12	38
	12	1/2"	CL70-H-12	13					
3/0 A.W.G. 80 mm²	10	3/8"	CL80-H-10	10.5	23.2	75	16	13	38
	12	1/2"	CL80-H-12	13					
3/0 A.W.G. 100 mm²	10	3/8"	CL100-H-10	10.5	26	75	18	14	40
	12	1/2"	CL100-H-12	13					
4/0 A.W.G. 120 mm²	12	1/2"	CL125-H-12	13	29	85	20	16	40
250/300 MCM 150 mm²	12	1/2"	CL150-H-12	13	31.5	94	22	17	46
300/350 MCM 185 mm²	12	1/2"	CL180-H-12	13	33	98	23	18.2	46
400/500 MCM 240 mm²	12	1/2"	CL200-H-12	13	37	104	26	20	48
400/500 MCM 240 mm²	12	1/2"	CL250-H-12	13	40.5	114	28	22	48
500/600 MCM 300 mm²	12	1/2"	CL325-H-12	13	46	118	32	25	50
600/750 MCM 400 mm²	12	1/2"	CL400-H-12	13	54	130	37	30	60
800/1000 MCM 500 mm²	12	1/2"	CL500-H-12	13	57.5	150	40	31	60
6 A.W.G. 16 mm²	6	1/4"	A-CL14-H-6	6.4	18.3	50	8.5	5.8	28.5
	8	5/16"	A-CL14-H-8	8.4					
	10	3/8"	A-CL14-H-10	10.5					
4 A.W.G. 25 mm²	8	5/16"	A-CL22-H-8	8.4	18.3	52	11.1	7.7	28.5
	10	3/8"	A-CL22-H-10	10.5					
2 A.W.G. 35 mm²	10	3/8"	A-CL38-H-10	10.5	17.8	64	12.2	9.8	34
	12	1/2"	A-CL38-H-12	13					
1/0 A.W.G. 60 mm²	10	3/8"	A-CL60-H-10	10.5	20	70	13.8	11	36
	12	1/2"	A-CL60-H-12	13					
2/0 A.W.G. 70 mm²	10	3/8"	A-CL70-H-10	10.5	21.4	72	14.8	12	38
	12	1/2"	A-CL70-H-12	13					
3/0 A.W.G. 80 mm²	10	3/8"	A-CL80-H-10	10.5	23.2	75	15.8	13	38
	12	1/2"	A-CL80-H-12	13					
3/0 A.W.G. 100 mm²	10	3/8"	A-CL100-H-10	10.5	26	75	17.8	14	40
	12	1/2"	A-CL100-H-12	13					
4/0 A.W.G. 120 mm²	12	1/2"	A-CL125-H-12	13	29	85	19.8	16	40
250/300 MCM 150 mm²	12	1/2"	A-CL150-H-12	13	31	94	21.5	17	46
300/350 MCM 185 mm²	12	1/2"	A-CL180-H-12	13	33	98	22.5	18.2	46
400/500 MCM 240 mm²	12	1/2"	A-CL200-H-12	13	36.8	104	25.5	20	48
400/500 MCM 240 mm²	12	1/2"	A-CL250-H-12	13	40	114	27.5	22	48
500/600 MCM 300 mm²	12	1/2"	A-CL325-H-12	13	45	118	31.5	25	50


CL-H 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：加长 Special structure:Lengthen
. 可接受异形定制 Acceptable customization





接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
6 A.W.G. 16 mm²	6	1/4"	B-CL14-H-6	6.4	18.3	50	8.3	5.8	28.5
	8	5/16"	B-CL14-H-8	8.4					
	10	3/8"	B-CL14-H-10	10.5					
4 A.W.G. 25 mm²	8	5/16"	B-CL22-H-8	8.4	17.2	52	10.7	7.7	28.5
	10	3/8"	B-CL22-H-10	10.5					
2 A.W.G. 35 mm²	10	3/8"	B-CL38-H-10	10.5	17.2	64	11.9	9.8	34
	12	1/2"	B-CL38-H-12	13					
1/0 A.W.G. 60 mm²	10	3/8"	B-CL60-H-10	10.5	20	70	13.5	11	36
	12	1/2"	B-CL60-H-12	13					
2/0 A.W.G. 70 mm²	10	3/8"	B-CL70-H-10	10.5	21.4	72	14.5	12	38
	12	1/2"	B-CL70-H-12	13					
3/0 A.W.G. 80 mm²	10	3/8"	B-CL80-H-10	10.5	23.2	75	15.5	13	38
	12	1/2"	B-CL80-H-12	13					
3/0 A.W.G. 100 mm²	10	3/8"	B-CL100-H-10	10.5	25.5	75	17.3	14	40
	12	1/2"	B-CL100-H-12	13					
4/0 A.W.G. 120 mm²	12	1/2"	B-CL125-H-12	13	28	85	19.3	16	40
250/300 MCM 150 mm²	12	1/2"	B-CL150-H-12	13	30.5	94	21.1	17	46
300/350 MCM 185 mm²	12	1/2"	B-CL180-H-12	13	32.5	98	22.1	18.2	46
400/500 MCM 240 mm²	12	1/2"	B-CL200-H-12	13	36	104	24.9	20	48
400/500 MCM 240 mm²	12	1/2"	B-CL250-H-12	13	39.5	114	26.9	22	48
500/600 MCM 300 mm²	12	1/2"	B-CL325-H-12	13	45	118	30.7	25	50
600/750 MCM 400 mm²	12	1/2"	B-CL400-H-12	13	52.5	130	35.7	30	60
800/1000 MCM 500 mm²	12	1/2"	B-CL500-H-12	13	56	150	38.4	31	60

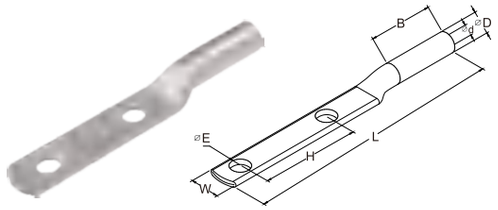


CL-2H 铜管端子
COPPER TUBE TERMINALS


. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：双孔 Special structure:Double hole
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B	H
6 A.W.G. 16 mm²	6	1/4"	CL14-2H-6	6.4	13	117.5	8.8	5.8	28.5	45
	8	5/16"	CL14-2H-8	8.4						
	10	3/8"	CL14-2H-10	10.5	15					
	12	1/2"	CL14-2H-12	12.6						
4 A.W.G. 25 mm²	6	1/4"	CL22-2H-6	6.4	16	119.2	11.3	7.7	28.5	45
	8	5/16"	CL22-2H-8	8.4						
	10	3/8"	CL22-2H-10	10.5						
	12	1/2"	CL22-2H-12	13	18.3					
2 A.W.G. 35 mm²	6	1/4"	CL38-2H-6	6.4	18.3	120	12.4	9.8	31.7	45
	8	5/16"	CL38-2H-8	8.5						
	10	3/8"	CL38-2H-10	10.5						
	12	1/2"	CL38-2H-12	13						
1/0 A.W.G. 60 mm²	8	5/16"	CL60-2H-8	8.5	20.5	130	14	11	40	45
	10	3/8"	CL60-2H-10	10.5						
	12	1/2"	CL60-2H-12	13						
	14	9/16"	CL60-2H-14	15						
2/0 A.W.G. 70 mm²	8	5/16"	CL70-2H-8	8.5	21.4	130	15	12	40	45
	10	3/8"	CL70-2H-10	10.5						
	12	1/2"	CL70-2H-12	13						
	14	9/16"	CL70-2H-14	15						
3/0 A.W.G. 80 mm²	8	5/16"	CL80-2H-8	8.4	23.2	130	16	13	40	45
	10	3/8"	CL80-2H-10	10.5						
	12	1/2"	CL80-2H-12	13						
	14	9/16"	CL80-2H-14	15						
3/0 A.W.G. 95 mm²	8	5/16"	CL95-2H-8	8.4	25	132	17.4	13.5	42	45
	10	3/8"	CL95-2H-10	10.5						
	12	1/2"	CL95-2H-12	13						
	14	9/16"	CL95-2H-14	15						
3/0 A.W.G. 100 mm²	8	5/16"	CL100-2H-8	8.4	26	132	18	14	42	45
	10	3/8"	CL100-2H-10	10.5						
	12	1/2"	CL100-2H-12	13						
	14	9/16"	CL100-2H-14	15						
	16	5/8"	CL100-2H-16	17						
4/0 A.W.G. 120 mm²	10	3/8"	CL125-2H-10	10.5	29	135	20	16	42	45
	12	1/2"	CL125-2H-12	13						
	14	9/16"	CL125-2H-14	15						
	16	5/8"	CL125-2H-16	17						
250/300 MCM 150 mm²	10	3/8"	CL150-2H-10	10.5	31.5	150	22	17	50	45
	12	1/2"	CL150-2H-12	13						
	14	9/16"	CL150-2H-14	15						
	16	5/8"	CL150-2H-16	17						
300/350 MCM 180 mm²	10	3/8"	CL180-2H-10	10.5	33	150	23	18.2	50	45
	12	1/2"	CL180-2H-12	13						
	14	9/16"	CL180-2H-14	15						
	16	5/8"	CL180-2H-16	17						


CL-2H 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：双孔 Special structure:Double hole
. 可接受异形定制 Acceptable customization





接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B	H
350/400 MCM 200 mm²	10	3/8"	CL200-2H-10	10.5	37	150	26	20	52.5	45
	12	1/2"	CL200-2H-12	13						
	14	9/16"	CL200-2H-14	15						
	16	5/8"	CL200-2H-16	17						
400/500 MCM 250 mm²	10	3/8"	CL250-2H-10	10.5	40.5	150	28	22	50	45
	12	1/2"	CL250-2H-12	13						
	14	9/16"	CL250-2H-14	15						
	16	5/8"	CL250-2H-16	17						
500/600 MCM 300 mm²	10	3/8"	CL325-2H-10	10.5	46	180	32	25	68	45
	12	1/2"	CL325-2H-12	13						
	14	9/16"	CL325-2H-14	14.5						
	16	5/8"	CL325-2H-16	17						
600/750 MCM 400 mm²	10	3/8"	CL400-2H-10	10.5	54	180	37	30	60	45
	12	1/2"	CL400-2H-12	13						
	14	9/16"	CL400-2H-14	15						
	16	5/8"	CL400-2H-16	17						
800/1000 MCM 500 mm²	10	3/8"	CL500-2H-10	10.5	57	180	40	31	60	45
	12	1/2"	CL500-2H-12	13						
	14	9/16"	CL500-2H-14	15						
	16	5/8"	CL500-2H-16	17						

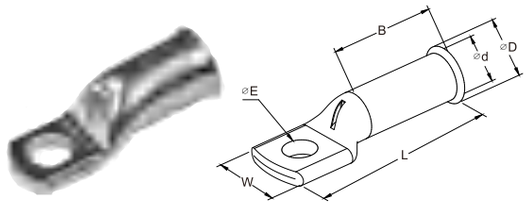

KRFS窄边铜管端子
COPPER TUBE TERMINALS


. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：喇叭口 Special structure:Bell mouth
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
2 A.W.G. 35 mm²	6	1/4"	KRFS35-6	6.6	15	41	11.2	8.2	21
1/0 A.W.G. 50 mm²	6	1/4"	KRFS50-6	6.6	15	43	12.8	9.5	22
	10	3/8"	KRFS50-10	11	19	49			
2/0 A.W.G. 70 mm²	6	1/4"	KRFS70-6	6.6	17	45	14.7	11.2	24
	8	5/16"	KRFS70-8	8.8	19	51			
	10	3/8"	KRFS70-10	11					
3/0 A.W.G. 95 mm²	8	5/16"	KRFS95-8	8.8	19	51	17.4	13.4	27
	10	3/8"	KRFS95-10	11		55			
4/0 A.W.G. 120 mm²	8	5/16"	KRFS120-8	8.8	19	61	20.6	15.6	30
	10	3/8"	KRFS120-10	11					
	12	1/2"	KRFS120-12	13					
250/300 MCM 150 mm²	8	5/16"	KRFS150-8	8.8	19	66	22.5	16.7	30
	10	3/8"	KRFS150-10	11					
300/350 MCM 185 mm²	10	3/8"	KRFS185-10	11	24.5	74	24.2	18.4	32
	12	1/2"	KRFS185-12	13					
400/500 MCM 240 mm²	10	3/8"	KRFS240-10	11	31	82	28.2	21.2	38
	12	1/2"	KRFS240-12	13.2					
500/600 MCM 300 mm²	10	3/8"	KRFS300-10	11	31	87	31.3	23.5	42
	12	1/2"	KRFS300-12	13.2					
	16	5/8"	KRFS300-16	17					

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。


TT喇叭口 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：喇叭口 Special structure:Bell mouth
. 可接受异形定制 Acceptable customization

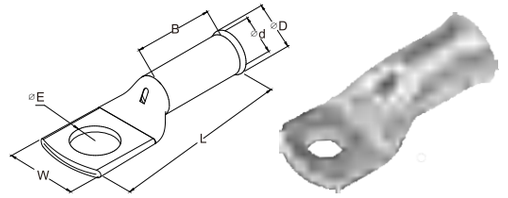

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
12-10 A.W.G. 4-6 mm²	4	#8	TT6-4	4.3	10.3	26	5.5	3.8	11
	5	#10	TT6-5	5.4		27			
	6	1/4"	TT6-6	6.8					
8 A.W.G. 10 mm²	6	1/4"	TT10-6	6.4	11.9	28	6.9	4.7	12
	8	5/16"	TT10-8	8.3	13.5	31			
6 A.W.G. 16 mm²	6	1/4"	TT16-6	6.4	11.9	33	7.8	5.6	17
	8	5/16"	TT16-8	8.3	13.5	37			
	10	3/8"	TT16-10	10.5	16	38			
4 A.W.G. 25 mm²	5	#10	TT25-5	5.3	14	39	9.5	7.1	18
	6	1/4"	TT25-6	6.4					
	8	5/16"	TT25-8	8.3					
	10	3/8"	TT25-10	10.5	16	42			
	12	1/2"	TT25-12	13.2	18	45			
2 A.W.G. 35 mm²	6	1/4"	TT35-6	6.4	16.5	42	11	8.2	19
	8	5/16"	TT35-8	8.3					
	10	3/8"	TT35-10	10.5		46			
	12	1/2"	TT35-12	13.2	18				
	14	9/16"	TT35-14	14.5	20	51			
	16	5/8"	TT35-16	16.5	23				
1/0 A.W.G. 50 mm²	6	1/4"	TT50-6	6.4	18	48	12.5	9.5	22
	8	5/16"	TT50-8	8.3					
	10	3/8"	TT50-10	10.5		51			
	12	1/2"	TT50-12	13					
	14	9/16"	TT50-14	14.5	22	56			
2/0 A.W.G. 70 mm²	8	5/16"	TT70-8	8.3	21.5	51	15	11.5	22
	10	3/8"	TT70-10	10.5		54			
	12	1/2"	TT70-12	13					
3/0 A.W.G. 95 mm²	8	5/16"	TT95-8	8.3	24.7	61	17	13.5	27
	10	3/8"	TT95-10	10.5					
	12	1/2"	TT95-12	13					
	14	9/16"	TT95-14	14.5		72			
	16	5/8"	TT95-16	16.5					
	20	3/4"	TT95-20	21	30				
4/0 A.W.G. 120 mm²	8	5/16"	TT120-8	8.4	29	74	20	15.6	29
	10	3/8"	TT120-10	10.5					
	12	1/2"	TT120-12	13					
	14	9/16"	TT120-14	14.5					
	16	5/8"	TT120-16	16.5					
200/300 MCM 150 mm²	10	3/8"	TT150-10	10.5	30.4	84	21	16.5	38
	12	1/2"	TT150-12	13					
	14	9/16"	TT150-14	14.5					
	16	5/8"	TT150-16	16.5					
300/350 MCM 185 mm²	12	1/2"	TT185-12	13	34	92	23.6	18.4	42
	14	9/16"	TT185-14	14.5					
	16	5/8"	TT185-16	16.5					
400/500 MCM 240 mm²	12	1/2"	TT240-12	13.2	38.5	98	26.4	21.2	45
	14	9/16"	TT240-14	14.5					
	16	5/8"	TT240-16	16.5					
500/600 MCM 300 mm²	14	9/16"	TT300-14	14.5	41.7	106	28.6	23.4	49
	16	5/8"	TT300-16	16.5					
600/750 MCM 400 mm²	14	9/16"	TT400-14	14.5	47.8	115	32.8	26.8	54
	16	5/8"	TT400-16	16.5					

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.

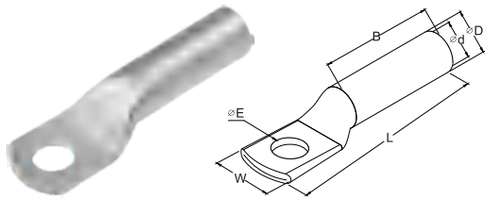


TL 铜管端子
COPPER TUBE TERMINALS

.端子材质：紫铜	Terminals material:Copper
.表面处理：镀锡	Plating:Tin plated
.特殊结构：加长	Special structure:Lengthen
.可接受异形定制	Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
8 A.W.G. 10 mm²	6	1/4"	TL10-6	6.4	11.9	35	6.9	4.7	19
	8	5/16"	TL10-8	8.3	13.5	38			
6 A.W.G. 16 mm²	6	1/4"	TL16-6	6.4	11.9	39	7.8	5.6	23
	8	5/16"	TL16-8	8.3	13.5	42			
	10	3/8"	TL16-10	10.5	16				
4 A.W.G. 25 mm²	8	5/16"	TL25-8	8.3	14	50	9.5	7.1	29
	10	3/8"	TL25-10	10.5	16	53			
	12	1/2"	TL25-12	13.2	18	56			
2 A.W.G. 35 mm²	6	1/4"	TL35-6	6.4	16.5	54	11	8.2	30
	8	5/16"	TL35-8	8.3					
	10	3/8"	TL35-10	10.5		58			
1/0 A.W.G. 50 mm²	8	5/16"	TL50-8	8.3	18	60	12.5	9.5	35
	10	3/8"	TL50-10	10.5		64			
	12	1/2"	TL50-12	13					
2/0 A.W.G. 70 mm²	8	5/16"	TL70-8	8.3	21.5	70	15	11.5	38
	10	3/8"	TL70-10	10.5					
	12	1/2"	TL70-12	13					
3/0 A.W.G. 95 mm²	10	3/8"	TL95-10	10.5	24.7	88	17	13.5	43
	12	1/2"	TL95-12	13					
	14	9/16"	TL95-14	14.5					
	16	5/8"	TL95-16	16.5					
4/0 A.W.G. 120 mm²	10	3/8"	TL120-10	10.5	29	94	20	15.6	49
	12	1/2"	TL120-12	13					
	14	9/16"	TL120-14	14.5					
	16	5/8"	TL120-16	16.5					
250/300 MCM 150 mm²	10	3/8"	TL150-10	10.5	30.4	102	21	16.5	56
	12	1/2"	TL150-12	13					
	14	9/16"	TL150-14	14.5					
	16	5/8"	TL150-16	16.5					
	20	3/4"	TL150-20	21					
300/350 MCM 185 mm²	10	3/8"	TL185-10	10.5	34	113	23.6	18.4	63
	12	1/2"	TL185-12	13					
	14	9/16"	TL185-14	14.5					
	16	5/8"	TL185-16	16.5					
	20	3/4"	TL185-20	21					
400/500 MCM 240 mm²	10	3/8"	TL240-10	10.5	38.5	119	26.4	21.2	66
	12	1/2"	TL240-12	13					
	14	9/16"	TL240-14	14.5					
	16	5/8"	TL240-16	16.5					
500/600 MCM 300 mm²	10	3/8"	TL300-10	10.5	41.7	133	28.6	23.4	77
	12	1/2"	TL300-12	13					
	14	9/16"	TL300-14	14.5					
	16	5/8"	TL300-16	16.5					
600/750 MCM 400 mm²	10	3/8"	TL400-10	10.5	47.8	140	32.8	26.8	71.7
	12	1/2"	TL400-12	13					
	14	9/16"	TL400-14	14.5					
	16	5/8"	TL400-16	17					

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

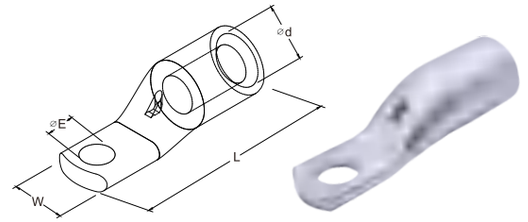


TM 铜管端子
COPPER TUBE TERMINALS

.端子材质：紫铜	Terminals material:Copper
.表面处理：镀锡	Plating:Tin plated
.特殊结构：窄头	Special structure:Narrow head
.可接受异形定制	Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀d
8 A.W.G. 10 mm²	5	#10	TM10-5	5.3	9	27	4.3
6 A.W.G. 16 mm²	5	#10	TM16-5	5.3	9	31	5.6
	6	1/4"	TM16-6	6.4	11	32	7.8
4 A.W.G. 25 mm²	5	#10	TM25-5	5.3	9	35	7
	6	1/4"	TM25-6	6.4	11	36	9.3
2 A.W.G. 35 mm²	6	1/4"	TM35-6	6.4	11.5	40.5	8.4
	8	5/16"	TM35-8	8.4	12.8	42.5	8.4
1/0 A.W.G. 50 mm²	6	1/4"	TM50-6	6.4	12.8	45.5	9.5
	8	5/16"	TM50-8	8.4	12.8	45.5	9.5
	10	3/8"	TM50-10	10.5	15.5	47.5	9.5
2/0 A.W.G. 70 mm²	8	5/16"	TM70-8	8.4	12.8	49	11.2
	10	3/8"	TM70-10	10.5	15.5	51	11.2
3/0 A.W.G. 95 mm²	8	5/16"	TM95-8	8.4	15.5	54	13.5
	10	3/8"	TM95-10	10.5	15.5	56	13.5
4/0 A.W.G. 120 mm²	8	5/16"	TM120-8	8.4	19	68	15.6
	10	3/8"	TM120-10	10.5	19	68	15.6
250/300 MCM 150 mm²	8	5/16"	TM150-8	8.4	19	75	16.7
	10	3/8"	TM150-10	10.5	19	75	16.7
300/350 MCM 185 mm²	10	3/8"	TM185-10	10.5	24.5	79	19
400/500 MCM 240 mm²	10	3/8"	TM240-10	10.5	29.8	86	27.9
	12	1/2"	TM240-12	13.2	29.8	92	21.2
500/600 MCM 300 mm²	12	1/2"	TM300-12	13.2	31	97	23.8


CP 铜管端子
COPPER TUBE TERMINALS

.端子材质：紫铜	Terminals material:Copper
.表面处理：镀锡	Plating:Tin plated
.特殊结构：窄头	Special structure:Narrow head
.可接受异形定制	Acceptable customization

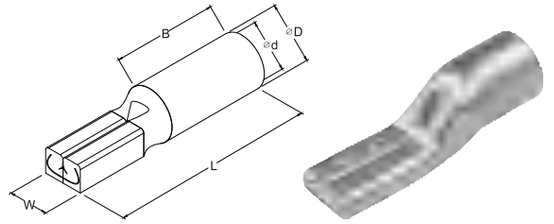

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) W	L	B	⌀D	⌀d
8 A.W.G. 10 mm²	CP 10	5	25	13	6.8	4.7
6 A.W.G. 16 mm²	CP 16	6	31	16	7.8	5.6
4 A.W.G. 25 mm²	CP 25	7	34	16	9.4	7.1
2 A.W.G. 35 mm²	CP 35	9	42	24	11.3	8.7
1/0 A.W.G. 50 mm²	CP 50	10	46	25	12.6	9.8
2/0 A.W.G. 70 mm²	CP 70	15	50	28	14.7	11.5
3/0 A.W.G. 95 mm²	CP 95	15	60	39	16.9	13.5


Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.

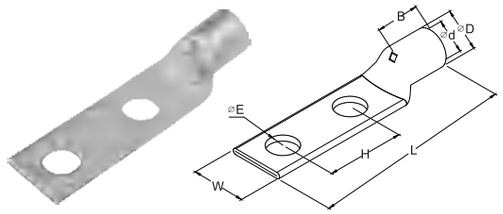

AD 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：双孔 Special structure:Double hole
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B	H
2 A.W.G. 26.7- 42.4mm²	8	5/16"	AD38-8	9.5	17.5	65.8	11.7	9.5	12	25.4
1/0 A.W.G. 42.4-60.4 mm²	10	3/8"	AD60-10	11	21.3	74.7	14.4	11.9	14	
3/0 A.W.G. 76.3-96.3 mm²	10	3/8"	AD80-10	11	26.7	82.3	17.9	14.9	19	
4/0 A.W.G. 96.3-117 mm²	10	3/8"	AD100-10	10.5	29.7	86.6	20.1	16.8	19.5	
250 MCM 117-139.3 mm²	10	3/8"	AD125-10	11	32	89.7	21.3	17.8	19	
300 MCM 139.3-164.7 mm²	10	3/8"	AD150-10	11	35	94.5	23.4	19.6	22.8	
350 MCM 164.7-190 mm²	12	1/2"	AD180-12	14	37.8	117	25.3	21.1	23.8	44.5
400 MCM 190-228 mm²	12	1/2"	AD200-12	14	39.7	119.6	27	22.5	24.8	
500/600 MCM 228-278.7 mm²	12	1/2"	AD250-12	14	45	120.7	30.2	25.2	26.8	
600 MCM 278.7-329.4 mm²	12	1/2"	AD325-12	14	49.2	130.2	33.1	27.6	36	
800 MCM 380-430.7 mm²	12	1/2"	AD400-12	14	56.4	136.8	38.2	31.8	40	
1000 MCM 481.4-570 mm²	12	1/2"	AD500-12	14	63	147.5	42.7	35.6	43	

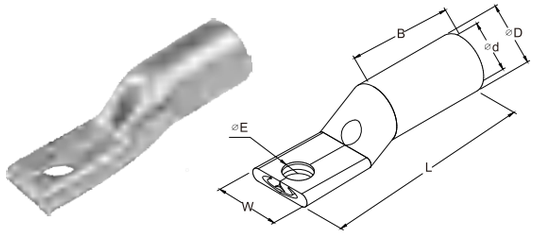


TPE 铜管端子
COPPER TUBE TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：窄头 Special structure:Narrow head
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	⌀D	⌀d	B
1/0 A.W.G. 50 mm²	6	1/4"	TPE50-6	6.4	15	50	12.6	9.8	32
	8	5/16"	TPE50-8	8.5					
	10	3/8"	TPE50-10	10.5					
2/0 A.W.G. 70 mm²	6	1/4"	TPE70-6	6.4	15	55	14.7	11.5	35
	8	5/16"	TPE70-8	8.5					
	10	3/8"	TPE70-10	10.5					
3/0 A.W.G. 95 mm²	8	5/16"	TPE95-8	8.5	15	60	16.9	13.5	39
	10	3/8"	TPE95-10	10.5					
4/0 A.W.G. 120 mm²	8	5/16"	TPE120-8	8.5	21	65	19.9	15.6	44
	10	3/8"	TPE120-10	10.5					
	12	1/2"	TPE120-12	12.5					
250/300 MCM 150 mm²	8	5/16"	TPE150-8	8.5	21	72	20.9	16.5	47
	10	3/8"	TPE150-10	10.5					
	12	1/2"	TPE150-12	12.5					
300/350 MCM 185 mm²	8	5/16"	TPE185-8	8.5	26	75	23.7	18.8	50
	10	3/8"	TPE185-10	10.5					
	12	1/2"	TPE185-12	12.5					
400/500 MCM 240 mm²	8	5/16"	TPE240-8	8.5	26	85	26.2	21.2	60
	10	3/8"	TPE240-10	10.5					
	12	1/2"	TPE240-12	12.5					
	16	5/8"	TPE240-16	16.5		90			

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

中接管端子
MIDDLE TAKEOVER TERMINAL





. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：观察孔 Special structure:Observation hole
. 可接受异形定制 Acceptable customization


接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) L	⌀D	⌀d
26-22 A.W.G. 0.2-0.5 mm²	BNT0.5	12	2.1	1.3
22-16 A.W.G. 0.5-1.5 mm²	BNT1	15	3.3	1.7
16-14 A.W.G. 1.5-2.5 mm²	BNT2	15	3.9	2.3
14-12 A.W.G. 2.5-4 mm²	BNT3	15	5	3
12-10 A.W.G. 4-6 mm²	BNT5	15	5.4	3.4
8 A.W.G. 8 mm²	BNT8	21	7	4.6
6 A.W.G. 14 mm²	BNT14	26	8.9	5.9
4 A.W.G. 22 mm²	BNT22	29	11.3	7.8
2 A.W.G. 38 mm²	BNT38	32	13.2	9.5
1/0 A.W.G. 60 mm²	BNT60	36	15.3	11.4
2/0 A.W.G. 70 mm²	BNT70	37	17.5	13.3
3/0 A.W.G. 80 mm²	BNT80	38	19.5	14.5
4/0 A.W.G. 100 mm²	BNT100	38	22.1	16.4
250/300 MCM 150 mm²	BNT150	54	26.4	19.5
300/350 MCM 180 mm²	BNT180	57	28.5	21
400/500 MCM 200 mm²	BNT200	63	32.4	24
500/600 MCM 325 mm²	BNT325	72	37	28

22-16 A.W.G. 0.5-1.5 mm²	M1.5	22	4	2.4
16-14 A.W.G. 1.5-2.5 mm²	M2.5	22	4.3	2.7
14-12 A.W.G. 2.5-4 mm²	M4	25	4.8	3.1
12-10 A.W.G. 4-6 mm²	M6	25	5.5	3.8
8 A.W.G. 10 mm²	M10	25	6.9	4.7
6 A.W.G. 16 mm²	M16	29	7.8	5.6
4 A.W.G. 25 mm²	M25	29	9.5	7.1
2 A.W.G. 35 mm²	M35	35	11	8.2
2 A.W.G. 40 mm²	M40	35	11.2	9
1/0 A.W.G. 50 mm²	M50	35	12.5	9.5
2/0 A.W.G. 70 mm²	M70	45	15	11.5
3/0 A.W.G. 95 mm²	M95	47	17	13.5
4/0 A.W.G. 120 mm²	M120	52	20	15.6
250/300 MCM 150 mm²	M150	59	21	16.5
300/350 MCM 185 mm²	M185	65	23.6	18.4
400/500 MCM 240 mm²	M240	75	26.4	21.2
500/600 MCM 300 mm²	M300	90	28.6	23.4
600/750 MCM 400 mm²	M400	106	32.8	26.8

22-16 A.W.G. 0.5-1.5 mm²	L1.5	20	3.7	1.8
16-14 A.W.G. 1.5-2.5 mm²	L2.5	20	4	2.4
14-12 A.W.G. 2.5-4 mm²	L4	20	4.8	3.1
12-10 A.W.G. 4-6 mm²	L6	20	5.5	3.8
8 A.W.G. 10 mm²	L10	20	6.2	4.5
6 A.W.G. 16 mm²	L16	40	7.1	5.4
4 A.W.G. 25 mm²	L25	45	8.8	6.8
2 A.W.G. 35 mm²	L35	45	10.6	8.2
1/0 A.W.G. 50 mm²	L50	45	12.4	9.5
2/0 A.W.G. 70 mm²	L70	50	14.7	11.2
3/0 A.W.G. 95 mm²	L95	50	17.4	13.5
4/0 A.W.G. 120 mm²	L120	55	19.4	15

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.






中间套管
B BCTT CONNECTORS B

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：观察孔 Special structure:Observation hole
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)		
		L	⌀D	⌀d
22-16 A.W.G. 0.5-1.5 mm²	T-B1.25	16.5	3.3	2.1
16-14 A.W.G. 1.5-2.5 mm²	T-B2	14.9	3.7	2.6
14-12 A.W.G. 2.5-4 mm²	T-B3.5	16.5	5	3.6
12-10 A.W.G. 4-6 mm²	T-B5.5	16.5	5.5	4
8 A.W.G. 10 mm²	T-B8	20.2	6.7	5.1
6 A.W.G. 16 mm²	T-B14	24.7	8.5	6.4
4 A.W.G. 25 mm²	T-B22	27.5	10.8	8.2
2 A.W.G. 35 mm²	T-B38	30.2	12.7	10.1
1/0 A.W.G. 50 mm²	T-B60	32.4	14.7	12
2/0 A.W.G. 70 mm²	T-B70	33.4	16.8	14.1
3/0 A.W.G. 80 mm²	T-B80	35.6	18.6	15.4
4/0 A.W.G. 100 mm²	T-B100	35.6	21.1	17.6
250/300 MCM 150 mm²	T-B125	39.1	23.1	19.2
300/350 MCM 180 mm²	T-B150	50	25	21
	T-B180	56	28.3	22.9
400/500 MCM 200 mm²	T-B200/250	58	31.1	25.7
500/600 MCM 325 mm²	T-B325	66.2	35.4	29

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)		
		L	⌀D	⌀d
22-16 A.W.G. 0.5-1.5 mm²	B1.25	16.5	3.3	1.9
16-14 A.W.G. 1.5-2.5 mm²	B2	16.5	4	2.6
12-10 A.W.G. 4-6 mm²	B5.5	16.5	5.5	3.7
8 A.W.G. 10 mm²	B8	22.5	7.1	5.1
6 A.W.G. 16 mm²	B14	27.5	9	6.4
4 A.W.G. 25 mm²	B22	30.5	11.4	8.2
2 A.W.G. 35 mm²	B38	33.5	13.3	10.1
1/0 A.W.G. 50 mm²	B60	36	15.4	12
2/0 A.W.G. 70 mm²	B70	37.8	17.4	14
3/0 A.W.G. 80 mm²	B80	39.5	19.4	15.4
4/0 A.W.G. 100 mm²	B100	39.5	22	17.6
250/300 MCM 150 mm²	B125	43.4	24.1	19.2
300/350 MCM 180 mm²	B150	55.5	26	20.9
	B180	58.5	28.6	22
400/500 MCM 200 mm²	B200/250	64.5	32.5	25.7
500/600 MCM 325 mm²	B325	73.5	37	29






中间套管
TBC BCTT CONNECTORS TBC

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：观察孔 Special structure:Observation hole
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)		
		L	⌀D	⌀d
22-16 A.W.G. 0.5-1.5 mm²	TBC1.5	16	3.7	1.8
16-14 A.W.G. 1.5-2.5 mm²	TBC2.5	20	3.9	2.3
14-12 A.W.G. 2.5-4 mm²	TBC4	20	4.7	3
12-10 A.W.G. 4-6 mm²	TBC6	20	5.9	4
8 A.W.G. 10 mm²	TBC10	23	6.6	4.5
6 A.W.G. 16 mm²	TBC16	30	7.5	5.5
4 A.W.G. 25 mm²	TBC25	35	9.1	6.7
2 A.W.G. 35 mm²	TBC35	40	11	8.6
1/0 A.W.G. 50 mm²	TBC50	40	12.4	9.5
2/0 A.W.G. 70 mm²	TBC70	45	15	12
3/0 A.W.G. 80 mm²	TBC95	45	17	13.4
4/0 A.W.G. 100 mm²	TBC120	50	19	15
250/300 MCM 150 mm²	TBC150	55	21.2	16.5
300/350 MCM 180 mm²	TBC185	60	23	19
	TBC240	60	26.5	21
400/500 MCM 200 mm²	TBC300	70	30	24.5
500/600 MCM 325 mm²	TBC400	80	35	27






CL中间套管
CL BCTT CONNECTORS CL

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 特殊结构：观察孔 Special structure:Observation hole
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)		
		L	⌀D	⌀d
12-10 A.W.G. 4-6 mm²	CL6	30	5.5	3.8
8 A.W.G. 10 mm²	CL10	30	6	4.5
6 A.W.G. 16 mm²	CL16	50	7.8	5.6
4 A.W.G. 25 mm²	CL25	50	9.5	7.1
2 A.W.G. 35 mm²	CL35	50	11	8.2
1/0 A.W.G. 50 mm²	CL50	56	13	10
2/0 A.W.G. 70 mm²	CL70	56	15	11.5
3/0 A.W.G. 95 mm²	CL95	70	17	13.5
4/0 A.W.G. 120 mm²	CL120	70	20	15.6
250/300 MCM 150 mm²	CL150	80	21.2	16.8
300/350 MCM 185 mm²	CL185	85	23.6	18.9
400/500 MCM 240 mm²	CL240	90	26.5	21.5
500/600 MCM 300 mm²	CL300	100	30	24.5
600/750 MCM 400 mm²	CL400	150	35	27.5
800/1000 MCM 500 mm²	CL500	160	39	31
1000/1250 MCM 630 mm²	CL630	160	44	34.5







无绝缘平行端子
NON-INSULATED PARALLEL CONNECTORS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
		L	⌀D	⌀d	T
26-22 A.W.G. 0.2-0.5 mm²	PNT0.5	5	2.1	1.3	0.4
22-16 A.W.G. 0.5-1.5 mm²	PNT1	8	3.3	1.7	0.8
16-14 A.W.G. 1.5-2.5 mm²	PNT2	8	3.9	2.3	0.8
14-12 A.W.G. 2.5-4 mm²	PNT3	8.5	5	3	1
12-10 A.W.G. 4-6 mm²	PNT5	8.5	5.4	3.4	1
8 A.W.G. 8 mm²	PNT8	9.5	7	4.6	1.2
6 A.W.G. 14 mm²	PNT14	11	8.9	5.9	1.5
4 A.W.G. 22 mm²	PNT22	13.5	11.3	7.8	1.75
2 A.W.G. 38 mm²	PNT38	16.5	13.2	9.5	1.85
1/0 A.W.G. 60 mm²	PNT60	19	15.3	11.4	1.95
2/0 A.W.G. 70 mm²	PNT70	19	17.5	13.3	2.1
3/0 A.W.G. 80 mm²	PNT80	19.5	19.5	14.5	2.5
4/0 A.W.G. 100 mm²	PNT100	20	22.1	16.4	2.85
250/300 MCM 150 mm²	PNT150	27	26.4	19.5	3.45
300/350 MCM 180 mm²	PNT180	28.5	28.5	21	3.75
400/500 MCM 200 mm²	PNT200	32	32.4	24	4.2
500/600 MCM 325 mm²	PNT325	37	37	28	4.5





短形全绝缘中间接头
SHORT FULL-INSULATING MIDDLE JOINT


. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：乙烯基　Insulation:Vinyl
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			颜色 Color
		L1	L2	⌀d	
26-22 A.W.G. 0.2-0.5 mm²	PVT0.5	8	13.5	1.5	黄 yellow
22-16 A.W.G. 0.5-1.5 mm²	PVT1.25	8	16.5	1.7	红 red
16-14 A.W.G. 1.5-2.5 mm²	PVT2	8	16.5	2.5	蓝 blue
12-10 A.W.G. 4-6 mm²	PVT5.5	8.5	20	3.5	黄 yellow
8 A.W.G. 8 mm²	PVT8	9.5	24	4.5	红 red
6 A.W.G. 14 mm²	PVT14	11	30	6	蓝 blue
4 A.W.G. 22 mm²	PVT22	13.5	37	8	黄 yellow
2 A.W.G. 38 mm²	PVT38	16.5	39.5	9.5	红 red

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

长方形全绝缘中间接头
LONG FULL-INSULATING MIDDLE JOINT


. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：乙烯基　Insulation:Vinyl
. 可接受异形定制　Acceptable customization



接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			颜色 Color
		L	⌀D	⌀d	
22-16 A.W.G. 0.5-1.5 mm²	BVT1.25	24	4.3	1.85	红 red
16-14 A.W.G. 1.5-2.5 mm²	BVT2	24	4.5	2.5	蓝 blue
12-10 A.W.G. 4-6 mm²	BVT5.5	27	6.5	3.6	黄 yellow
8 A.W.G. 8 mm²	BVT8	33	7	4.5	红 red
6 A.W.G. 14 mm²	BVT14	48	10.4	6.4	蓝 blue
4 A.W.G. 22 mm²	BVT22	41	13	8.2	黄 yellow
2 A.W.G. 38 mm²	BVT38	45.5	14.1	10.1	红 red

长方形全绝缘中间接头(尼龙)
LONG FULL-INSULATING MIDDLE JOINT(NYLON)


. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon
. 可接受异形定制　Acceptable customization



接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			颜色 Color
		L	⌀D	⌀d	
22-16 A.W.G. 0.5-1.5 mm²	BNYT1.25	25	4	1.85	红 red
16-14 A.W.G. 1.5-2.5 mm²	BNYT2	25.3	4.5	2.5	蓝 blue
12-10 A.W.G. 4-6 mm²	BNYT5.5	27.5	6.5	3.6	黄 yellow

长方形全绝缘中间接头(热缩)
LONG FULL-INSULATING MIDDLE JOINT (HEAT SHRINK)


. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 热缩绝缘　Heat Shrink-insulated
. 可接受异形定制　Acceptable customization

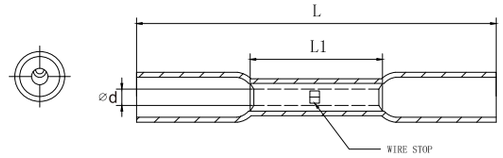

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			颜色 Color
		L	L1	⌀d	
26-22 A.W.G. 0.2-0.5 mm²	BHT0.5	26	12	1.3	黄 yellow
22-16 A.W.G. 0.5-1.5 mm²	BHT1.25	36	15	1.7	红 red
16-14 A.W.G. 1.5-2.5 mm²	BHT2	26	15	1.3	蓝 blue
12-10 A.W.G. 4-6 mm²	BHT5.5	26	15	1.3	黄 yellow

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.






无绝缘护套管形端子(适用于软线)
NON-INSULATED CORD END TERMINAL (APPLY IN FLEXIBLE WIRE)

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) L	W	D	d
26 A.W.G. 0.2 mm²	EN 0206	6	1.4	1	0.7
	EN 0207	7			
	EN 0208	8			
24 A.W.G. 0.3 mm²	EN 0306	6	1.5	1.1	0.8
	EN 0308	8			
	EN 0310	10			
22 A.W.G. 0.5 mm²	EN 0505	5	1.7	1.3	1
	EN 0506	6			
	EN 0508	8			
	EN 0510	10			
	EN 0512	12			
20 A.W.G. 0.75 mm²	EN 7506	6	1.9	1.6	1.3
	EN 7508	8			
	EN 7510	10			
	EN 7512	12			
18 A.W.G. 1 mm²	EN 1006	6	2.2	1.8	1.5
	EN 1008	8			
	EN 1010	10			
	EN 1012	12			
16 A.W.G. 1.5 mm²	EN 1507	7	2.5	2	1.7
	EN 1508	8			
	EN 1510	10			
	EN 1512	12			
	EN 1518	18			
14 A.W.G. 2.5 mm²	EN 2507	7	3.3	2.6	2.3
	EN 2508	8			
	EN 2510	10			
	EN 2512	12			
	EN 2518	18			
12 A.W.G. 4 mm²	EN 4009	9	3.9	3.2	2.8
	EN 4012	12			
	EN 4018	18			
10 A.W.G. 6 mm²	EN 6010	10	4.8	3.9	3.5
	EN 6012	12			
	EN 6015	15			
	EN 6018	18			
7 A.W.G. 10 mm²	EN 10-12	12	5.8	4.9	4.5
	EN 10-15	15			
	EN 10-18	18			
5 A.W.G. 16 mm²	EN 16-12	12	7.2	6.2	5.8
	EN 16-15	15			
	EN 16-18	18			
4 A.W.G. 25 mm²	EN 25-16	16	9.1	7.9	7.5
	EN 25-22	22			

无绝缘护套管形端子(适用于软线)
NON-INSULATED CORD END TERMINAL (APPLY IN FLEXIBLE WIRE)


. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) L	W	D	d
2 A.W.G. 35 mm²	EN 35-16	16	10.2	8.7	8.3
	EN 35-25	25			
1 A.W.G. 50 mm²	EN 50-20	20	12.4	10.9	10.3
	EN 50-25	25			
1/0 A.W.G. 50 mm²	EN 50-30	30	12.7	10.9	10.3
	EN 50-32	32			
2/0 A.W.G. 70 mm²	EN 70-22	22	15.8	14.3	13.5
	EN 70-25	25			
	EN 70-30	30			
	EN 70-32	32			
3/0 A.W.G. 95 mm²	EN 95-25	25	17.3	15.3	14.5
	EN 95-30	30			
	EN 95-32	32			
	EN 95-34	34			
4/0 A.W.G. 120 mm²	EN 120-30	30	20.2	17.5	16.5
	EN 120-32	32			
	EN 120-34	34			
	EN 120-38	38			
	EN 120-40	40			
250/300 A.W.G. 150 mm²	EN 150-32	32	23	20.6	19.6
	EN 150-34	34			
	EN 150-38	38			
	EN 150-40	40			
250/300 A.W.G. 185 mm²	EN 185-32	32	23.9	21.4	20.2
	EN 185-40	40			






尼龙绝缘护套管形端子(适用于软线)
NYLON-INSULATED CORD END TERMINAL (APPLY IN FLEXIBLE WIRE)

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation Material:Nylon

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					颜色 COLOR	
		F	L	W	D	C	Germany	France
26 A.W.G. 0.14 mm²	ENY 0106	6	10.0	1.9	1.1	0.75	GREY	
	ENY 0108	8	12.0					
26 A.W.G. 0.25 mm²	ENY 0206	6	10.0	1.9	1.1	0.75	LIGHT BLUE	VIOLET
	ENY 0208	8	12.0					
	ENY 0210	10	14.0					
	ENY 0212	12	16.0					
24 A.W.G. 0.34 mm²	ENY 0306	6	10.4	1.9	1.1	0.8	TURQUOISE	PINK
	ENY 0308	8	12.4					
	ENY 0310	10	14.4					
22 A.W.G. 0.5 mm²	ENY 0506	6	11.9	2.6	1.3	1.0	ORANGE	WHITE
	ENY 0508	8	13.9					
	ENY 0510	10	15.9					
	ENY 0512	12	17.9					
20 A.W.G. 0.75 mm²	ENY 7506	6	12.5	2.8	1.5	1.2	WHITE	BLUE
	ENY 7508	8	14.5					
	ENY 7510	10	16.5					
	ENY 7512	12	18.5					
	ENY 7518	18	24.5					
18 A.W.G. 1 mm²	ENY 1006	6	12.6	3.2	1.8	1.5	YELLOW	RED
	ENY 1008	8	14.6					
	ENY 1010	10	16.6					
	ENY 1012	12	18.6					
	ENY 1018	18	24.6					
16 A.W.G. 1.5 mm²	ENY 1508	8	15.1	3.6	2.1	1.8	RED	BLACK
	ENY 1510	10	17.1					
	ENY 1512	12	19.1					
	ENY 1515	15	22.1					
	ENY 1518	18	25.1					
14 A.W.G. 2.5 mm²	ENY 2508	8	15.2	4.2	2.6	2.3	BLUE	GREY
	ENY 2510	10	17.2					
	ENY 2512	12	19.2					
	ENY 2518	18	25.2					
	ENY 2525	25	32.2					
12 A.W.G. 4 mm²	ENY 4009	9	17.5	4.9	3.2	2.8	GREY	ORANGE
	ENY 4010	10	18.5					
	ENY 4012	12	20.5					
	ENY 4018	18	26.5					
10 A.W.G. 6 mm²	ENY 6012	12	20.5	6.0	3.9	3.5	BLACK	GREEN
	ENY 6018	18	26.5					
8 A.W.G. 10 mm²	ENY 10-12	12	21.8	7.4	4.9	4.5	IVORY	BROWN
	ENY 10-18	18	27.8					
6 A.W.G. 16 mm²	ENY 16-12	12	22.2	8.8	6.2	5.8	GREEN	IVORY
	ENY 16-18	18	28.2					


尼龙绝缘护套管形端子(适用于软线)
NYLON-INSULATED CORD END TERMINAL (APPLY IN FLEXIBLE WIRE)

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation Material:Nylon





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					颜色 COLOR	
		F	L	W	D	C	Germany	France
4 A.W.G. 25 mm²	ENY 25-12	12	24.2	10.9	7.9	7.5	BROWN	BLACK
	ENY 25-16	16	28.2					
	ENY 25-18	18	30.2					
	ENY 25-22	22	34.5					
2 A.W.G. 35 mm²	ENY 35-16	16	30.0	12.2	8.7	8.3	BEIGE	RED
	ENY 35-18	18	32.0					
	ENY 35-22	22	36.0					
	ENY 35-25	25	39.0					
1/0 A.W.G. 50 mm²	ENY 50-12	12	28.0	15.0	10.9	10.3	OLIVE	BLUE
	ENY 50-20	20	36.0					
2/0 A.W.G. 70 mm²	ENY 70-20	20	36.3	16.2	14.3	13.5	YELLOW	YELLOW
	ENY 70-25	25	41.3					
	ENY 70-27	27	43.3					
3/0 A.W.G. 95 mm²	ENY 95-25	25	44.0	18.1	15.3	14.5	RED	RED

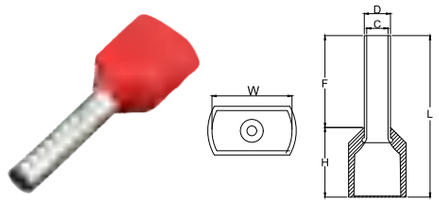

尼龙绝缘护套双线管形端子(适用于软线)
NYLON-INSULATED TWIN CORD END TERMINAL (APPLY IN FLEXIBLE WIRE)

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation Material:Nylon

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						颜色 COLOR	
		F	L	W	H	D	C	Germany	France
2x22 A.W.G. 2x0.5 mm²	TENY 0508	8	15.7	5.5	7.7	1.8	1.5	ORANGE	WHITE
	TENY 0510	10	17.7						
	TENY 0512	12	19.7						
2x20 A.W.G. 2x0.75 mm²	TENY 7508	8	15.8	5.5	7.8	2.1	1.8	WHITE	BLUE
	TENY 7510	10	17.8						
	TENY 7512	12	19.8						
2x18 A.W.G. 2x1.0 mm²	TENY 1008	8	15.9	5.5	7.9	2.4	2.1	YELLOW	RED
	TENY 1010	10	17.9						
	TENY 1012	12	19.9						
2x16 A.W.G. 2x1.5 mm²	TENY 1508	8	16.0	6.4	8.0	2.6	2.3	RED	BLACK
	TENY 1510	10	18.0						
	TENY 1512	12	20.0						
2x14 A.W.G. 2x2.5 mm²	TENY 2508	8	16.8	8.0	8.8	3.3	2.9	BLUE	GREY
	TENY 2510	10	18.8						
	TENY 2512	12	20.8						
	TENY 2513	13	21.8						
2x12 A.W.G. 2x4.0 mm²	TENY 4009	9	18.7	8.8	9.7	4.2	3.8	GREY	ORANGE
	TENY 4012	12	21.7						
2x10 A.W.G. 2x6.0 mm²	TENY 6014	14	25.7	9.5	11.7	5.3	4.9	BLACK	GREEN
2x8 A.W.G. 2x10 mm²	TENY 10-14	14	26.3	12.6	12.3	6.9	6.5	IVORY	BROWN
2x6 A.W.G. 2x16 mm²	TENY 16-14	14	31.3	19.0	17.3	8.7	8.3	GREEN	IVORY

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。



接受红蓝黑黄绿等多种颜色的绝缘护套定制，接受连带结构定制。
We accept customization in various colors such as red, blue, black, yellow, and green, as well as structural customization.



铜板成型系列
Copper Sheet Forming Series

焊缝 Copper alloy welding seam

通过全自动化进行焊缝，产品与导体连接的导电性能和机械强度更好，我们的板端偏硬不易变形，线端偏柔与导线结合的物理性能更佳。

By fully automating the welding process, the conductivity and mechanical strength of the connection betweenthe product and the conductor are improved.



PVC绝缘阻燃易进式
PVC insulated flame retardant funnel entry

护套采用阻燃性好的绝缘材料加工成，导线穿插入端子时经过渐进收缩结构，顺畅进入不易返丝，提高了线束加工的生产效率。

The sheath is made of flame retardant insulation material, with a gradual shrinkage structure that allows for smooth entry without easy rewinding, there by improving the production efficiency of wire harness processing.



尼龙绝缘耐高温易进式
Nylon insulated high temperature resistant funnel entry

采用耐高温性能更强的尼龙绝缘材料加工成易进式结构，机械强度高，韧性好，有较好的抗拉抗压能力，并适用于多种温度环境。

Adopting nylon insulation material with stronger high temperature resistance and easy to enter structure, it has good tensile and compressive strength and is suitable for various temperature environments.




加铜套管抗震结构
Seismic structure with copper bushing

在绝缘护套与端子的中间增加了紫铜镀锡套管，在与导线压接后，线束的拉拔力和抗震性能更强，提高了线束的稳定性和使用寿命。

A copper tin plated sleeve is added between the insulation sheath and the terminal. After crimping with the wire,the wire harness has stronger pulling force and seismic performance, which improves the stability and service life ofthe wire harness.







圆形裸端子90°
NON-INSULATED RING-90° TERMINALS


. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 特殊结构：折弯90°　Special structure:Bending 90°
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	C	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3.5	#6	R1.25-3.5M/90	3.7	6.6	8	4.5	3.4	1.7	0.8
	4	#8	R1.25-4S/90	4.3	6.6	8				
	4	#8	R1.25-4L/90	4.3	8	9.5				
	5	#10	R1.25-5/90	5.3	8	9.5				
	6	1/4"	R1.25-6/90	6.4	11.6	15				
16-14 A.W.G. 1.5-2.5 mm²	3	#4	R2-3/90	3.2	8.5	10	4.8	4	2.3	0.8
	3.5	#6	R2-3.5/90	3.7						
	4	#8	R2-4/90	4.3	8.5	10				
	5	#10	R2-5/90	5.3	9.5	10				
	6	1/4"	R2-6/90	6.4	12	15				
14-12 A.W.G. 2.5-4 mm²	4	#8	R3.5-4/90	4.3	9.5	11.2	6.8	5	3.2	0.8
	5	#10	R3.5-5/90	5.3						
	6	1/4"	R3.5-6/90	6.4	12	12				
	3	#4	R3.5-3/90(T=1.0)	3.2	8	10	6	5	3	1
	3.5	#6	R3.5-3.5/90(T=1.0)	3.7						
	4	#8	R3.5-4/90(T=1.0)	4.3	8	10				
	5	#10	R3.5-5S/90(T=1.0)	5.3	8	10				
	5	#10	R3.5-5L/90(T=1.0)	5.3	12	13.5				
	6	1/4"	R3.5-6/90(T=1.0)	6.5	12	13.5				
	8	5/16"	R3.5-8/90(T=1.0)	8.5	15	19				
	10	3/8"	R3.5-10/90(T=1.0)	10.5	15	19				
12-10 A.W.G. 4-6 mm²	3.5	#6	R5.5-3.5/90	3.7	9.5	11	6.8	5.6	3.5	1
	3.5	#6	R5.5-3.5S/90	3.7	7.2	7.7	6			
	4	#8	R5.5-4/90	4.3	9.5	11	6.8			
	4	#8	R5.5-4S/90	4.3	7.2	7.7	6			
	5	#10	R5.5-5/90	5.3	9.5	11	6.8			
	6	1/4"	R5.5-6/90	6.4	12	17				
	6	1/4"	R5.5-6S/90	6.4		13.7				
8 A.W.G. 8 mm²	3.5	#6	R8-3.5/90	3.7	10	11	8	7	4.5	1.15
	4	#8	R8-4/90	4.3						
	5	#10	R8-5/90	5.3						
	6	1/4"	R8-6/90	6.4	11	12.5				
	8	5/16"	R8-8/90	8.3	14	16.5				
	4	#8	R8-4S/90	4.3	8.8	12.5	8.5	7.2	4.7	1.2
	5	#10	R8-5S/90	5.3						
	4	#8	R8-4/90(T=1.2)	4.3	12	13	8.5	7	4.5	1.2
	5	#10	R8-5/90(T=1.2)	5.3						
	6	1/4"	R8-6/90(T=1.2)	6.4						
	8	5/16"	R8-8/90(T=1.2)	8.4	15	19				

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

圆形裸端子90°
NON-INSULATED RING-90° TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 特殊结构：折弯90°　Special structure:Bending 90°
. 可接受异形定制　Acceptable customization






接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	C	B	⌀D	⌀d	T
6 A.W.G. 14 mm²	5	#10	R14-5/90	5.3	11	12	11	8.5	5.9	1.2
	6	1/4"	R14-6/90	6.4						
	8	5/16"	R14-8/90	8.4	14	17				
	4	#8	R14-4/90(T=1.4)	4.3	12	16.5	10.5	9	5.8	1.4
	5	#10	R14-5/90(T=1.4)	5.3						
	6	1/4"	R14-6/90(T=1.4)	6.5						
	6	1/4"	R14-6L/90(T=1.4)	6.5	16	19.5				
	8	5/16"	R14-8/90(T=1.4)	8.5						
	10	3/8"	R14-10/90(T=1.4)	10.5						
	4	#8	R14-4/90(T=1.7)	4.3	12	15	10	9.3	5.8	1.7
	5	#10	R14-5/90(T=1.7)	5.3						
	6	1/4"	R14-6/90(T=1.7)	6.4						
	8	5/16"	R14-8/90(T=1.7)	8.4	16	19				
4 A.W.G. 22 mm²	5	#10	R22-5/90	5.3	12	17.5	11	11	7.8	1.5
	6	1/4"	R22-6/90	6.4						
	8	5/16"	R22-8/90	8.4	16	18.5				
	5	#10	R22-5/90(T=1.8)	5.3	16.5	19	12	11.3	7.7	1.8
	6	1/4"	R22-6/90(T=1.8)	6.4						
	8	5/16"	R22-8/90(T=1.8)	8.4						
2 A.W.G. 38 mm²	6	1/4"	R38-6/90	6.4	15.3	20	14	13	9.6	1.6
	8	5/16"	R38-8/90	8.4						
	10	3/8"	R38-10/90	10.5						
	6	1/4"	R38-6/90(T=2.0)	6.4	22	24.5	14	13.4	9.4	2
	8	5/16"	R38-8/90(T=2.0)	8.4						
	10	3/8"	R38-10/90(T=2.0)	10.5		26.5				
1/0 A.W.G. 60 mm²	6	1/4"	R60-6/90	6.4	22	23	17	15.3	11.9	1.7
	8	5/16"	R60-8/90	8.4						
	10	3/8"	R60-10/90	10.5						
2/0 A.W.G. 70 mm²	6	1/4"	R70-6/90	6.4	27	28.5	19	17.5	13.5	2
	8	5/16"	R70-8/90	8.4						
	10	3/8"	R70-10/90	10.5						
	12	1/2"	R70-12/90	13						
3/0 A.W.G. 80 mm²	6	1/4"	R80-6/90	6.4	27	28	20	19.4	14.8	2.2
	8	5/16"	R80-8/90	8.4						
	10	3/8"	R80-10/90	10.5						
	12	1/2"	R80-12/90	13						

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.





圆形裸端子
NON-INSULATED RING TERMINALS


. 端子材质：紫铜　　Terminals material:Copper
. 表面处理：镀锡　　Plating:Tin plated
. 可接受异形定制　　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	R1.25-3	3.2	5.5	11.5	4.5	3.4	1.7	0.8
	3.5	#6	R1.25-3.5S	3.7						
	3.5	#6	R1.25-3.5M	3.7	6.6	14.4				
	4	#8	R1.25-4S	4.3	6.6	14.4				
	4	#8	R1.25-4L	4.3	8	15.8				
	5	#10	R1.25-5	5.3	8	15.8				
	6	1/4"	R1.25-6	6.4	11.6	21.7				
	8	5/16"	R1.25-8	8.4						
	10	3/8"	R1.25-10	10.5	13.6	26				
16-14 A.W.G. 1.5-2.5 mm²	3	#4	R2-3	3.2	8.5	16.8	4.8	4	2.3	0.8
	3.5	#6	R2-3.5M	3.7	6.6	14.4				
	3.5	#6	R2-3.5L	3.7	8.5	16.8				
	4	#8	R2-4S	4.3	6.6	14.4				
	4	#8	R2-4L	4.3	8.5	16.8				
	5	#10	R2-5	5.3	9.5	16.8				
	6	1/4"	R2-6	6.4	12	21.8				
	8	5/16"	R2-8	8.4						
	10	3/8"	R2-10	10.5	13.6	25.5				
14-12 A.W.G. 2.5-4 mm²	4	#8	R3.5-4	4.3	9.5	20	6.8	5	3.2	0.8
	5	#10	R3.5-5	5.3						
	6	1/4"	R3.5-6	6.4	12	21.4				
	8	5/16"	R3.5-8	8.4						
	3	#4	R3.5-3(T=1.0)	3.2	8	18	6	5	3	1
	3.5	#6	R3.5-3.5(T=1.0)	3.7						
	4	#8	R3.5-4(T=1.0)	4.3	8	18				
	5	#10	R3.5-5S(T=1.0)	5.3	8	18				
	5	#10	R3.5-5L(T=1.0)	5.3	12	21.5				
	6	1/4"	R3.5-6(T=1.0)	6.5	12	21.5				
	8	5/16"	R3.5-8(T=1.0)	8.5	15	27				
	10	3/8"	R3.5-10(T=1.0)	10.5	15	27				
12-10 A.W.G. 4-6 mm²	3.5	#6	R5.5-3.5	3.7	9.5	19.8	6.8	5.6	3.5	1
	3.5	#6	R5.5-3.5S	3.7	7.2	15.7	6			
	4	#8	R5.5-4	4.3	9.5	19.8	6.8			
	4	#8	R5.5-4S	4.3	7.2	15.7	6			
	5	#10	R5.5-5	5.3	9.5	19.8	6.8			
	6	1/4"	R5.5-6	6.4	12	25.8				
	6	1/4"	R5.5-6S	6.4		22.5				
	8	5/16"	R5.5-8	8.4	15	28				
	10	3/8"	R5.5-10	10.5						
	12	1/2"	R5.5-12	13.2	18.2	28.5				
8 A.W.G. 8 mm²	3.5	#6	R8-3.5	3.7	10	21	8	7	4.5	1.15
	4	#8	R8-4	4.3						
	5	#10	R8-5	5.3						
	6	1/4"	R8-6	6.4	11	22.5				
	8	5/16"	R8-8	8.3	14	27				
	10	3/8"	R8-10	10.5	18	30				
	12	1/2"	R8-12	13						

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

圆形裸端子
NON-INSULATED RING TERMINALS

. 端子材质：紫铜　　Terminals material:Copper
. 表面处理：镀锡　　Plating:Tin plated
. 可接受异形定制　　Acceptable customization






接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	⌀d	T
8 A.W.G. 8 mm²	4	#8	R8-4S	4.3	8.8	23.8	8.5	7.2	4.7	1.2
	5	#10	R8-5S	5.3						
	4	#8	R8-4(T=1.2)	4.3	12	23.8	8.5	7	4.5	1.2
	5	#10	R8-5(T=1.2)	5.3						
	6	1/4"	R8-6(T=1.2)	6.4						
	8	5/16"	R8-8(T=1.2)	8.4	15	29.8				
	10	3/8"	R8-10(T=1.2)	10.5						
6 A.W.G. 14 mm²	5	#10	R14-5	5.3	11	25.5	11	8.5	5.9	1.2
	6	1/4"	R14-6	6.4						
	8	5/16"	R14-8	8.4	14	31				
	10	3/8"	R14-10	10.5	18	33				
	12	1/2"	R14-12	13						
	4	#8	R14-4(T=1.4)	4.3	12	29.8	10.5	9	5.8	1.4
	5	#10	R14-5(T=1.4)	5.3						
	6	1/4"	R14-6(T=1.4)	6.5						
	6	1/4"	R14-6L(T=1.4)	6.5	16	32.8				
	8	5/16"	R14-8(T=1.4)	8.5						
	10	3/8"	R14-10(T=1.4)	10.5						
	4	#8	R14-4(T=1.7)	4.3	12	27.5	10	9.3	5.8	1.7
	5	#10	R14-5(T=1.7)	5.3						
	6	1/4"	R14-6(T=1.7)	6.4						
	8	5/16"	R14-8(T=1.7)	8.4	16	32.5				
	10	3/8"	R14-10(T=1.7)	10.5						
4 A.W.G. 22 mm²	5	#10	R22-5	5.3	12	31	11	11	7.8	1.5
	6	1/4"	R22-6	6.4						
	8	5/16"	R22-8	8.4	16	34				
	10	3/8"	R22-10	10.5	18	35				
	12	1/2"	R22-12	13						
	5	#10	R22-5(T=1.8)	5.3	16.5	33.7	12	11.3	7.7	1.8
	6	1/4"	R22-6(T=1.8)	6.4						
	8	5/16"	R22-8(T=1.8)	8.4						
	10	3/8"	R22-10(T=1.8)	10.5		36.7				
2 A.W.G. 38 mm²	6	1/4"	R38-6	6.4	15.3	37.7	14	13	9.6	1.6
	8	5/16"	R38-8	8.4						
	10	3/8"	R38-10	10.5						
	12	1/2"	R38-12	13	22	43				
	6	1/4"	R38-6(T=2.0)	6.4	22	41	14	13.4	9.4	2
	8	5/16"	R38-8(T=2.0)	8.4						
	10	3/8"	R38-10(T=2.0)	10.5		43				
	12	1/2"	R38-12(T=2.0)	13						
1/0 A.W.G. 60 mm²	6	1/4"	R60-6	6.4	22	44	17	15.3	11.9	1.7
	8	5/16"	R60-8	8.4						
	10	3/8"	R60-10	10.5						
	12	1/2"	R60-12	13						
	14	9/16"	R60-14	15						
	16	5/8"	R60-16	17						

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.





圆形裸端子
NON-INSULATED RING TERMINALS


. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	⌀d	T
2/0 A.W.G. 70 mm²	6	1/4"	R70-6	6.4	27	52.5	19	17.5	13.5	2
	8	5/16"	R70-8	8.4						
	10	3/8"	R70-10	10.5						
	12	1/2"	R70-12	13						
3/0 A.W.G. 80 mm²	6	1/4"	R80-6	6.4	27	54.2	20	19.4	14.8	2.2
	8	5/16"	R80-8	8.4						
	10	3/8"	R80-10	10.5						
	12	1/2"	R80-12	13						
	14	9/16"	R80-14	15						
	16	5/8"	R80-16	17						
4/0 A.W.G. 120 mm²	8	5/16"	R100-8	8.4	28.5	55.6	21	21.7	16.4	2.5
	10	3/8"	R100-10	10.5						
	12	1/2"	R100-12	13						
	14	9/16"	R100-14	15						
	16	5/8"	R100-16	17						

本产品手册所列产品图片与内容请以本公司
实物或技术图纸为准，更多产品请咨询客服。

OT圆形裸端子
OT NON-INSULATED RING TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀银　Plating:Silver plated
. 可接受异形定制　Acceptable customization






接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	OT1-3	3.2	5.8	13.7	5.2	3.4	1.9	0.7
	4	#8	OT1-4	4.2	7.8	17.1				
	5	#10	OT1-5	5.5	9.2	19.2				
	6	1/4"	OT1-6	6.4	10.3	20.3				
	8	5/16"	OT1-8	8.5	14.8	25.4				
	10	3/8"	OT1-10	10.5	15.1	27.1				
	3	#4	OT1.5-3	3.2	6	14.1	5.2	3.5	2.2	0.7
	4	#8	OT1.5-4	4.3	7.9	17				
	5	#10	OT1.5-5	5.2	9.3	18.9				0.8
	6	1/4"	OT1.5-6	6.4	11.1	21.9				0.8
	8	5/16"	OT1.5-8	8.4	13.4	24.2				
	10	3/8"	OT1.5-10	10.4	15.1	27.1				0.7
	12	1/2"	OT1.5-12	12.4	18.6	31.5				
16-14 A.W.G. 1.5-2.5 mm²	4	#8	OT2.5-4	4.1	7.9	17	5.3	4.2	2.7	0.8
	5	#10	OT2.5-5	5.4	9.4	18.9				
	6	1/4"	OT2.5-6	6.6	11.9	22				
	8	5/16"	OT2.5-8	8.3	13.4	24.3				0.7
	10	3/8"	OT2.5-10	10.4	15	26.7				
14-12 A.W.G. 2.5-4 mm²	3	#4	OT4-3	3.3	8.1	17.4	6.3	5.2	3.5	0.8
	4	#8	OT4-4	4.2	8.2	17.7				0.9
	5	#10	OT4-5	5.2	9.1	19.9				
	6	1/4"	OT4-6	6.4	11.6	23				
	8	5/16"	OT4-8	8.4	14	26				
	10	3/8"	OT4-10	10.5	17.1	30.5				
12-10 A.W.G. 4-6 mm²	4	#8	OT6-4	4.5	9.5	20.9	7.3	6.5	4.5	0.9
	5	#10	OT6-5	5.2	9.5	20.8				
	6	1/4"	OT6-6	6.4	11.9	23.9				1
	8	5/16"	OT6-8	8.5	14.5	27				
	10	3/8"	OT6-10	10.4	17.7	32.2				0.9
	12	1/2"	OT6-12	12.5	20.1	34.2				
8 A.W.G. 10 mm²	4	#8	OT10-4	4.5	10.3	24	9	8	5.5	1.2
	5	#10	OT10-5	5.3	10.4	24				
	6	1/4"	OT10-6	6.5	12.1	26.7				
	8	5/16"	OT10-8	8.5	15.8	30.6				
	10	3/8"	OT10-10	10.6	17.6	34				
	12	1/2"	OT10-12	12.5	20.1	38.2				
6 A.W.G. 16 mm²	5	#10	OT16-5	5.4	13	29.6	10.9	10	7.1	1.4
	6	1/4"	OT16-6	6.5	13	30				
	8	5/16"	OT16-8	8.6	17.3	33.1				
	10	3/8"	OT16-10	10.5	18	35.1				
	12	1/2"	OT16-12	12.6	20.6	39.1				
4 A.W.G. 25 mm²	6	1/4"	OT25-6	6.6	15.6	33.3	12.3	11.9	8.5	1.5
	8	5/16"	OT25-8	8.5	16.1	34.5				
	10	3/8"	OT25-10	10.5	18.5	36.7				1.6
	12	1/2"	OT25-12	12.4	21.1	40.8				

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.






OT圆形裸端子
OT NON-INSULATED RING TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀银 Plating:Silver plated
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	⌀d	T
2 A.W.G. 35 mm²	6	1/4"	OT35-6	6.6	17	37.4	14.1	12.6	9.2	1.5
	8	5/16"	OT35-8	8.5	17	37.4				1.6
	10	3/8"	OT35-10	10.5	18.9	39.5				
	12	1/2"	OT35-12	12.5	21	42.1				
1/0 A.W.G. 50 mm²	6	1/4"	OT50-6	6.6	18.1	39.5	14.6	14.9	11.3	1.6
	8	5/16"	OT50-8	8.6	18.1	39.2				
	10	3/8"	OT50-10	10.5	20	41.9				
	12	1/2"	OT50-12	12.4	21	43				
2/0 A.W.G. 70 mm²	6	1/4"	OT70-6	6.7	19.8	47.2	19.3	17.9	13.8	1.9
	8	5/16"	OT70-8	8.5	19.9	47.3				
	10	3/8"	OT70-10	10.6	21.2	48.6				
	12	1/2"	OT70-12	12.5	23	50.4				
3/0 A.W.G. 95 mm²	6	1/4"	OT95-6	6.4	23.5	53.4	20.9	19.9	15.5	2.2
	8	5/16"	OT95-8	8.4	23.5	53				
	10	3/8"	OT95-10	10.4	23.6	52.5				
	12	1/2"	OT95-12	12.5	24.6	55.5				
4/0 A.W.G. 120 mm²	8	5/16"	OT120-8	8.7	25.1	57.4	22.3	22	17	2.45
	10	3/8"	OT120-10	10.8	27.9	59.4				
	12	1/2"	OT120-12	12.5	27.9	58.7				
250/300 MCM 150 mm²	8	5/16"	OT150-8	8.6	32	67.3	27.3	25.7	20.4	2.75
	10	3/8"	OT150-10	10.4	32	67.3				
	12	1/2"	OT150-12	12.5	32	67.2				
	14	9/16"	OT150-14	14.3	32	67.5				2.7
300/350 MCM 185 mm²	10	3/8"	OT185-10	10.3	33.9	70.3	28.4	28.7	22	3.3
	12	1/2"	OT185-12	12.4	33.9	70.3				
400/500 MCM 240 mm²	12	1/2"	OT240-12	12.9	37	74.6	31.8	31.2	23	3.7


无绝缘护套圆形端子
NON-INSULATED RING TERMINALS

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 可接受异形定制 Acceptable customization





接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) E	W	L	F	B	WS	H	T
22-16 A.W.G. 0.5-1.5 mm²	#4	RNB 1.25-3-PS	3.2	5.7	12.6	5.0	4.8	4.1	4.0	0.75
	#6	RNB 1.25-3.5S-PS	3.7	5.7	12.6	5.0				
	#6	RNB 1.25-3.5M-PS	3.7	6.6	14.4	6.3				
	#6	RNB 1.25-3.5L-PS	3.7	8.0	15.8	7.0				
	#8	RNB 1.25-4S-PS	4.3	6.6	14.4	6.3				
	#8	RNB 1.25-4L-PS	4.3	8.0	15.8	7.0				
	#10	RNB 1.25-5S-PS	5.3	8.0	15.8	7.0				
	#10	RNB 1.25-5L-PS	5.3	9.8	17.4	8.0				
	1/4	RNB 1.25-6S-PS	6.4	9.8	17.6	8.0				
	1/4	RNB 1.25-6L-PS	6.4	11.6	21.8	11.1				
	5/16	RNB 1.25-8-PS	8.4	11.6	21.8	11.1				
	3/8	RNB 1.25-10-PS	10.5	13.6	25.5	14.0				
16-14 A.W.G. 1.5-2.5 mm²	#4	RNB 2-3-PS	3.2	6.6	12.5	4.3	4.8	5.0	5.0	0.8
	#6	RNB 2-3.5S-PS	3.7	6.6	12.5	4.5				
	#6	RNB 2-3.5M-PS	3.7	6.6	14.5	6.5				
	#6	RNB 2-3.5L-PS	3.7	8.5	16.8	7.7				
	#8	RNB 2-4S-PS	4.3	6.6	14.2	6.5				
	#8	RNB 2-4L-PS	4.3	8.5	16.8	7.7				
	#10	RNB 2-5S-PS	5.3	8.5	16.8	7.7				
	#10	RNB 2-5L-PS	5.3	9.5	16.8	7.7				
	1/4	RNB 2-6S-PS	6.4	9.5	16.8	7.7				
	1/4	RNB 2-6L-PS	6.4	12.0	21.8	11.0				
	5/16	RNB 2-8-PS	8.4	12.0	21.8	11.0				
	3/8	RNB 2-10-PS	10.5	14.6	26.0	14.0				
14-12 A.W.G. 2.5-4 mm²	#8	RNB 3.5-4-PS	4.3	8.0	18.0	7.7	6.0	7.0	5.8	1.0
	#10	RNB 3.5-5S-PS	5.3	8.0	18.0	7.7				
	#10	RNB 3.5-5L-PS	5.3	12.0	21.4	9.3				
	1/4	RNB 3.5-6L-PS	6.4	12.0	21.4	9.3				
	5/16	RNB 3.5-8-PS	8.4	15.0	27.1	13.6				
	3/8	RNB 3.5-10-PS	10.5	15.0	27.1	13.6				
12-10 A.W.G. 4-6 mm²	#4	RNB 5.5-3-PS	3.2	7.2	16.2	6.7	6.2	8.0	6.6	1.0
	#6	RNB 5.5-3.5-PS	3.7	7.2	16.2	6.7				
	#8	RNB 5.5-4S-PS	4.3	7.2	16.2	6.7				
	#8	RNB 5.5-4L-PS	4.3	9.5	19.0	8.5				
	#10	RNB 5.5-5-PS	5.3	9.5	19.0	8.5				
	1/4	RNB 5.5-6-PS	6.4	12.0	23.0	11.0				
	5/16	RNB 5.5-8-PS	8.4	15.0	27.5	13.7				
	3/8	RNB 5.5-10-PS	10.5	15.0	27.5	13.7				
	1/2	RNB 5.5-12-PS	13.0	19.2	32.4	16.0				
8 A.W.G. 6-10 mm²	#8	RNB 8-4-PS	4.3	8.8	23.8	11.0	8.5	8.3	8.8	1.2
	#8	RNB 8-4L-PS	4.3	12.0	23.8	9.3				
	#10	RNB 8-5S-PS	5.3	8.8	23.8	11.0				
	#10	RNB 8-5M-PS	5.3	12.0	23.8	9.3				
	#10	RNB 8-5L-PS	5.3	15.0	29.8	29.5				
	1/4	RNB 8-6S-PS	6.4	12.0	23.8	9.3				
	1/4	RNB 8-6L-PS	6.4	15.0	29.8	29.5				
	5/16	RNB 8-8-PS	8.4	15.0	29.8	29.5				
	3/8	RNB 8-10-PS	10.5	15.0	29.8	29.5				

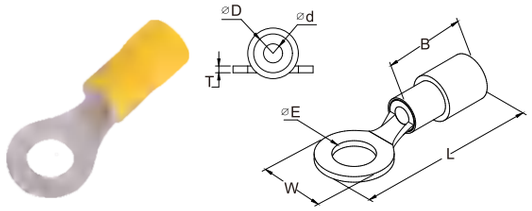

PVC预绝缘圆形端子
VINYL-INSULATED RING TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	RV1.25-3	3.2	5.5	17.3	10.4	4	1.7	0.8
	3.5	#6	RV1.25-3.5S	3.7						
	3.5	#6	RV1.25-3.5M	3.7	6.6	20.3				
	4	#8	RV1.25-4S	4.3	6.6	20.3				
	4	#8	RV1.25-4L		8	21.8				
	5	#10	RV1.25-5	5.3	8	21.8				
	6	1/4"	RV1.25-6	6.4	11.6	27.5				
	8	5/16"	RV1.25-8	8.4						
	10	3/8"	RV1.25-10	10.5	13.6	31.8				
16-14 A.W.G. 1.5-2.5 mm²	3	#4	RV2-3	3.2	8.5	22.3	10.4	4.6	2.3	0.8
	3.5	#6	RV2-3.5M	3.7	6.6	19.8				
	3.5	#6	RV2-3.5L	3.7	8.5	22.3				
	4	#8	RV2-4S	4.3	6.6	19.8				
	4	#8	RV2-4L		8.6	22.3				
	5	#10	RV2-5	5.3	9.5	22.3				
	6	1/4"	RV2-6	6.4	12	27.3				
	8	5/16"	RV2-8	8.4						
	10	3/8"	RV2-10	10.5	13.6	30.8				
14-12 A.W.G. 2.5-4 mm²	4	#8	RV3.5-4	4.3	9.5	26.3	13.3	5.8	3.2	0.8
	5	#10	RV3.5-5	5.3						
	6	1/4"	RV3.5-6	6.4	12	27.7				
	8	5/16"	RV3.5-8	8.4						
	4	#8	RV3.5-4(T=1.0)	4.3	8	25	13	6.4	3	1
	5	#10	RV3.5-5S(T=1.0)	5.3						
	5	#10	RV3.5-5L(T=1.0)	5.3	12	28.5				
	6	1/4"	RV3.5-6(T=1.0)	6.5						
	8	5/16"	RV3.5-8(T=1.0)	8.5	15	34				
	10	3/8"	RV3.5-10(T=1.0)	10.5						
	12	1/2"	RV3.5-12(T=1.0)	13	19.2	39				
12-10 A.W.G. 4-6 mm²	3.5	#6	RV5.5-3.5	3.7	9.5	26.5	13.5	6.6	3.5	1
	3.5	#6	RV5.5-3.5S		7.2	23.2				
	4	#8	RV5.5-4	4.3	9.5	26.5				
	4	#8	RV5.5-4S		7.2	23.2				
	5	#10	RV5.5-5	5.3	9.5	26.5				
	6	1/4"	RV5.5-6	6.4	12	32.5				
	6	1/4"	RV5.5-6S			29.2				
	8	5/16"	RV5.5-8	8.4	15	34.5				
	10	3/8"	RV5.5-10	10.5						
	12	1/2"	RV5.5-12	13.2	18.2	35				
8 A.W.G. 8 mm²	3.5	#6	RV8-3.5	3.7	10	30	17.5	8.3	4.5	1.15
	4	#8	RV8-4	4.3						
	5	#10	RV8-5	5.3						
	6	1/4"	RV8-6	6.4	11	31.5				
	8	5/16"	RV8-8	8.4	14	36				
	10	3/8"	RV8-10	10.5	18	39				
	12	1/2"	RV8-12	13						
6 A.W.G. 14 mm²	5	#10	RV14-5	5.3	11	37.5	23	9.7	5.9	1.2
	6	1/4"	RV14-6	6.4						
	8	5/16"	RV14-8	8.4	14	43				
	10	3/8"	RV14-10	10.5	18	45				
	12	1/2"	RV14-12	13						

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。


PVC预绝缘折弯圆形端子
VINYL-INSULATED BENDING RING TERMINALS



. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号 90°折弯	ITEM NO. 品名型号 45°折弯	尺寸DIMENSIONS (mm) ⌀E	W	⌀d	B	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	RV1.25-3/90	RV1.25-3/45	3.2	5.5	1.7	10.4	0.8
	3.5	#6	RV1.25-3.5S/90	RV1.25-3.5S/45	3.7				
	3.5	#6	RV1.25-3.5M/90	RV1.25-3.5M/45	3.7	6.6			
	4	#8	RV1.25-4S/90	RV1.25-4S/45	4.3	6.6			
	4	#8	RV1.25-4L/90	RV1.25-4L/45		8			
	5	#10	RV1.25-5/90	RV1.25-5/45	5.3	8			
	6	1/4"	RV1.25-6/90	RV1.25-6/45	6.4	11.6			
	8	5/16"	RV1.25-8/90	RV1.25-8/45	8.4				
	10	3/8"	RV1.25-10/90	RV1.25-10/45	10.5	13.6			
16-14 A.W.G. 1.5-2.5 mm²	3	#4	RV2-3/90	RV2-3/45	3.2	8.5	2.3	10.4	0.8
	3.5	#6	RV2-3.5M/90	RV2-3.5M/45	3.7	6.6			
	3.5	#6	RV2-3.5L/90	RV2-3.5L/45	3.7	8.5			
	4	#8	RV2-4S/90	RV2-4S/45	4.3	6.6			
	4	#8	RV2-4L/90	RV2-4L/45		8.6			
	5	#10	RV2-5/90	RV2-5/45	5.3	9.5			
	6	1/4"	RV2-6/90	RV2-6/45	6.4	12			
	8	5/16"	RV2-8/90	RV2-8/45	8.4				
	10	3/8"	RV2-10/90	RV2-10/45	10.5	13.6			
14-12 A.W.G. 2.5-4 mm²	4	#8	RV3.5-4/90	RV3.5-4/45	4.3	9.5	3.2	13.3	0.8
	5	#10	RV3.5-5/90	RV3.5-5/45	5.3				
	6	1/4"	RV3.5-6/90	RV3.5-6/45	6.4	12			
	8	5/16"	RV3.5-8/90	RV3.5-8/45	8.4				
	4	#8	RV3.5-4/90(T=1.0)	RV3.5-4/45(T=1.0)	4.3	8	3	13	1
	5	#10	RV3.5-5S/90(T=1.0)	RV3.5-5S/45(T=1.0)	5.3				
	5	#10	RV3.5-5L/90(T=1.0)	RV3.5-5L/45(T=1.0)	5.3	12			
	6	1/4"	RV3.5-6/90(T=1.0)	RV3.5-6/45(T=1.0)	6.5				
	8	5/16"	RV3.5-8/90(T=1.0)	RV3.5-8/45(T=1.0)	8.5	15			
	10	3/8"	RV3.5-10/90(T=1.0)	RV3.5-10/45(T=1.0)	10.5				
	12	1/2"	RV3.5-12/90(T=1.0)	RV3.5-12/45(T=1.0)	13	19.2			
12-10 A.W.G. 4-6 mm²	3.5	#6	RV5.5-3.5/90	RV5.5-3.5/45	3.7	9.5	3.5	13.5	1
	3.5	#6	RV5.5-3.5S/90	RV5.5-3.5S/45		7.2			
	4	#8	RV5.5-4/90	RV5.5-4/45	4.3	9.5			
	4	#8	RV5.5-4S/90	RV5.5-4S/45		7.2			
	5	#10	RV5.5-5/90	RV5.5-5/45	5.3	9.5			
	6	1/4"	RV5.5-6/90	RV5.5-6/45	6.4	12			
	6	1/4"	RV5.5-6S/90	RV5.5-6S/45					
	8	5/16"	RV5.5-8/90	RV5.5-8/45	8.4	15			
	10	3/8"	RV5.5-10/90	RV5.5-10/45	10.5				
	12	1/2"	RV5.5-12/90	RV5.5-12/45	13.2	18.2			
8 A.W.G. 8 mm²	3.5	#6	RV8-3.5/90	RV8-3.5/45	3.7	10	4.5	17.5	1.15
	4	#8	RV8-4/90	RV8-4/45	4.3				
	5	#10	RV8-5/90	RV8-5/45	5.3				
	6	1/4"	RV8-6/90	RV8-6/45	6.4	11			
	8	5/16"	RV8-8/90	RV8-8/45	8.4	14			
	10	3/8"	RV8-10/90	RV8-10/45	10.5	18			
	12	1/2"	RV8-12/90	RV8-12/45	13				
6 A.W.G. 14 mm²	5	#10	RV14-5/90	RV14-5/45	5.3	11	5.9	23	1.2
	6	1/4"	RV14-6/90	RV14-6/45	6.4				
	8	5/16"	RV14-8/90	RV14-8/45	8.4	14			
	10	3/8"	RV14-10/90	RV14-10/45	10.5	18			
	12	1/2"	RV14-12/90	RV14-12/45	13				

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.

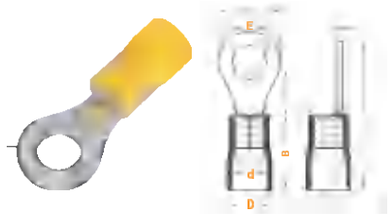


PVC预绝缘圆形端子加铜套
VINYL-INSULATED RING TERMINALS DOUBLE CRIMP

. 端子材质：紫铜　Terminals material:Copper
. 金属套管：铜　Metallic sleeve:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	RD1.25-3	3.2	5.5	17.5	10.5	4.3	1.7	0.75
	3.5	#6	RD1.25-3.5	3.7						
	3.5	#6	RD1.25-3.5L		6.6	20.4				
	4	#8	RD1.25-4	4.3	8	21.7				
	4	#8	RD1.25-4M		6.6	20.4				
	5	#10	RD1.25-5	5.3	8	21.7				
	6	1/4"	RD1.25-6	6.4	11.6	27.6				
	8	5/16"	RD1.25-8	8.4						
	10	3/8"	RD1.25-10	10.5	13.7	31.5				
	13	1/2"	RD1.25-12	13	19	35				
16-14 A.W.G. 1.5-2.5 mm²	3	#4	RD2-3M	3.2	6.6	20.6	11	5.3	2.3	0.8
	3	#4	RD2-3		8.5	23				
	3.5	#6	RD2-3.5	3.7	6.6	20.6				
	3.5	#6	RD2-3.5L		8.5	23				
	4	#8	RD2-4	4.3	8.5	23				
	4	#8	RD2-4M		6.6	20.8				
	5	#10	RD2-5M	5.3	8.5	23				
	5	#10	RD2-5		9.5	23				
	6	1/4"	RD2-6	6.4	12	28.1				
	8	5/16"	RD2-8	8.4						
	10	3/8"	RD2-10	10.5	13.7	31.9				
	13	1/2"	RD2-12	13	19	35.5				
12-10 A.W.G. 4-6 mm²	3	#4	RD5.5-3	3.2	9.5	26.7	14	6.8	3.4	1
	3.5	#6	RD5.5-3.5	3.7						
	4	#8	RD5.5-4S	4.3	7.4	26				
	4	#8	RD5.5-4		9.5	26.7				
	5	#10	RD5.5-5	5.3						
	5	#10	RD5.5-5S		7.4	26				
	6	1/4"	RD5.5-6	6.4	12	32.7				
	8	5/16"	RD5.5-8	8.4	15	34.9				
	10	3/8"	RD5.5-10	10.5						
	13	1/2"	RD5.5-12	13	19.2	40				

尼龙预绝缘圆形端子
NYLON-INSULATED RING TERMINALS FUNNEL ENTRY易进式






. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	RNY1.25-3	3.2	5.5	18.2	11.3	4.3	1.7	0.8
	3.5	#6	RNY1.25-3.5S	3.7						
	3.5	#6	RNY1.25-3.5M		6.6	21.2				
	4	#8	RNY1.25-4S	4.3	6.6	21.2				
	4	#8	RNY1.25-4L		8	22.7				
	5	#10	RNY1.25-5	5.3	8	22.7				
	6	1/4"	RNY1.25-6	6.4	11.6	28.4				
	8	5/16"	RNY1.25-8	8.4						
	10	3/8"	RNY1.25-10	10.5	13.6	32.7				
16-14 A.W.G. 1.5-2.5 mm²	3	#4	RNY2-3	3.2	8.5	23.2	11.3	4.6	2.3	0.8
	3.5	#6	RNY2-3.5M	3.7	6.6	20.7				
	3.5	#6	RNY2-3.5L		8.5	23.2				
	4	#8	RNY2-4S	4.3	6.6	20.7				
	4	#8	RNY2-4L		8.6	23.2				
	5	#10	RNY2-5	5.3	9.5	23.2				
	6	1/4"	RNY2-6	6.4	12	28.2				
	8	5/16"	RNY2-8	8.4						
	10	3/8"	RNY2-10	10.5	13.6	31.7				
12-10 A.W.G. 4-6 mm²	3.5	#6	RNY5.5-3.5	3.7	9.5	27.1	14.1	6.6	3.5	1
	3.5	#6	RNY5.5-3.5S		7.2	23.8				
	4	#8	RNY5.5-4	4.3	9.5	27.1				
	4	#8	RNY5.5-4S		7.2	23.8				
	5	#10	RNY5.5-5	5.3	9.5	27.1				
	6	1/4"	RNY5.5-6	6.4	12	33.1				
	6	1/4"	RNY5.5-6S			29.8				
	8	5/16"	RNY5.5-8	8.4	15	35.1				
	10	3/8"	RNY5.5-10	10.5						
	12	1/2"	RNY5.5-12	13.2	18.2	35.6				
8 A.W.G. 8 mm²	3.5	#6	RNY8-3.5	3.7	10	29	16	8	4.5	1.15
	4	#8	RNY8-4	4.3						
	5	#10	RNY8-5	5.3						
	6	1/4"	RNY8-6	6.4	11	30.5				
	8	5/16"	RNY8-8	8.4	14	35.5				
	10	3/8"	RNY8-10	10.5	18	38				
	12	1/2"	RNY8-12	13						





尼龙预绝缘圆形端子加铜套

NYLON-INSULATED RING TERMINALS DOUBLE CRIMP FUNNEL ENTRY易进式

.端子材质：紫铜	Terminals material:Copper
.金属套管：铜	Metallic sleeve:Copper
.表面处理：镀锡	Plating:Tin plated
.绝缘材质：尼龙	Insulation:Nylon


接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					
mm² (A.W.G.)	Metrie	American		⌀E	W	L	B	⌀D	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	RNYD1.25-3	3.2	5.5	17.5	10.5	4.5	0.75
	3.5	#6	RNYD1.25-3.5	3.7					
	3.5	#6	RNYD1.25-3.5L		6.6	20.4			
	4	#8	RNYD1.25-4	4.3	8	21.7			
	4	#8	RNYD1.25-4M		6.6	20.4			
	5	#10	RNYD1.25-5	5.3	8	21.7			
	6	1/4"	RNYD1.25-6	6.4	11.6	27.6			
	8	5/16"	RNYD1.25-8	8.4					
	10	3/8"	RNYD1.25-10	10.5	13.7	31.5			
	13	1/2"	RNYD1.25-12	13	19	35			
16-14 A.W.G. 1.5-2.5 mm²	3	#4	RNYD2-3M	3.2	6.6	20.6	11	5	0.8
	3	#4	RNYD2-3		8.5	23			
	3.5	#6	RNYD2-3.5	3.7	6.6	20.6			
	3.5	#6	RNYD2-3.5L		8.5	23			
	4	#8	RNYD2-4	4.3	8.5	23			
	4	#8	RNYD2-4M		6.6	20.8			
	5	#10	RNYD2-5M	5.3	8.5	23			
	5	#10	RNYD2-5		9.5	23			
	6	1/4"	RNYD2-6	6.4	12	28.1			
	8	5/16"	RNYD2-8	8.4					
	10	3/8"	RNYD2-10	10.5	13.7	31.9			
	13	1/2"	RNYD2-12	13	19	35.5			
12-10 A.W.G. 4-6 mm²	3	#4	RNYD5.5-3	3.2	9.5	26.7	14	7.1	1
	3.5	#6	RNYD5.5-3.5	3.7					
	4	#8	RNYD5.5-4S	4.3	7.4	26			
	4	#8	RNYD5.5-4		9.5	26.7			
	5	#10	RNYD5.5-5	5.3					
	5	#10	RNYD5.5-5S		7.4	26			
	6	1/4"	RNYD5.5-6	6.4	12	32.7			
	8	5/16"	RNYD5.5-8	8.4	15	34.9			
	10	3/8"	RNYD5.5-10	10.5					
	13	1/2"	RNYD5.5-12	13	19.2	39.6			

本产品手册所列产品图片与内容请以本公司
实物或技术图纸为准，更多产品请咨询客服。

无绝缘方头端子

SQUAER TONGUE TERMINALS

.端子材质：紫铜	Terminals material:Copper
.表面处理：镀锡	Plating:Tin plated
.可接受异形定制	Acceptable customization





接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)							
mm² (A.W.G.)	Metrie	American		⌀E	W	L	B	⌀D	⌀d	C1	T
12-10 A.W.G. 4-6 mm²	4	#8	SQNB5-4	4.3	7.9	20	5.1	5.7	3.5	10	1
	5	#10	SQNB5-5	5.3							
8 A.W.G. 8 mm²	4	#8	SQNB8-4	4.2	9.8	23.2	7	7.3	4.5	11.8	1.2
	5	#10	SQNB8-5	5.3					4.6		
8 A.W.G. 10 mm²	4	#8	SQNB10-4	4.2	7.9	27.2	10	8.3	5.4	11	1.4
	5	#10	SQNB10-5	5.2	8						
6 A.W.G. 16 mm²	4	#8	SQNB16-4	4.3	8.5	26.9	9.8	9.2	6.4	10.2	1.4
	5	#10	SQNB16-5	5.5	8.6		10			11	
4 A.W.G. 22 mm²	5	#10	SQNB22-5	5.3	12.5	32	12	11.5	7.7	13.5	1.7
	6	1/4"	SQNB22-6	6.4							
	8	5/16"	SQNB22-8	8.4							
2 A.W.G. 38 mm²	5	#10	SQNB38-5	5.3	13.5	38	13.8	13.3	9.4	16.3	1.8
	6	1/4"	SQNB38-6	6.4							
1/0 A.W.G. 60 mm²	8	5/16"	SQNB60-8	8.4	16	49	18.5	15.5	11	20	2
	10	3/8"	SQNB60-10	10.5							
3/0 A.W.G. 80 mm²	8	5/16"	SQNB80-8	8.4	21.8	49	19	19.5	14.5	20	2.3
	10	3/8"	SQNB80-10	10.5							
	12	1/2"	SQNB80-12	13							
4/0 A.W.G. 100 mm²	8	5/16"	SQNB100-8	8.4	21.8	53	20	22.3	16.4	21	2.7
	10	3/8"	SQNB100-10	10.5							
	12	1/2"	SQNB100-12	13							
250/300 MCM 150 mm²	8	5/16"	SQNB150-8	8.4	22	61	26.5	26.5	19.5	22.3	3.2
	10	3/8"	SQNB150-10	10.5							
	12	1/2"	SQNB150-12	13							
400/500 MCM 200 mm²	10	3/8"	SQNB200-10	10.5	36	72.5	31	32.7	24	22.3	4
	12	1/2"	SQNB200-12	13							

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.




叉形裸端子
NON-INSULATED SPADE TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
mm^2 (A.W.G.)	Metrie	American		⌀E	W	L	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm^2	3	#4	S1.25-3	3.2	5.7	16	4.5	3.4	1.7	0.8
	3.5	#6	S1.25-3.5S	3.7	5.7					
	3.5	#6	S1.25-3.5L		6.2					
	4	#8	S1.25-4S	4.3	6.4					
	4	#8	S1.25-4M		7.2					
	5	#10	S1.25-5	5.3	8					
	6	1/4"	S1.25-6	6.7	10.7	17				
16-14 A.W.G. 1.5-2.5 mm^2	3	#4	S2-3	3.2	5.7	16	4.5	4	2.3	0.8
	3.5	#6	S2-3.5S	3.7						
	3.5	#6	S2-3.5L		6.2					
	4	#8	S2-4S	4.3	6.4					
	4	#8	S2-4M		7.2					
	5	#10	S2-5	5.3	8					
	6	1/4"	S2-6	6.7	10.7	19				
14-12 A.W.G. 2.5-4 mm^2	4	#8	S3.5-4	4.3	8	18	6.3	5	3.2	0.8
	5	#10	S3.5-5	5.3						
	6	1/4"	S3.5-6	6.4	12	24	6.5			
	3	#4	S3.5-3(T=1.0)	3.2	8	18.3	6	5	3	1
	3.5	#6	S3.5-3.5(T=1.0)	3.7						
	4	#8	S3.5-4(T=1.0)	4.3						
	5	#10	S3.5-5S(T=1.0)	5.3						
	6	1/4"	S3.5-6S(T=1.0)	6.5	9	19				
	6	1/4"	S3.5-6L(T=1.0)	6.5	12	21.5				
	8	5/16"	S3.5-8(T=1.0)	8.5	14	23.8				
	10	3/8"	S3.5-10(T=1.0)	10.5	17.5	26.5				
12-10 A.W.G. 4-6 mm^2	3.5	#6	S5.5-3.5	3.7	8.2	19.5	6.5	5.6	3.5	1
	4	#8	S5.5-4	4.3						
	5	#10	S5.5-5	5.3	9					
	6	1/4"	S5.5-6	6.4	12	24				
	8	5/16"	S5.5-8	8.4	14					
	10	3/8"	S5.5-10	10.5	15	26				
8 A.W.G. 8 mm^2	4	#8	S8-4	4.3	9	23.5	8.6	7	4.5	1.15
	5	#10	S8-5	5.3						
	6	1/4"	S8-6	6.7	12	24				
	8	5/16"	S8-8	8.4	13	28	8			
	10	3/8"	S8-10	10.5	15					
6 A.W.G. 14 mm^2	5	#10	S14-5	5.3	12	27.5	10	8.5	5.9	1.2
	6	1/4"	S14-6	6.7						
	5	#10	S14-5(T=1.5)	5.3				9.1	6	1.5

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。






无绝缘折弯叉形裸端子
NON-INSULATED BENDING SPADE TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization

接线范围	STUD SIZE 螺栓孔		品名型号 ITEM NO.		尺寸DIMENSIONS (mm)					
mm^2 (A.W.G.)	Metrie	American	90°折弯	45°折弯	E	W	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm^2	3	#4	S1.25-3/90	S1.25-3/45	3.2	5.7	4.5	3.4	1.7	0.8
	3.5	#6	S1.25-3.5S/90	S1.25-3.5S/45	3.7	5.7				
	3.5	#6	S1.25-3.5L/90	S1.25-3.5L/45		6.2				
	4	#8	S1.25-4S/90	S1.25-4S/45	4.3	6.4				
	4	#8	S1.25-4M/90	S1.25-4M/45		7.2				
	5	#10	S1.25-5/90	S1.25-5/45	5.3	8				
	6	1/4"	S1.25-6/90	S1.25-6/45	6.7	10.7				
16-14 A.W.G. 1.5-2.5 mm^2	3	#4	S2-3/90	S2-3/45	3.2	5.7	4.5	4	2.3	0.8
	3.5	#6	S2-3.5S/90	S2-3.5S/45	3.7					
	3.5	#6	S2-3.5L/90	S2-3.5L/45		6.2				
	4	#8	S2-4S/90	S2-4S/45	4.3	6.4				
	4	#8	S2-4M/90	S2-4M/45		7.2				
	5	#10	S2-5/90	S2-5/45	5.3	8				
	6	1/4"	S2-6/90	S2-6/45	6.7	10.7				
14-12 A.W.G. 2.5-4 mm^2	4	#8	S3.5-4/90	S3.5-4/45	4.3	8	6.3	5	3.2	0.8
	5	#10	S3.5-5/90	S3.5-5/45	5.3					
	6	1/4"	S3.5-6/90	S3.5-6/45	6.4	12	6.5			
	3	#4	S3.5-3/90(T=1.0)	S3.5-3/45(T=1.0)	3.2	8	6	5	3	1
	3.5	#6	S3.5-3.5/90(T=1.0)	S3.5-3.5/45(T=1.0)	3.7					
	4	#8	S3.5-4/90(T=1.0)	S3.5-4/45(T=1.0)	4.3					
	5	#10	S3.5-5S/90(T=1.0)	S3.5-5S/45(T=1.0)	5.3					
	6	1/4"	S3.5-6S/90(T=1.0)	S3.5-6S/45(T=1.0)	6.5	9				
	6	1/4"	S3.5-6L/90(T=1.0)	S3.5-6L/45(T=1.0)	6.5	12				
	8	5/16"	S3.5-8/90(T=1.0)	S3.5-8/45(T=1.0)	8.5	14				
	10	3/8"	S3.5-10/90(T=1.0)	S3.5-10/45(T=1.0)	10.5	17.5				
12-10 A.W.G. 4-6 mm^2	3.5	#6	S5.5-3.5/90	S5.5-3.5/45	3.7	8.2	6.5	5.6	3.5	1
	4	#8	S5.5-4/90	S5.5-4/45	4.3					
	5	#10	S5.5-5/90	S5.5-5/45	5.3	9				
	6	1/4"	S5.5-6/90	S5.5-6/45	6.4	12				
	8	5/16"	S5.5-8/90	S5.5-8/45	8.4	14				
	10	3/8"	S5.5-10/90	S5.5-10/45	10.5	15				
8 A.W.G. 8 mm^2	4	#8	S8-4/90	S8-4/45	4.3	9	8.6	7	4.5	1.15
	5	#10	S8-5/90	S8-5/45	5.3					
	6	1/4"	S8-6/90	S8-6/45	6.7	12				
	8	5/16"	S8-8/90	S8-8/45	8.4	13	8			
	10	3/8"	S8-10/90	S8-10/45	10.5	15				
6 A.W.G. 14 mm^2	5	#10	S14-5/90	S14-5/45	5.3	12	10	8.5	5.9	1.2
	6	1/4"	S14-6/90	S14-6/45	6.7					
	5	#10	S14-5/90(T=1.5)	S14-5/45(T=1.5)	5.3			9.1	6	1.5

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.





无绝缘护套叉形端子
NON-INSULATED SPADE TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) E	W	L	F	B	WS	H	T
22-16 A.W.G. 0.5-1.5 mm²	#4	SNB 1.25-3-PS	3.2	5.7	16.0	6.5	4.8	4.2	4.0	0.75
	#6	SNB 1.25-3.5S-PS	3.7	5.7	16.0	6.5				
	#6	SNB 1.25-3.5L-PS	3.7	6.4	16.0	6.5				
	#8	SNB 1.25-4S-PS	4.3	6.4	16.0	6.5				
	#8	SNB 1.25-4M-PS	4.3	7.2	16.0	6.5				
	#8	SNB 1.25-4L-PS	4.3	8.1	16.0	6.3				
	#10	SNB 1.25-5S-PS	5.3	8.1	16.0	6.5				
	#10	SNB 1.25-5L-PS	5.3	9.5	16.0	6.5				
	1/4	SNB 1.25-6S-PS	6.4	9.5	16.0	6.5				
	1/4	SNB 1.25-6L-PS	6.4	12.0	22.0	10.6				
16-14 A.W.G. 1.5-2.5 mm²	#4	SNB 2-3-PS	3.2	5.7	16.0	6.5	4.8	5.0	5.0	0.8
	#6	SNB 2-3.5S-PS	3.7	5.7	16.0	6.5				
	#6	SNB 2-3.5L-PS	3.7	6.2	16.0	6.5				
	#8	SNB 2-4S-PS	4.3	6.4	16.0	6.5				
	#8	SNB 2-4M-PS	4.3	7.2	16.0	6.5				
	#8	SNB 2-4L-PS	4.3	8.1	16.0	6.5				
	#10	SNB 2-5S-PS	5.3	8.1	16.0	6.5				
	#10	SNB 2-5L-PS	5.3	9.5	16.0	6.5				
	1/4	SNB 2-6S-PS	6.4	9.5	16.0	6.5				
	1/4	SNB 2-6L-PS	6.4	12.0	22.0	11.0				
14-12 A.W.G. 2.5-4 mm²	#4	SNB 3.5-3-PS	3.2	5.7	18.0	7.0	6.8	7.0	5.8	1.0
	#8	SNB 3.5-4S-PS	4.3	7.2	18.0	7.0				
	#8	SNB 3.5-4-PS	4.3	8.0	18.0	7.0				
	#10	SNB 3.5-5-PS	5.3	8.0	18.0	7.0				
	1/4	SNB 3.5-6-PS	6.4	12.0	21.5	8.0				
12-10 A.W.G. 4-6 mm²	#6	SNB 5.5-3.5-PS	3.7	7.2	18.0	7.5	6.8	8.0	6.6	1.0
	#8	SNB 5.5-4S-PS	4.3	8.3	19.0	7.0				
	#8	SNB 5.5-4L-PS	4.3	9.0	19.0	7.0				
	#10	SNB 5.5-5-PS	5.3	9.0	19.0	7.5				
	1/4	SNB 5.5-6S-PS	6.4	9.0	19.0	7.5				
	1/4	SNB 5.5-6L-PS	6.4	12.0	25.5	12.0				
	5/16	SNB 5.5-8-PS	8.4	14.0	24.5	11.5				

PVC易进式绝缘叉形端子
VINYL-INSULATED SPADE TERMINALS
FUNNEL ENTRY易进式

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC
. 可接受异形定制　Acceptable customization





接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	American	ITEM NO. 品名型号 BRAZED SEAM 焊接	BUTTED SEAM 不焊接	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	SVE1.25-3B	SVE1.25-3	3.2	5.6	21.9	10.7	1.7	0.75
	3.5	#6	SVE1.25-3.5SB	SVE1.25-3.5S	3.7	5.7	21.9			
	3.5	#6	SVE1.25-3.5LB	SVE1.25-3.5L		6.4	21.7			
	4	#8	SVE1.25-4SB	SVE1.25-4S	4.2	6.4	21.9			
	4	#8	SVE1.25-4B	SVE1.25-4	4.3	7.2	21.9			
	4	#8	SVE1.25-4LB	SVE1.25-4L		8.1	21.9			
	5	#10	SVE1.25-5SB	SVE1.25-5S	5.3	8.1	21.9			
	5	#10	SVE1.25-5LB	SVE1.25-5L		9.3	21.7			
	6	1/4"	SVE1.25-6SB	SVE1.25-6S	6.4	9.5	21.9			
16-14 A.W.G. 1.5-2.5 mm²	3	#4	SVE2-3B	SVE2-3	3.2	5.7	22.5	11.3	2.3	0.8
	3.5	#6	SVE2-3.5SB	SVE2-3.5S	3.7	5.7	22.5			
	3.5	#6	SVE2-3.5LB	SVE2-3.5L		6.4	22.3			
	4	#8	SVE2-4SB	SVE2-4S	4.2	6.4	22.5			
	4	#8	SVE2-4B	SVE2-4	4.3	7.2	22.5			
	4	#8	SVE2-4LB	SVE2-4L		8.1	22.5			
	5	#10	SVE2-5SB	SVE2-5S	5.3	8.1	22.5			
	5	#10	SVE2-5LB	SVE2-5L		9.3	22.3			
	6	1/4"	SVE2-6SB	SVE2-6S	6.4	9.5	22.5			
14-12 A.W.G. 2.5-4 mm²	4	#8	SVE3.5-4SB	SVE3.5-4S	4.2	6.8	25.2	13.4	2.9	1
	4	#8	SVE3.5-4B	SVE3.5-4	4.3	8	25.7			
	5	#10	SVE3.5-5B	SVE3.5-5	5.3	8	25.7			
	6	1/4"	SVE3.5-6B	SVE3.5-6	6.5	12	28.9			
12-10 A.W.G. 4-6 mm²	3.5	#6	SVE5.5-3.5B	SVE5.5-3.5	3.7	7.2	25.2	14	3.4	1
	4	#8	SVE5.5-4SB	SVE5.5-4S	4.3	8.3	26.7			
	4	#8	SVE5.5-4LB	SVE5.5-4L		9	26.6			
	5	#10	SVE5.5-5B	SVE5.5-5	5.3	9	26.6			
	6	1/4"	SVE5.5-6SB	SVE5.5-6S	6.4	9	26.6			
	6	1/4"	SVE5.5-6LB	SVE5.5-6L		12	32.8			
	8	5/16"	SVE5.5-8B	SVE5.5-8	8.4	14	31.7			



PVC绝缘叉形端子
VINYL-INSULATED SPADE TERMINALS


. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：PVC Insulation:PVC
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	SV1.25-3	3.2	5.7	21.8	10.4	4	1.7	0.8
	3.5	#6	SV1.25-3.5S	3.7	5.7					
	3.5	#6	SV1.25-3.5L		6.2					
	4	#8	SV1.25-4S	4.3	6.4					
	4	#8	SV1.25-4M		7.2					
	5	#10	SV1.25-5	5.3	8					
	6	1/4"	SV1.25-6	6.7	10.7	22.8				
16-14 A.W.G. 1.5-2.5 mm²	3	#4	SV2-3	3.2	5.7	21.8	10.4	4.6	2.3	0.8
	3.5	#6	SV2-3.5S	3.7	5.7					
	3.5	#6	SV2-3.5L		6.2					
	4	#8	SV2-4S	4.3	6.4					
	4	#8	SV2-4M		7.2					
	5	#10	SV2-5	5.3	8					
	6	1/4"	SV2-6	6.7	10.7	24.8				
14-12 A.W.G. 2.5-4 mm²	4	#8	SV3.5-4	4.3	8	24.8	13.3	5.8	3.2	0.8
	5	#10	SV3.5-5	5.3						
	6	1/4"	SV3.5-6	6.4	12	30.8				
	3	#4	SV3.5-3(T=1.0)	3.2	8	25.3	13	6.4	3	1
	3.5	#6	SV3.5-3.5(T=1.0)	3.7						
	4	#8	SV3.5-4(T=1.0)	4.3						
	5	#10	SV3.5-5S(T=1.0)	5.3						
	6	1/4"	SV3.5-6S(T=1.0)	6.5	9	26				
	6	1/4"	SV3.5-6L(T=1.0)	6.5	12	28.5				
	8	5/16"	SV3.5-8(T=1.0)	8.5	14	30.8				
	10	3/8"	SV3.5-10(T=1.0)	10.5	17.5	33.5				
12-10 A.W.G. 4-6 mm²	3.5	#6	SV5.5-3.5	3.7	8.2	26.5	13.6	6.6	3.5	1
	4	#8	SV5.5-4	4.3						
	5	#10	SV5.5-5	5.3	9					
	6	1/4"	SV5.5-6	6.4	12	31.2				
	8	5/16"	SV5.5-8	8.4	14					
	10	3/8"	SV5.5-10	10.5	15	33.1				
8 A.W.G. 8 mm²	4	#8	SV8-4	4.3	9	32	17.5	8.3	4.5	1.15
	5	#10	SV8-5	5.3						
	6	1/4"	SV8-6	6.7	12	32.5				
	8	5/16"	SV8-8	8.4	13	37.5				
6 A.W.G. 14 mm²	5	#10	SV14-5	5.3	12	40.5	23	9.7	5.9	1.2
	6	1/4"	SV14-6	6.7						

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

PVC绝缘叉形端子加铜套
VINYL-INSULATED SPADE TERMINALS DOUBLE CRIMP






. 端子材质：紫铜 Terminals material:Copper
. 金属套管：铜 Metallic sleeve:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：PVC Insulation:PVC

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	SD1.25-3	3.2	5.7	21.5	10	4.3	1.7	0.75
	3.5	#6	SD1.25-3.5S	3.7						
	3.5	#6	SD1.25-3.5		6.2					
	4	#8	SD1.25-4	4.3	7.2					
	4	#8	SD1.25-4S		6.4					
	5	#10	SD1.25-5	5.3	8					
	6	1/4"	SD1.25-6	6.4	10.7	22.5				
	6	1/4"	SD1.25-6S	6.4	9.3					
	8	5/16"	SD1.25-8	8.4	13.5	27.5				
16-14 A.W.G. 1.5-2.5 mm²	3	#4	SD2-3	3.2	5.7	22	10.5	5.3	2.3	0.8
	3.5	#6	SD2-3.5S	3.7						
	3.5	#6	SD2-3.5		6.2					
	4	#8	SD2-4S	4.3	6.4					
	4	#8	SD2-4		7.2					
	5	#10	SD2-5	5.3	8					
	6	1/4"	SD2-6	6.4	10.7	23				
	6	1/4"	SD2-6S	6.4	9.3	23				
12-10 A.W.G. 4-6 mm²	3	#4	SD5.5-3	3.2	7.3	26.2	13.6	6.7	3.4	1
	3.5	#6	SD5.5-3.5	3.7	8.1					
	3.5	#6	SD5.5-3.5S	3.7	6.3					
	4	#8	SD5.5-4	4.3	8.2					
	4	#8	SD5.5-4S	4.3	6.3					
	5	#10	SD5.5-5	5.3	9					
	6	1/4"	SD5.5-6	6.4	12	30.2				
	6	1/4"	SD5.5-6S	6.4	9					
	8	5/16"	SD5.5-8	8.4	12	32.2				

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.

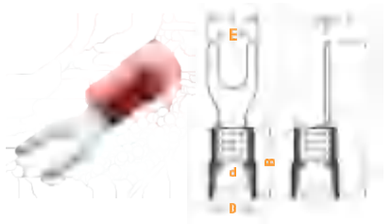

尼龙绝缘叉形端子加铜套

NYLON-INSULATED SPADE TERMINALS DOUBLE CRIMP FUNNEL ENTRY易进式

. 端子材质：紫铜 Terminals material:Copper
. 金属套管：铜 Metallic sleeve:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	SNYD1.25-3	3.2	5.7	22	10.5	4.5	0.75
	3.5	#6	SNYD1.25-3.5	3.7	6.2				
	3.5	#6	SNYD1.25-3.5S		5.7				
	4	#8	SNYD1.25-4	4.3	7.2				
	4	#8	SNYD1.25-4S		6.4				
	5	#10	SNYD1.25-5	5.3	8				
	6	1/4"	SNYD1.25-6	6.4	10.7	23			
	6	1/4"	SNYD1.25-6S		9.3				
	8	5/16"	SNYD1.25-8	8.4	13.5	28			
16-14 A.W.G. 1.5-2.5 mm²	3	#4	SNYD2-3	3.2	5.7	22	11	5	0.8
	3.5	#6	SNYD2-3.5	3.7	6.2				
	3.5	#6	SNYD2-3.5S		5.7				
	4	#8	SNYD2-4	4.3	7.2				
	4	#8	SNYD2-4S		6.4				
	5	#10	SNYD2-5	5.3	8				
	6	1/4"	SNYD2-6	6.4	10.7	23			
	6	1/4"	SNYD2-6S		9.3				
12-10 A.W.G. 4-6 mm²	3	#4	SNYD5.5-3	3.2	7.3	26.7	14	7.1	1
	3.5	#6	SNYD5.5-3.5	3.7	8.1				
	3.5	#6	SNYD5.5-3.5S		6.3				
	4	#8	SNYD5.5-4	4.3	8.2				
	4	#8	SNYD5.5-4M	4.5	7.2				
	4	#8	SNYD5.5-4S	4.3	6.3				
	5	#10	SNYD5.5-5	5.3	9				
	6	1/4"	SNYD5.5-6	6.4	12	30.7			
	6	1/4"	SNYD5.5-6S		9				
	8	5/16"	SNYD5.5-8	8.4	13.5	32.6			

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

尼龙绝缘叉形端子

NYLON-INSULATED SPADE TERMINALS FUNNEL ENTRY易进式

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon
. 可接受异形定制 Acceptable customization





接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔 Metrie	STUD SIZE 螺栓孔 American	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) ⌀E	W	L	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	SNY1.25-3	3.2	5.7	22.7	11.3	4.3	1.7	0.8
	3.5	#6	SNY1.25-3.5S	3.7						
	3.5	#6	SNY1.25-3.5L		6.2					
	4	#8	SNY1.25-4S	4.3	6.4					
	4	#8	SNY1.25-4M		7.2					
	5	#10	SNY1.25-5	5.3	8					
	6	1/4"	SNY1.25-6	6.7	10.7	23.7				
16-14 A.W.G. 1.5-2.5 mm²	3	#4	SNY2-3	3.2	5.7	22.7	11.3	4.6	2.3	0.8
	3.5	#6	SNY2-3.5S	3.7						
	3.5	#6	SNY2-3.5L		6.2					
	4	#8	SNY2-4S	4.3	6.4					
	4	#8	SNY2-4M		7.2					
	5	#10	SNY2-5	5.3	8					
	6	1/4"	SNY2-6	6.7	10.7	25.7				
12-10 A.W.G. 4-6 mm²	3.5	#6	SNY5.5-3.5	3.7	8.2	27.1	14.1	6.6	3.5	1
	4	#8	SNY5.5-4	4.3						
	5	#10	SNY5.5-5	5.3	9					
	6	1/4"	SNY5.5-6	6.4	12	31.8				
8 A.W.G. 8 mm²	5	#10	SNY8-5	5.3	9	30.9	16	8	4.5	1.15
	6	1/4"	SNY8-6	6.7	12	31.4				
	8	5/16"	SNY8-8	8.4	13	36				
	10	3/8"	SNY8-10	10.5	15					

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.



片形针型裸端子
NON-INSULATED PIN TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) W	L	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	TPIN1.25F-10/2.3	2.3	14.5	4.5	3.4	1.7	0.8
	TPIN1.25F-10/3.0	3					
	TPIN1.25F-13/2.3	2.3	17.5				
	TPIN1.25F-13/3.0	3					
	TPIN1.25F-14.5/2.3	2.3	19				
	TPIN1.25F-14.5/3.0	3					
	TPIN1.25F-18/2.3	2.3	22.5				
	TPIN1.25F-18/3.0	3					
16-14 A.W.G. 1.5-2.5 mm²	TPIN2F-8/2.3	2.3	12.8	4.8	4	2.3	0.8
	TPIN2F-8/3.0	3					
	TPIN2F-10/2.3	2.3	14.8				
	TPIN2F-10/3.0	3					
	TPIN2F-13/2.3	2.3	17.8				
	TPIN2F-13/3.0	3					
	TPIN2F-14/2.3	2.3	18.8				
	TPIN2F-14/3.0	3					
	TPIN2F-18/2.3	2.3	22.8				
	TPIN2F-18/3.0	3					
12-10 A.W.G. 4-6 mm²	TPIN5.5F-10/2.3	2.3	16.8	6.8	5.6	3.5	1
	TPIN5.5F-10/3.0	3					
	TPIN5.5F-14/2.3	2.3	20.8				
	TPIN5.5F-14/3.0	3					
	TPIN5.5F-18/2.3	2.3	24.8				
	TPIN5.5F-18/3.0	3					


无绝缘折弯板形裸端子
NON-INSULATED BENDING BLADE TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号 90°折弯	45°折弯	尺寸DIMENSIONS (mm) W	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	TPIN1.25F-10/2.3/90	TPIN1.25F-10/2.3/45	2.3	4.5	3.4	1.7	0.8
	TPIN1.25F-10/3.0/90	TPIN1.25F-10/3.0/45	3				
	TPIN1.25F-13/2.3/90	TPIN1.25F-13/2.3/45	2.3				
	TPIN1.25F-13/3.0/90	TPIN1.25F-13/3.0/45	3				
	TPIN1.25F-14.5/2.3/90	TPIN1.25F-14.5/2.3/45	2.3				
	TPIN1.25F-14.5/3.0/90	TPIN1.25F-14.5/3.0/45	3				
	TPIN1.25F-18/2.3/90	TPIN1.25F-18/2.3/45	2.3				
	TPIN1.25F-18/3.0/90	TPIN1.25F-18/3.0/45	3				
16-14 A.W.G. 1.5-2.5 mm²	TPIN2F-8/2.3/90	TPIN2F-8/2.3/45	2.3	4.8	4	2.3	0.8
	TPIN2F-8/3.0/90	TPIN2F-8/3.0/45	3				
	TPIN2F-10/2.3/90	TPIN2F-10/2.3/45	2.3				
	TPIN2F-10/3.0/90	TPIN2F-10/3.0/45	3				
	TPIN2F-13/2.3/90	TPIN2F-13/2.3/45	2.3				
	TPIN2F-13/3.0/90	TPIN2F-13/3.0/45	3				
	TPIN2F-14/2.3/90	TPIN2F-14/2.3/45	2.3				
	TPIN2F-14/3.0/90	TPIN2F-14/3.0/45	3				
	TPIN2F-18/2.3/90	TPIN2F-18/2.3/45	2.3				
	TPIN2F-18/3.0/90	TPIN2F-18/3.0/45	3				
12-10 A.W.G. 4-6 mm²	TPIN5.5F-10/2.3/90	TPIN5.5F-10/2.3/45	2.3	6.8	5.6	3.5	1
	TPIN5.5F-10/3.0/90	TPIN5.5F-10/3.0/45	3				
	TPIN5.5F-14/2.3/90	TPIN5.5F-14/2.3/45	2.3				
	TPIN5.5F-14/3.0/90	TPIN5.5F-14/3.0/45	3				
	TPIN5.5F-18/2.3/90	TPIN5.5F-18/2.3/45	2.3				
	TPIN5.5F-18/3.0/90	TPIN5.5F-18/3.0/45	3				
8 A.W.G. 8 mm²	TPIN8-14/90	TPIN8-14/45	5	8.5	7.2	4.8	1.2
6 A.W.G. 14 mm²	TPIN14-16/90	TPIN14-16/45	6	10.5	9	6	1.4
4 A.W.G. 22 mm²	TPIN22-17/90	TPIN22-17/45	6.5	12	11.5	8.1	1.8
2 A.W.G. 38 mm²	TPIN38-17/90	TPIN38-17/45	7.1	14.3	13.5	9.8	1.8

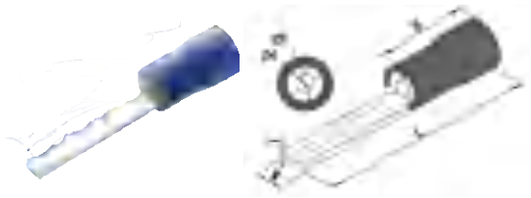

PVC绝缘片形针型端子
VINYL-INSULATED PIN TERMINALS

.端子材质：紫铜	Terminals material:Copper
.表面处理：镀锡	Plating:Tin plated
.绝缘材质：PVC	Insulation:PVC
.可接受异形定制	Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) W	L	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	PIN1.25F-10/2.3	2.3	20.4	10.4	4	1.7	0.8
	PIN1.25F-10/3.0	3					
	PIN1.25F-13/2.3	2.3	23.4				
	PIN1.25F-13/3.0	3					
	PIN1.25F-14.5/2.3	2.3	24.9				
	PIN1.25F-14.5/3.0	3					
	PIN1.25F-18/2.3	2.3	28.4				
	PIN1.25F-18/3.0	3					
16-14 A.W.G. 1.5-2.5 mm²	PIN2F-8/2.3	2.3	18.4	10.4	4.6	2.3	0.8
	PIN2F-8/3.0	3					
	PIN2F-10/2.3	2.3	20.4				
	PIN2F-10/3.0	3					
	PIN2F-13/2.3	2.3	23.4				
	PIN2F-13/3.0	3					
	PIN2F-14/2.3	2.3	24.4				
	PIN2F-14/3.0	3					
	PIN2F-18/2.3	2.3	28.4				
	PIN2F-18/3.0	3					
12-10 A.W.G. 4-6 mm²	PIN5.5F-10/2.3	2.3	23.5	13.5	6.6	3.5	1
	PIN5.5F-10/3.0	3					
	PIN5.5F-14/2.3	2.3	27.5				
	PIN5.5F-14/3.0	3					
	PIN5.5F-18/2.3	2.3	31.5				
	PIN5.5F-18/3.0	3					

PVC绝缘板形端子加铜套
VINYL-INSULATED BLADE TERMINALS
DOUBLE CRIMP

.端子材质：紫铜	Terminals material:Copper
.金属套管：铜	Metallic sleeve:Copper
.表面处理：镀锡	Plating:Tin plated
.绝缘材质：PVC	Insulation:PVC






接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) W	L	F	⌀D	T
22-16 A.W.G. 0.5-1.5 mm²	DBD1.25-9/2.3	2.3	19.5	9	4.3	0.75
	DBD1.25-9/2.7	2.8	19.5	9		
	DBD1.25-12	3	21.5	12		
	DBD1.25-14.5	3	25	14.5		
	DBD1.25-18	2.45	28.5	18		
16-14 A.W.G. 1.5-2.5 mm²	DBD2-9	2.8	20	9	5.3	0.8
	DBD2-16	2.9	27	16		
	DBD2-18	2.45	29	18		
12-10 A.W.G. 4-6 mm²	DBD5.5-10	2.8	24	10	6.8	1
	DBD5.5-13	4.6	27	13		
	DBD5.5-18/3.0	3	32	18		
	DBD5.5-18/4.5	4.5	32	18		

PVC易进式板形端子
VINYL-INSULATED BLADE TERMINALS
FUNNEL ENTRY 易进式

.端子材质：紫铜	Terminals material:Copper
.表面处理：镀锡	Plating:Tin plated
.绝缘材质：PVC	Insulation:PVC
.可接受异形定制	Acceptable customization





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号 BRAZED SEAM 焊接	BUTTED SEAM 不焊接	尺寸DIMENSIONS (mm) W	L	F	⌀D	T
22-16 A.W.G. 0.5-1.5 mm²	DBVE1.25-9/2.3B	DBVE1.25-9/2.3	2.3	20.5	9	3.8	0.75
	DBVE1.25-9/2.7B	DBVE1.25-9/2.7	2.8	20.5	9		
	DBVE1.25-12B	DBVE1.25-12	3	22.5	12		
	DBVE1.25-14.5B	DBVE1.25-14.5	3	26	14.5		
	DBVE1.25-18B	DBVE1.25-18	2.45	29.5	18		
16-14 A.W.G. 1.5-2.5 mm²	DBVE2-9B	DBVE2-9	2.8	20.5	9	4.3	0.8
	DBVE2-16B	DBVE2-16	2.9	27.5	16		
	DBVE2-18B	DBVE2-18	2.45	29.5	18		
12-10 A.W.G. 4-6 mm²	DBVE5.5-10B	DBVE5.5-10	2.8	25	10	5.8	1
	DBVE5.5-13B	DBVE5.5-13	4.6	28	13		
	DBVE5.5-18/3.0B	DBVE5.5-18/3.0	3	33.5	18		
	DBVE5.5-18/4.5B	DBVE5.5-18/4.5	4.5	33.5	18		

尼龙绝缘板形端子
NYLON-INSULATED BLADE TERMINALS
FUNNEL ENTRY 易进式



. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号 BRAZED SEAM 焊接	BUTTED SEAM 不焊接	尺寸DIMENSIONS (mm) W	L	F	⌀D	T
22-16 A.W.G. 0.5-1.5 mm²	DBNY1.25-9/2.3B	DBNY1.25-9/2.3	2.3	19.5	9	4.1	0.75
	DBNY1.25-9/2.7B	DBNY1.25-9/2.7	2.8	19.5	9		
	DBNY1.25-12B	DBNY1.25-12	3	21.5	12		
	DBNY1.25-14.5B	DBNY1.25-14.5	3	25	14.5		
	DBNY1.25-18B	DBNY1.25-18	2.45	28.5	18		
16-14 A.W.G. 1.5-2.5 mm²	DBNY2-9B	DBNY2-9	2.8	20	9	4.5	0.8
	DBNY2-16B	DBNY2-16	2.9	27	16		
	DBNY2-18B	DBNY2-18	2.45	29	18		
12-10 A.W.G. 4-6 mm²	DBNY5.5-10B	DBNY5.5-10	2.8	24	10	6.6	1
	DBNY5.5-13B	DBNY5.5-13	4.6	27	13		
	DBNY5.5-18/3.0B	DBNY5.5-18/3.0	3	32	18		
	DBNY5.5-18/4.5B	DBNY5.5-18/4.5	4.5	32	18		

尼龙绝缘板形端子加铜套
NYLON-INSULATED BLADE TERMINALS
DOUBLE CRIMP
FUNNEL ENTRY 易进式



. 端子材质：紫铜　Terminals material:Copper
. 金属套管：铜　Metallic sleeve:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon


接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) W	L	F	⌀D	T
22-16 A.W.G. 0.5-1.5 mm²	DBNYD1.25-9/2.3	2.3	19.5	9	4.1	0.75
	DBNYD1.25-9/2.7	2.8	19.5	9		
	DBNYD1.25-12	3	21.5	12		
	DBNYD1.25-14.5	3	25	14.5		
	DBNYD1.25-18	2.45	28.5	18		
16-14 A.W.G. 1.5-2.5 mm²	DBNYD2-9	2.8	20	9	4.9	0.8
	DBNYD2-16	2.9	27	16		
	DBNYD2-18	2.45	29	18		
12-10 A.W.G. 4-6 mm²	DBNYD5.5-10	2.8	24	10	7.1	1
	DBNYD5.5-13	4.6	27	13		
	DBNYD5.5-18/3.0	3	32	18		
	DBNYD5.5-18/4.5	4.5	32	18		

圆形针型裸端子
NON-INSULATED PIN TERMINALS



. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) L	F	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	TPIN1.25	16.3	2	4.5	3.4	1.7	0.75
	TPIN1.25 (0.7)					1.8	0.65
	TPIN1.25-9	13.8	1.9	4.8		1.7	0.7
	TPIN1.25-10	14.5	2	4.5			0.75
	TPIN1.25-12	16.8	1.9	4.8			0.7
	TPIN1.25-13	17.8					
	TPIN1.25-18	21.8					
16-14 A.W.G. 1.5-2.5 mm²	TPIN2	17	2	4.8	4	2.3	0.75
	TPIN2 (0.7)					2.4	0.65
	TPIN2-9	13.8	1.9			2.3	0.8
	TPIN2-10	14.8					
	TPIN2-12	16.8					
	TPIN2-13	17.8					
	TPIN2-18	21.8					
12-10 A.W.G. 4-6 mm²	TPIN5.5	20.5	2.7	6.8	5.6	3.5	1
	TPIN5.5-13	19	2.8	6	5.5	3.4	
8 A.W.G. 8 mm²	PTNB10-12	22	4.3	8	6.9	4.5	1.1
6 A.W.G. 16 mm²	PTNB16-13	26	5.5	10	8.4	5.9	1.2
4 A.W.G. 25 mm²	PTNB25-15	33.5	6.8	13.5	9.5	7	1.2
2 A.W.G. 35 mm²	PTNB35-20	40.5	8	16	11.8	8.7	1.5
1/0 A.W.G. 50 mm²	PTNB50-20	45	9.5	19	13.6	9.8	1.8
2/0 A.W.G. 70 mm²	PTNB70-25	55	11	24	15.8	11.6	2
3/0 A.W.G. 95 mm²	PTNB95-25	55	12.5	24	18.9	13.7	2.5
4/0 A.W.G. 120 mm²	PTNB120-34	62	14.3	26	21.3	15.1	3
250/300 MCM 150 mm²	PTNB150-37	63	16.8	27.5	23	16.5	3.2
300/350 MCM 185 mm²	PTNB185-38	70.5	19	35	26	19	3.45
400/500 MCM 240 mm²	PTNB240-44	82.5	21.5	40.5	29.2	21.2	3.95

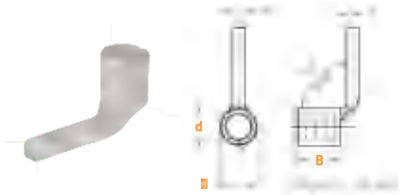

无绝缘折弯针形裸端子
NON-INSULATED BENDING PIN TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		W	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	TPIN1.25/90	2	4.5	3.4	1.7	0.75
	TPIN1.25 (0.7)/90				1.8	0.65
	TPIN1.25-9/90	1.9	4.8		1.7	0.7
	TPIN1.25-10/90	2	4.5			0.75
	TPIN1.25-12/90	1.9	4.8			0.7
	TPIN1.25-13/90					
	TPIN1.25-18/90					
16-14 A.W.G. 1.5-2.5 mm²	TPIN2/90	2	4.8	4	2.3	0.75
	TPIN2 (0.7)/90				2.4	0.65
	TPIN2-9/90	1.9			2.3	0.8
	TPIN2-10/90					
	TPIN2-12/90					
	TPIN2-13/90					
	TPIN2-18/90					
12-10 A.W.G. 4-6 mm²	TPIN5.5/90	2.7	6.8	5.6	3.5	1
	TPIN5.5-13/90	2.8	6	5.5	3.4	
8 A.W.G. 8 mm²	PTNB10-12/90	4.3	8	6.9	4.5	1.1
6 A.W.G. 16 mm²	PTNB16-13/90	5.5	10	8.4	5.9	1.2
4 A.W.G. 25 mm²	PTNB25-15/90	6.8	13.5	9.5	7	1.2
2 A.W.G. 35 mm²	PTNB35-20/90	8	16	11.8	8.7	1.5
1/0 A.W.G. 50 mm²	PTNB50-20/90	9.5	19	13.6	9.8	1.8
2/0 A.W.G. 70 mm²	PTNB70-25/90	11	24	15.8	11.6	2
3/0 A.W.G. 95 mm²	PTNB95-25/90	12.5	24	18.9	13.7	2.5
4/0 A.W.G. 120 mm²	PTNB120-34/90	14.3	26	21.3	15.1	3
250/300 MCM 150 mm²	PTNB150-37/90	16.8	27.5	23	16.5	3.2
300/350 MCM 185 mm²	PTNB185-38/90	19	35	26	19	3.45
400/500 MCM 240 mm²	PTNB240-44/90	21.5	40.5	29.2	21.2	3.95

PVC易进式针形端子
VINYL-INSULATED PIN TERMINALS
FUNNEL ENTRY易进式


. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC
. 可接受异形定制　Acceptable customization




接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
		W	L	F	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	PTVE1.25-9	1.9	19.7	9	10.7	4	1.7	0.7
	PTVE1.25-10	1.9	20.7	10				
	PTVE1.25-12	1.9	22.7	12				
	PTVE1.25-13	1.9	23.7	13				
	PTVE1.25-18	1.9	28.7	18				
16-14 A.W.G. 1.5-2.5 mm²	PTVE2-9	1.9	20.3	9	11.3	4.6	2.3	0.8
	PTVE2-10	1.9	21.3	10				
	PTVE2-12	1.9	23.3	12				
	PTVE2-13	1.9	24.3	13				
	PTVE2-18	1.9	29.3	18				
12-10 A.W.G. 4-6 mm²	PTVE5.5-13	2.8	27	13	14	6.1	3.4	1

PVC绝缘针形端子
VINYL-INSULATED PIN TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC
. 可接受异形定制　Acceptable customization

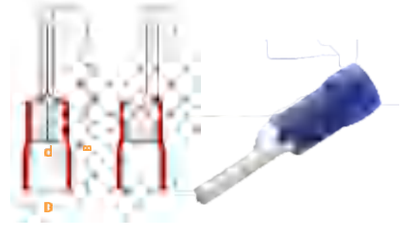

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
		W	L	F	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	PTV1.25	2	22.5	12	10.4	4	1.7	0.75
	PTV1.25-9	1.9	19	9	10	4.2	1.7	0.7
	PTV1.25-10	1.9	20	10				
	PTV1.25-12	1.9	22	12				
	PTV1.25-13	1.9	23	13				
	PTV1.25-18	1.9	27	18				
16-14 A.W.G. 1.5-2.5 mm²	PTV2	2	22.5	12	10.4	4.6	2.3	0.75
	PTV2-9	1.9	19	9	10	4.7	2.3	0.8
	PTV2-10	1.9	20	10				
	PTV2-12	1.9	22	12				
	PTV2-13	1.9	23	13				
	PTV2-18	1.9	27	18				
12-10 A.W.G. 4-6 mm²	PTV5.5	2.7	27.3	13.7	13.5	6.6	3.5	1
	PTV5.5-13	2.8	26	13	13	6.5	3.4	1

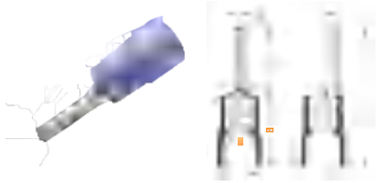

尼龙绝缘针形端子
NYLON-INSULATED PIN TERMINALS
FUNNEL ENTRY易进式

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
		W	L	F	B	⌀D	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	PTNY1.25-9	1.9	19.7	9	11	3.9	1.7	0.7
	PTNY1.25-10	1.9	20.7	10				
	PTNY1.25-12	1.9	22.7	12				
	PTNY1.25-13	1.9	23.7	13				
	PTNY1.25-18	1.9	28.7	18				
16-14 A.W.G. 1.5-2.5 mm²	PTNY2-9	1.9	20.3	9	11	5	2.3	0.8
	PTNY2-10	1.9	21.3	10				
	PTNY2-12	1.9	23.3	12				
	PTNY2-13	1.9	24.3	13				
	PTNY2-18	1.9	29.3	18				
12-10 A.W.G. 4-6 mm²	PTNY5.5-13	2.8	27	13	14	6.8	3.4	1

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

无绝缘锁式裸端子
NON-INSULATED LOCKING SPADE TERMINALS



. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
	Metrie	American		⌀E	W	L	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	LS1.25-3B	3.2	5.7	16	1.9	0.75
	3.5	#6	LS1.25-3.5B	3.7	6.2	16		
	4	#8	LS1.25-4B	4.3	7.2	16		
	5	#10	LS1.25-5B	5.3	8	16		
16-14 A.W.G. 1.5-2.5 mm²	3	#4	LS2-3B	3.2	5.7	16	2.5	0.8
	3.5	#6	LS2-3.5B	3.7	6.2	16		
	4	#8	LS2-4B	4.3	7.2	16		
	5	#10	LS2-5B	5.3	8	16		
12-10 A.W.G. 4-6 mm²	3.5	#6	LS5.5-3.5B	3.7	8.1	19.5	3.6	1
	4	#8	LS5.5-4B	4.3	8.2	19.5		
	5	#10	LS5.5-5B	5.3	9	19.5		
	6	1/4	LS5.5-6B	6.4	12	23.1		


无绝缘折弯锁式裸端子
NON-INSULATED BENDING LOCKING SPADE TERMINALS



. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	STUD SIZE 螺栓孔		ITEM NO. 品名型号		尺寸DIMENSIONS (mm)			
	Metrie	American	90°折弯	45°折弯	⌀E	W	⌀d	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	LS1.25-3B/90	LS1.25-3B/45	3.2	5.7	1.9	0.75
	3.5	#6	LS1.25-3.5B/90	LS1.25-3.5B/45	3.7	6.2		
	4	#8	LS1.25-4B/90	LS1.25-4B/45	4.3	7.2		
	5	#10	LS1.25-5B/90	LS1.25-5B/45	5.3	8		
16-14 A.W.G. 1.5-2.5 mm²	3	#4	LS2-3B/90	LS2-3B/45	3.2	5.7	2.5	0.8
	3.5	#6	LS2-3.5B/90	LS2-3.5B/45	3.7	6.2		
	4	#8	LS2-4B/90	LS2-4B/45	4.3	7.2		
	5	#10	LS2-5B/90	LS2-5B/45	5.3	8		
12-10 A.W.G. 4-6 mm²	3.5	#6	LS5.5-3.5B/90	LS5.5-3.5B/45	3.7	8.1	3.6	1
	4	#8	LS5.5-4B/90	LS5.5-4B/45	4.3	8.2		
	5	#10	LS5.5-5B/90	LS5.5-5B/45	5.3	9		
	6	1/4	LS5.5-6B/90	LS5.5-6B/45	6.4	12		

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.

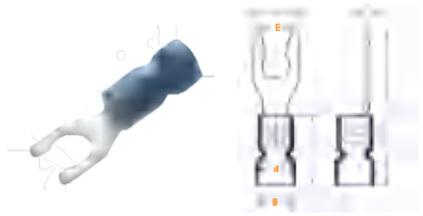

PVC易进式绝缘锁式端子
VINYL-INSULATED LOCKING SPADE TERMINALS
FUNNEL ENTRY易进式

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC
. 可接受异形定制　Acceptable customization

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号		尺寸DIMENSIONS (mm)		
mm^2 (A.W.G.)	Metrie	American	BRAZED SEAM 焊接	BUTTED SEAM 不焊接	⌀E	W	T
22-16 A.W.G. 0.5-1.5 mm^2	3	#4	LSVE1.25-3B	LSVE1.25-3	3.2	5.7	0.75
	3.5	#6	LSVE1.25-3.5B	LSVE1.25-3.5	3.7	6.2	
	4	#8	LSVE1.25-4B	LSVE1.25-4	4.3	7.2	
	5	#10	LSVE1.25-5B	LSVE1.25-5	5.3	8	
16-14 A.W.G. 1.5-2.5 mm^2	3	#4	LSVE2-3B	LSVE2-3	3.2	5.7	0.8
	3.5	#6	LSVE2-3.5B	LSVE2-3.5	3.7	6.2	
	4	#8	LSVE2-4B	LSVE2-4	4.3	7.2	
	5	#10	LSVE2-5B	LSVE2-5	5.3	8	
12-10 A.W.G. 4-6 mm^2	3.5	#6	LSVE5.5-3.5B	LSVE5.5-3.5	3.7	8.1	1
	4	#8	LSVE5.5-4B	LSVE5.5-4	4.3	8.2	
	5	#10	LSVE5.5-5B	LSVE5.5-5	5.3	9	
	6	1/4	LSVE5.5-6B	LSVE5.5-6	6.4	12	

PVC绝缘锁式端子
VINYL-INSULATED LOCKING SPADE TERMINALS

. 端子材质：紫铜　Terminals material:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC
. 可接受异形定制　Acceptable customization

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号		尺寸DIMENSIONS (mm)			
mm^2 (A.W.G.)	Metrie	American	BRAZED SEAM 焊接	BUTTED SEAM 不焊接	⌀E	W	L	T
22-16 A.W.G. 0.5-1.5 mm^2	3	#4	LSV1.25-3B	LSV1.25-3	3.2	5.7	22	0.75
	3.5	#6	LSV1.25-3.5B	LSV1.25-3.5	3.7	6.2		
	4	#8	LSV1.25-4B	LSV1.25-4	4.3	7.2		
	5	#10	LSV1.25-5B	LSV1.25-5	5.3	8		
16-14 A.W.G. 1.5-2.5 mm^2	3	#4	LSV2-3B	LSV2-3	3.2	5.7	22.5	0.8
	3.5	#6	LSV2-3.5B	LSV2-3.5	3.7	6.2		
	4	#8	LSV2-4B	LSV2-4	4.3	7.2		
	5	#10	LSV2-5B	LSV2-5	5.3	8		
12-10 A.W.G. 4-6 mm^2	3.5	#6	LSV5.5-3.5B	LSV5.5-3.5	3.7	8.1	26.7	1
	4	#8	LSV5.5-4B	LSV5.5-4	4.3	8.2		
	5	#10	LSV5.5-5B	LSV5.5-5	5.3	9		
	6	1/4	LSV5.5-6B	LSV5.5-6	6.4	12	30.7	

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。



PVC绝缘锁式端子加铜套
VINYL-INSULATED LOCKING SPADE TERMINALS DOUBLE CRIMP

. 端子材质：紫铜　Terminals material:Copper
. 金属套管：铜　Metallic sleeve:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC


接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
mm^2 (A.W.G.)	Metrie	American		⌀E	W	L	T
22-16 A.W.G. 0.5-1.5 mm^2	3	#4	LSC1.25-3	3.2	5.7	22	0.75
	3.5	#6	LSC1.25-3.5	3.7	6.2		
	4	#8	LSC1.25-4	4.3	7.2		
	5	#10	LSC1.25-5	5.3	8		
16-14 A.W.G. 1.5-2.5 mm^2	3	#4	LSC2-3	3.2	5.7	22.5	0.8
	3.5	#6	LSC2-3.5	3.7	6.2		
	4	#8	LSC2-4	4.3	7.2		
	5	#10	LSC2-5	5.3	8		
12-10 A.W.G. 4-6 mm^2	3.5	#6	LSC5.5-3.5	3.7	8.1	26.7	1
	4	#8	LSC5.5-4	4.3	8.2		
	5	#10	LSC5.5-5	5.3	9		
	6	1/4	LSC5.5-6	6.4	12	30.7	

PVC绝缘锁式端子加铜套
VINYL-INSULATED LOCKING SPADE TERMINALS DOUBLE CRIMP

. 端子材质：紫铜　Terminals material:Copper
. 金属套管：铜　Metallic sleeve:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
mm^2 (A.W.G.)	Metrie	American		⌀E	W	L	T
22-16 A.W.G. 0.5-1.5 mm^2	3	#4	LSD1.25-3	3.2	5.7	22	0.75
	3.5	#6	LSD1.25-3.5	3.7	6.2		
	4	#8	LSD1.25-4	4.3	7.2		
	5	#10	LSD1.25-5	5.3	8		
16-14 A.W.G. 1.5-2.5 mm^2	3	#4	LSD2-3	3.2	5.7	22.5	0.8
	3.5	#6	LSD2-3.5	3.7	6.2		
	4	#8	LSD2-4	4.3	7.2		
	5	#10	LSD2-5	5.3	8		
12-10 A.W.G. 4-6 mm^2	3.5	#6	LSD5.5-3.5	3.7	8.1	26.7	1
	4	#8	LSD5.5-4	4.3	8.2		
	5	#10	LSD5.5-5	5.3	9		
	6	1/4	LSD5.5-6	6.4	12	30.7	


Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.

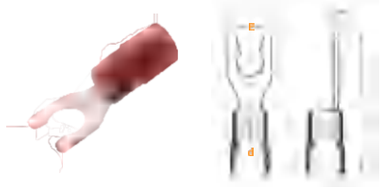

尼龙绝缘锁式端子
NYLON-INSULATED LOCKING SPADE TERMINALS
FUNNEL ENTRY易进式

. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon
. 可接受异形定制 Acceptable customization

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号		尺寸DIMENSIONS (mm)			
mm² (A.W.G.)	Metrie	American	BRAZED SEAM 焊接	BUTTED SEAM 不焊接	⌀E	W	L	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	LSNY1.25-3B	LSNY1.25-3	3.2	5.7	22	0.75
	3.5	#6	LSNY1.25-3.5B	LSNY1.25-3.5	3.7	6.2		
	4	#8	LSNY1.25-4B	LSNY1.25-4	4.3	7.2		
	5	#10	LSNY1.25-5B	LSNY1.25-5	5.3	8		
16-14 A.W.G. 1.5-2.5 mm²	3	#4	LSNY2-3B	LSNY2-3	3.2	5.7	22.5	0.8
	3.5	#6	LSNY2-3.5B	LSNY2-3.5	3.7	6.2		
	4	#8	LSNY2-4B	LSNY2-4	4.3	7.2		
	5	#10	LSNY2-5B	LSNY2-5	5.3	8		
12-10 A.W.G. 4-6 mm²	3.5	#6	LSNY5.5-3.5B	LSNY5.5-3.5	3.7	8.1	26.7	1
	4	#8	LSNY5.5-4B	LSNY5.5-4	4.3	8.2		
	5	#10	LSNY5.5-5B	LSNY5.5-5	5.3	9		
	6	1/4	LSNY5.5-6B	LSNY5.5-6	6.4	12	30.7	

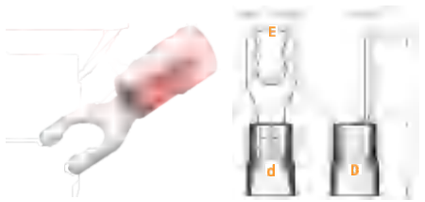

尼龙绝缘锁式端子加铜套
NYLON-INSULATED LOCKING SPADE TERMINALS
DOUBLE CRIMP
FUNNEL ENTRY易进式

. 端子材质：紫铜 Terminals material:Copper
. 金属套管：铜 Metallic sleeve:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
mm² (A.W.G.)	Metrie	American		⌀E	W	L	T
22-16 A.W.G. 0.5-1.5 mm²	3	#4	LSNYD1.25-3	3.2	5.7	22	0.75
	3.5	#6	LSNYD1.25-3.5	3.7	6.2		
	4	#8	LSNYD1.25-4	4.3	7.2		
	5	#10	LSNYD1.25-5	5.3	8		
16-14 A.W.G. 1.5-2.5 mm²	3	#4	LSNYD2-3	3.2	5.7	22.5	0.8
	3.5	#6	LSNYD2-3.5	3.7	6.2		
	4	#8	LSNYD2-4	4.3	7.2		
	5	#10	LSNYD2-5	5.3	8		
12-10 A.W.G. 4-6 mm²	3.5	#6	LSNYD5.5-3.5	3.7	8.1	26.7	1
	4	#8	LSNYD5.5-4	4.3	8.2		
	5	#10	LSNYD5.5-5	5.3	9		
	6	1/4	LSNYD5.5-6	6.4	12	30.7	

圆形裸端子 DIN46234
NON-INSULATED RING TERMINALS
DIN46234



. 端子材质：紫铜 Terminals material:Copper
. 表面处理：镀锡 Plating:Tin plated
. 可接受异形定制 Acceptable customization

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
mm² (A.W.G.)	Metrie	American		⌀E	W	L	L1	⌀d	B	T
26-22 A.W.G. 0.1-0.5 mm²	2	#2	DR2-0.5	2.2	5	12.5	10	1	4	0.5
	2.5	#3	DR2.5-0.5	2.7						
	3	#4	DR3-0.5	3.2						
	3.5	#6	DR3.5-0.5	3.7	6	15	12			
	4	#8	DR4-0.5	4.3	6.5	15.3				
	5	#10	DR5-0.5	5.3	8	16				
22-16 A.W.G. 0.5-1.5 mm²	2.5	#3	DR2.5-1	2.7	6	14	11	1.6	5	0.8
	3	#4	DR3-1	3.2						
	3.5	#6	DR3.5-1	3.7						
	4	#8	DR4-1	4.3	8	16	12			
	5	#10	DR5-1	5.3	10	18	13			
16-14 A.W.G. 1.5-2.5 mm²	3	#4	DR3-2.5	3.2	6	14	11	2.3	5	0.8
	3.5	#6	DR3.5-2.5	3.7						
	4	#8	DR4-2.5	4.3	8	16	12			
	5	#10	DR5-2.5	5.3	10	19	14			
	6	1/4"	DR6-2.5	6.5	11	21.5	16			
	8	5/16"	DR8-2.5	8.4	14	24	17			
12-10 A.W.G. 4-6 mm²	4	#8	DR4-6	4.3	8	18	14	3.6	6	1
	5	#10	DR5-6	5.3	10	20	15			
	6	1/4"	DR6-6	6.5	11	21.5	16			
	8	5/16"	DR8-6	8.4	14	26	19			
	10	3/8"	DR10-6	10.5	18	30	21			
8 A.W.G. 10 mm²	5	#10	DR5-10	5.3	10	21	16	4.5	8	1.1
	6	1/4"	DR6-10	6.5	11	22.5	17			
	8	5/16"	DR8-10	8.4	14	27	20			
	10	3/8"	DR10-10	10.5	18	30	21			
	12	1/2"	DR12-10	13	22	34	23			
6 A.W.G. 16 mm²	5	#10	DR5-16	5.3	11	25.5	20	5.8	10	1.2
	6	1/4"	DR6-16	6.5						
	8	5/16"	DR8-16	8.4	14	29	22			
	10	3/8"	DR10-16	10.5	18	33	24			
	12	1/2"	DR12-16	13	22	37	26			
4 A.W.G. 25 mm²	5	#10	DR5-25	5.3	12	31	25	7.5	11	1.5
	6	1/4"	DR6-25	6.5						
	8	5/16"	DR8-25	8.4	16	33				
	10	3/8"	DR10-25	10.5	18	35	26			
	12	1/2"	DR12-25	13	22	42	31			
	16	5/8"	DR16-25	17	28	49	35			
2 A.W.G. 35 mm²	6	1/4"	DR6-35	6.5	15	33.5	26	9	12	1.6
	8	5/16"	DR8-35	8.4	16	34				
	10	3/8"	DR10-35	10.5	18	36	27			
	12	1/2"	DR12-35	13	22	42	31			
	16	5/8"	DR16-35	17	28	50	36			





圆形裸端子 DIN46234

NON-INSULATED RING TERMINALS DIN46234

. 端子材质：紫铜	Terminals material:Copper
. 表面处理：镀锡	Plating:Tin plated
. 可接受异形定制	Acceptable customization

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
mm^2 (A.W.G.)	Metrie	American		⌀E	W	L	L1	⌀d	B	T
1/0 A.W.G. 50 mm^2	6	1/4"	DR6-50	6.5	18	43	34	11	16	1.8
	8	5/16"	DR8-50	8.4						
	10	3/8"	DR10-50	10.5						
	12	1/2"	DR12-50	13	22	47	36			
	16	5/8"	DR16-50	17	28	54	40			
2/0 A.W.G. 70 mm^2	6	1/4"	DR6-70	6.5	22	49	38	13	18	2
	8	5/16"	DR8-70	8.4						
	10	3/8"	DR10-70	10.5						
	12	1/2"	DR12-70	13						
	16	5/8"	DR16-70	17	28	56	42			
3/0 A.W.G. 95 mm^2	8	5/16"	DR8-95	8.4	24	54	42	15	20	2.5
	10	3/8"	DR10-95	10.5						
	12	1/2"	DR12-95	13						
	16	5/8"	DR16-95	17	28	58	44			
4/0 A.W.G. 120 mm^2	8	5/16"	DR8-120	8.4	24	56	44	16.5	22	3
	10	3/8"	DR10-120	10.5						
	12	1/2"	DR12-120	13						
	16	5/8"	DR16-120	17	28	62	48			
250/300 MCM 150 mm^2	8	5/16"	DR8-150	8.4	30	65	50	19	24	3.2
	10	3/8"	DR10-150	10.5						
	12	1/2"	DR12-150	13						
	16	5/8"	DR16-150	17						
300/350 MCM 185 mm^2	8	5/16"	DR8-185	8.4	36	68	50	21	28	3.5
	10	3/8"	DR10-185	10.5						
	12	1/2"	DR12-185	13						
	16	5/8"	DR16-185	17						
400/500 MCM 240 mm^2	8	5/16"	DR8-240	8.4	38	75	56	23.5	32	4
	10	3/8"	DR10-240	10.5						
	12	1/2"	DR12-240	13						
	16	5/8"	DR16-240	17						

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

PVC绝缘圆形端子

(德国标准DIN46234)

VINYL-INSULATED RING TERMINALS

. 端子材质：紫铜	Terminals material:Copper
. 表面处理：镀锡	Plating:Tin plated
. 绝缘材质：PVC	Insulation:PVC
. 可接受异形定制	Acceptable customization





接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
mm^2 (A.W.G.)	Metrie	American		⌀E	W	d	T
22-16 A.W.G. 0.5-1.5 mm^2	2.5	#3	DRV2.5-1B	2.7	6	1.6	0.8
	3	#4	DRV3-1B	3.2			
	3.5	#6	DRV3.5-1B	3.7			
	4	#8	DRV4-1B	4.3	8		
	5	#10	DRV5-1B	5.3	10		
	6	1/4"	DRV6-1B	6.5	11		
	8	5/16"	DRV8-1B	8.4	14	1.7	
	10	3/8"	DRV10-1B	10.5	18		
16-14 A.W.G. 1.5-2.5 mm^2	3	#4	DRV3-2.5B	3.2	6	2.3	0.8
	3.5	#6	DRV3.5-2.5B	3.7			
	4	#8	DRV4-2.5B	4.3	8		
	5	#10	DRV5-2.5B	5.3	10		
	6	1/4"	DRV6-2.5B	6.5	11		
	8	5/16"	DRV8-2.5B	8.4	14		
	10	3/8"	DRV10-2.5B	10.5	18	2.4	
12-10 A.W.G. 4-6 mm^2	4	#8	DRV4-6B	4.3	8	3.6	1
	5	#10	DRV5-6B	5.3	10.1		
	6	1/4"	DRV6-6B	6.5	11.1		
	8	5/16"	DRV8-6B	8.4	14.1		
	10	3/8"	DRV10-6B	10.5	18		
	12	1/2"	DRV12-6B	13	19		

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.



尼龙绝缘圆形端子


(德国标准DIN46234)

NYLON-INSULATED RING TERMINALS

.端子材质：紫铜	Terminals material:Copper
.表面处理：镀锡	Plating:Tin plated
.绝缘材质：尼龙	Insulation:Nylon
.可接受异形定制	Acceptable customization

接线范围	STUD SIZE 螺栓孔		ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
mm^2 (A.W.G.)	Metrie	American		⌀E	W	d	T
22-16 A.W.G. 0.5-1.5 mm^2	2.5	#3	DRNY2.5-1B	2.7	6	1.6	0.8
	3	#4	DRNY3-1B	3.2			
	3.5	#6	DRNY3.5-1B	3.7			
	4	#8	DRNY4-1B	4.3	8		
	5	#10	DRNY5-1B	5.3	10		
	6	1/4"	DRNY6-1B	6.5	11		
	8	5/16"	DRNY8-1B	8.4	14	1.7	
	10	3/8"	DRNY10-1B	10.5	18		
16-14 A.W.G. 1.5-2.5 mm^2	3	#4	DRNY3-2.5B	3.2	6	2.3	0.8
	3.5	#6	DRNY3.5-2.5B	3.7			
	4	#8	DRNY4-2.5B	4.3	8		
	5	#10	DRNY5-2.5B	5.3	10		
	6	1/4"	DRNY6-2.5B	6.5	11		
	8	5/16"	DRNY8-2.5B	8.4	14		
	10	3/8"	DRNY10-2.5B	10.5	18	2.4	
12-10 A.W.G. 4-6 mm^2	4	#8	DRNY4-6B	4.3	8	3.6	1
	5	#10	DRNY5-6B	5.3	10.1		
	6	1/4"	DRNY6-6B	6.5	11.1		
	8	5/16"	DRNY8-6B	8.4	14.1		
	10	3/8"	DRNY10-6B	10.5	18		
	12	1/2"	DRNY12-6B	13	19		

本产品手册所列产品图片与内容请以本公司
实物或技术图纸为准，更多产品请咨询客服。

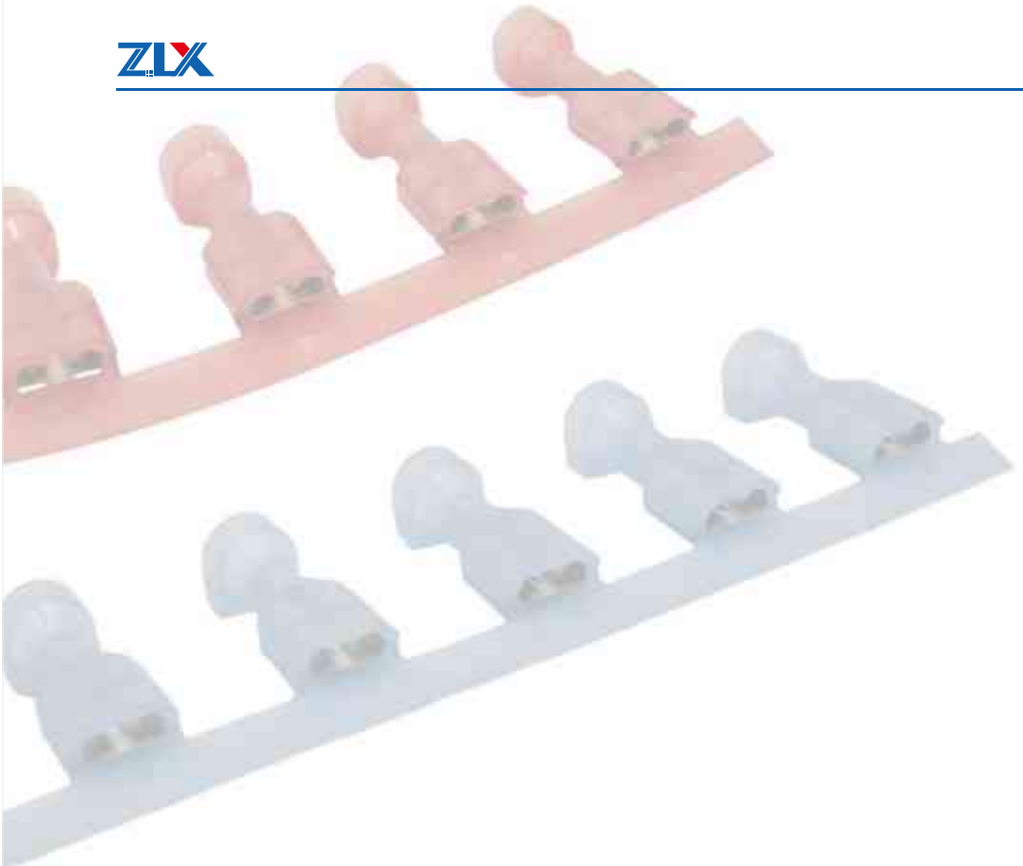

接受红蓝黑黄绿等多种颜色的绝缘护套定制，接受连带结构定制。
We accept customization in various colors such as red, blue, black, yellow, and green, as well as structural customization.







公母接插系列
Male And Female Plug Series

PVC传统工艺护套
PVC traditional process jacket

护套采用阻燃性好、强度高、对气侯变化适应能力强的绝缘材料加工而成。具有绝缘性好、阻燃性高、适应性强、成本较低等优势。

It has the advantages of good insulation, high flame retardancy, strong adaptability, and low cost.



PVC绝缘阻燃易进式
PVC insulated flame retardant funnel entry

护套采用阻燃性好的绝缘材料加工成，导线穿插入端子时经过渐进收缩结构，顺畅进入不易返丝，提高了线束加工的生产效率。

The sheath is made of flame retardant insulation material, with a gradual shrinkage structure that allows for smooth entry without easy rewinding, there by improving the production efficiency of wire harness processing.



尼龙绝缘耐高温易进式
Nylon insulated high temperature resistant funnel entry

采用耐高温性能更强的尼龙绝缘材料加工成易进式结构，机械强度高，韧性好，有较好的抗拉抗压能力，并适用于多种温度环境。

Adopting nylon insulation material with stronger high temperature resistance and easy to enter structure, it has good tensile and compressive strength and is suitable for various temperature environments.



加铜套管抗震结构
Seismic structure with copper bushing

在绝缘护套与端子的中间增加了紫铜镀锡套管，在与导线压接后，线束的拉拔力和抗震性能更强，提高了线束的稳定性和使用寿命。

A copper tin plated sleeve is added between the insulation sheath and the terminal. After crimping with the wire,the wire harness has stronger pulling force and seismic performance, which improves the stability and service life ofthe wire harness.





PVC绝缘母插端子
VINYL-INSULATED FEMALE DISCONNECTS

. 端子材质：黄铜　Terminals material:Brass
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	VF1.25-110(5)	2.8*0.5	3.6	3.2	18.5	0.25
	VF1.25-110(8)	2.8*0.8		3.2		
	VF1.25-187(5)	4.8*0.5		5	19	0.4
	VF1.25-187(8)	4.8*0.8		5		
	VF1.25-205	5.2*0.5		5.6	20	
	VF1.25-250	6.4*0.8		6.7	20.5	
	VF1.25-312	8.0*0.8		8.2	23	
	VF1.25-375	9.4*1.2		9.9	26.5	0.5
16-14 A.W.G. 1.5-2.5 mm²	VF2-110(5)	2.8*0.5	4.4	3.2	18.5	0.25
	VF2-110(8)	2.8*0.8		3.2		
	VF2-187(5)	4.8*0.5		5	18.5	0.4
	VF2-187(8)	4.8*0.8		5		
	VF2-205	5.2*0.5		5.6	19.5	
	VF2-250	6.4*0.8		6.7	20.5	
	VF2-312	8.0*0.8		8.2	23	
	VF2-375	9.4*1.2		9.9	26.5	0.5
12-10 A.W.G. 4-6 mm²	VF5.5-110(5)	2.8*0.5	5.4	3.2	21.5	0.4
	VF5.5-110(8)	2.8*0.8		3.2		
	VF5.5-187(5)	4.8*0.5		5		
	VF5.5-187(8)	4.8*0.8		5		
	VF5.5-250	6.4*0.8		6.7	23.5	
	VF5.5-375	9.4*1.2		9.9	29	0.5

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

PVC绝缘母插端子加铜套
VINYL-INSULATED FEMALE DISCONNECTS
DOUBLE CRIMP

. 端子材质：黄铜　Terminals material:Brass
. 金属套管：铜　Metallic sleeve:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC

FUNNEL ENTRY易进式





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	VF1.25-110(5)D	2.8*0.5	4.1	3.2	19	0.25
	VF1.25-110(8)D	2.8*0.8		3.2		
	VF1.25-187(5)D	4.8*0.5		5	19.5	0.4
	VF1.25-187(8)D	4.8*0.8		5		
	VF1.25-205D	5.2*0.5		5.6	20	
	VF1.25-250D	6.4*0.8		6.7	21.5	
	VF1.25-312D	8.0*0.8	4.3	8.2	23	
	VF1.25-375D	9.4*1.2		9.9	26.5	0.5
16-14 A.W.G. 1.5-2.5 mm²	VF2-110(5)D	2.8*0.5	4.9	3.2	19.5	0.25
	VF2-110(8)D	2.8*0.8		3.2		
	VF2-187(5)D	4.8*0.5		5	20	0.4
	VF2-187(8)D	4.8*0.8		5		
	VF2-205D	5.2*0.5		5.6		
	VF2-250D	6.4*0.8		6.7	22	
	VF2-312D	8.0*0.8		8.3	23.5	
	VF2-375D	9.4*1.2		9.9	27	0.5
12-10 A.W.G. 4-6 mm²	VF5.5-110(5)D	2.8*0.5	6.5	3.2	23	0.4
	VF5.5-110(8)D	2.8*0.8		3.2		
	VF5.5-187(5)D	4.8*0.5		5		
	VF5.5-187(8)D	4.8*0.8		5		
	VF5.5-250D	6.4*0.8		6.7	25	
	VF5.5-375D	9.4*1.2		9.9	30.1	0.5

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.





PVC全绝缘母插端子
VINYL-FULLY INSULATED FEMALE DISCONNECTS

. 端子材质：黄铜　Terminals material:Brass
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC
. 可接受异形定制　Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	VF1.25-110(5)A	2.8*0.5	3.6	3.3	19	0.25
	VF1.25-110(8)A	2.8*0.8				
	VF1.25-187(5)A	4.8*0.5	3.5	5	20	0.4
	VF1.25-187(8)A	4.8*0.8				
	VF1.25-250A	6.4*0.8	4	6.7	22	
16-14 A.W.G. 1.5-2.5 mm²	VF2-110(5)A	2.8*0.5	4.3	3.3	19	0.25
	VF2-110(8)A	2.8*0.8				
	VF2-187(5)A	4.8*0.5	4.5	5	20	0.4
	VF2-187(8)A	4.8*0.8				
	VF2-250A	6.4*0.8		6.7	22.5	
12-10 A.W.G. 4-6 mm²	VF5.5-187(5)A	4.8*0.5	5.5	5	23.5	0.4
	VF5.5-187(8)A	4.8*0.8				
	VF5.5-250A	6.4*0.8		6.7	24	
	VF5.5-375A	9.4*1.2		9.9	29	0.5

本产品手册所列产品图片与内容请以本公司
实物或技术图纸为准，更多产品请咨询客服。

PVC全绝缘母插端子加铜套
VINYL-FULLY INSULATED FEMALE DISCONNECTS
DOUBLE CRIMP

. 端子材质：黄铜　Terminals material:Brass
. 金属套管：铜　Metallic sleeve:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC


FUNNEL ENTRY易进式





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	VF1.25-110(5)AD	2.8*0.5	4.1	3.2	20.5	0.25
	VF1.25-110(8)AD	2.8*0.8		3.2		
	VF1.25-187(5)AD	4.8*0.5		5		0.4
	VF1.25-187(8)AD	4.8*0.8		5		
	VF1.25-205AD	5.2*0.5		5.6		
	VF1.25-250AD	6.4*0.8		6.7	22	
16-14 A.W.G. 1.5-2.5 mm²	VF2-110(5)AD	2.8*0.5	4.9	3.2	20.5	0.25
	VF2-110(8)AD	2.8*0.8		3.2		
	VF2-187(5)AD	4.8*0.5		5	21.5	0.4
	VF2-187(8)AD	4.8*0.8		5		
	VF2-205AD	5.2*0.5		5.6	22.5	
	VF2-250AD	6.4*0.8		6.7	22.5	
12-10 A.W.G. 4-6 mm²	VF5.5-187(5)AD	4.8*0.5	6.7	5	22	0.4
	VF5.5-187(8)AD	4.8*0.8		5		
	VF5.5-250AD	6.4*0.8		6.7	25	
	VF5.5-375AD	9.4*1.2		9.9	29.5	0.5

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.

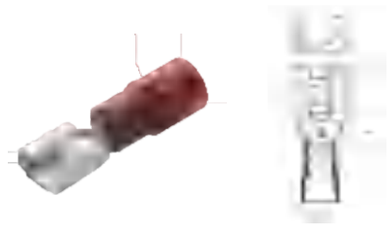

尼龙绝缘母插端子
NYLON-INSULATED FEMALE DISCONNECTS

. 端子材质：黄铜　Terminals material:Brass
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon
. 可接受异形定制　Acceptable customization

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEF1.25-110(5)	2.8*0.5	4.1	3.2	18.5	0.25
	AEF1.25-110(8)	2.8*0.8		3.2		
	AEF1.25-187(5)	4.8*0.5		5	19.5	0.4
	AEF1.25-187(8)	4.8*0.8		5		
	AEF1.25-205	5.2*0.5		5.6	20	
	AEF1.25-250	6.4*0.8		6.7	21.5	
	AEF1.25-312	8.0*0.8		9.1	23	
	AEF1.25-375	9.4*1.2		11	26.5	0.5
16-14 A.W.G. 1.5-2.5 mm²	AEF2-110(5)	2.8*0.5	4.5	3.2	19	0.25
	AEF2-110(8)	2.8*0.8		3.2		
	AEF2-187(5)	4.8*0.5		5	20	0.4
	AEF2-187(8)	4.8*0.8		5		
	AEF2-205	5.2*0.5		5.6	20	
	AEF2-250	6.4*0.8		6.7	22	
	AEF2-312	8.0*0.8		9.1	23.5	
	AEF2-375	9.4*1.2		11	27	0.5
12-10 A.W.G. 4-6 mm²	AEF5.5-110(5)	2.8*0.5	6.6	3.2	22	0.4
	AEF5.5-110(8)	2.8*0.8		3.2		
	AEF5.5-187(5)	4.8*0.5		5	23	
	AEF5.5-187(8)	4.8*0.8		5		
	AEF5.5-250	6.4*0.8		6.7	25	
	AEF5.5-375	9.4*1.2		9.9	30.1	0.5


本产品手册所列产品图片与内容请以本公司
实物或技术图纸为准，更多产品请咨询客服。

尼龙绝缘母插端子加铜套
NYLON-INSULATED FEMALE DISCONNECTS
DOUBLE CRIMP

. 端子材质：黄铜　Terminals material:Brass
. 金属套管：铜　Metallic sleeve:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon


FUNNEL ENTRY易进式





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEF1.25-110(5)D-TR	2.8*0.5	4.1	3.2	18.5	0.25
	AEF1.25-110(8)D-TR	2.8*0.8		3.2		
	AEF1.25-187(5)D-TR	4.8*0.5		5	19.5	0.4
	AEF1.25-187(8)D-TR	4.8*0.8		5		
	AEF1.25-205D-TR	5.2*0.5		5.6	20	
	AEF1.25-250D-TR	6.4*0.8		6.7	21.5	
	AEF1.25-312D-TR	8.0*0.8		9.1	23	
	AEF1.25-375D-TR	9.4*1.2		11	26.5	0.5
16-14 A.W.G. 1.5-2.5 mm²	AEF2-110(5)D-TR	2.8*0.5	5	3.2	19	0.25
	AEF2-110(8)D-TR	2.8*0.8		3.2		
	AEF2-187(5)D-TR	4.8*0.5		5	20	0.4
	AEF2-187(8)D-TR	4.8*0.8		5		
	AEF2-205D-TR	5.2*0.5		5.6	20	
	AEF2-250D-TR	6.4*0.8		6.7	22	
	AEF2-312D-TR	8.0*0.8		9.1	23.5	
	AEF2-375D-TR	9.4*1.2		11	27	0.5
12-10 A.W.G. 4-6 mm²	AEF5.5-110(5)D-TR	2.8*0.5	6.6	3.2	22	0.4
	AEF5.5-110(8)D-TR	2.8*0.8		3.2		
	AEF5.5-187(5)D-TR	4.8*0.5		5	23	
	AEF5.5-187(8)D-TR	4.8*0.8		5		
	AEF5.5-250D-TR	6.4*0.8		6.7	25	
	AEF5.5-375D-TR	9.4*1.2		9.9	30.1	0.5

Images and content of product manuals please refer to the company material objects
or technical drawings. Please consult customer service about more products.

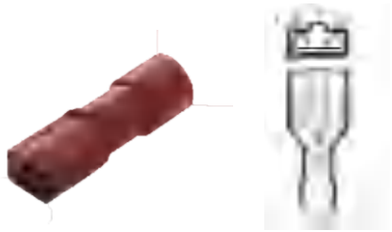

尼龙全绝缘母插端子
NYLON-FULLY INSULATED FEMALE DISCONNECTS

. 端子材质：黄铜　Terminals material:Brass
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon
. 可接受异形定制　Acceptable customization

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEF1.25-110(5)A	2.8*0.5	4.3	3.2	19	0.25
	AEF1.25-110(8)A	2.8*0.8		3.2		
	AEF1.25-187(5)A	4.8*0.5		5	19.5	0.4
	AEF1.25-187(8)A	4.8*0.8		5		
	AEF1.25-250A	6.4*0.8		6.7	21.5	
16-14 A.W.G. 1.5-2.5 mm²	AEF2-187(5)A	4.8*0.5	5	5	20	0.4
	AEF2-187(8)A	4.8*0.8		5		
	AEF2-250A	6.4*0.8		6.7	22	
12-10 A.W.G. 4-6 mm²	AEF5.5-250A	6.4*0.8	6.6	6.7	26	0.4



尼龙全绝缘母插端子加铜套
NYLON-FULLY INSULATED FEMALE DISCONNECTS DOUBLE CRIMP

. 端子材质：黄铜　Terminals material:Brass
. 金属套管：铜　Metallic sleeve:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEF1.25-110(5)AD-TR	2.8*0.5	4.3	3.2	19	0.25
	AEF1.25-110(8)AD-TR	2.8*0.8		3.2		
	AEF1.25-187(5)AD-TR	4.8*0.5		5	19.5	0.4
	AEF1.25-187(8)AD-TR	4.8*0.8		5		
	AEF1.25-250AD-TR	6.4*0.8		6.7	21.5	
16-14 A.W.G. 1.5-2.5 mm²	AEF2-187(5)AD-TR	4.8*0.5	5	5	20	0.4
	AEF2-187(8)AD-TR	4.8*0.8		5		
	AEFD2-250AD-TR	6.4*0.8		6.7	22	
12-10 A.W.G. 4-6 mm²	AEF5.5-250AD-TR	6.4*0.8	6.6	6.7	26	0.4

本产品手册所列产品图片与内容请以本公司实物或技术图纸为准，更多产品请咨询客服。

尼龙全绝缘母插端子(AL系列)
NYLON-FULLY INSULATED FEMALE DISCONNECTS

. 端子材质：黄铜　Terminals material:Brass
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon
. 可接受异形定制　Acceptable customization

FUNNEL ENTRY易进式






接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEF1.25-250AL-TR	6.4*0.8	4.4	6.7	22.5	0.4
16-14 A.W.G. 1.5-2.5 mm²	AEF2-250AL-TR	6.4*0.8			21.8	
12-10 A.W.G. 4-6 mm²	AEF5.5-250AL-TR	6.4*0.8	6.65		26	

尼龙全绝缘旗形母插端子
NYLON-FULLY INSULATED FLAG FEMALE DISCONNECTS

. 端子材质：黄铜　Terminals material:Brass
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon
. 可接受异形定制　Acceptable customization


FUNNEL ENTRY易进式





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
		F	B	L	d
22-16 A.W.G. 0.5-1.5 mm²	AEFF1.25A-TR	7.9	6.6	16.1	1.7
16-14 A.W.G. 1.5-2.5 mm²	AEFF2A-TR	7.9	6.6	16.1	2.3
12-10 A.W.G. 4-6 mm²	AEFF5.5A-TR	7.6	6.6	16.9	3.4

Images and content of product manuals please refer to the company material objects or technical drawings. Please consult customer service about more products.

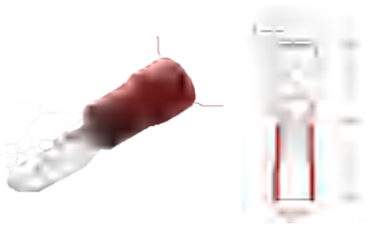


PVC绝缘公插端子
VINYL-INSULATED MALE DISCONNECTS

. 端子材质：黄铜　Terminals material:Brass
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC
. 可接受异形定制　Acceptable customization

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	VM1.25-110(5)	2.8*0.5	3.6	2.9	21.5	0.25
	VM1.25-110(8)	2.8*0.8		2.9		0.4
	VM1.25-187(5)	4.8*0.5		4.8		0.25
	VM1.25-187(8)	4.8*0.8		4.8		0.4
	VM1.25-250	6.4*0.8		6.4		
16-14 A.W.G. 1.5-2.5 mm²	VM2-110(5)	2.8*0.5	4.4	2.9	22	0.25
	VM2-110(8)	2.8*0.8		2.9		0.4
	VM2-187(5)	4.8*0.5		4.8		0.25
	VM2-187(8)	4.8*0.8		4.8		0.4
	VM2-250	6.4*0.8		6.4		
12-10 A.W.G. 4-6 mm²	VM5.5-110(5)	2.8*0.5	5.4	2.9	23.5	0.25
	VM5.5-110(8)	2.8*0.8		2.9		0.4
	VM5.5-187(5)	4.8*0.5		4.8		0.25
	VM5.5-187(8)	4.8*0.8		4.8		0.4
	VM5.5-250	6.4*0.8		6.4		

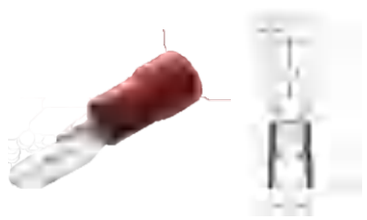

PVC绝缘公插端子加铜套
VINYL-INSULATED MALE DISCONNECTS
DOUBLE CRIMP

. 端子材质：黄铜　Terminals material:Brass
. 金属套管：铜　Metallic sleeve:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：PVC　Insulation:PVC

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	VM1.25-110(5)D	2.8*0.5	4.1	2.9	22	0.25
	VM1.25-110(8)D	2.8*0.8		2.9		0.4
	VM1.25-187(5)D	4.8*0.5		4.8		0.25
	VM1.25-187(8)D	4.8*0.8		4.8		0.4
	VM1.25-250D	6.4*0.8		6.4		
16-14 A.W.G. 1.5-2.5 mm²	VM2-110(5)D	2.8*0.5	4.9	2.9	22.5	0.25
	VM2-110(8)D	2.8*0.8		2.9		0.4
	VM2-187(5)D	4.8*0.5		4.8		0.25
	VM2-187(8)D	4.8*0.8		4.8		0.4
	VM2-250D	6.4*0.8		6.4		
12-10 A.W.G. 4-6 mm²	VM5.5-110(5)D	2.8*0.5	6.5	2.9	24.5	0.25
	VM5.5-110(8)D	2.8*0.8		2.9		0.4
	VM5.5-187(5)D	4.8*0.5		4.8		0.25
	VM5.5-187(8)D	4.8*0.8		4.8		0.4
	VM5.5-250D	6.4*0.8		6.4		



尼龙绝缘公插端子
NYLON-INSULATED MALE DISCONNECTS

. 端子材质：黄铜　Terminals material:Brass
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon
. 可接受异形定制　Acceptable customization

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEM1.25-110(5)	2.8*0.5	4.1	2.9	22	0.25
	AEM1.25-110(8)	2.8*0.8		2.9		0.4
	AEM1.25-187(5)	4.8*0.5		4.8		0.25
	AEM1.25-187(8)	4.8*0.8		4.8		0.4
	AEM1.25-250	6.4*0.8		6.4		
16-14 A.W.G. 1.5-2.5 mm²	AEM2-110(5)	2.8*0.5	4.5	2.9	22.5	0.25
	AEM2-110(8)	2.8*0.8		2.9		0.4
	AEM2-187(5)	4.8*0.5		4.8		0.25
	AEM2-187(8)	4.8*0.8		4.8		0.4
	AEM2-250	6.4*0.8		6.4		
12-10 A.W.G. 4-6 mm²	AEM5.5-110(5)	2.8*0.5	6.6	2.9	24.5	0.25
	AEM5.5-110(8)	2.8*0.8		2.9		0.4
	AEM5.5-187(5)	4.8*0.5		4.8		0.25
	AEM5.5-187(8)	4.8*0.8		4.8		0.4
	AEM5.5-250	6.4*0.8		6.4		



尼龙绝缘公插端子加铜套
NYLON-INSULATED MALE DISCONNECTS
DOUBLE CRIMP

. 端子材质：黄铜　Terminals material:Brass
. 金属套管：铜　Metallic sleeve:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEM1.25-110(5)D-TR	2.8*0.5	4.1	2.9	22	0.25
	AEM1.25-110(8)D-TR	2.8*0.8		2.9		0.4
	AEM1.25-187(5)D-TR	4.8*0.5		4.8		0.25
	AEM1.25-187(8)D-TR	4.8*0.8		4.8		0.4
	AEM1.25-250D-TR	6.4*0.8		6.4		
16-14 A.W.G. 1.5-2.5 mm²	AEM2-110(5)D-TR	2.8*0.5	5	2.9	22.5	0.25
	AEM2-110(8)D-TR	2.8*0.8		2.9		0.4
	AEM2-187(5)D-TR	4.8*0.5		4.8		0.25
	AEM2-187(8)D-TR	4.8*0.8		4.8		0.4
	AEM2-250D-TR	6.4*0.8		6.4		
12-10 A.W.G. 4-6 mm²	AEM5.5-110(5)D-TR	2.8*0.5	6.6	2.9	24.5	0.25
	AEM5.5-110(8)D-TR	2.8*0.8		2.9		0.4
	AEM5.5-187(5)D-TR	4.8*0.5		4.8		0.25
	AEM5.5-187(8)D-TR	4.8*0.8		4.8		0.4
	AEM5.5-250D-TR	6.4*0.8		6.4		





尼龙全绝缘公插端子(AL系列)
NYLON-FULLY INSULATED MALE DISCONNECTS

. 端子材质：黄铜 Terminals material:Brass
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon
. 可接受异形定制 Acceptable customization

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)				
		TAB SIZE	D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEM1.25-250AL-TR	6.4*0.8	3.9	6.4	25	0.8
16-14 A.W.G. 1.5-2.5 mm²	AEM2-250AL-TR	6.4*0.8	4.4			
12-10 A.W.G. 4-6 mm²	AEM5.5-250AL-TR	6.4*0.8	6.7		28.8	





PVC全绝缘子弹形母插端子
VINYL-FULLY INSULATED BULLET RECEPTACLES

. 端子材质：黄铜 Terminals material:Brass
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：PVC Insulation:PVC
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
		D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	VF1.25-156A	3.3	4.65	23	0.4
16-14 A.W.G. 1.5-2.5 mm²	VF2-156A	4	4.65	24.5	
	VF2-195A		5.65	23.5	
12-10 A.W.G. 4-6 mm²	VF5.5-156A	6	4.65	27.5	
	VF5.5-195A	5.3	5.65	23.5	






PVC全绝缘子弹形母插端子加铜套
VINYL-FULLY INSULATED BULLET RECEPTACLES DOUBLE CRIMP

. 端子材质：黄铜 Terminals material:Brass
. 金属套管：铜 Metallic sleeve:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：PVC Insulation:PVC

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
		D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	VF1.25-156AD	4.3	4.65	25	0.4
16-14 A.W.G. 1.5-2.5 mm²	VF2-156AD	4.9	4.65		
	VF2-195AD		5.65		
12-10 A.W.G. 4-6 mm²	VF5.5-156AD	6.5	4.65	25	
	VF5.5-195AD		5.65		





尼龙全绝缘子弹形母插端子
NYLON-FULLY INSULATED BULLET RECEPTACLES

. 端子材质：黄铜 Terminals material:Brass
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon
. 可接受异形定制 Acceptable customization

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
		D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEF1.25-156A	4.3	4.65	24	0.4
16-14 A.W.G. 1.5-2.5 mm²	AEF2-156A	5	4.65		
	AEF2-195A		5.65		
12-10 A.W.G. 4-6 mm²	AEF5.5-156A	6.6	4.65	27	
	AEF5.5-195A		5.65		





尼龙全绝缘子弹形母插端子加铜套
NYLON-FULLY INSULATED BULLET RECEPTACLES DOUBLE CRIMP

. 端子材质：黄铜 Terminals material:Brass
. 金属套管：铜 Metallic sleeve:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEF1.25-156AD-TR	4.3	4.65	24	0.4
16-14 A.W.G. 1.5-2.5 mm²	AEF2-156AD-TR	5	4.65		
	AEF2-195AD-TR		5.65		
12-10 A.W.G. 4-6 mm²	AEF5.5-156AD-TR	6.6	4.65	27	
	AEF5.5-195AD-TR		5.65		





尼龙全绝缘子弹形母插加铜套
NYLON-FULLY INSULATED FEMALE BULLET RECEPTACLES DOUBLE CRIMP

. 端子材质：黄铜 Terminals material:Brass
. 金属套管：铜 Metallic sleeve:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) D	B	L	T
26-18 A.W.G. 0.2-0.5 mm²	AEF0.5-078AC-TR	3.6	2.05	24.5	0.3





尼龙全绝缘子弹形公插加铜套
NYLON-FULLY INSULATED MALE BULLET RECEPTACLES DOUBLE CRIMP

. 端子材质：黄铜 Terminals material:Brass
. 金属套管：铜 Metallic sleeve:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) D	B	L	T
26-18 A.W.G. 0.2-0.5 mm²	AEM0.5-078AC-TR	3.6	2.05	24.5	0.3





PVC绝缘子弹形公插
VINYL-INSULATED MALE BULLETS

. 端子材质：黄铜 Terminals material:Brass
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：PVC Insulation:PVC
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	VM1.25-156	3.6	4	22	0.4
16-14 A.W.G. 1.5-2.5 mm²	VM2-156	4.4	4	21.5	
	VM2-195		5	22	
12-10 A.W.G. 4-6 mm²	VM5.5-156	5.4	4	25	
	VM5.5-195		5		





PVC绝缘公插端子加铜套
VINYL-INSULATED MALE BULLETS DOUBLE CRIMP

. 端子材质：黄铜 Terminals material:Brass
. 金属套管：铜 Metallic sleeve:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：PVC Insulation:PVC

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	VM1.25-156D	4.3	4	22.5	0.4
16-14 A.W.G. 1.5-2.5 mm²	VM2-156D	4.9	4		
	VM2-195D		5		
12-10 A.W.G. 4-6 mm²	VM5.5-156D	6.5	4	26	
	VM5.5-195D		5		






尼龙绝缘子弹形公插
NYLON-INSULATED MALE BULLETS

. 端子材质：黄铜 Terminals material:Brass
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon
. 可接受异形定制 Acceptable customization

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm) D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEM1.25-156	4.1	4	22	0.4
16-14 A.W.G. 1.5-2.5 mm²	AEM2-156	4.5	4	22.5	
	AEM2-195		5		
12-10 A.W.G. 4-6 mm²	AEM5.5-156	6.6	4	25.7	
	AEM5.5-195		5		





尼龙绝缘子弹形公插加铜套
NYLON-INSULATED MALE BULLETS DOUBLE CRIMP

. 端子材质：黄铜 Terminals material:Brass
. 金属套管：铜 Metallic sleeve:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
		D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEM1.25-156D-TR	4.1	4	22	0.4
16-14 A.W.G. 1.5-2.5 mm²	AEM2-156D-TR	5	4	22.5	
	AEM2-195D-TR		5		
12-10 A.W.G. 4-6 mm²	AEM5.5-156D-TR	6.6	4	26	
	AEM5.5-195D-TR		5		






尼龙全绝缘子弹形公插
NYLON-FULLY INSULATED MALE BULLETS

. 端子材质：黄铜 Terminals material:Brass
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon
. 可接受异形定制 Acceptable customization

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
		D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEM1.25-156A	4.3	4	25	0.4
16-14 A.W.G. 1.5-2.5 mm²	AEM2-156A	5	4		
	AEM2-195A		5		
12-10 A.W.G. 4-6 mm²	AEM5.5-156A	6.6	4	27.5	
	AEM5.5-195A		5		





尼龙全绝缘子弹形公插加铜套
NYLON-FULLY INSULATED MALE BULLETS DOUBLE CRIMP

. 端子材质：黄铜 Terminals material:Brass
. 金属套管：铜 Metallic sleeve:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：尼龙 Insulation:Nylon

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)			
		D	B	L	T
22-16 A.W.G. 0.5-1.5 mm²	AEM1.25-156AD-TR	4.3	4	25	0.4
16-14 A.W.G. 1.5-2.5 mm²	AEM2-156AD-TR	5	4		
	AEM2-195AD-TR		5		
12-10 A.W.G. 4-6 mm²	AEM5.5-156AD-TR	6.6	4	27.5	
	AEM5.5-195AD-TR		5		

PVC绝缘肩背形公母插端子
VINYL-INSULATED PIGGYBACK DISCONNECTS

. 端子材质：黄铜 Terminals material:Brass
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：PVC Insulation:PVC
. 可接受异形定制 Acceptable customization





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					
		TAB SIZE	D	B	L	b	T
22-16 A.W.G. 0.5-1.5 mm²	VPB1.25-250	6.4*0.8	3.6	6.7	22.5	6.35	0.4
16-14 A.W.G. 1.5-2.5 mm²	VPB2-250	6.4*0.8	4.4				
12-10 A.W.G. 4-6 mm²	VPB5.5-250	6.4*0.8	5.4		25		

PVC绝缘肩背形公母插端子加铜套
VINYL-INSULATED PIGGYBACK DISCONNECTS DOUBLE CRIMP

. 端子材质：黄铜 Terminals material:Brass
. 金属套管：铜 Metallic sleeve:Copper
. 表面处理：镀锡 Plating:Tin plated
. 绝缘材质：PVC Insulation:PVC

FUNNEL ENTRY易进式





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					
		TAB SIZE	D	B	L	b	T
22-16 A.W.G. 0.5-1.5 mm²	VPB1.25-250D	6.4*0.8	4.3	6.7	22.5	6.35	0.4
16-14 A.W.G. 1.5-2.5 mm²	VPB2-250D	6.4*0.8	4.9		23		
12-10 A.W.G. 4-6 mm²	VPB5.5-250D	6.4*0.8	6.5		26		





尼龙绝缘肩背形公母插端子
NYLON-INSULATED PIGGYBACK DISCONNECTS

. 端子材质：黄铜　Terminals material:Brass
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon
. 可接受异形定制　Acceptable customization

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					
		TAB SIZE	D	B	L	b	T
22-16 A.W.G. 0.5-1.5 mm²	AEPB1.25-250	6.4*0.8	4.1	6.7	22.5	6.35	0.4
16-14 A.W.G. 1.5-2.5 mm²	AEPB2-250	6.4*0.8	4.5		23		
12-10 A.W.G. 4-6 mm²	AEPB5.5-250	6.4*0.8	6.6		26		





尼龙绝缘肩背形公母插端子加铜套
NYLON-INSULATED PIGGYBACK DISCONNECTS DOUBLE CRIMP

. 端子材质：黄铜　Terminals material:Brass
. 金属套管：铜　Metallic sleeve:Copper
. 表面处理：镀锡　Plating:Tin plated
. 绝缘材质：尼龙　Insulation:Nylon

FUNNEL ENTRY易进式

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					
		TAB SIZE	D	B	L	b	T
22-16 A.W.G. 0.5-1.5 mm²	AEPB1.25-250D-TR	6.4*0.8	4.1	6.7	22.5	6.35	0.4
16-14 A.W.G. 1.5-2.5 mm²	AEPB2-250D-TR	6.4*0.8	5		23		
12-10 A.W.G. 4-6 mm²	AEPB5.5-250D-TR	6.4*0.8	6.6		26		

本产品手册所列产品图片与内容请以本公司
实物或技术图纸为准，更多产品请咨询客服。

辅助材料及工具
ANCILLARY MATERIALS AND TOOLS








快速连接器（乌龟夹）
SPLICE CONNECTORS

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)	
		W	L
22-16 A.W.G.	3MR	19.7	31.5
16-14 A.W.G.	3MB	19.7	31.5
12-10 A.W.G.	3MY	20	31.8











快速连接器（蚂蚁夹）
T-TAPS



接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)	
		W	L
22-16 A.W.G.	PPR	37	0.8
16-14 A.W.G.	PPB		
12-10 A.W.G.	PPY		

配套公插端子对照表
Cross-reference sheet for corresponding male disconnects

蚂蚁夹 T-TAP		配套公插端子（尼龙全绝缘公插端子） Nylon-fully insulated male disconnects
PPR	→	FDFNY1.25-250
PPB	→	FDFNY2-250
PPY	→	FDFNY5-250


闭端端子
CLOSED-END CONNECTORS






ITEM NO. 品名型号	尺寸DIMENSIONS (mm)		
	d	D	L
CE1	2.6	7.8	18.2
CE1X	2.6	7.8	18.2
CE2	3.3	9.5	20
CE2X	3.3	9.5	20
CE5	4.4	12.5	25.2
CE5X	4.4	12.5	25.2
CE8	5.3	14.3	27.7


接线帽
SCREW-ON CONNECTOS





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)		
		L	B	C
22-16 A.W.G.	E1	15.2	8.6	6.7
16-14 A.W.G.	E2	17.6	9.8	7.4
	E3	22	12	9.9
	E4	24.5	14	11
18-10 A.W.G.	E6	26.5	16.4	13





铜接线端头(堵油型)
COPPER TERMINAL (TYPE OIL PLUGGING)

. 端子材质：紫铜　　Terminals material:Copper
. 表面处理：镀锡　　Plating:Tin plated

ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
	⌀E	W	L	L1	⌀D	⌀d	T
DT-10	8.5	16	62	26	9	5.2	2.5
DT-16	8.5	16	68	30	10	6.1	2.5
DT-25	8.5	18	70	33	11	7.1	2.7
DT-35	10.5	20.5	80	36	12	8.5	3
DT-50	10.5	23	86	36	14	9.8	3.4
DT-70	12.5	26	95	43	16	11.5	3.8
DT-95	12.5	28	104	46	18	13.5	4.2
DT-120	14.5	30	112	49	20	15	4.7
DT-150	14.5	34	121	51	22	17	5.5
DT-185	16.5	37	126	55	25	18.6	5.8
DT-240	16.5	40	127	60	27	21.5	6.5
DT-300	21	50	158	68	31	24	8
DT-400	21	50	175	78	34	27	9
DT-500	21	60	186	82	38	30	10
DT-630	21	80	215	86	45	34.2	12





铜铝接线端头
COPPER AND ALUMINUM TERMINAL

. 端子材质：铜材 铝材
. 表面处理：酸洗

Terminals material:Aluminum Copper
Plating:Pickling

ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
	⌀E	W	L	L1	⌀D	⌀d	T
DTL-10	8.8	16	65	32	10	5.2	2.5
DTL-16	8.8	16	70	34	11	6.1	2.6
DTL-25	8.8	18	75	37	12	7.1	3.2
DTL-35	10.8	20	85	41	14	8.5	3.6
DTL-50	10.8	23	90	43	16	9.8	4
DTL-70	13	26	102	50	18	11.5	4.6
DTL-95	13	28	112	54	21	13.5	4.8
DTL-120	14.8	30	120	56	23	15	5.3
DTL-150	14.8	34	126	58	25	17	5.8
DTL-185	17	37	133	60	27	18.6	6.5
DTL-240	17	40	140	63	30	21.5	7
DTL-300	21	45	158	70	34	24	8.5
DTL-400	21	50	175	75	38	27	9.5
DTL-500	21	60	190	80	45	30	10
DTL-630	-	78	225	90	50	34.2	11

小头铜接线端头
SMALL HEAD COPPER-ALUMINUM TERMINAL

. 端子材质：紫铜　　Terminals material:Copper
. 表面处理：酸洗　　Plating:Pickling






接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
		⌀E	W	L	L1	L2	⌀D	⌀d
2 A.W.G. 38 mm²	DT-35X	8.8	16	76	33	30	11	8.7
1/0 A.W.G. 50 mm²	DT-50X	8.8	16	82	36	30	13	10.2
2/0 A.W.G. 70 mm²	DT-70X	8.8	16	87	39	30	15	12
3/0 A.W.G. 95 mm²	DT-95X	8.8	16	92	43	30	17	14
4/0 A.W.G. 120 mm²	DT-120X	8.8	16	98	47	30	19	15.5
250/300 MCM 150 mm²	DT-150X	8.8	16	108	48	36	21	17
300/350 MCM 185 mm²	DT-185X	8.8	16	115	53	36	24	19
400/450 MCM 240 mm²	DT-240X	8.8	16	120	57	36	26	21.3

小头铜铝接线端头
SMALL HEAD COPPER AND ALUMINUM TERMINAL

. 端子材质：铜材 铝材
. 表面处理：酸洗


Terminals material:Aluminum Copper
Plating:Pickling





接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
		⌀E	W	L	L1	L2	⌀D	⌀d
2 A.W.G. 38 mm²	DTL-35X	8.8	16	80	37	30	12	8.3
1/0 A.W.G. 50 mm²	DTL-50X	8.8	16	85	40	30	14	9.8
2/0 A.W.G. 70 mm²	DTL-70X	8.8	16	90	44	30	16	11.5
3/0 A.W.G. 95 mm²	DTL-95X	8.8	16	95	47	30	16	13.5
4/0 A.W.G. 120 mm²	DTL-120X	8.8	16	102	51	30	20	15
250/300 MCM 150 mm²	DTL-150X	8.8	16	112	53	36	22	16.8
300/350 MCM 185 mm²	DTL-185X	8.8	16	117	55	36	24	18.8
400/450 MCM 240 mm²	DTL-240X	8.8	16	125	60	36	28	21





鸭嘴型铜铝插针端头
DUCKBILL COPPER AND ALUMINUM PIN TERMINAL

. 端子材质：铜材 铝材
. 表面处理：酸洗

Terminals material:Aluminum Copper
Plating:Pickling

接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
		W	L	L2	L3	⌀D	⌀d	T
8 A.W.G. 10 mm²	DTLC-10	6.7	47	22.5	17	10	6	4.8
6 A.W.G. 16 mm²	DTLC-16	6.7	47	20.5	17	10	6.3	4.8
4 A.W.G. 25 mm²	DTLC-25	6.7	48	22.5	17	11	7.2	4.8
2 A.W.G. 38 mm²	DTLC-35	6.7	48.2	20.5	17	12	8.3	5





铜开口接线鼻
COPPER OPENING TERMINAL LUG


. 端子材质：紫铜　　Terminals material:Copper
. 表面处理：酸洗　　Plating:Pickling

ITEM NO. 品名型号	尺寸DIMENSIONS (mm)					
	⌀E	L	L1	R	R1	T
OT-3A	4.2	11.5	5	3.5	1.3	0.5
OT-5A	5.2	12.5	5.4	4.2	1.75	0.6
OT-10A	5.2	15	6	4.7	2	0.8
OT-20A	6.2	17	7.4	5.5	2.5	1
OT-30A	6.2	18	8.2	5.8	3.2	1.1
OT-40A	6.2	20	9	6.1	3.5	1.1
OT-50A	6.2	21.5	9	6.3	3.7	1.2
OT-60A	8.2	23	10.5	7.2	4	1.3
OT-80A	8.2	25.5	11	8	4.5	1.4
OT-100A	8.2	29	12	8.5	5	1.5
OT-150A	10.4	31	12.4	9	5.5	1.6
OT-200A	10.4	33	14	10	6	1.7
OT-250A	10.4	36	15.5	10.5	6.5	1.8
OT-300A	12.4	40	17	11.5	7	2
OT-400A	14.4	43	18	13	8	2.2
OT-500A	14.4	46	20	14.5	8.5	2.4
OT-600A	16.5	50.5	23	16	10.5	2.7
OT-800A	18.5	60	30	17.5	12.5	3.2
OT-1000A	18.5	66	33	20.5	15.5	3.6

铜连接管（通孔型）
COPPER CONNECTING PIPE (TYPE THROUGH HOLE)


. 端子材质：铜管　　Terminals material:Copper
. 表面处理：酸洗　　Plating:Pickling






接线范围 mm² (A.W.G.)	ITEM NO. 品名型号	尺寸DIMENSIONS (mm)		
		L	⌀D	⌀d
22-16 A.W.G. 0.5-1.5 mm²	GT-1-1.5	28	3.5	2.5
16-14 A.W.G. 1.5-2.5 mm²	GT-1-2.5	30	4	3
14-12 A.W.G. 2.5-4 mm²	GT-1-4	35	5	3.4
12-10 A.W.G. 4-6 mm²	GT-1-6	40	6	4.4
8 A.W.G. 10 mm²	GT-1-10	50	8	5.4
6 A.W.G. 16 mm²	GT-1-16	56	9	6.4
4 A.W.G. 25 mm²	GT-1-25	60	10	7.4
2 A.W.G. 38 mm²	GT-1-35	64	11	8.4
1/0 A.W.G. 50 mm²	GT-1-50	72	13	10.3
2/0 A.W.G. 70 mm²	GT-1-70	78	16	12.3
3/0 A.W.G. 95 mm²	GT-1-195	85	18	14.3
4/0 A.W.G. 120 mm²	GT-1-120	90	19	15.3
250/300 MCM 150 mm²	GT-1-150	94	22	17.3

绝缘软套管
INSULATED TELEFLEX





ITEM NO. 品名型号	尺寸DIMENSIONS (mm)						
	L	L1	L2	D1	D2	D3	T
V-1.25(1.5)	13	6	7	2.8	3.3	3.1	0.6
V-2.0(2.5)	14	7	7	3.3	4.5	3.7	0.7
V-3.5(4)	17	9	8	4.2	5.7	4.1	0.8
V-5.5(6)	17	9	8	4.8	5.7	5.2	0.8
V-8(10)	19	10	9	6.2	7.2	6.2	1
V-14(16)	25	14	11	7.5	10	8	1.1
V-22(25)	30	15	15	10.5	12	9.5	1.2
V-35(38)	34	17.5	16.5	12.5	14	11.8	1.5
V-50(60)	39	20	19	15	16.8	13.5	1.5
V-70(80)	47	25	22	17	19	16	1.6
V-95(100)	54	30	24	19	22	18	1.7
V-120(125)	57	32	25	21	24	20	1.8
V-140(150)	65	35	30	23	24.5	22	2
V-185(200)	65	35	30	27	32	24	2.5
V-240(250)	77	35	4.2	29	38	26.5	2.5
V-300(325)	77	37	40	29	38	29	2.5
V-400	86	47	39	39	44	37	2.5


螺柱尺寸STUD SIZE


标准尺寸 STANDRD SIZE	螺柱尺寸 STUD SIZE		孔尺寸 HOLE SIZE	
	(Inch)	(mm)	(mm)	(Inch)
	#2	2	2.2	. 087"
	#3	2.5	2.7	. 106"
	#4	3	3.2	. 126"
	#6	3.5	3.7	. 146"
	#8	4	4.3	. 169"
	#10	5	5.3	. 209"
	1/4"	6	6.4	. 252"
	5/16"	8	8.4	. 331"
	3/8"	10	10.5	. 413"
	7/16"	11	11.5	. 453"
	1/2"	12	13	. 512"
	9/16"	14	15	. 591"
	5/8"	16	17	. 669"
	11/16"	18	19	. 748"
	3/4"	20	21	. 827"
	7/8"	22	23	. 906"
	15/16"	24	25	. 984"

TAB SIZE

Description

SERIES	TAB SIZE（W）	
	(Inch)	(mm)
110	. 110×. 020 . 110×. 020	2.8×0.5 2.8×0.8
187	. 187×. 020 . 187×. 032	4.8×0.5 4.8×0.8
205	. 205×. 020 . 205×. 032	5.2×0.5 5.2×0.8
250	. 250×0.32	6.4×0.8
312	. 312×0.32	8.0×0.8
375	. 375×0.47	9.4×1.2

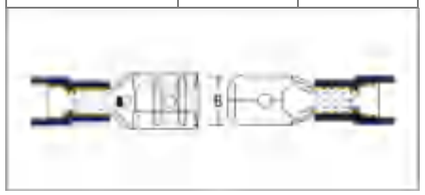

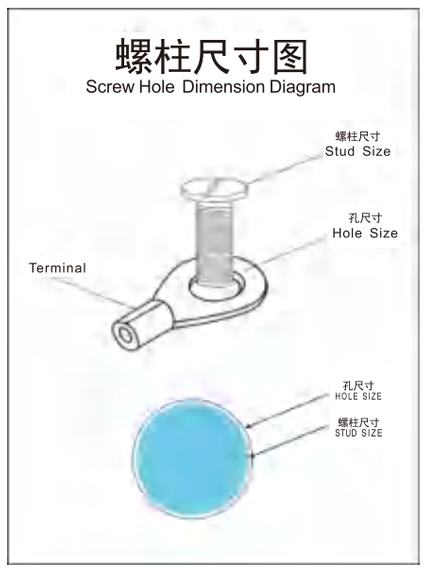

Wire Range Standard Cross-reference Sheet
Current&Voltage Cross-reference Sheel

APPLICABLE TERMINALS	AREA mm² INSULATED COLOR CODE	WIRE SIZE				TENSILE STRENGTH		MAX CURRENT (A)
		mm²	AWG	DIAMETER (mm²)	AREA (mm²)	JIS-2805 (Kgf)	UL-486A (Kgf)	
0.5	0.10-0.4 Yellow	0.12	26	0.4050	0.129		1.37	
		0.2	24	0.5110	0.205		2.27	
1.25	0.25-1.65 Red	0.3	22	0.6440	0.326		3.63	9
		0.5	20	0.8120	0.518		5.90	12
2		0.75	18	1.0240	0.823		9.07	17
3.5	1.04-2.63 Blue	1.25	16	1.2910	1.309	20.400	13.61	19
5.5	2.63-4.6 Black	2	14	1.6280	2.081	29.580	22.68	27
8	2.63-6.64 Yellow	3.5	12	2.0530	3.310	55.080	31.75	37
14	6.64-10.52 Red	5.5	10	2.5880	5.260	79.560	36.29	48
22	10.52-16.7g Blue	8	8	3.2640	8.368	99.968	40.82	62
38	16.78-26.66 Yellow	14	6	4.1150	13.300	142.800	45.36	88
60	26.66-42.42 Red	22	4	5.1890	21.150	183.600	63.50	115
80	42.42-60.57 Yellow	38	2	6.540	33.600	255.000	81.65	160
100	76.28-96.30 Red	60	1-00	8.400	55.500	326.400	113.40	215
150	96.30-117.2 Red	80	3-00	10.400	84.950	357.000	158.75	255
200	117.20-152.05	100	4-00	11.680	107.150	397.800	204.11	300
325	192.6-242.72	150	300	19.910	151.950	418.200	249.47	395
	24.27-325.0	200	400	16.060	202.600	448.800	294.83	470
		325	600	19.670	303.900	489.600	408.22	650

Note:Advise to use standard electrical wires or which have attestationto work together with ZLX products.