Code Conductor,For14-10# Cable



- Cable lugs are connecting devices used primarily for terminating and joining cable and wire conductors in electrical installations and equipment.
- These lugs are used for severe-duty applications and have thicker walls for greater strength and conductivity.
- Suitable for various copper cable and wire types, as long as the correct size is selected and the relevant "crimping" method is used.
- Manufactured from high conductivity copper which is tin plated to prevent corrosion.
- Easy to use in conjunction with mechanical or hydraulic crimping equipment.
- Color-Coded for Easy Identification.

Specifications

Material	Copper
Finish/Coating	Tin-Plated, Nickel-Plated
Wire Range	14-10#
Color Code	Yellow
Bolt Size	1/4,5/16,3/8,1/2,#6,#8,#10
Tongue Angle	Straight,45°,90°
Barrel Type	Standard, Long, With or Without Inspection Window
Tongue Type	Standard, Narrow
Certification	RoHS,REACH,CE
Customizable	Yes

14-10# Compression Lug/Yellow Printed/Straight Type

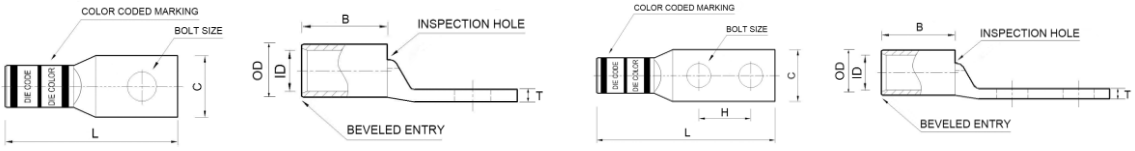

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LX1410-10W	#8-#10	1	/	0.38	0.38	0.06	0.97	0.13	0.22
2	LX1410-14W	1/4	1	/	0.45	0.41	0.05	1.10	0.13	0.22
3	LX1410-56W	5/16	1	/	0.53	0.39	0.04	1.13	0.13	0.22
4	LX1410-38W	3/8	1	/	0.55	0.45	0.04	1.17	0.13	0.22
5	LXL1410-14W	1/4	1	/	0.41	0.69	0.05	1.52	0.13	0.22

14-10# Compression Lug/Yellow Printed/Straight Type

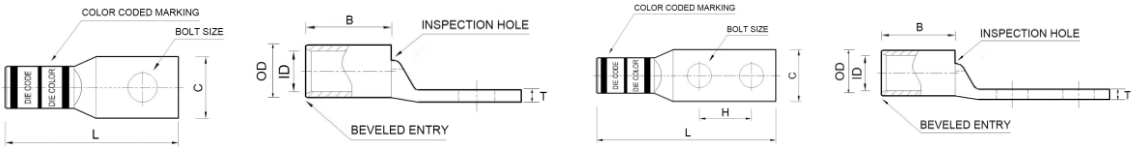

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX1410-1058W	#10	2	5/8	0.36	0.38	0.06	1.72	0.13	0.22
2	LXX1410-1458W	1/4	2	5/8	0.41	0.38	0.05	1.84	0.13	0.22
3	LXX1410-1434W	1/4	2	3/4	0.41	0.38	0.05	1.97	0.13	0.22
4	LXX1410-1401W	1/4	2	1	0.41	0.38	0.05	2.22	0.13	0.22
5	LXX1410-3801W	3/8	2	1	0.56	0.38	0.04	2.40	0.13	0.22
6	LXXL1410-1458W	1/4	2	5/8	0.41	0.69	0.05	2.16	0.13	0.22
7	LXXL1410-1401W	1/4	2	1	0.41	0.69	0.05	2.53	0.13	0.22
8	LXXL1410-1434W	1/4	2	3/4	0.41	0.69	0.05	2.28	0.13	0.22
9	LXXL1410-3801W	3/8	2	1	0.61	0.69	0.05	2.72	0.13	0.22

14-10# Compression Lug/Yellow Printed/45°Angle

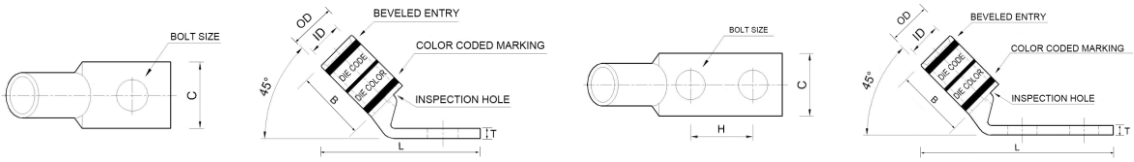

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXL1410-14HW	1/4	1	/	0.41	0.69	0.05	1.18	0.13	0.22

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX1410-1058HW	#10	2	5/8	0.36	0.38	0.06	1.59	0.13	0.22
2	LXX1410-1458HW	1/4	2	5/8	0.41	0.38	0.05	1.67	0.13	0.22
3	LXX1410-1434HW	1/4	2	3/4	0.41	0.38	0.05	1.79	0.13	0.22
4	LXX1410-1401HW	1/4	2	1	0.41	0.38	0.05	2.04	0.13	0.22
5	LXX1410-3801HW	3/8	2	1	0.56	0.38	0.04	2.28	0.13	0.22
6	LXXL1410-1458HW	1/4	2	5/8	0.41	0.69	0.05	1.82	0.13	0.22
7	LXXL1410-1434HW	1/4	2	3/4	0.41	0.69	0.05	1.94	0.13	0.22

14-10# Compression Lug/Yellow Printed/90°Angle

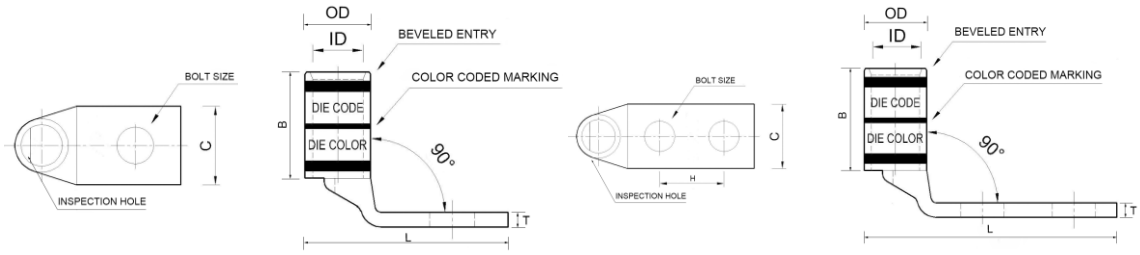

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXS1410-14FW	1/4	1	/	0.42	0.38	0.05	0.94	0.13	0.22
2	LXL1410-14FW	1/4	1	/	0.41	0.69	0.05	0.94	0.13	0.22

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX1410-1058FW	#10	2	5/8	0.36	0.38	0.06	1.47	0.13	0.22
2	LXX1410-1458FW	1/4	2	5/8	0.41	0.38	0.05	1.56	0.13	0.22
3	LXX1410-3801FW	3/8	2	1	0.56	0.38	0.04	2.16	0.13	0.22
4	LXXL1410-1458FW	1/4	2	5/8	0.41	0.69	0.05	1.56	0.13	0.22
5	LXXL1410-1434FW	1/4	2	3/4	0.41	0.69	0.05	1.69	0.13	0.22