Code Conductor,For 2/0 AWG Cable




- Cable lugs are connecting devices used primarily for terminating and joining cable and wire conductors in electrical installations and equipment.
- These lugs are used for severe-duty applications and have thicker walls for greater strength and conductivity.
- Suitable for various copper cable and wire types, as long as the correct size is selected and the relevant "crimping" method is used.
- Manufactured from high conductivity copper which is tin plated to prevent corrosion.
- Easy to use in conjunction with mechanical or hydraulic crimping equipment.
- Color-Coded for Easy Identification.

Specifications


Material	Copper	Tongue Angle	Straight,45°,90°
Finish/Coating	Tin-Plated, Nickel-Plated	Barrel Type	Standard, Long, With or Without Inspection Window
Wire Range	2/0 AWG	Tongue Type	Standard, Narrow
Color Code	Black	Certification	RoHS,REACH,CE
Bolt Size	1/4,5/16,3/8,1/2,#10	Customizable	Yes

2/0 AWG Compression Lug/Black Printed/Straight Type

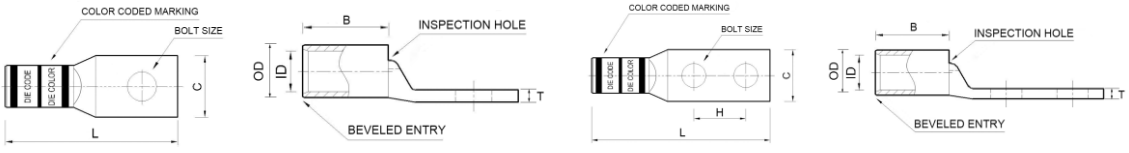

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LX2/0-14W	1/4	1	/	0.83	0.94	0.11	1.94	0.45	0.56
2	LX2/0-38W	3/8	1	/	0.83	0.94	0.11	2.36	0.45	0.56
3	LX2/0-12W	1/2	1	/	0.83	0.94	0.11	2.44	0.45	0.56
4	LX2/0-34W	3/4	1	/	1.02	0.94	0.10	2.96	0.45	0.56
5	LX2/0-10WNT	#10	1	/	0.62	0.94	0.13	2.62	0.45	0.56
6	LX2/0-14WNT	1/4	1	/	0.48	0.94	0.11	2.02	0.45	0.56
7	LX2/0-56WNT	5/16	1	/	0.62	0.94	0.13	2.06	0.45	0.56
8	LX2/0-38WNT	3/8	1	/	0.72	0.94	0.12	2.48	0.45	0.56
9	LXL2/0-14W	1/4	1	/	0.83	1.50	0.11	2.56	0.45	0.56
10	LXL2/0-56W	5/16	1	/	0.83	1.50	0.11	2.65	0.45	0.56


2/0 AWG Compression Lug/Black Printed/Straight Type

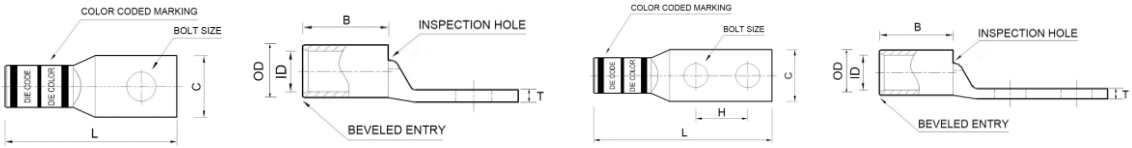

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
11	LXL2/0-38W	3/8	1	/	0.83	1.50	0.11	2.75	0.45	0.56
12	LXL2/0-12W	1/2	1	/	0.83	1.50	0.11	3.00	0.45	0.56

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX2/0-1458W	1/4	2	5/8	0.83	0.94	0.11	2.64	0.45	0.56
2	LXX2/0-1434W	1/4	2	3/4	0.83	0.94	0.11	2.76	0.45	0.56
3	LXX2/0-1401W	1/4	2	1	0.83	0.94	0.11	3.01	0.45	0.56
4	LXX2/0-5678W	5/16	2	7/8	0.83	0.94	0.11	2.95	0.45	0.56
5	LXX2/0-3801W	3/8	2	1	0.83	0.94	0.11	3.20	0.45	0.56
6	LXX2/0-1243W	1/2	2	1-3/4	0.83	0.94	0.11	4.39	0.45	0.56
7	LXX2/0-1458WNT	1/4	2	5/8	0.56	0.94	0.12	2.66	0.45	0.56
8	LXX2/0-1401WNT	1/4	2	1	0.56	0.94	0.12	3.03	0.45	0.56
9	LXXL2/0-1458WNT	1/4	2	5/8	0.48	1.50	0.12	3.35	0.45	0.56
10	LXXL2/0-1458W	1/4	2	5/8	0.83	1.50	0.11	3.20	0.45	0.56
11	LXXL2/0-1434W	1/4	2	3/4	0.83	1.50	0.11	3.32	0.45	0.56
12	LXXL2/0-1401W	1/4	2	1	0.83	1.50	0.11	3.57	0.45	0.56
13	LXXL2/0-3801W	3/8	2	1	0.83	1.50	0.11	3.76	0.45	0.56
14	LXXL2/0-3843W	3/8	2	1-3/4	0.83	1.50	0.11	4.51	0.45	0.56
15	LXXL2/0-1243W	1/2	2	1-3/4	0.83	1.50	0.11	4.95	0.45	0.56


2/0 AWG Compression Lug/Black Printed/45°Angle

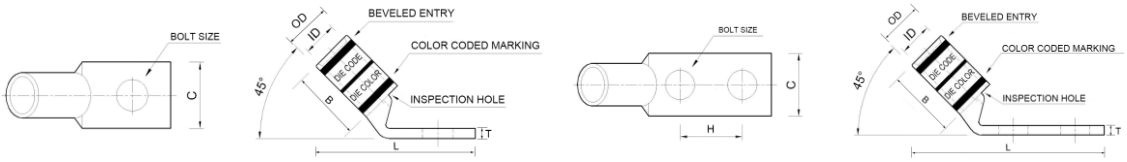

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LX2/0-14HW	1/4	1	/	0.83	0.94	0.11	1.77	0.45	0.56
2	LX2/0-38HW	3/8	1	/	0.83	0.94	0.11	1.83	0.45	0.56
3	LX2/0-12HW	1/2	1	/	0.83	0.94	0.11	2.08	0.45	0.56
4	LX2/0-34HW	3/4	1	/	1.02	0.94	0.10	2.66	0.45	0.56
5	LXL2/0-38HW	3/8	1	/	0.83	1.50	0.11	2.31	0.45	0.56
6	LXL2/0-12HW	1/2	1	/	0.83	1.50	0.11	2.53	0.45	0.56

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX2/0-1458HW	1/4	2	5/8	0.83	0.94	0.11	2.38	0.45	0.56
2	LXX2/0-1434HW	1/4	2	3/4	0.83	0.94	0.11	2.52	0.45	0.56
3	LXX2/0-5678HW	5/16	2	7/8	0.83	0.94	0.11	2.64	0.45	0.56
4	LXX2/0-3801HW	3/8	2	1	0.83	0.94	0.11	2.83	0.45	0.56
5	LXX2/0-1243HW	1/2	2	1-3/4	0.83	0.94	0.11	3.99	0.45	0.56
6	LXXL2/0-1458HW	1/4	2	5/8	0.83	1.50	0.11	2.76	0.45	0.56
7	LXXL2/0-1434HW	1/4	2	3/4	0.83	1.50	0.11	2.88	0.45	0.56
8	LXXL2/0-1401HW	1/4	2	1	0.83	1.50	0.11	3.13	0.45	0.56
9	LXXL2/0-5601HW	5/16	2	1	0.83	1.50	0.11	3.24	0.45	0.56
10	LXXL2/0-3801HW	3/8	2	1	0.83	1.50	0.11	3.20	0.45	0.56
11	LXXL2/0-3843HW	3/8	2	1-3/4	0.83	1.50	0.11	3.95	0.45	0.56
12	LXXL2/0-1201HW	1/2	2	1	0.83	1.50	0.11	3.56	0.45	0.56
13	LXXL2/0-1243HW	1/2	2	1-3/4	0.83	1.50	0.11	4.36	0.45	0.56

2/0 AWG Compression Lug/Black Printed/90°Angle

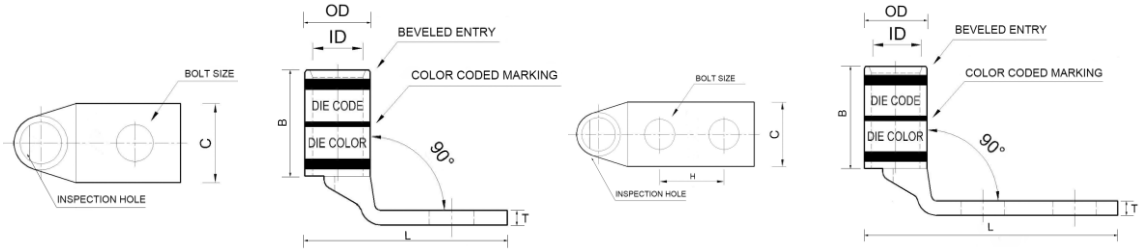

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LX2/0-14FW	1/4	1	/	0.83	0.94	0.11	1.59	0.45	0.56
2	LX2/0-56FW	5/16	1	/	0.83	0.80	0.11	1.59	0.45	0.56
3	LX2/0-38FW	3/8	1	/	0.83	0.94	0.11	1.66	0.45	0.56
4	LX2/0-12FW	1/2	1	/	0.83	0.94	0.11	1.66	0.45	0.56
5	LX2/0-34FW	3/4	1	/	1.02	0.94	0.10	1.91	0.45	0.56
6	LXL2/0-38FW	3/8	1	/	0.83	1.50	0.11	2.30	0.45	0.56

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX2/0-1458FW	1/4	2	5/8	0.83	0.94	0.11	2.22	0.45	0.56
2	LXX2/0-1434FW	1/4	2	3/4	0.83	0.94	0.11	2.34	0.45	0.56
3	LXX2/0-5678FW	5/16	2	7/8	0.83	0.94	0.11	2.47	0.45	0.56
4	LXX2/0-3801FW	3/8	2	1	0.83	0.94	0.11	2.66	0.45	0.56
5	LXX2/0-1243FW	1/2	2	1-3/4	0.83	0.94	0.11	3.82	0.45	0.56
6	LXXL2/0-1458FW	1/4	2	5/8	0.83	1.50	0.11	2.22	0.45	0.56
7	LXXL2/0-1434FW	1/4	2	3/4	0.83	1.50	0.11	2.34	0.45	0.56
8	LXXL2/0-1401FW	5/16	2	1	0.83	1.50	0.11	2.59	0.45	0.56
9	LXXL2/0-5601FW	5/16	2	1	0.83	1.50	0.11	2.59	0.45	0.56
10	LXXL2/0-3801FW	3/8	2	1	0.83	1.50	0.11	2.66	0.45	0.56
11	LXXL2/0-3843FW	1/2	2	1-3/4	0.83	1.50	0.11	2.91	0.45	0.56
12	LXXL2/0-1201FW	1/2	2	1	0.83	1.50	0.11	2.85	0.45	0.56
13	LXXL2/0-1243FW	1/2	2	1-3/4	0.83	1.50	0.11	3.82	0.45	0.56