Code Conductor,For 2 AWG Cable




- Cable lugs are connecting devices used primarily for terminating and joining cable and wire conductors in electrical installations and equipment.
- These lugs are used for severe-duty applications and have thicker walls for greater strength and conductivity.
- Suitable for various copper cable and wire types, as long as the correct size is selected and the relevant "crimping" method is used.
- Manufactured from high conductivity copper which is tin plated to prevent corrosion.
- Easy to use in conjunction with mechanical or hydraulic crimping equipment.
- Color-Coded for Easy Identification.

Specifications


Material	Copper
Finish/Coating	Tin-Plated, Nickel-Plated
Wire Range	2 AWG
Color Code	Brown
Bolt Size	1/4,5/16,3/8,1/2,#10
Tongue Angle	Straight,45°,90°
Barrel Type	Standard, Long, With or Without Inspection Window
Tongue Type	Standard, Narrow
Certification	RoHS,REACH,CE
Customizable	Yes

2 AWG Compression Lug/Brown Printed/Straight Type

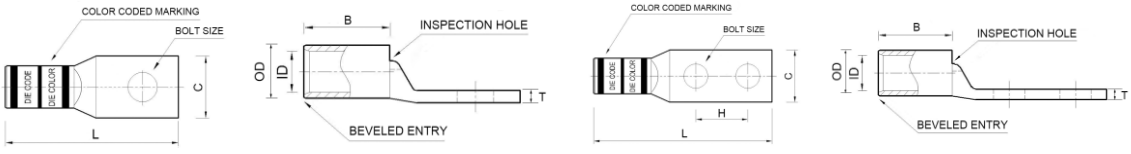

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXS2-14W	1/4	1	/	0.61	0.57	0.11	1.46	0.31	0.42
2	LXS2-56W	5/16	1	/	0.61	0.57	0.11	1.58	0.31	0.42
3	LXS2-38W	3/8	1	/	0.61	0.57	0.11	1.66	0.31	0.42
4	LXS2-12W	1/2	1	/	0.73	0.57	0.09	1.89	0.31	0.42
5	LX2-14W	1/4	1	/	0.61	0.88	0.11	1.88	0.31	0.42
6	LX2-56W	5/16	1	/	0.61	0.88	0.11	1.93	0.31	0.42
7	LX2-38W	3/8	1	/	0.61	0.88	0.11	2.06	0.31	0.42
8	LX2-12W	1/2	1	/	0.73	0.88	0.09	2.32	0.31	0.42
9	LX2-10WNT	#10	1	/	0.48	0.88	0.11	1.80	0.31	0.42
10	LX2-14WNT	1/4	1	/	0.50	0.88	0.11	1.80	0.31	0.42


2 AWG Compression Lug/Brown Printed/Straight Type

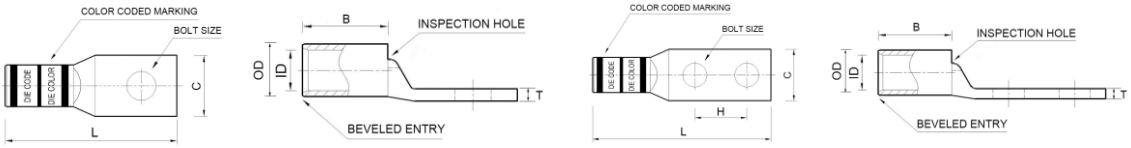

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
11	LX2-56WNT	5/16	1	/	0.49	0.88	0.11	1.82	0.31	0.42
12	LXL2-10W	#10	1	/	0.60	1.25	0.11	2.10	0.31	0.42
13	LXL2-14W	1/4	1	/	0.60	1.25	0.11	2.21	0.31	0.42
14	LXL2-56W	5/16	1	/	0.60	1.25	0.11	2.29	0.31	0.42
15	LXL2-38W	3/8	1	/	0.60	1.25	0.11	2.40	0.31	0.42
16	LXL2-12W	1/2	1	/	0.73	1.25	0.09	2.65	0.31	0.42

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX2-1458W	1/4	2	5/8	0.60	0.88	0.11	2.47	0.31	0.42
2	LXX2-1434W	1/4	2	3/4	0.60	0.88	0.11	2.60	0.31	0.42
3	LXX2-1401W	1/4	2	1	0.60	0.88	0.11	2.85	0.31	0.42
4	LXX2-5634W	5/16	2	3/4	0.60	0.88	0.11	2.67	0.31	0.42
5	LXX2-5601W	5/16	2	1	0.60	0.88	0.11	2.91	0.31	0.42
6	LXX2-3801W	3/8	2	1	0.60	0.88	0.11	3.03	0.31	0.42
7	LXX2-1243W	1/2	2	1-3/4	0.83	0.88	0.12	4.27	0.31	0.42
8	LXX2-1414WNT	1/4	2	1/4	0.48	0.88	0.11	2.60	0.31	0.42
9	LXX2-1458WNT	1/4	2	5/8	0.48	0.88	0.11	2.47	0.31	0.42
10	LXX2-1401WNT	1/4	2	1	0.48	0.88	0.11	2.84	0.31	0.42
11	LXXL2-1034W	#10	2	3/4	0.60	1.25	0.11	2.85	0.31	0.42
12	LXXL2-1458W	1/4	2	5/8	0.60	1.25	0.11	2.85	0.31	0.42
13	LXXL2-1434W	1/4	2	3/4	0.60	1.25	0.11	2.97	0.31	0.42
14	LXXL2-1401W	1/4	2	1	0.60	1.25	0.11	3.22	0.31	0.42
15	LXXL2-5658W	5/16	2	5/8	0.60	1.25	0.11	2.91	0.31	0.42
16	LXXL2-5634W	5/16	2	3/4	0.60	1.25	0.11	3.03	0.31	0.42
17	LXXL2-3834W	3/8	2	3/4	0.60	1.25	0.11	3.16	0.31	0.42
18	LXXL2-3878W	3/8	2	7/8	0.60	1.25	0.11	3.28	0.31	0.42
19	LXXL2-3801W	3/8	2	1	0.60	1.25	0.11	3.41	0.31	0.42
20	LXXL2-38UW	3/8	2	3/4-1	0.60	1.25	0.11	3.42	0.31	0.42
21	LXXL2-3843W	3/8	2	1-3/4	0.60	1.25	0.11	4.16	0.31	0.42
22	LXXL2-1243W	1/2	2	1-3/4	0.83	1.25	0.12	4.64	0.31	0.42


2 AWG Compression Lug/Brown Printed/45°Angle

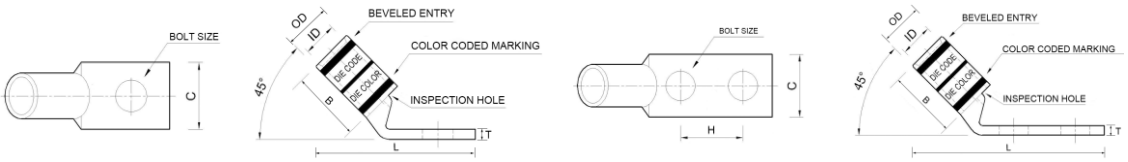

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXS2-14HW	1/4	1	/	0.61	0.57	0.11	1.27	0.31	0.42
2	LXS2-56HW	5/16	1	/	0.61	0.57	0.11	1.39	0.31	0.42
3	LXS2-38HW	3/8	1	/	0.61	0.57	0.11	1.46	0.31	0.42
4	LXS2-12HW	1/2	1	/	0.73	0.57	0.09	1.68	0.31	0.42
5	LX2-14HW	1/4	1	/	0.61	0.88	0.11	1.49	0.31	0.42
6	LX2-56HW	5/16	1	/	0.61	0.88	0.11	1.61	0.31	0.42
7	LX2-38HW	3/8	1	/	0.61	0.88	0.11	1.68	0.31	0.42
8	LX2-12HW	1/2	1	/	0.73	0.88	0.09	1.90	0.31	0.42
9	LXL2-10HW	#10	1	/	0.60	1.25	0.11	1.76	0.31	0.42
10	LXL2-14HW	1/4	1	/	0.60	1.25	0.11	1.93	0.31	0.42
11	LXL2-56HW	5/16	1	/	0.60	1.25	0.11	1.95	0.31	0.42


ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX2-1458HW	1/4	2	5/8	0.60	0.88	0.11	2.11	0.31	0.42
2	LXX2-1434HW	1/4	2	3/4	0.60	0.88	0.11	2.24	0.31	0.42
3	LXX2-1401HW	1/4	2	1	0.60	0.88	0.11	2.49	0.31	0.42
4	LXX2-5634HW	5/16	2	3/4	0.60	0.88	0.11	2.36	0.31	0.42
5	LXX2-3801HW	3/8	2	1	0.60	0.88	0.11	2.71	0.31	0.42
6	LXX2-1243HW	1/2	2	1-3/4	0.83	0.88	0.12	3.84	0.31	0.42
7	LXX2-1458HWNT	1/4	2	5/8	0.48	0.88	0.11	2.12	0.31	0.42
8	LXX2-1401HWNT	1/4	2	1	0.48	0.88	0.11	2.49	0.31	0.42
9	LXXL2-1058HW	#10	2	5/8	0.60	1.25	0.11	2.24	0.31	0.42
10	LXXL2-1034HW	#10	2	3/4	0.60	1.25	0.11	2.36	0.31	0.42
11	LXXL2-1458HW	1/4	2	5/8	0.60	1.25	0.11	2.34	0.31	0.42
12	LXXL2-1434HW	1/4	2	3/4	0.60	1.25	0.11	2.47	0.31	0.42
13	LXXL2-1401HW	1/4	2	1	0.60	1.25	0.11	2.72	0.31	0.42
14	LXXL2-5658HW	5/16	2	5/8	0.60	1.25	0.11	2.59	0.31	0.42
15	LXXL2-5634HW	5/16	2	3/4	0.60	1.25	0.11	2.72	0.31	0.42
16	LXXL2-5678HW	5/16	2	7/8	0.60	1.25	0.11	2.79	0.31	0.42

2 AWG Compression Lug/Brown Printed/45°Angle

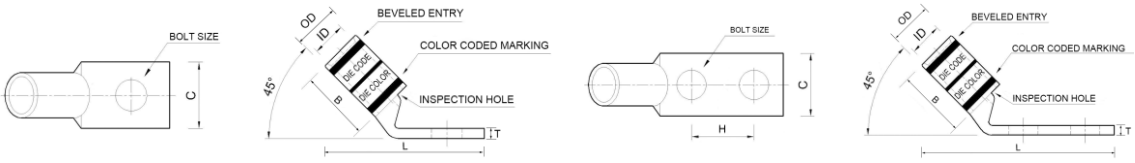


ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
17	LXXL2-3834HW	3/8	2	3/4	0.60	1.25	0.11	2.67	0.31	0.42
18	LXXL2-3878HW	3/8	2	7/8	0.60	1.25	0.11	2.79	0.31	0.42
19	LXXL2-3801HW	3/8	2	1	0.60	1.25	0.11	2.92	0.31	0.42
20	LXXL2-3843HW	3/8	2	1-3/4	0.60	1.25	0.11	3.67	0.31	0.42
21	LXXL2-1243HW	1/2	2	1-3/4	0.83	1.25	0.12	4.07	0.31	0.42
22	LXXL2-38UHW	3/8	2	3/4-1	0.60	1.25	0.11	2.92	0.31	0.42

2 AWG Compression Lug/Brown Printed/90°Angle

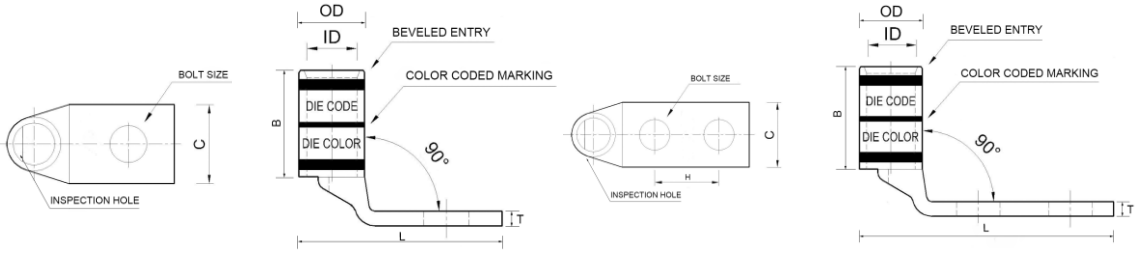

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXS2-14FW	1/4	1	/	0.61	0.57	0.11	1.24	0.31	0.42
2	LXS2-56FW	5/16	1	/	0.61	0.57	0.11	1.36	0.31	0.42
3	LXS2-38FW	3/8	1	/	0.61	0.57	0.11	1.44	0.31	0.42
4	LXS2-12FW	1/2	1	/	0.73	0.57	0.09	1.67	0.31	0.42
5	LX2-14FW	1/4	1	/	0.61	0.88	0.11	1.24	0.31	0.42
6	LX2-56FW	5/16	1	/	0.61	0.88	0.11	1.36	0.31	0.42
7	LX2-38FW	3/8	1	/	0.61	0.88	0.11	1.44	0.31	0.42
8	LX2-12FW	1/2	1	/	0.73	0.88	0.09	1.67	0.31	0.42
9	LXL2-10FW	#10	1	/	0.60	1.25	0.11	1.74	0.31	0.42
10	LXL2-14FW	1/4	1	/	0.60	1.25	0.11	1.74	0.31	0.42
11	LXL2-56FW	5/16	1	/	0.60	1.25	0.11	1.74	0.31	0.42

2 AWG Compression Lug/Brown Printed/90°Angle

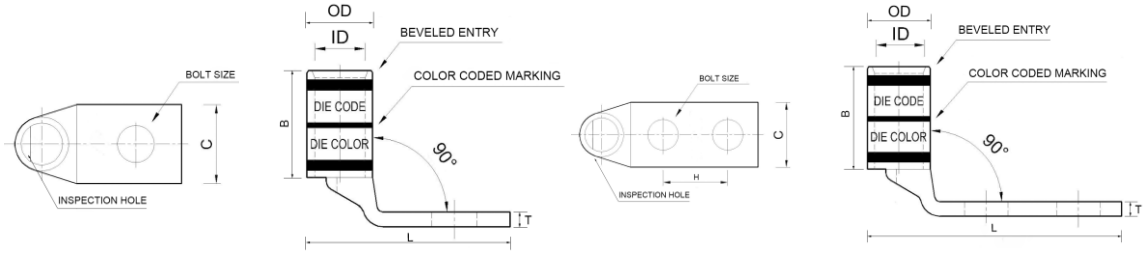

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX2-1458FW	1/4	2	5/8	0.60	0.88	0.11	1.86	0.31	0.42
2	LXX2-1434FW	1/4	2	3/4	0.60	0.88	0.11	1.99	0.31	0.42
3	LXX2-1401FW	1/4	2	1	0.60	0.88	0.11	2.24	0.31	0.42
4	LXX2-5634FW	5/16	2	3/4	0.60	0.88	0.11	2.11	0.31	0.42
5	LXX2-3801FW	3/8	2	1	0.60	0.88	0.11	2.47	0.31	0.42
6	LXX2-1243FW	1/2	2	1-3/4	0.83	0.88	0.12	3.61	0.31	0.42
7	LXX2-1458FWNT	1/4	2	5/8	0.48	0.88	0.11	1.86	0.31	0.42
8	LXX2-1401FWNT	1/4	2	1	0.48	0.88	0.11	2.24	0.31	0.42
9	LXXL2-1058FW	#10	2	5/8	0.60	1.25	0.11	1.76	0.31	0.42
10	LXXL2-1034FW	#10	2	3/4	0.60	1.25	0.11	1.89	0.31	0.42
11	LXXL2-1458FW	1/4	2	5/8	0.60	1.25	0.11	1.86	0.31	0.42
12	LXXL2-1434FW	1/4	2	3/4	0.60	1.25	0.11	1.99	0.31	0.42
13	LXXL2-1401FW	1/4	2	1	0.60	1.25	0.11	2.24	0.31	0.42
14	LXXL2-5658FW	5/16	2	5/8	0.60	1.25	0.11	2.11	0.31	0.42
15	LXXL2-5634FW	5/16	2	3/4	0.60	1.25	0.11	2.24	0.31	0.42
16	LXXL2-3834FW	3/8	2	3/4	0.60	1.25	0.11	2.19	0.31	0.42
17	LXXL2-3878FW	3/8	2	7/8	0.60	1.25	0.11	2.31	0.31	0.42
18	LXXL2-3801FW	3/8	2	1	0.60	1.25	0.11	2.44	0.31	0.42
19	LXXL2-3843FW	3/8	2	1-3/4	0.60	1.25	0.11	3.19	0.31	0.42
20	LXXL2-1243FW	1/2	2	1-3/4	0.83	1.25	0.12	3.61	0.31	0.42
21	LXXL2-38UFW	3/8	2	3/4-1	0.60	1.25	0.11	2.44	0.31	0.42