Code Conductor,For 250KCM Cable




- Cable lugs are connecting devices used primarily for terminating and joining cable and wire conductors in electrical installations and equipment.
- These lugs are used for severe-duty applications and have thicker walls for greater strength and conductivity.
- Suitable for various copper cable and wire types, as long as the correct size is selected and the relevant "crimping" method is used.
- Manufactured from high conductivity copper which is tin plated to prevent corrosion.
- Easy to use in conjunction with mechanical or hydraulic crimping equipment.
- Color-Coded for Easy Identification.

Specifications


Material	Copper
Finish/Coating	Tin-Plated, Nickel-Plated
Wire Range	250KCM
Color Code	Yellow
Bolt Size	1/4,5/16,3/8,1/2,7/8
Tongue Angle	Straight,45°,90°
Barrel Type	Standard, Long, With or Without Inspection Window
Tongue Type	Standard, Narrow
Certification	RoHS,REACH,CE
Customizable	Yes

250KCM Compression Lug/Yellow Printed/Straight Type

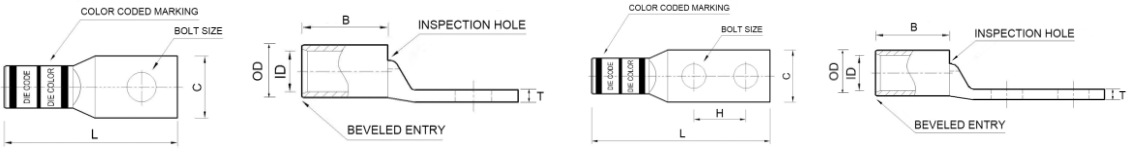

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LX250-14W	1/4	1	/	1.11	1.06	0.15	2.23	0.63	0.77
2	LX250-56W	5/16	1	/	1.11	1.06	0.15	2.29	0.63	0.77
3	LX250-38W	3/8	1	/	1.11	1.06	0.15	2.42	0.63	0.77
4	LX250-12W	1/2	1	/	1.11	1.06	0.15	2.67	0.63	0.77
5	LX250-78W	7/8	1	/	1.11	1.06	0.15	3.36	0.63	0.77
6	LX250-14WNT	1/4	1	/	0.90	1.06	0.15	2.22	0.63	0.77
7	LX250-56WNT	5/16	1	/	0.90	1.06	0.15	2.49	0.63	0.77
8	LX250-38WNT	3/8	1	/	0.90	1.06	0.15	2.96	0.63	0.77
9	LX250-38WNT(C=0.96)	3/8	1	/	0.96	1.06	0.15	2.96	0.63	0.77
10	LX250-12WNT	1/2	1	/	0.90	1.06	0.15	3.08	0.63	0.77
11	LXL250-78W	7/8	1	/	1.25	1.62	0.15	3.85	0.63	0.77


250KCM Compression Lug/Yellow Printed/Straight Type

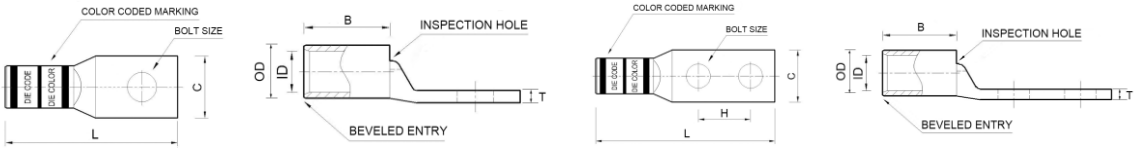

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
12	LXL250-38W	3/8	1	/	1.11	1.62	0.16	2.98	0.63	0.77
13	LXL250-12W	1/2	1	/	1.11	1.62	0.16	3.23	0.63	0.77

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX250-3801W	3/8	2	1	1.17	1.06	0.14	3.43	0.63	0.77
2	LXX250-3801WNT	3/8	2	1	0.80	1.00	0.10	3.43	0.68	0.75
3	LXX250-3843WNT	3/8	2	1-3/4	0.80	1.00	0.16	4.18	0.63	0.75
4	LXX250-1243W	1/2	2	1-3/4	1.17	1.06	0.14	4.62	0.63	0.77
5	LXXL250-3801W	3/8	2	1	1.17	1.62	0.14	3.99	0.63	0.77
6	LXXL250-1243W	1/2	2	1-3/4	1.17	1.62	0.14	5.18	0.63	0.77


250KCM Compression Lug/Yellow Printed/45°Angle

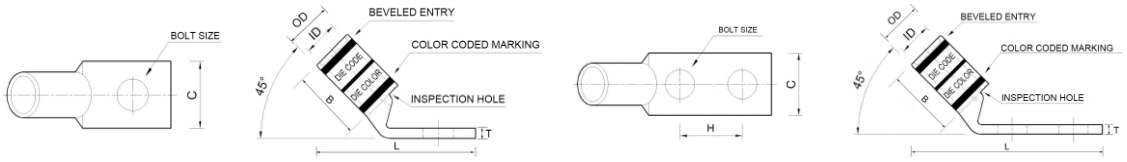

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LX250-14HW	1/4	1	/	1.11	1.06	0.15	1.89	0.63	0.77
2	LX250-56HW	5/16	1	/	1.11	1.06	0.15	1.90	0.63	0.77
3	LX250-38HW	3/8	1	/	1.11	1.06	0.15	1.97	0.63	0.77
4	LX250-12HW	1/2	1	/	1.11	1.56	0.15	2.20	0.63	0.77
5	LXL250-12HW	1/2	1	/	1.11	1.62	0.14	2.74	0.63	0.77
6	LXL250-78HW	7/8	1	/	1.11	1.62	0.12	3.27	0.63	0.77

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX250-3801HW	3/8	2	1	1.14	1.25	0.15	3.13	0.63	0.77
2	LXX250-1243HW	1/2	2	1-3/4	1.14	1.25	0.15	4.27	0.63	0.77
3	LXXL250-5601HW	5/16	2	1	1.14	1.62	0.15	3.31	0.63	0.77
4	LXXL250-3801HW	3/8	2	1	1.14	1.62	0.15	3.51	0.63	0.77
5	LXXL250-1201HW	1/2	2	1	1.14	1.62	0.15	3.74	0.63	0.77
6	LXXL250-1243HW	1/2	2	1-3/4	1.14	1.62	0.15	4.65	0.63	0.77

250KCM Compression Lug/Yellow Printed/90°Angle

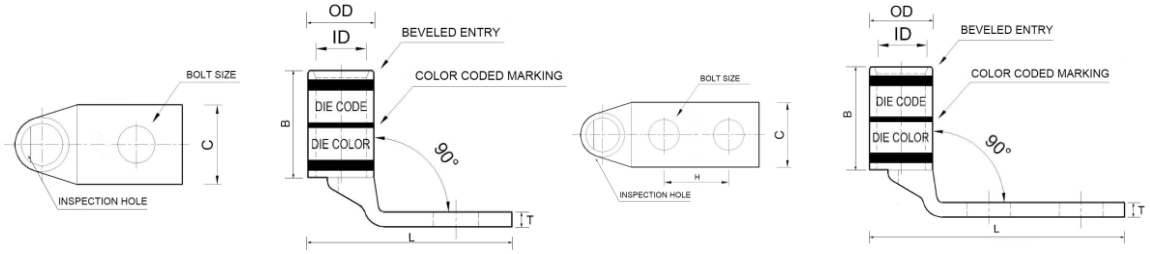

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LX250-14FW	1/4	1	/	1.11	1.06	0.15	1.82	0.63	0.77
2	LX250-56FW	5/16	1	/	1.11	1.06	0.15	1.83	0.63	0.77
3	LX250-38FW	3/8	1	/	1.11	1.06	0.15	1.90	0.63	0.77
4	LX250-12FW	1/2	1	/	1.11	1.06	0.15	2.13	0.63	0.77
5	LXL250-12FW	1/2	1	/	1.11	1.62	0.14	2.54	0.63	0.77
6	LXL250-78FW	7/8	1	/	1.25	1.62	0.12	2.58	0.63	0.77

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXX250-3801FW	3/8	2	1	1.14	1.25	0.15	2.90	0.63	0.77
2	LXX250-1243FW	1/2	2	1-3/4	1.14	1.25	0.15	4.04	0.63	0.77
3	LXXL250-5601FW	5/16	2	1	1.14	1.62	0.15	2.83	0.63	0.77
4	LXXL250-3801FW	3/8	2	1	1.14	1.62	0.15	2.90	0.63	0.77
5	LXXL250-1201FW	1/2	2	1	1.14	1.62	0.15	3.13	0.63	0.77
6	LXXL250-1243FW	1/2	2	1-3/4	1.14	1.62	0.15	4.04	0.63	0.77