Code Conductor,For 600KCM Cable



- Cable lugs are connecting devices used primarily for terminating and joining cable and wire conductors in electrical installations and equipment.
- These lugs are used for severe-duty applications and have thicker walls for greater strength and conductivity.
- Suitable for various copper cable and wire types, as long as the correct size is selected and the relevant "crimping" method is used.
- Manufactured from high conductivity copper which is tin plated to prevent corrosion.
- Easy to use in conjunction with mechanical or hydraulic crimping equipment.
- Color-Coded for Easy Identification.

Specifications

Material	Copper
Finish/Coating	Tin-Plated, Nickel-Plated
Wire Range	600KCM
Color Code	Green
Bolt Size	3/8,1/2

Tongue Angle	Straight,45°,90°
Barrel Type	Standard, Long, With or Without Inspection Window
Tongue Type	Standard, Narrow
Certification	RoHS,REACH,CE
Customizable	Yes

600KCM Compression Lug/Green Printed

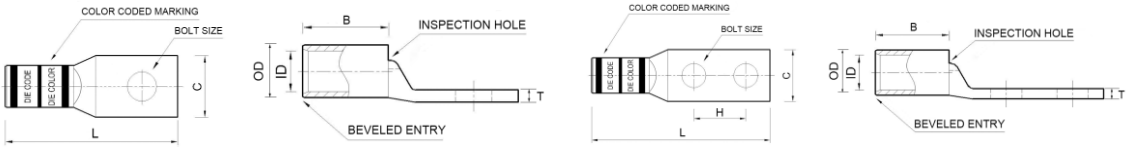

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LX600-38WNT	3/8	1	/	1.12	1.38	0.27	4.09	1.00	1.18
2	LX600-12WNT	1/2	1	/	1.00	1.38	0.27	3.29	1.04	1.19
3	LX600-12W	1/2	1	/	1.70	1.38	0.26	3.29	0.92	1.19
4	LX600-58W	5/8	1	/	1.70	1.38	0.26	3.54	0.92	1.19
5	LX600-78W	7/8	1	/	1.70	1.38	0.26	3.97	0.92	1.19
6	LXL600-38W	3/8	1	/	1.70	2.69	0.26	4.54	0.92	1.19
7	LXL600-12W	1/2	1	/	1.70	2.69	0.26	4.60	0.92	1.19
8	LXX600-1243WNT	1/2	2	1-3/4	1.12	1.38	0.27	5.43	1.02	1.19
9	LXX600-3801W	3/8	2	1	1.70	1.38	0.26	4.23	0.92	1.19
10	LXX600-1243W	1/2	2	1-3/4	1.70	1.38	0.26	5.23	0.92	1.19
11	LXXL600-3801W	3/8	2	1	1.70	2.69	0.26	5.55	0.92	1.19
12	LXXL600-1243W	1/2	2	1-3/4	1.70	2.69	0.26	6.55	0.92	1.19

Code Conductor,For 600KCM Cable



- Cable lugs are connecting devices used primarily for terminating and joining cable and wire conductors in electrical installations and equipment.
- These lugs are used for severe-duty applications and have thicker walls for greater strength and conductivity.
- Suitable for various copper cable and wire types, as long as the correct size is selected and the relevant "crimping" method is used.
- Manufactured from high conductivity copper which is tin plated to prevent corrosion.
- Easy to use in conjunction with mechanical or hydraulic crimping equipment.
- Color-Coded for Easy Identification.

Specifications

Material	Copper
Finish/Coating	Tin-Plated, Nickel-Plated
Wire Range	600KCM
Color Code	Green
Bolt Size	3/8,1/2

Tongue Angle	Straight,45°,90°
Barrel Type	Standard, Long, With or Without Inspection Window
Tongue Type	Standard, Narrow
Certification	RoHS,REACH,CE
Customizable	Yes

600KCM Compression Lug/Green Printed/Straight Type

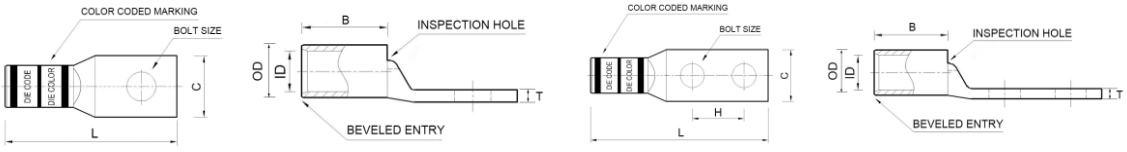

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXXL600-3801W	3/8	2	1	1.70	2.69	0.26	5.20	0.92	1.19
2	LXXL600-1243W	1/2	2	1-3/4	1.70	2.69	0.26	6.36	0.92	1.19

600KCM Compression Lug/Green Printed/45°Angle

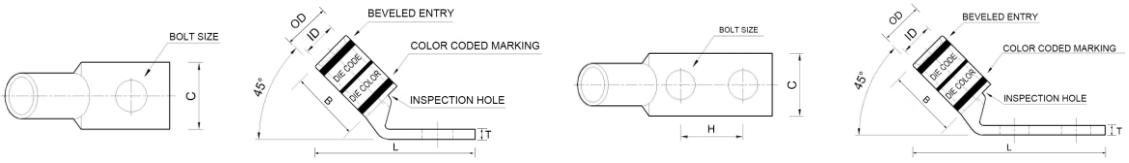

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXXL600-3801HW	3/8	2	1	1.70	2.69	0.26	4.47	0.92	1.19
2	LXXL600-1243HW	1/2	2	1-3/4	1.70	2.69	0.26	5.65	0.92	1.19

600KCM Compression Lug/Green Printed/90°Angle

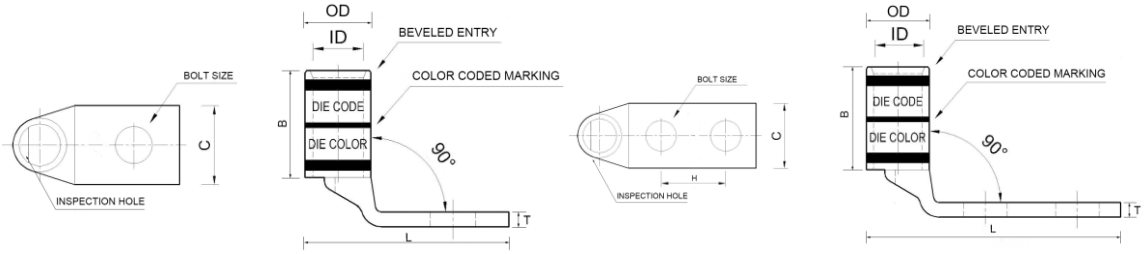

ITEM#	Part No#	BOLT SIZE	Holes	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			QTY	H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXXL600-3801FW	3/8	2	1	1.70	2.69	0.26	3.26	0.92	1.19
2	LXXL600-1243FW	1/2	2	1-3/4	1.70	2.69	0.26	4.44	0.92	1.19