Code Conductor,Four Holes



- Cable lugs are connecting devices used primarily for terminating and joining cable and wire conductors in electrical installations and equipment.
- These lugs are used for severe-duty applications and have thicker walls for greater strength and conductivity.
- Suitable for various copper cable and wire types, as long as the correct size is selected and the relevant "crimping" method is used.
- Manufactured from high conductivity copper which is tin plated to prevent corrosion.
- Easy to use in conjunction with mechanical or hydraulic crimping equipment.
- Color-Coded for Easy Identification.

Specifications

Material	Copper
Finish/Coating	Tin-Plated, Nickel-Plated
Wire Range	1/0 AWG,2/0AWG,3/0AWG,4/0AWG
Color Code	Pink, Black, Orange, Purple

Bolt Size	1/4,3/8
Finish/Coating	Straight
Certification	RoHS,REACH,CE
Customizable	Yes

Four Holes Compression Lug

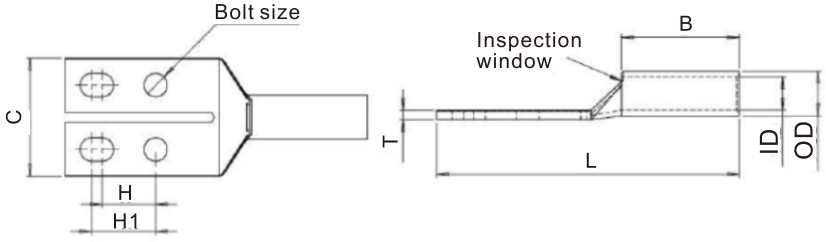

ITEM#	Part No#	DIE COLOR	WIRE SIZE	BOLT SIZE	Hole Spacing	Tang Width	Barrel length	Tang Thickness	Over all length	Inner diameter	Outer diameter
			STR		H(inch)	C(inch)	B(inch)	T(inch)	L(inch)	ID(inch)	OD(inch)
1	LXF1/0-1458W	PINK	1/0AWG	1/4	5/8	1.38	0.88	0.11	3.05	0.39	0.52
2	LXFL1/0-14UW	PINK	1/0AWG	1/4	5/8-3/4	1.38	1.38	0.11	3.55	0.39	0.52
3	LXFL1/0-38UW	PINK	1/0AWG	3/8	1-1-1/8	1.63	1.38	0.11	3.93	0.39	0.52
4	LXF2/0-1458W	BLACK	2/0AWG	1/4	5/8	1.38	0.94	0.21	3.15	0.45	0.56
5	LXFL2/0-14UW	BLACK	2/0AWG	1/4	5/8-3/4	1.38	1.50	0.21	3.71	0.45	0.58
6	LXFL2/0-38UW	BLACK	2/0AWG	3/8	1-1-1/8	1.63	1.50	0.21	4.09	0.45	0.58
7	LXF3/0-1458W	ORANGE	3/0AWG	1/4	5/8	1.38	1.00	0.21	3.25	0.51	0.63
8	LXF4/0-1458W	PURPLE	4/0AWG	1/4	5/8	1.38	1.00	0.21	3.29	0.56	0.70
9	LXFL4/0-14UW	PURPLE	4/0AWG	1/4	5/8-3/4	1.38	1.62	0.21	3.91	0.56	0.70