


WELKEN®



SAFETY LOCKOUT 2025

WELKEN®

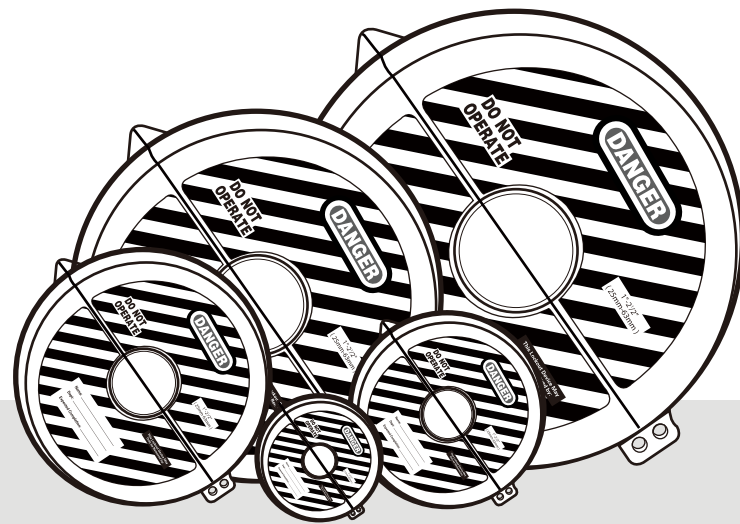

Marst Safety Equipment (Tianjin) Co., Ltd

+86-022-2857 7599

welken@chinawelken.com


www.chinawelken.com

No. 36, Fagang South Road, Shuang gang Town, Jinnan District, Tianjin, China

WELKEN LOTO Product Catalogue

Quality products and services

SAFETY PRODUCT SAMPLE BOOK

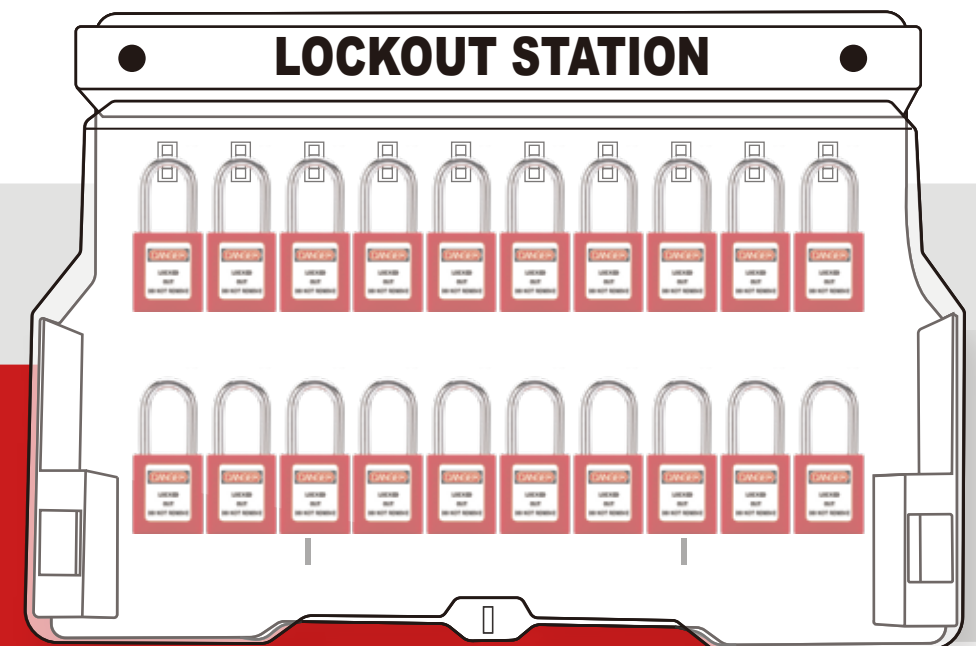

Marst Safety Equipment (Tianjin) Co., Ltd

Company Profile

Marst Safety Equipment (Tianjin) Co., Ltd is a professional manufacturer that focuses on R&D, production and sales of personal protective equipment. We hold the concept of “With quality to win credibility, science, and technology to win the future” and focus on brand building and product innovation. With independent intellectual property rights and professional R&D team, we are dedicated to providing customers with quality services and one-stop solutions for personal safety protection.

In 2008, our company became one of Chinese suppliers of Alibaba. For more than 20 years, we have actively strengthened the cooperation with customers from various countries through the global professional exhibitions held in Germany, the United States, and other places. Our products are exported to more than 70 countries and regions such as South America, North America, Europe, Asia, Africa, and the Middle East. Our company has passed ISO certification, and has 12 invention patents, 37 utility model patents and 14 design patents. The main products have EU CE certification, ANSI certification. We strive to create world-class levels of products and provide workplace safety and security for more customers!

God helps those who help themselves; great virtue can carry all things. With a goal of continuous improvement and surpassing development, Marst Safety Equipment (Tianjin) Co., Ltd is dedicated to providing more quality safety products for domestic and foreign customers.



Patent



CE



ISO



DIRECTORY

1

Concept of safety lockout



01 — 03

2

The Functions and Ways of Using the Key



04 — 06

3

Safety padlock



07 — 29

4

PVC Tag and Warning Sign



30 — 38

5

Electrical lockout



39 — 56

6

Valve lockout



57 — 67

7

Hasp lockout



68 — 73

8

Cable lockout



74 — 82

9

Lockout station




83 — 95

10

Floor Marking Tape Dispenser



96 — 97

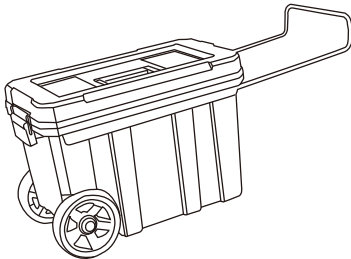

1 Concept of safety lockout

WHAT IS LOTO SYSTEM:

Lockout is defined as the 'Control of Hazardous Energy - In practice.
Lockout is the isolation of energy from the system (a machine, equipment, or process)

WHY IS LOTO IMPORTANT?

Preparing for the shutdown is required in certain circumstances, such as when there is insufficient electrical power available to maintain the equipment on line and the plant must be shut down to avoid damage or injury due to an emergency condition (e.g,fire). The shutdown preparation process begins before the actual shutdown of the power source by disconnecting any safety related equipment which may affect the integrity of the power supply.

WHO IS LOTO AUTHORIZED EMPLOYEE?

A person who knocks out or tags out machines or equipment in order to perform servicing or maintenance on that machine or equipment. An affected employee becomes an authorized employee when that employee's duties include performing servicing or maintenance covered under this section.

WHERE/ WHEN SHOULD USE LOTO?

1. During Cleaning, Servicing, Adjusting Operations:



- Machinery or equipment capable of movement must be stopped and power source(s) de-energized or disengaged.
- Accident prevention signs or tags or both must be placed on the controls of the power source of the machinery or equipment.
- If necessary, the moveable parts must be mechanically blocked or locked out to prevent inadvertent movement, or release of stored energy.

2. During Repair Work and Setting-Up Operations, Machines, Equipment /Prime Movers:



- Must be locked out or positively sealed in the "off" position if they have lockable controls (or are readily adaptable to lockable controls).
- Must be de-energized or disconnected from their power source (or other actions taken to effectively prevent inadvertent movement or release of stored energy) if they do not have lockable controls.
- Accident prevention signs and tags (or both) must be placed on the controls.

3. Outside Servicing Personnel



- Whenever outside servicing personnel are to be engaged in activities covered by the lockout/tagout regulation, the employer's on-site lockout or tagout procedures must be followed.

EIGHT Steps of LOTO Safety & Lockout/Tagout Procedures

STEP 1: PREPARATION	During the preparation phase, the authorized employee should investigate and gain a complete understanding of all types of hazardous energy that might be controlled. Identify the specific hazards.
STEP 2: NOTIFY	Notify all the employee that may affected by the shutdown, even if they won't play a role in the service or maintenance.
STEP 3: SHUT DOWN	Shut down the machine or equipment that will be serviced or maintained.
STEP 4: ISOLATE	Isolate the machine or equipment from any source of energy.
STEP 5: LOCKOUT/TAGOUT	Lock and tag out the machine or equipment. The authorized employee will attach lockout and/or tagout devices to each energy-isolating device.
STEP 6: STORED ENERGY CHECK	Look for any hazardous energy that's been "stored" within the machine. Any potentially hazardous stored or residual energy must be relieved, disconnected, restrained.
STEP 7: VERIFY ISOLATION	An authorized employee should verify and make sure the machine or equipment has been properly isolated and de-energized.
STEP 8: RECOVER	Bring equipment back on line.

Remove Lockout/Tagout Procedures:

STEP 01

Check tools,

remove isolation

facilities;



STEP 02

Check staff;



STEP 03

Remove

Lockout/Tagout

devices;



STEP 04

Inform relevant

staff;



STEP 05

Restart

equipment energy.



Lockout and tagout requirements

- When more than one persons are authorized a same task, each staff should do the lockout and tagout operation in person, rather than leave the job to others.
- Never authorize others to remove your lockout and tagout device.
- Only operate on equipment that has been locked out and tagged out.
- When you take over the shift, you must not take out the lockout and tagout device until the next shift worker come and put on the lockout and tagout device. Also, the new shift worker must reconfirm whether the lock-out and tagout is safe and reliable. Only when the confirmation has been done, the following operations can be carried on.
- Never put your safety on someone else's lockout and tagout, and always remember to use your ownlockout to protect your own safety.
- Use the correct lockout, for example: what you want to lock is a 3-inch gate valve, and you have a gate valve lockout in the range of 5 inches to 6.5 inches, please don't try to use that, you should immediately get a matching lockout.
- Make sure that your lockout and tagout can withstand the environment in which it is located, such as moisture, corrosiveness, etc., otherwise it will lose its due effect.
- Lockout and tagout need to be used together but cannot be replaced by each other.
- Since 1990 January 2nd, When activities such as maintenance, repair, or set-up; install new machinery and equipment, these safety devices used for the machine and equipment shall be use locking devices.
- The operator should periodically inspect the capability control procedures at least once a year to ensure that the procedures and requirements of this standard are being implemented and should conduct periodic inspections by authorized employees rather than by those performing the energy control procedures.
- If there is a possibility that the stored energy will re-accumulate to dangerous levels, the isolation status should continue to be verified until repairs or maintenance are completed, or this possibility no longer exists.
- Whenever external maintenance personnel participate in maintenance activities within this scope, the on-site operator and the external operator shall inform each other of their respective lockout or tagout procedures.




2 The Functions and Ways of Using the Key




Keyed to Differ

Each padlock has unique key, padlock cannot open mutually.

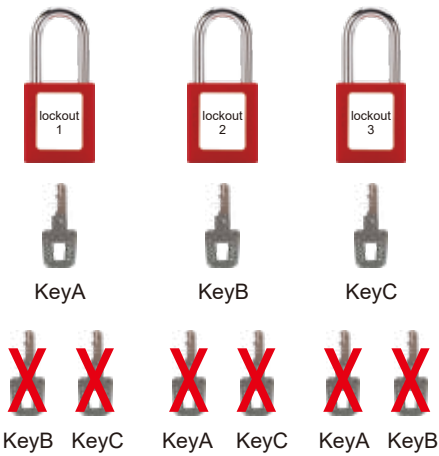


Keyed Alike

Within a group, all padlocks can open mutually, one key or several keys can open all padlocks in this group. Can customize several groups, between groups cannot open mutually.

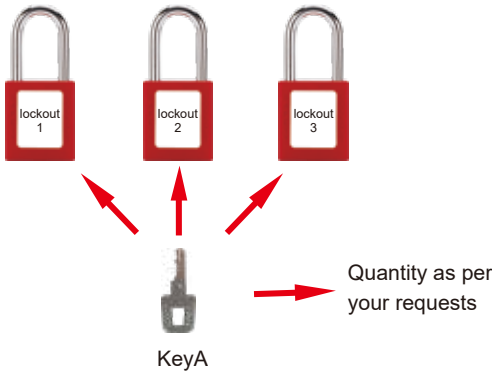


Master&Differ

Within a group, each padlock just has unique key, padlock cannot open mutually, but one master key can open all padlocks in the group. Can customize several groups, different master keys between groups cannot open mutually.

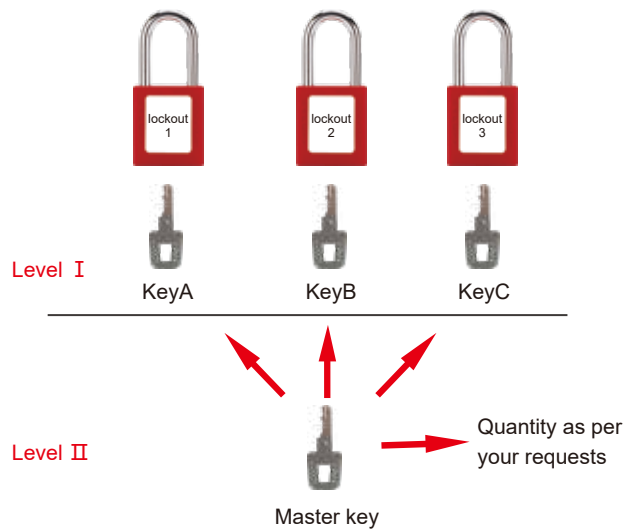


Master&Alike

Within a group, all padlocks can open mutually, one key or several keys can open all padlocks in this group. Can customize several groups, between groups cannot open mutually. And if need open all groups padlocks, can add a master key.

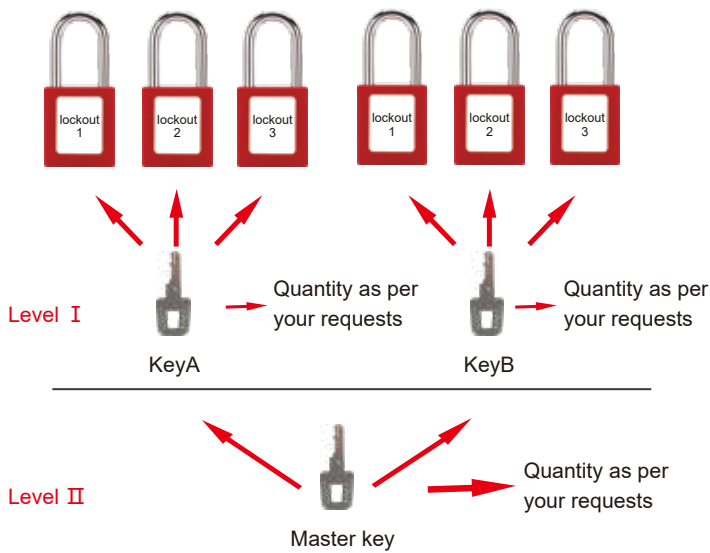

Grand Master Differ

Based on several groups of master&differ series, if you need to designate a higher-level supervisor key to open all groups, you can add third-level master keys.

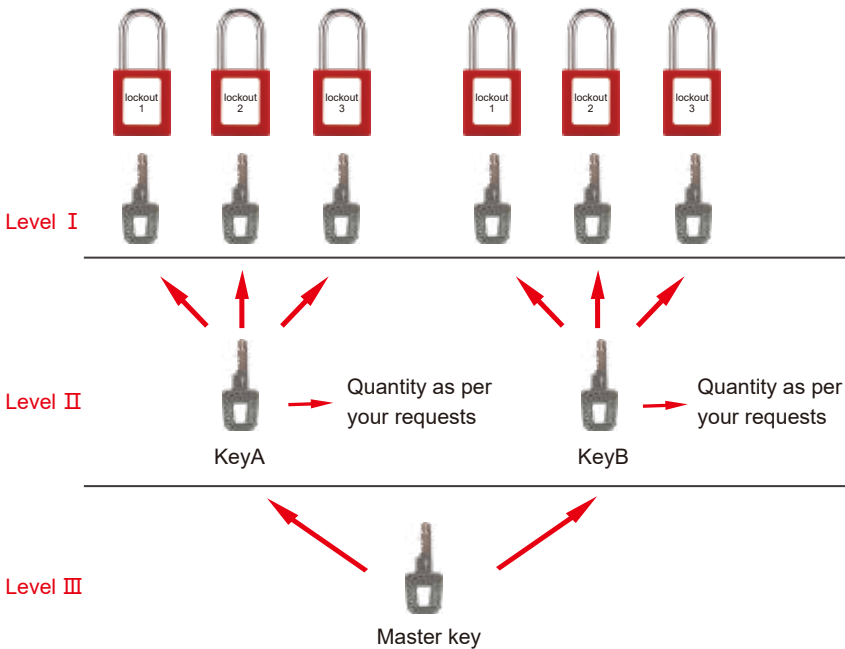

The Function and Ways of the Colors of the Key

The company can provide key shells of 16 different colors to collocate keys, making the functions of keys more powerful.

1. For example, the supervisor's key covers black shell and the personal key without shell, so that when it is used, it can easily distinguish which is the supervisor key.
2. Different departments use different colors key. For example, the electrical maintenance department uses a key with a red shell with a red padlock, the locksmith department uses a key with a yellow shell with a yellow padlock, and the production department uses a key with a blue shell with a blue padlock. In this way, the color can distinguish which department is overhauling or which department's key, which facilitates the key management. The company can backup and archive the customer's padlock key according to the customer's request, so that the customer's key management system will be supplemented in the future which also can avoid the confusion of the original key management system.



3 Safety padlock



ABS Safety padlock

16 Colors ABS Lock Body



Lock Cylinder



Brass cylinder


Key



Can Customize Lock label




Shackle Style

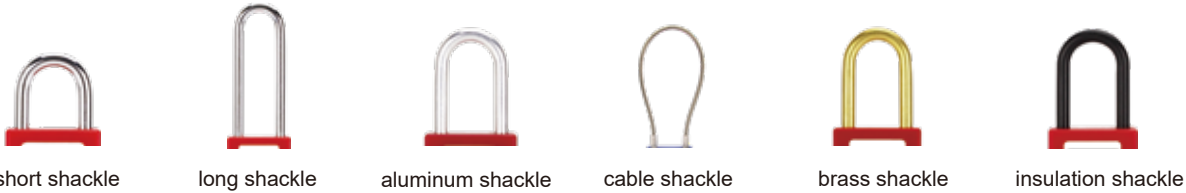

Print Code By Laser



Safety Padlock

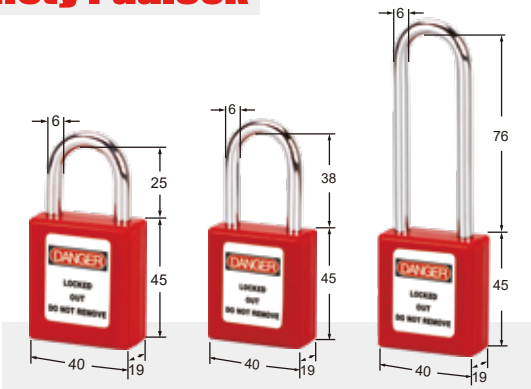


- ABS lock body is resistant impact, UV, high and low temperature, shackle is steel chrome plated, hard and beautiful.
- Include 2 sets lock body warning labels, can write owner's information.
- 16 colors ABS lock body, convenient to choose.

BD-8511 BD-8521 BD-8525

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8511	Steel	6	25	ABS	Keyed to differ, key-retaining
BD-8512					Keyed alike, key-retaining
BD-8513					Master & alike, key-retaining
BD-8514					Master & differ, key-retaining
BD-8521			38		Keyed to differ, key-retaining
BD-8522					Keyed alike, key-retaining
BD-8523					Master & alike, key-retaining
BD-8524					Master & differ, key-retaining
BD-8525			76		Keyed to differ, key-retaining
BD-8526					Keyed alike, key-retaining
BD-8527					Master & alike, key-retaining
BD-8528					Master & differ, key-retaining

Insulation Safety Padlock

- ABS lock body and nylon shackle combined perfectly, with better non-conductive, anti-magnetism, explosion-proof quality.
- Nylon shackle is non-conductive, especially suitable for chemical industry, military, mining, power and flammable and explosive areas.
- All fittings of padlock are explosion-proof, anti-magnetism, insulation.
- Include 2 sets lock body warning labels, can write owner's information.

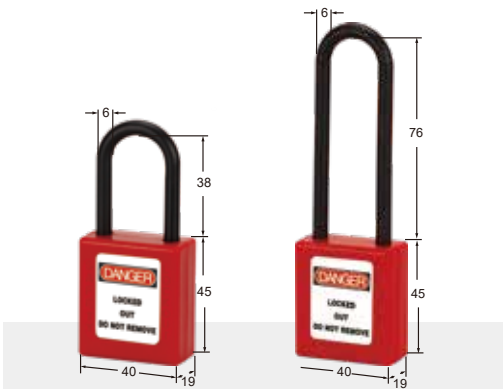

BD-8531 BD-8535

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8531	Nylon	6	38	ABS	Keyed to differ, key-retaining
BD-8532					Keyed alike, key-retaining
BD-8533					Master & alike, key-retaining
BD-8534					Master & differ, key-retaining
BD-8535			76		Keyed to differ, key-retaining
BD-8536					Keyed alike, key-retaining
BD-8537					Master & alike, key-retaining
BD-8538					Master & differ, key-retaining

Spark-proof Aluminum Shackle Safety Padlock




BD-8541

- ABS lock body is resistant impact, UV, high and low temperature.
- Spark-proof aluminum shackle, anti-static, anti-magnetism, explosion-proof, corrosion-resistant.
- Lock body dimensions: Length 45mm, Width 40mm, Thickness 19mm; Shackle Diameter 6mm, Shackle Height 38mm.
- Include 2 sets lock body warning labels, can write owner's information.
- 16 colors ABS lock body, convenient to choose.

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8541	Spark-proof aluminum	6	38	ABS	Keyed to differ, key-retaining
BD-8542					Keyed alike, key-retaining
BD-8543					Master & alike, key-retaining
BD-8544					Master & differ, key-retaining

Brass Shackle Safety Padlock

- Lock body dimensions: Length 45mm, Width 40mm, Thickness 19mm; Shackle Diameter 6mm, Shackle Height 38mm.
- ABS lock body is resistant impact, UV, high and low temperature.
- Brass shackle, anti-static, anti-magnetism, explosion-proof.
- Include 2 sets lock body warning labels, can write owner's information.
- 16 colors ABS lock body, convenient to choose.

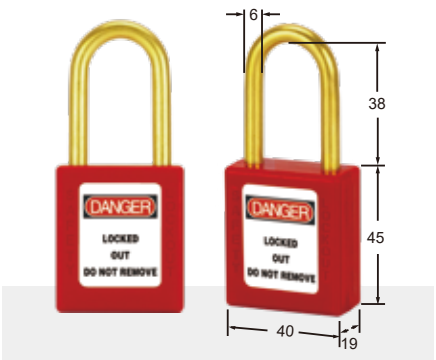

BD-8551

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8551	Brass	6	38	ABS	Keyed to differ, key-retaining
BD-8552					Keyed alike, key-retaining
BD-8553					Master & alike, key-retaining
BD-8554					Master & differ, key-retaining

Long Lock Body Safety Padlock



BD-8571 BD-8575

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8571	Steel	6	38	ABS	Keyed to differ, key-retaining
BD-8572					Keyed alike, key-retaining
BD-8573					Master & alike, key-retaining
BD-8574					Master & differ, key-retaining
BD-8575			76		Keyed to differ, key-retaining
BD-8576					Keyed alike, key-retaining
BD-8577					Master & alike, key-retaining
BD-8578					Master & differ, key-retaining

- ABS lock body is resistant impact, UV, high and low temperature.
- Shackle is heavy steel chrome plated, hard and beautiful.
- Include 2 sets lock body warning labels, can write owner's information.
- 16 colors ABS lock body, convenient to choose.

Insulation Long Lock Body Safety Padlock




BD-8571N BD-8575N

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8571N	Nylon	6	38	ABS	Keyed to differ, key-retaining
BD-8572N					Keyed alike, key-retaining
BD-8573N					Master & alike, key-retaining
BD-8574N					Master & differ, key-retaining
BD-8575N			76		Keyed to differ, key-retaining
BD-8576N					Keyed alike, key-retaining
BD-8577N					Master & alike, key-retaining
BD-8578N					Master & differ, key-retaining

- ABS lock body is resistant impact, UV, corrosion, high and low temperature.
- Nylon shackle is non-conductive, especially suitable for chemical industry, military, mining, power and flammable and explosive areas.
- Include 2 sets lock body warning labels, can write owner's information.
- 16 colors ABS lock body, convenient to choose.

Dust-proof Safety Padlock Function

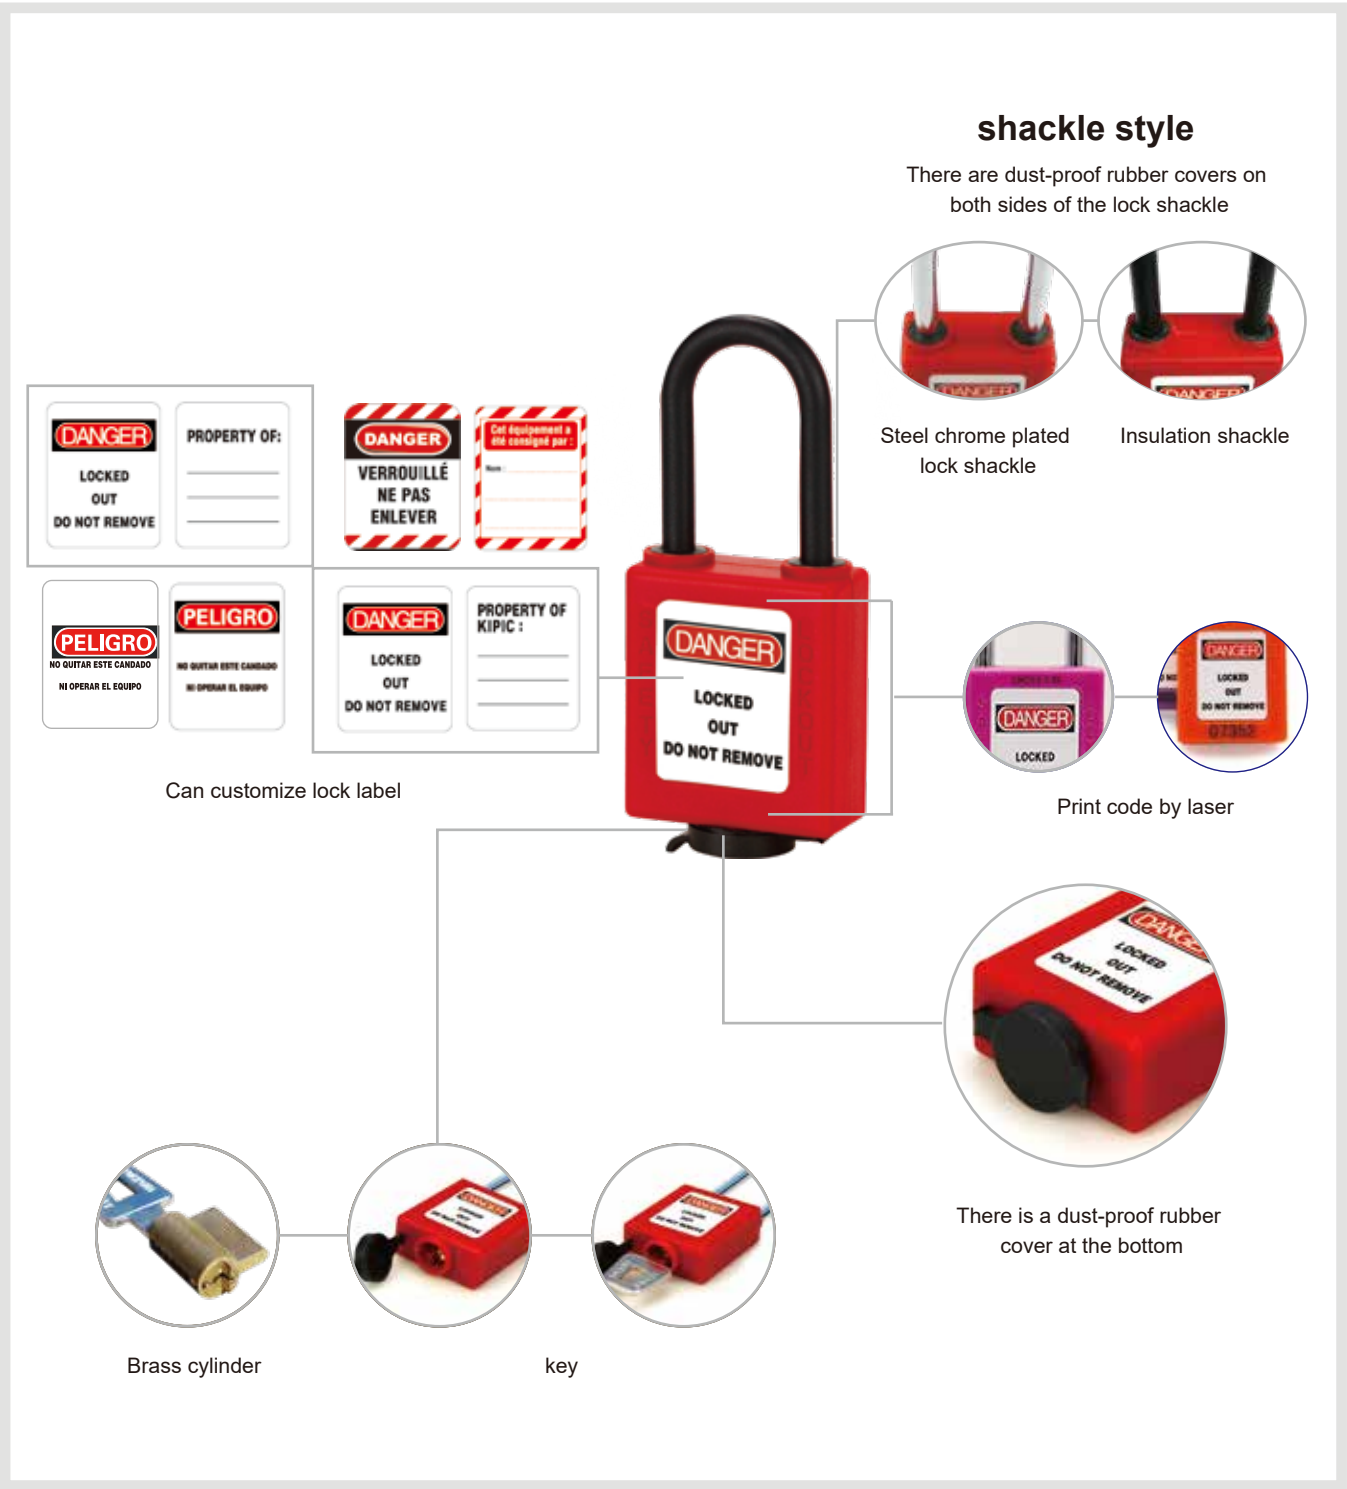

Dust-proof Safety Padlock



- ABS lock body is resistant impact, UV, high and low temperature.
- Shackle is heavy steel chrome plated.
- The sealer to block keyhole is PP, soft and durable, good sealing.
- Include 2 sets lock body warning labels, can write owner's information.

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8591	Steel	6	38	ABS	Keyed to differ, key-retaining
BD-8592					Keyed alike, key-retaining
BD-8593					Master & alike, key-retaining
BD-8594					Master & differ, key-retaining
BD-8595			76		Keyed to differ, key-retaining
BD-8596					Keyed alike, key-retaining
BD-8597					Master & alike, key-retaining
BD-8598					Master & differ, key-retaining

- ABS lock body is resistant impact, UV, high and low temperature.
- Nylon shackle is non-conductive, especially suitable for chemical industry, military, mining, power and flammable and explosive areas.
- The sealer to block keyhole is PP, soft and durable, good sealing.
- Include 2 sets lock body warning labels, can write owner's information.



Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8591N	Nylon	6	38	ABS	Keyed to differ, key-retaining
BD-8592N					Keyed alike, key-retaining
BD-8593N					Master & alike, key-retaining
BD-8594N					Master & differ, key-retaining
BD-8595N			76		Keyed to differ, key-retaining
BD-8596N					Keyed alike, key-retaining
BD-8597N					Master & alike, key-retaining
BD-8598N					Master & differ, key-retaining

Cable padlock




- ABS lock body and 3mm diameter stainless steel cable.
- Can lock neighboring electrical appliances or other switch at the same time, saving the padlocks quantity and space, easy to manage.
- Use with professional safety padlock and tag together.
- Can customize the cable with PVC coated

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8441	Stainless steel	3	150	ABS	Keyed to differ cable padlock
BD-8443					Keyed alike cable padlock
BD-8445					Master&alike cable padlock
BD-8447					Master&differ cable padlock
BD-8442			240		Keyed to differ cable padlock
BD-8444					Keyed alike cable padlock
BD-8446					Master&alike cable padlock
BD-8448					Master&differ cable padlock

Nylon Safety Padlock NEW

Padlock Function

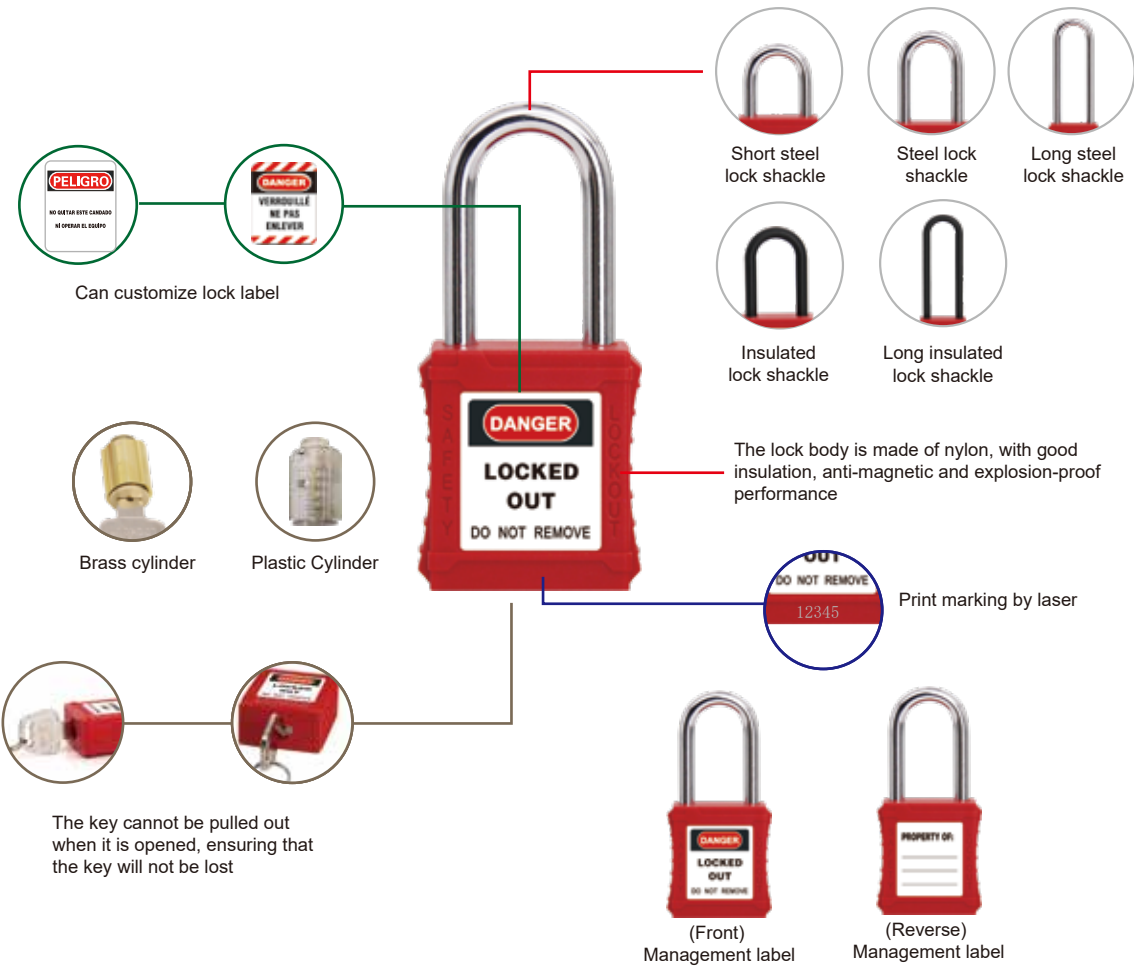

The following padlock body are available



Nylon Safety Padlock [BD-8511]




16 colors ABS lock body



- Nylon lock body is resistant impact, UV, high and low temperature, shackle is heavy steel chrome plated, hard and beautiful.
- Lock body dimensions: Length 45mm, Width 40mm, Thickness 19mm; Shackle Diameter 6mm, Shackle Height 25mm.
- Include 2 sets lock body warning labels, can write owner's information.

Model	Description	Shackle Height	Lock Body Type
BD-8511AS/BS/CS	Keyed to differ, key-retaining	25mm	AS BS CS
BD-8512AS/BS/CS	Keyed alike, key-retaining		
BD-8513AS/BS/CS	Master&alike, key-retaining		
BD-8514AS/BS/CS	Master&differ, key-retaining		

Nylon Safety Padlock [BD-8521]

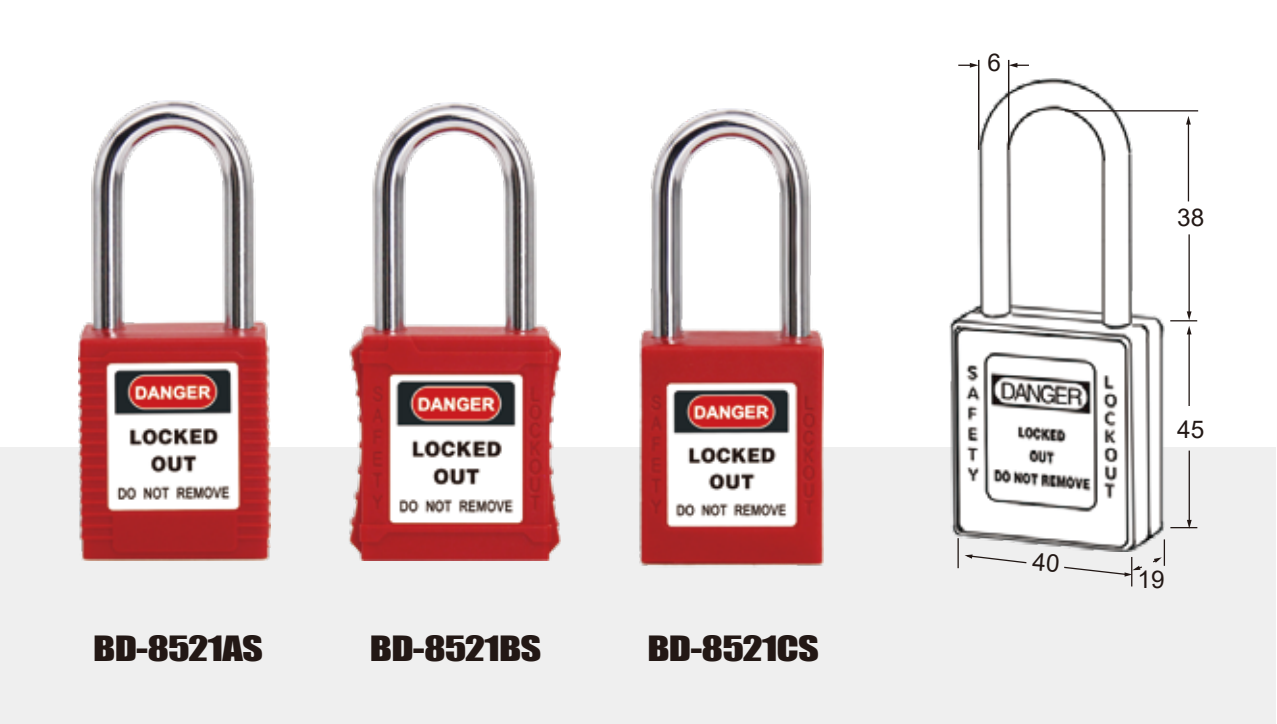

16 colors ABS lock body



- Nylon lock body is resistant impact, UV, high and low temperature, shackle is heavy steel chrome plated, hard and beautiful.
- Lock body dimensions: Length 45mm, Width 40mm, Thickness 19mm; Shackle Diameter 6mm, Shackle Height 38mm.
- Include 2 sets lock body warning labels, can write owner's information.

Model	Description	Shackle Height	Lock Body Type
BD-8521AS/BS/CS	Keyed to differ, key-retaining	38mm	AS BS CS
BD-8522AS/BS/CS	Keyed alike, key-retaining		
BD-8523AS/BS/CS	Master&alike, key-retaining		
BD-8524AS/BS/CS	Master&differ, key-retaining		

Nylon Safety Padlock [BD-8525]




16 colors ABS lock body



- Nylon lock body is resistant impact, UV, high and low temperature, shackle is heavy steel chrome plated, hard and beautiful.
- Lock body dimensions: Length 45mm, Width 40mm, Thickness 19mm; Shackle Diameter 6mm, Shackle Height 76mm.
- Include 2 sets lock body warning labels, can write owner's information.

Model	Description	Shackle Height	Lock Body Type
BD-8525AS/BS/CS	Keyed to differ, key-retaining	76mm	AS BS CS
BD-8526AS/BS/CS	Keyed alike, key-retaining		
BD-8527AS/BS/CS	Master&alike, key-retaining		
BD-8528AS/BS/CS	Master&differ, key-retaining		

Nylon Safety Padlock [BD-8531]

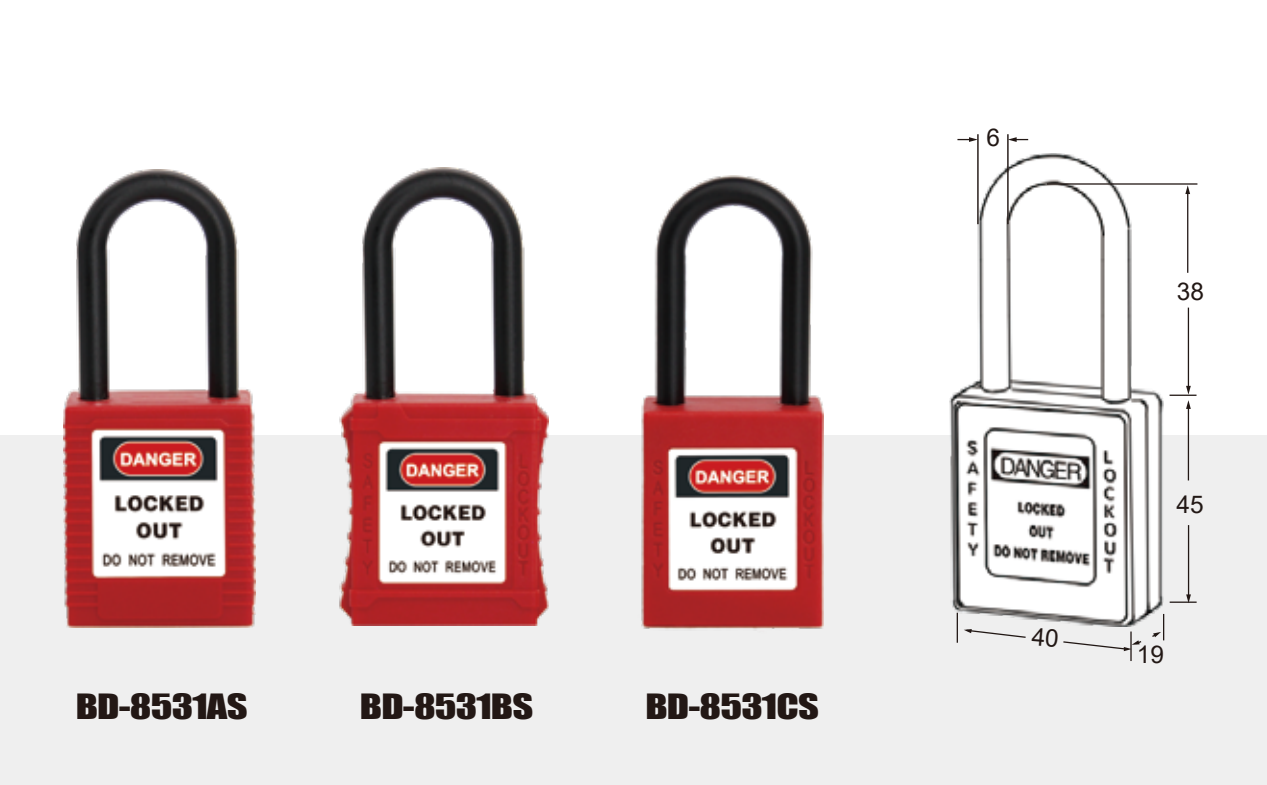

16 colors ABS lock body



- Nylon lock body and nylon shackle combined perfectly, with better non-conductive, anti-magnetism, explosion-proof quality.
- Nylon shackle is non-conductive, especially suitable for chemical industry, military, mining, power and flammable and explosive areas.
- Lock body dimensions: Length 45mm, Width 40mm, Thickness 19mm; Shackle Diameter 6mm, Shackle Height 38mm.
- All fittings of padlock are explosion-proof, anti-magnetism, insulation.
- Include 2 sets lock body warning labels, can write owner's information.

Model	Description	Shackle Height	Lock Body Type
BD-8531AS/BS/CS	Keyed to differ, key-retaining	38mm	AS BS CS
BD-8532AS/BS/CS	Keyed alike, key-retaining		
BD-8533AS/BS/CS	Master&alike, key-retaining		
BD-8534AS/BS/CS	Master&differ, key-retaining		

Nylon Safety Padlock [BD-8535]




16 colors ABS lock body



- Nylon lock body and nylon shackle combined perfectly, with better non-conductive, anti-magnetism, explosion-proof quality.
- Nylon shackle is non-conductive, especially suitable for chemical industry, military, mining, power and flammable and explosive areas.
- Lock body dimensions: Length 45mm, Width 40mm, Thickness 19mm; Shackle Diameter 6mm, Shackle Height 76mm.
- All fittings of padlock are explosion-proof, anti-magnetism, insulation.
- Include 2 sets lock body warning labels, can write owner's information.

Model	Description	Shackle Height	Lock Body Type
BD-8535AS/BS/CS	Keyed to differ, key-retaining	76mm	AS BS CS
BD-8536AS/BS/CS	Keyed alike, key-retaining		
BD-8537AS/BS/CS	Master&alike, key-retaining		
BD-8538AS/BS/CS	Master&differ, key-retaining		

Safety Padlock
(4MM Lock Shackle)

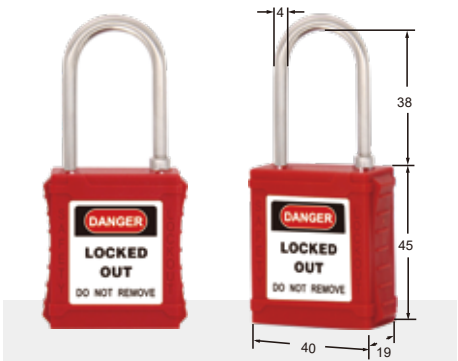


- Nylon lock body is resistant impact, UV, high and low temperature. Shackle is made of 304 stainless steel, anti-acid, anti-alkali.
- Lock body dimensions: Length 45mm, Width 40mm, Thickness 19mm, Shackle Diameter 4mm, Shackle Height 38mm.
- Include 2 sets lock body warning labels, can write owner's information.

BD-8581 AS / BS / CS


Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8581AS/BS/CS	Stainless Steel	4	38	Nylon	Keyed to differ, key-retaining
BD-8582AS/BS/CS					Keyed alike, key-retaining
BD-8583AS/BS/CS					Master&alike, key-retaining
BD-8584AS/BS/CS					Master&differ, key-retaining

- Nylon lock body and nylon shackle combined perfectly, with better non-conductive, anti-magnetism, explosion-proof quality.
- Nylon shackle is non-conductive, especially suitable for chemical industry, military, mining, power and flammable and explosive areas.
- Lock body dimensions: Length 45mm, Width 40mm, Thickness 19mm, Shackle Diameter 4mm, Shackle Height 38mm.
- Include 2 sets lock body warning labels, can write owner's information.

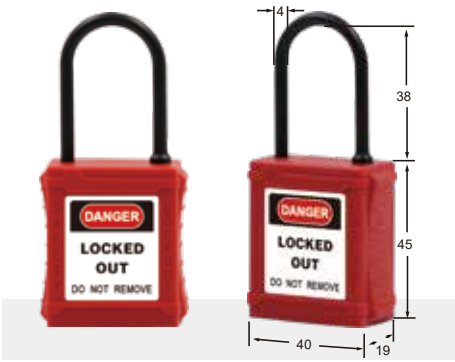

BD-8581 ASN / BSN / CSN

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8581ASN/BSN/CSN	Nylon	4	38	Nylon	Keyed to differ, key-retaining
BD-8582ASN/BSN/CSN					Keyed alike, key-retaining
BD-8583ASN/BSN/CSN					Master&alike, key-retaining
BD-8584ASN/BSN/CSN					Master&differ, key-retaining

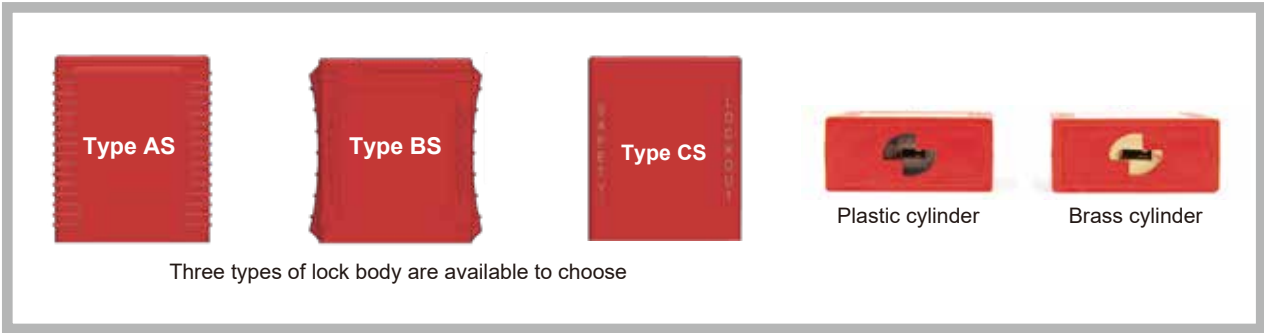

Stainless Steel Padlock



- Meticulous workmanship, 304 stainless steel material, beautiful, resistance corrosion and antirust.
- Double leakage holes to prevent water accumulation, corrosion.
- Arc edge design, grinding, good handle without cutting hands.
- Thicker lock body strong and firm high anti-theft performance.
- Thicker 304 stainless steel shackle can prevent cutting, sawing; safety and reliability.
- There are four specifications lock body to choose; each specification can collocate long shackle or short shackle.



BD-85A11 BD-85A15

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-85A11	Stainless Steel	5	20	Stainless Steel	Keyed to differ, key-retaining
BD-85A12			40		Keyed alike, key-retaining
BD-85A15					Keyed to differ, key-retaining
BD-85A16					Keyed alike, key-retaining



BD-85A21 BD-85A25

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-85A21	Stainless Steel	7.2	26	Stainless Steel	Keyed to differ, key-retaining
BD-85A22			45		Keyed alike, key-retaining
BD-85A25					Keyed to differ, key-retaining
BD-85A26					Keyed alike, key-retaining



BD-85A31 BD-85A35

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-85A31	Stainless Steel	9	30	Stainless Steel	Keyed to differ, key-retaining
BD-85A32			55		Keyed alike, key-retaining
BD-85A35					Keyed to differ, key-retaining
BD-85A36					Keyed alike, key-retaining



BD-85A41 BD-85A45

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-85A41	Stainless Steel	11	35	Stainless Steel	Keyed to differ, key-retaining
BD-85A42			57		Keyed alike, key-retaining
BD-85A45					Keyed to differ, key-retaining
BD-85A46					Keyed alike, key-retaining



Brass Padlock




- The lock body is made of brass material, strong and firm, strong anti-theft, meticulous and beautiful, and anti-corrosion.
 - The lock shackle is heavy steel chrome plated, which is strong and beautiful.
- There are two types of long shackle and short shackle to choose.

BD-85D11 BD-85D21

Model	Shackle			Lock Body Material	Description	
	Material	Dia. (mm)	Inner Height (mm)			
BD-85D11	Steel	6.35	38	Brass	Keyed to differ, key-retaining	
BD-85D12					Keyed alike, key-retaining	
BD-85D13					Master & alike, key-retaining	
BD-85D14					Master & differ, key-retaining	
BD-85D21			74.5		Keyed to differ, key-retaining	
BD-85D22					Keyed alike, key-retaining	
BD-85D23					Master & alike, key-retaining	
BD-85D24					Master & differ, key-retaining	


Economic Brass Padlock

- The lock body is made of brass material, strong and firm, anti-theft, meticulous and beautiful, and anti-corrosion.
- The lock shackle is heavy steel chrome plated, which is strong and beautiful.
- Optional waterproof rubber ring.

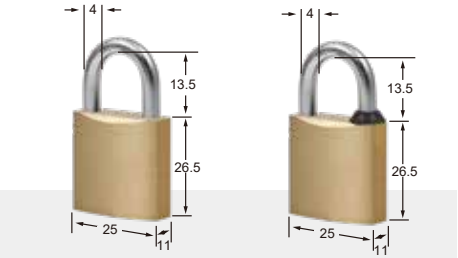

BD-85HX25 BD-85HX25C


Model	Description
BD-85HX25C	With waterproof rubber ring

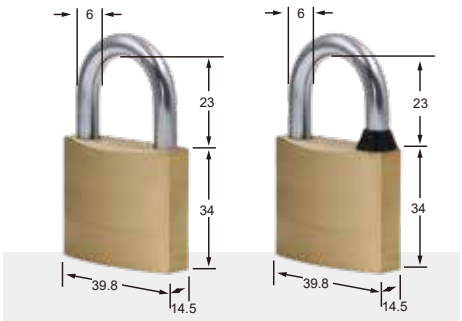

BD-85HX40 BD-85HX40C


Model	Description
BD-85HX40C	With waterproof rubber ring

- The lock body is made of brass material, strong and firm, anti-theft, meticulous and beautiful, and anti-corrosion.
- The lock shackle is heavy steel chrome plated, which is strong and beautiful.
- Optional waterproof rubber ring.

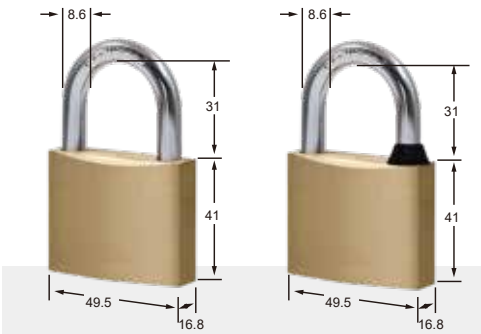

BD-85HX50 BD-85HX50C

Model	Description
BD-85HX50C	With waterproof rubber ring

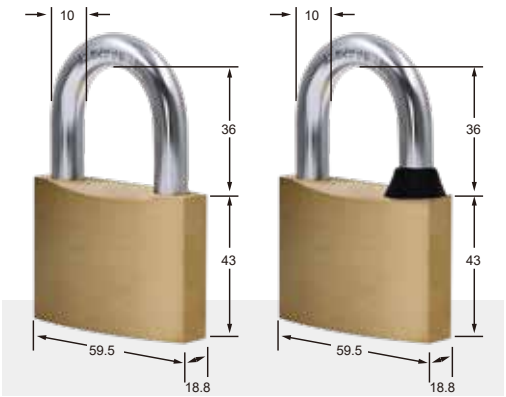


BD-85HX60 BD-85HX60C

Model	Description
BD-85HX60C	With waterproof rubber ring

- The lock body is made of brass material, strong and firm, anti-theft, meticulous and beautiful, and anti-corrosion.
- The lock shackle is heavy steel chrome plated, which is strong and beautiful.
- Optional waterproof rubber ring.

Laminated Steel Safety Padlock

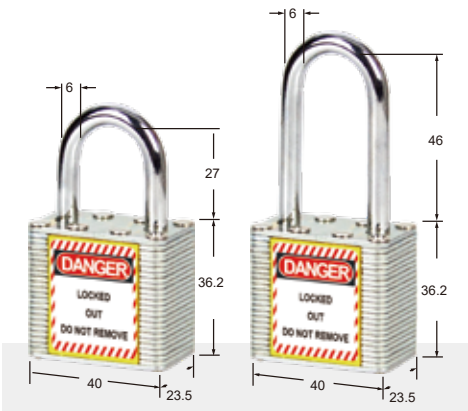


- Laminated padlock is suitable for using in special environment.
- Can stick obvious warning labels on lock body, easy to identify and manage.
- Lock body is made of laminated steel, shackle is steel chrome plated, hard and durable.
- The board on lock body for label is yellow, safe and eye-catching.

BD-8561 BD-8565

Model	Shackle			Lock Body Material	Description	
	Material	Dia. (mm)	Inner Height (mm)			
BD-8561	Steel	6	27	Laminated Steel	Keyed to differ, key-retaining	
BD-8562						Keyed alike, key-retaining
BD-8565						Keyed to differ, key-retaining
BD-8566						Keyed alike, key-retaining

- Lock body is made of laminated steel, can provide extra strength, shackle is made of steel chrome plated, hard and durable.
- Best used for outdoors.
- Laser printing available.

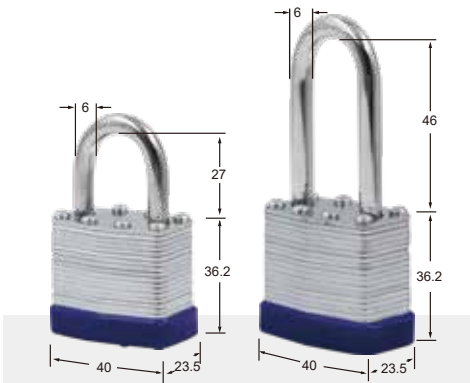


BD-8561LB BD-8565LB

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-8561LB	Steel	6	27	Laminated Steel	Keyed to differ, key-retaining
BD-8562LB					
BD-8565LB					
BD-8566LB					

Aluminum Padlock



- Suitable for chemical、 automobile industry etc., light and solid, resistant chemical corrosion, high and low temperature, UV, and impact.
- Arc lock body design, Aluminum lock body, Chromium plated steel shackle, light and solid, bear a strong external force.
- Brass cylinder is more resistant corrosion, 6 cartridge cylinder improve the anti-lock by others.
- Provided eight colourful mental which include red, yellow, green, blue, black, purple, white, and orange Differ cylinder lockout, it also customize by the user.
- The oxidized surface of the lock body is corrosion-resistant and can be labeled or laser engraved.

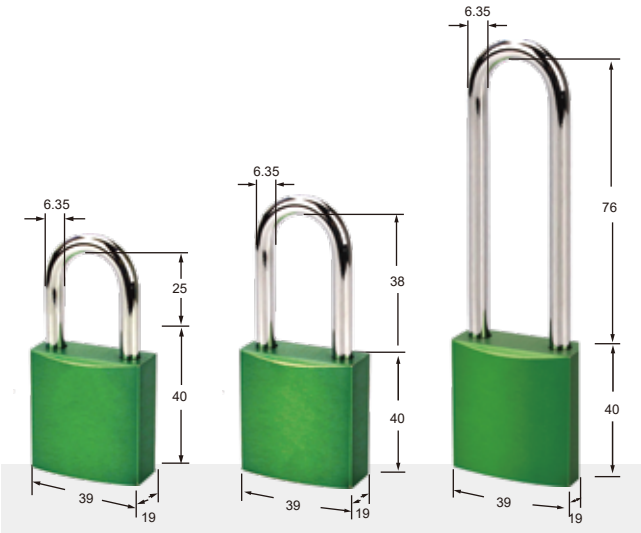

4 PVC Tag and Warning Sign

BD-85B01 BD-85B11 BD-85B15

Model	Shackle			Lock Body Material	Description
	Material	Dia. (mm)	Inner Height (mm)		
BD-85B01	Steel	6.35	25	Aluminium	Keyed to differ, key-retaining
BD-85B02					Keyed alike, key-retaining
BD-85B03					Master & alike, key-retaining
BD-85B04					Master & differ, key-retaining
BD-85B11			38		Keyed to differ, key-retaining
BD-85B12					Keyed alike, key-retaining
BD-85B13					Master & alike, key-retaining
BD-85B14					Master & differ, key-retaining
BD-85B15			76		Keyed to differ, key-retaining
BD-85B16					Keyed alike, key-retaining
BD-85B17					Master & alike, key-retaining
BD-85B18					Master & differ, key-retaining



PVC Tag [BD-8611]



- PVC material, sunscreen ink printing, suitable for outdoor.
- 10 pieces per bag.
- Can customize as per customers' request.

Regular Type



BD-8611 PVC Tags Length:145mm Width: 75mm
Thickness: 0.8mm Lockhole diameter: 8mm

Customize Type



PVC Tag [BD-8621]



- BD-8621 PVC Warning Signs Material: PVC Printing requests: dimensions and content can customize as per request
- Regular Size: 300mm X 200mm.
- BD-8622 Sticky Warning Signs Material: Sticky Printing requests: dimensions and content can customize as per request
- Regular Size: 300mm X 200mm.



A white door with a circular handle at the top, two small circular holes in the center, and a red 'DO NOT USE SCAFFOLD' sign at the bottom. The sign is rectangular with rounded corners and contains the text 'DO NOT USE SCAFFOLD' in white capital letters. Above the sign is a red circle with a diagonal line through it, indicating prohibition. Above that is a red rectangular box with the text 'Ref.No.' in red, followed by a blank space for a reference number.

[illegible]

- Scaffolding tag, insert card customization service:
can print customized content, such as customer information, company logo, contact number, etc.
- Language: Chinese, English, Chinese and English, and other languages.
- One-piece tag slot
- Tag body is made of high-strength ABS engineering plastic, which is heat-resistant, cold-resistant, and corrosion-resistant.
- Available in multiple colors, it can be used by different departments.

Category	Description
Scaffolding Tag	Can be attached to equipment with adhesive or tied to electrical wire with cable ties, suitable for all legal hanging points.
Insert Card	Green card: The scaffolding is safe and can be used normally; Yellow card: The scaffolding is under maintenance; Red card (no card inserted): Scaffolding is prohibited to use.

BD-831 Holder

Dimensions: 38.3mm (width), 19.4mm (width), 81mm (height), 54.3mm (height), 8.1mm (width), 4mm (width), 13mm (height).

BD-831KZ Tag

Dimensions: 31mm (width), 48mm (height).

BD-831KZ Tags can be customized

Examples of customized tags showing fields like Ref.No., ID Number, Inspection Date, Next Test Date, Next Inspection, Inspected by, VIB MAGNITUDE, MAX. DAILY USE, NOISE LEVEL, and TEST DATE.


The image displays three templates for safety tags, each with specific dimensions and layout details.

BD-833 Holder: A white plastic holder with a top hole of diameter 55mm. The overall height is 307mm and the width is 90mm. It features a red "Ref. No." label, a red prohibition symbol, and a red "DO NOT USE SCAFFOLD" label.


BD-833KZ Tag: A yellow tag with a top hole of diameter 55mm. The overall height is 196mm and the width is 81mm. It includes a warning symbol, a "WARNING" section, an "AUTHORIZED PERSON" section, a "STRUCTURE TO BE USED FOR" section, and a "TO BE COMPLETED BY INSPECTOR" section.

BD-833KZ Tag (Customizable): A black tag with a top hole of diameter 55mm. The overall height is 196mm and the width is 81mm. It includes a "FORKLIFT TRUCKS OPERATOR CHECKLIST" section, a "FORKLIFT TRUCKS OPERATOR CHECKLIST" section, and a "FORKLIFT TRUCKS OPERATOR CHECKLIST" section.


BD-834 Holder

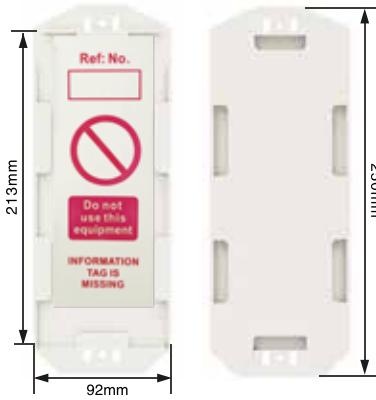


BD-834KZ Tag

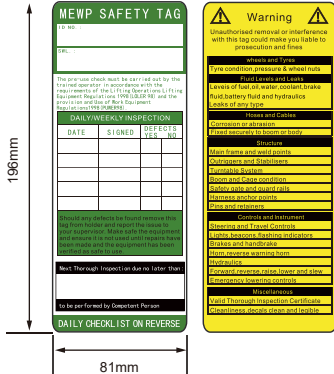

BD-834KZ Tags can be customized



BD-837 Holder



BD-837KZ Tags can be customized



BD-839 Holder




BD-839KZ Tags can be customized




BD-835 Holder




BD-835KZ Tag

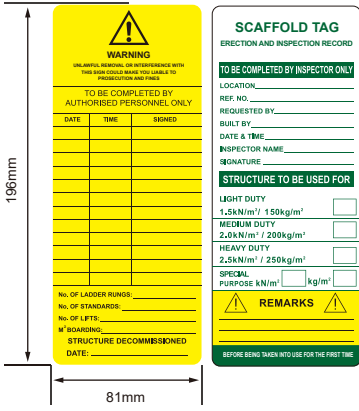

BD-835KZ Tags can be customized

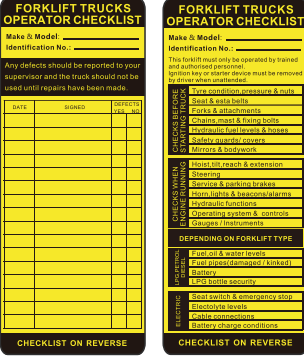

BD-840 Holder



BD-840KZ Tags can be customized



BD-836 Holder



BD-836KZ Tags can be customized





5

Electrical Lockout



Industrial Electrical Lockout



Back glue 5cm × 5cm




Magnetic suction

Note: +C after the model

BD-8101~8107

- The lock body is made of alloy engineering plastic and A3 galvanized steel plate;
- It can lock a variety of non-standard electrical or distribution cabinets.
- Two fixed methods (back glue 5cm × 5cm, magnetic suction)
- Base: width 54mm × 51mm (general parts)

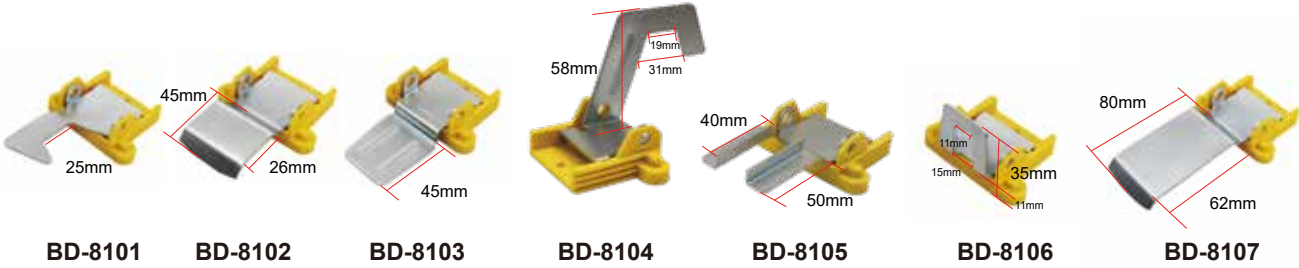

BD-8101 BD-8102 BD-8103 BD-8104 BD-8105 BD-8106 BD-8107

Model	Description
BD-8101	With back glue, suitable for locking knob switch, changeover switch, etc
BD-8102	With back glue, suitable for locking button switch, lock hole of distribution cabinet, etc
BD-8103	With back glue, suitable for locking cabinet door, electrical handle hole, low voltage drawer cabinet, etc
BD-8104	With back glue, suitable for locking drawer cabinet switch handle and changeover switch
BD-8105	With back glue, suitable for locking knife switch, handle switch, etc
BD-8106	With back glue, suitable for locking knob switch, changeover switch, etc
BD-8107	With back glue, suitable for locking knob switch, lock hole of distribution cabinet, etc
BD-8101C	With magnetic suction, suitable for locking knob switch, changeover switch, etc
BD-8102C	With magnetic suction, suitable for locking button switch, lock hole of distribution cabinet, etc
BD-8103C	With magnetic suction, suitable for locking cabinet door, electrical handle hole, low voltage drawer cabinet, etc
BD-8104C	With magnetic suction, suitable for locking drawer cabinet switch handle and changeover switch
BD-8105C	With magnetic suction, suitable for locking knife switch, handle switch, etc
BD-8106C	With magnetic suction, suitable for locking knob switch, changeover switch, etc
BD-8107C	With magnetic suction, suitable for locking knob switch, lock hole of distribution cabinet, etc



Miniature Circuit Breaker Lockout

- Be made of ABS resin and has good insulation performance.
- Pin out (in) with a unique design, easy to install.
- Can customize to mark on lockout by laser.
- Use with professional safety padlock and tag together.



BD-8111



BD-8112



BD-8114



BD-8115




BD-8116



BD-8117

Model	Description
BD-8111	Pin out, suitable for the circuit breaker toggle switch width≤12mm, ABS material
BD-8112	Pin out, suitable for the circuit breaker toggle switch width≤20mm, ABS material
BD-8114	Pin in, suitable for locking space maximum 12.7mm, ABS material
BD-8115	Pin in, suitable for the circuit breaker toggle switch width≤12mm, nylon material
BD-8116	Pin out, suitable for the circuit breaker toggle switch width≤12mm, nylon material
BD-8117	Pin out, suitable for the circuit breaker toggle switch width≤20mm, nylon material



BD-8120



Description
Suitable for Miniature Circuit Breaker



Multi-mini Breaker Lockout



BD-8113

- Be made of ABS and miniature brass screw with nickel plated.
- External dimensions: Length 58mm, Width 42mm, Thickness 14.5mm.
- With a screw can tighten directly to install, easy to use, without assistant tools.
- Can customize to mark on lockout by laser.
- Use with professional safety padlock and tag together, padlock can be horizontal or vertical locked in two methods.

Description
Suitable for the circuit breaker toggle switch thickness maximum 9mm, no limit for width.



Motor Circuit Breaker Lockout



BD-8118

- Be made of ABS and brass screw with nickel plated.
- With a screw can tighten to install, easy to use, without assistant tools.
- Special square hole slot and screw can guarantee not appear any swing after be locked.
- Can customize to mark on lockout by laser.
- Use with professional safety padlock and tag together.

Description
Suitable for motor circuit breaker (button dimensions≤14.5mm X 22mm)

suitable this kind of circuit breaker

Step 1

Step 2

Step 3



BD-8121

- Be made of ABS and brass screw with nickel plated.
- With a screw can tighten to install, easy to use, without assistant tools.
- Special square hole slot and screw can guarantee not appear any swing after be locked.
- Can customize to mark on lockout by laser.
- Use with professional safety padlock and tag together.

Description
Suitable for miniature circuit breaker (handle width≤17mm, handle thickness≤15mm)

suitable this kind of circuit breaker

Step 1

Step 2

Step 3



BD-8119

- Be made of Nylon&ABS lock body
- With a screw can tighten to install, easy to use, without assistant tools.
- Wide application: suitable for various miniature circuit breakers (handle width≤15mm)

Description
7mm≤a≤15mm miniature circuit breaker

suitable this kind of circuit breaker



BD-8119A

- Be made of high strength nylon(PA) plastic;
- Safely and effectively lock miniature circuit breaker, suitable for European and Asian equipment;
- Available for single-pole and multi-pole circuit breakers;
- Recommend to use with safety padlock with maximum 7mm diameter shackle;
- No extra tool needed, can be install easily with a rod, button or screw.

Description
Suitable for multi-pole miniature circuit breaker

Moulded Case Circuit Breaker Lockout(small)



BD-8121A

- Be made of ABS resin and has good insulation performance.
- Special stainless steel teeth design, fixed by screw, providing better bite for handle.
- According to the circuit breaker handle space, the adjustable baffle can move to confirm the suitable position.
- Can customize to mark on lockout by laser.
- Use with professional safety padlock and tag together.



Description

Suitable for handle width≤19.5mm, thickness≤10mm



suitable this kind of circuit breaker

Step 1



Step 2



Step 3



Moulded Case Circuit Breaker Lockout



BD-8122

- Be made of ABS and brass screw with nickel plated.
- With a screw can tighten to install, easy to use, without assistant tools.
- Can customize to mark on lockout by laser.
- Use with professional safety padlock and tag together.



Description

Suitable for all kinds of medium-sized circuit breaker (handle thickness: 11mm-18mm, no limit to width).



suitable this kind of circuit breaker



BD-8122A

- Be made of ABS resin and has good insulation performance.
- Special stainless steel teeth design, fixed by screw, providing better bite for handle.
- Can customize to mark on lockout by laser.
- Use with professional safety padlock and tag together.

Description

Suitable for handle width≤41mm, thickness≤15.8mm



suitable this kind of circuit breaker



Simple Circuit Breaker Lockout



BD-8123A



BD-8123B



BD-8123C



BD-8123D



BD-8123E



BD-8123F

BD-8123A~F

- Be made of ABS.
- Can be locked with a screw driver.
- Can accommodate one safety padlock with shackle diameters≤7mm.
- Can customize to mark on lockout by laser.
- Use with professional safety padlock and tag together.

Suitable this kind of circuit breaker



Model

Description

BD-8123A Suitable for single pole miniature circuit breakers with handle thickness<7.7mm.

BD-8123B Suitable for 2 to 4 poles miniature circuit breaker

BD-8123C Suitable for mini and middle size moulded case circuit breakers with handle thickness<5mm

BD-8123D Suitable for mini and middle size moulded case circuit breakers with handle thickness<5mm

BD-8123E Suitable for large size moulded case circuit breakers

BD-8123F Suitable for miniature circuit breakers with handle thickness<9.3mm, middle size moulded case circuit breakers with handle thickness<12mm



BD-8123A



BD-8123B



BD-8123C



BD-8123E



BD-8123F



BD-8123F

Knife-switch Lockout



BD-8125

- Be made of ABS resin and has good insulation performance.
- One set includes a red and a green, and red indicates connection, green indicates disconnection.
- Use with professional safety padlock and tag together.



Description
Suitable for knife-switch

Moulded Case Circuit Breaker Lockout(small)



BD-8126

- Shell is made of ABS resin and main body is durable metal.
- External dimensions: Length 68.5mm, Width 23.5mm, Thickness 14mm.
- With a screw can tighten directly to install, easy to use, without assistant tools.
- Use with professional safety padlock and tag together.



Description
Suitable for the circuit breaker toggle switch thickness≤10mm, no limit for width.

suitable this kind of circuit breaker

Step1: Remove the adjustable block

Step2: Tighten the screw

Step3: Lockout and tagout

Moulded Case Circuit Breaker Lockout (big)



BD-8127

- Shell is made of ABS resin and main body is durable metal.
- With a screw can tighten directly to install, easy to use, without assistant tools.
- Use with professional safety padlock and tag together.



Rotary screw



Adjusting block

Description
Suitable for the circuit breaker toggle switch width≤60mm,thickness≤23mm.

suitable this kind of circuit breaker

New Clamp-on Circuit Breaker Lockout

- Made of sturdy polypropylene, high-strength modified nylon, and engineering plastic materials.
- Wide range of uses-suitable for various medium-sized molded case circuit breakers.
- Use the screw to fix the lockout on the switch handle, and then buckle the cover to the knob and finish locking to avoid loosening.
- Blade design makes the fit closer.
- A sliding long splint can ensure that the circuit breaker is locked.
- The detachable splint (included) further expands the scope of application.
- Padlocks with a maximum shackle diameter of 7mm can be used.
- Use with professional safety padlock and tag together.



BD-8128A



BD-8128B



BD-8128C

Model	Description
BD-8128A	Circuit breaker with lockable handle width ≤ 16mm
BD-8128B	Circuit breaker with lockable handle width ≤ 42mm
BD-8128C	Circuit breaker with lockable handle width ≤ 72mm

suitable this kind of circuit breaker

480V~600V Breaker Lockout



BD-8129

Back self-adhesive track(can put stop rod isolated)

- Be made of ABS.
- Back self-adhesive track can fix on the distributor forever—clean the surface of the distributor no hole needed.
- To lock the special large or unique shape switch, the length of the rod is 19cm.
- Red stop rod mains the switch is in the off state, green stop rod means the switch is in on state.
- Use with professional safety padlock and tag together.

Description
Can accommodate two safety padlocks with shackle diameters≤7mm.

Electrical Button Switch Lockout



BD-8141

- Be made of transparent ABS resin injection molding.
- Bottom border use double-sided adhesive tape to stick, easy to install.
- Use with professional safety padlock and tag together.

Description
Bottom hole diameter 29mm



Emergency Stop Lockout



BD-8131

BD-8132

- Be made of transparent acrylic injection molding, with warning yellow base, safe and eye-catching.
- Install on the push-pulled or knob released emergency stop button to prevent misoperation permanently.
- Use with professional safety padlock and tag together.

Model	Description
8131	Install hole diameter 22mm
8132	Install hole diameter 30.5mm



Universal Switch Lockout



BD-8142

- Be made of transparent ABS resin injection molding.
- Bottom border use double-sided adhesive tape to stick, easy to install.
- Use with professional safety padlock and tag together.

Description
Bottom square hole size 69mm X 69mm,applicable for most square switches

Quick Install Emergency Lockout



BD-8136

- Be made of transparent ABS resin injection molding.
- Bottom border use double-sided adhesive tape to stick, easy to install.
- Use with professional safety padlock and tag together.

Description
Diameter 62mm, height 54mm



8133 Install Base

8134 Install Base

8135 Install Base

Step 1



Step 2



Step 3



Quick Install Gear Switch Lockout



BD-8145

- Be made of transparent ABS injection molding, Base material: PC(polycarbonate).
- The lockout is made up of two parts: the lockout cover and the base.
- The base is fixed on the bottom of the switch.
- Just need to install or remove the lockout cover and easy to use.
- Use with professional safety padlock and tag together.

Description
Diameter 71.5mm, height 99mm



8143 Install Base

8144 Install Base




Electric Switch Lockout




BD-8151

- Be made of transparent ABS resin injection molding.
- External dimensions: Length 30mm, Width 28mm, Thickness 18mm.
- Bottom border use double-sided adhesive tape to stick, easy to install.
- Use with professional safety padlock and tag together.

Description
Bottom hole size: Length 28mm, Width 22.5mm

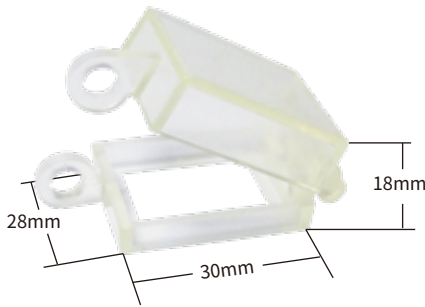


General Wall Switch Lockout

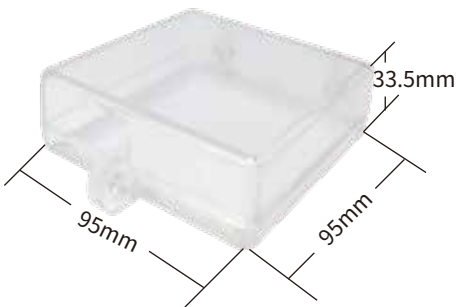

BD-8161

- Be made of industrial grade transparent ABS resin injection molding, beautiful and practical and can lock switch effectively. Prevent accidental operation.
- Applicable 110V ~ 220V Chinese standard 86 series wall switch.
- Lockout open method: up and down to open.
- Use with professional safety padlock and tag together.


Description
External dimensions: Length 95mm, Width 95mm, Thickness 33.5mm

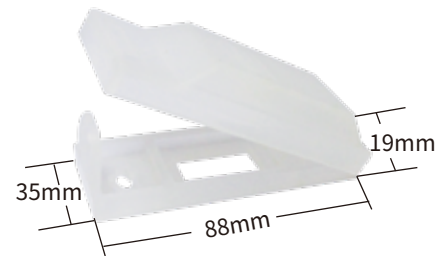

BD-8171 (European and American Standards)

- Be made of industrial grade high strength polypropylene injection molding, beautiful and practical and can lock switch effectively. Prevent accidental operation.
- Applicable 110V ~ 220V European and American Standards wall switch.
- Lockout open method: up and down to open.
- Use with professional safety padlock and tag together.

Description
External dimensions: Length 88mm, Width 35mm, Thickness 19mm

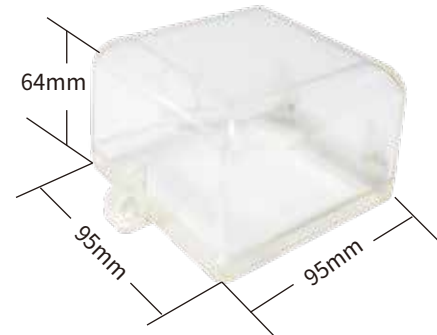

BD-8162

- Be made of industrial grade transparent ABS resin injection molding, beautiful and practical and can lock socket effectively. Prevent accidental operation.
- Applicable 110V ~ 220V Chinese standard 86 series wall socket
- Lockout open method: left and right to open.
- Use with professional safety padlock and tag together.

Description
External dimensions: Length 95mm, Width 95mm, Thickness 64mm

Plug Lockout



BD-8181

- Be made of ABS resin, side hole diameter 10mm.
- Stick with sunscreen label can write the name of the person in charge and matters.
- Use with professional safety padlock and tag together.

Description
External dimensions: Length 103mm, Width 60mm, Height 60mm



Big Plug Lockout



BD-8182

- Be made of ABS resin, side hole diameter 25mm.
- Four lock holes are available, multiple persons co-management to prevent accidental connection.
- Use with professional safety padlock and tag together.

Description
External dimensions: Length 178mm, Width 80mm, Thickness 85mm



Two-phase Plug



BD-8183

- Shell is made of ABS.
- Stick with sunscreen label can write the name of the person in charge and matters.
- Use with professional safety padlock and tag together.

Description
Applicable 220V two-phase flat plug



Three-phase Plug Lockout



BD-8184

- Shell is made of ABS.
- Stick with sunscreen label can write the name of the person in charge and matters.
- Use with professional safety padlock and tag together.

Model	Description
BD-8184	Applicable 10A 220V three-phase power plug
BD-8185	Applicable 16A 220V three-phase power plug



European Standard Two-phase Plug Lockout



BD-8186

- Shell is made of ABS.
- Stick with sunscreen label can write the name of the person in charge and matters.
- Use with professional safety padlock and tag together.

Description
Applicable 220V two-phase round plug and European standard power plug



Trapezoidal Plug Lockout



BD-8187

- Shell is made of ABS.
- Use with professional safety padlock and tag together.

Description
Provide lock protection for the computer host and electrical equipment



Crane Lift Controller Lockout Bag



BD-8191



BD-8192

- Made of sewing tear-resistant nylon fabric.
- There is a PVC barrier in the bag to prevent people from accidentally starting the controller button.
- The bag surface is marked with warning sign.
- Use with professional safety padlock and tag together.



Model	Description
BD-8191	Fasten with a strap, External dimensions: Length 450mm, Width 250mm
BD-8192	Fasten with a steel cable, External dimensions: Length 450mm, Width 250mm

6 Valve Lockout



Single Arm Universal Ball Valve Lockout




BD-8212

- Be made of reinforced nylon and metal, with better impact resistance and excellent chemical resistance.
- Advanced trapezoidal upper teeth improves the bite strength of valve handle.
- The rotating arm makes the bite more tight and improves the safety performance.
- Two gear adjustable.
- Use with professional safety padlock and tag together.

Description
External dimensions: Length 205mm, Width 50mm, Height 275mm Suitable for handle width≤46mm, suitable for handle maximum thickness≤25mm

Double Arms Universal Ball Valve Lockout

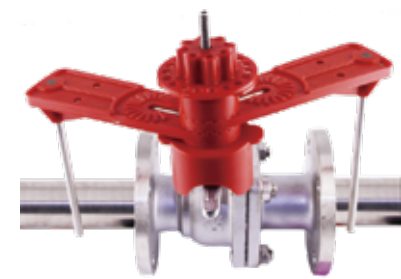

BD-8213

- Be made of reinforced nylon and metal, with better impact resistance and excellent chemical resistance.
- Advanced trapezoidal upper teeth improves the bite strength of valve handle.
- The rotating arm makes the bite more tight and improves the safety performance.
- Two gear adjustable.
- Use with professional safety padlock and tag together.

Description
External dimensions: Length 375mm, Width 50mm, Height 275mm Suitable for handle width≤46mm, suitable for handle maximum thickness≤25mm





Metal bite



Teeth mold bite



Two gear adjustable

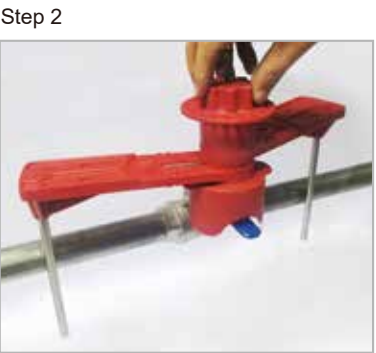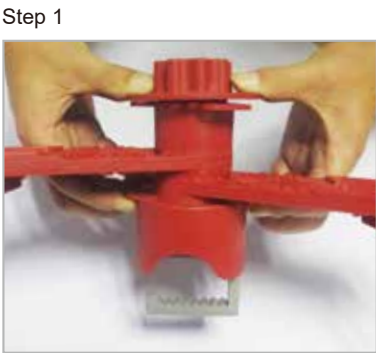

Ball Valve Lockout

BD-8211

- Be made of high strength polypropylene, excellent anti-fracture, wear resistance and insulation performance.
- Can adjust the position of the padlock arbitrarily, convenient and quick.
- Extended block design increase the suitable range.
- Applicable ball valve locking range: 0.25"-1" in open, 0.25"-1.5" in close.
- Use with professional safety padlock and tag together.

Description
External dimensions: Length 208mm, Width 77mm, Height 130mm



Rotation Valve Lockout

BD-8214

- Be made of reinforced nylon and stainless steel, durable and resistance to chemicals, corrosion resistance.
- Unique design to lock the flange ball valve from which handle can be removed or shut-off valve.
- Use with professional safety padlock and tag together.

Description
Suitable for handles≤34mm X 49mm



PLUG VALVE LOCKOUT



BD-82F41

BD-82F42



BD-82F43

BD-82F44

- Material of Construction Polypropylene & stainless steel fastening belt.
- Suitable for valve diameter from 25.4mm (1 inch) to 203.2mm (8 inches).
- Designed to effectively secure a manual plug valve.
- Durable and vandal resistant, Small size, easy to carry.


How to Measure

Measure the dimension A to B (the diameter of the valve stem), and then select the appropriate plug lock according to the diameter of the valve stem.

Easy to operate and easy to adjust

If the valve stem flat above the operating wrench and the clamp is fully occluded, the base and fixture of the plug valve lock can be left on the valve for backup, then remove the cover, the valve can be opened.

Description
Valve Diameter 44mm-52mm

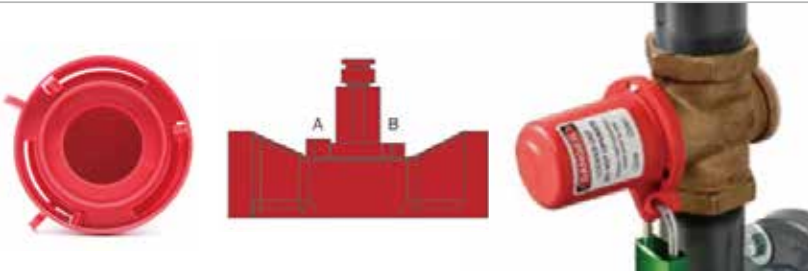


New Design Valve Lockout

BD-8215

- Be made of impact resistant ABS, corrosion resistance and better insulation performance.
- One-piece design, can lock the small right angle rotating ball valve in closed position.
- With a knob can tighten directly to install, easy to use, without assistant tools.
- Use with professional safety padlock and tag together.
- Suitable for locking 0.25"-1" ball valve handle in closed condition.

Description					
A	B	C	D	E	F
90mm	78mm	20mm	77mm	48mm	7mm



Step 1: Insert the ball valve handle



Step 2: Tighten the clamp to grip the ball valve handle



Step 3: Lock




New Design Metal Valve Lockout

BD-8216



- Heavy steel with painting.
- Easy to use, one-piece design, can lock the right angle turning ball valve in closed position.
- With a knob can tighten directly to install, easy to use, without assistant tools.
- Use with professional safety padlock and tag together.
- Suitable for locking 1.25"-2.5" ball valve handle in closed condition.

Description					
A	B	C	D	E	F
200mm	130mm	76mm	18mm	110mm	7.5mm



Step 1: Insert the ball valve handle



Step 2: Use the key to grip the handle



Step 3: Lock



Butterfly Valve Lockout

BD-8221



- Be made of high strength polypropylene, excellent anti-fracture, wear resistance and insulation performance.
- Can adjust the position of the padlock arbitrarily, convenient and quick.
- Suitable for butterfly valve size: 0.25"- 2.5".
- Use with professional safety padlock and tag together.

Description
External dimensions: Length 300mm, Width 106mm, Height 67mm

Step 1: Orthogonal



Step 2: Merge



Step 3: Lock



Butterfly Valve Lockout

BD-8222



- Be made of reinforced nylon PA6 and metal, with better impact resistance and excellent chemical resistance.
- Advanced trapezoidal upper teeth improves the bite strength of valve handle.
- Use with professional safety padlock and tag together.

Description
Suitable for handle width≤46mm, suitable for handle maximum thickness≤25mm



Butterfly Valve Lockout

BD-8223



- Be made of PP
- Suitable for part of butterfly valve lockout
- Other colors to be ordered. Chinese and English label can be choose.

Description
Valve rod diameter: width≤42mm, Max opening ≥14.5mm, height: 5mm~35mm




Adjustable flange ball valve lockout



BD-8217

- Made of polypropylene.
- The maximum locking diameter is 9mm.
- Suitable to lock the DN8-DN125 flange ball valve which removed the valve handle.
- Colors can be customized.
- Warning labels in English and Chinese are optional.

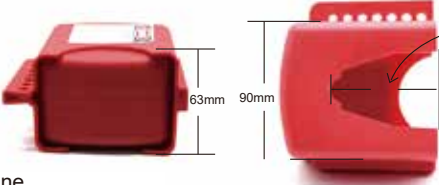

When the lock box is closed, the length of the hole is 45mm-110mm.

Description
Suitable to DN8-DN125 ball valve.



Flanged ball valve lockout bag



BD-8219

- The bag's main body is made of PC wear-resistant material, which is durable in harsh environment
- 3 safety padlocks ≤7mm can be locked at the same time
- The bag comes with a handle storage pocket to store accessories, easy to use and prevents accessories from being lost
- The fixing strap is made of PP, which makes the bag fixed stably

Description
Valve head diameter30mm



Gate Valve Lockout



BD-8231~8235

- Be made of high strength engineering plastics, with better high temperature resistance, corrosion resistance, impact resistance and insulation performance.
- Unique design of central bulge, after removing, can be used for lifting rod gate valve.
- According to the handle diameter, there are 5 specifications lockout to choose.
- Stick with a warning label and indicate the application scope.
- Half moon flat box design, can completely lock the valve handle to prevent misoperation.
- Use with professional safety padlock and tag together.
- Two lockingholds for lockout&tagout.



Model	Description
BD-8231	Suitable for the handle diameter: 25mm-63mm, back hole diameter: 19mm, disassembled circular hole diameter: 19mm, thickness: 40mm
BD-8232	Suitable for the handle diameter: 63mm-127mm, back hole diameter: 32mm, disassembled circular hole diameter: 32mm, thickness: 40mm
BD-8233	Suitable for the handle diameter: 127mm-165mm, back hole diameter: 53mm, disassembled circular hole diameter: 53mm, thickness: 55mm
BD-8234	Suitable for the handle diameter: 165mm-254mm, back hole diameter: 70mm, disassembled circular hole diameter: 70mm, thickness: 75mm
BD-8235	Suitable for the handle diameter: 254mm-330mm, back hole diameter: 70mm, disassembled circular hole diameter: 70mm, thickness: 80mm

Gate Valve Lockout



- Made of imported DuPont alloy engineering plastics
- Different sizes, can be integrated into one when storing or carrying, reducing the volume by half
- 2-4 safety padlocks with shackle diameter ≤7mm can be locked
- Other colors to order. Chinese and English warning labels are available


BD-8235P

Material	ABS/PP
Description	Suitable for stem diameter (handwheel diameter)330mm-450mm (13-18)
Hole diameter	123mm
Inner thickness	65mm

BD-8235B

Material	ABS/PP
Description	Suitable for stem diameter (handwheel diameter)450mm-600mm (18-24)
Hole diameter	130mm
Inner thickness	65mm

Butterfly Valve Lockout

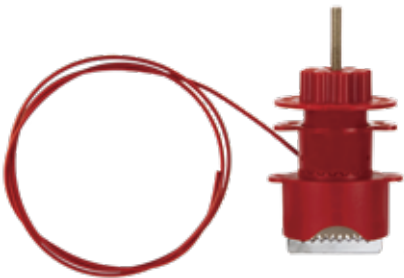

BD-8236

- Be made of reinforced nylon and metal, with better impact resistance and excellent chemical resistance.
- Suitable for handle width≤46mm, hadle thickness≤25mm.
- Advanced trapezoidal upper teeth and opening design lower teeth are easy to hitch the valve handle and improve the bite strength of valve handle.
- Use with professional safety padlock and tag together.

Description

standard cable length 1.5m, diameter 3mm, the length can be customized as requests



Universal Valve Lockout



BD-8237

- Be made of reinforced nylon and metal, with better impact resistance and excellent chemical resistance.
- Suitable for handle width≤46mm, thickness≤25mm.
- BD-8237 has adjustable arm, can adjust the length of the arm according to customers' requests.
- Use with professional safety padlock and tag together.

Description

Can lock most of the ball valve, butterfly valve, gate valve; Standard cable length 1.5m, the length can be customized as requests



Universal Valve Lockout



BD-8238

- Be made of reinforced nylon and metal, with better impact resistance and excellent chemical resistance.
- Suitable for handle width≤46mm, thickness≤25mm.
- Use with professional safety padlock and tag together.

Description

Can lock most of the butterfly valve, gate valve; Standard cable length 2m, the length can be customized as requests



Adjustable Gate Valve Lockout



BD-8239


- Be made of ABS.
- A safety padlock with a lock shackle diameters≤7mm can be locked.
- Appearance: red, other colors need to be customized; warning labels in English.

Description

The locking range is adjustable, suitable for valve handle diameter: 25mm-165mm, thickness: 55mm




Pneumatic Lockout

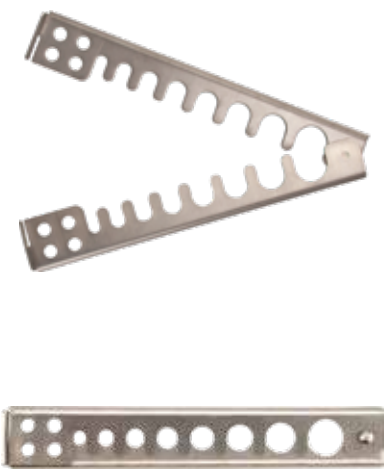

BD-8241

- Be made of stainless steel, better antirust and corrosion resistance performance.
- Can lock air source made connector.
- Can lock air source made connector to prevent the air from being reconnected.
- External dimensions: Length 206mm, Width 33mm, Thickness 2.6mm.

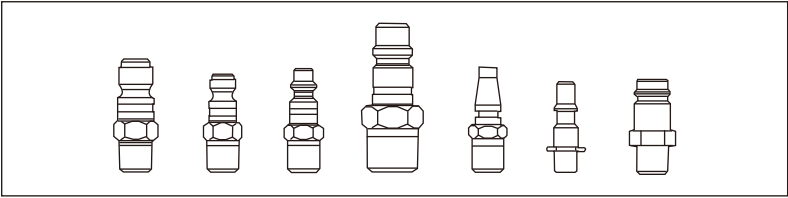

Pressurized Gas Cylinder Valve Lockout



BD-8251

- Be made of high strength industrial ABS resin, with better impact resistance, chemical pollution resistance.
- Lock the gas cylinder high pressure valve, prevent to open, suitable for valve with limiter.
- Applicable to all gas cylinder high pressure valves, valve diameter range can up to 76mm.
- External dimensions: 115mm X 97mm



7 Hasp Lockout





BD-8311 BD-8312

- Install the hasp lockout on the energy cut off switch so that the equipment cannot be operated during maintenance. It can be locked by multiple people at the same time.
- The equipment cannot be turned on unless the last person opens his/her padlock.

Model	Description	Jaw Size
8311	Steel jaw, polypropylene injection handle	1"
8312	Steel jaw, polypropylene injection handle	1.5"




- Install the hasp lockout on the energy cut off switch so that the equipment cannot be operated during maintenance. It can be locked by multiple people at the same time.
- The equipment cannot be turned on unless the last person opens his/her padlock.



BD-8313 BD-8313A

Model	Description	Jaw Size
8313	ABS resin lock body and nylon lock shackle, insulation, anti-chemical, anti-magnetic and non-conductive, Shacke size: 6.9mm X 4.2mm	78mm X 20mm
8313A	ABS resin lock body and nylon lock shackle, insulation, anti-chemical, anti-magnetic and non-conductive, Shacke size: 5.8mm X 4mm	78mm X 20mm

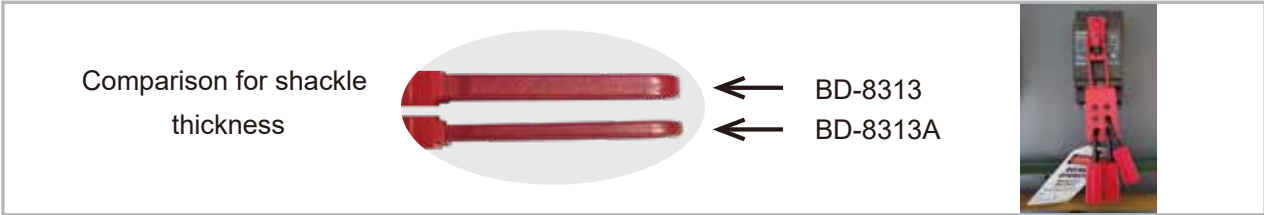

BD-8317 BD-8318

- Install the hasp lockout on the energy cut off switch so that the equipment cannot be operated during maintenance.
- The equipment cannot be turned on unless the last person opens his/her padlock.
- Can accommodate 6 people to lock, can be locked by multiple people at the same time.

Model	Description	Jaw Size
8317	Spark-proof aluminum jaw, polypropylene injection handle	1"
8318	Spark-proof aluminum jaw, polypropylene injection handle	1.5"



- Install the hasp lockout on the energy cut off switch so that the equipment cannot be operated during maintenance. It can be locked by multiple people at the same time.
- The equipment cannot be turned on unless the last person opens his/her padlock.



BD-8314

Model	Description	Jaw Size
8314	Zinc alloy, polypropylene injection handle	1.5"

New Design
Hasp Lockout with 3 Holes



BD-8316

- Be made of heavy steel, shackle diameter is 6mm.
- Can accommodate 3 padlocks.
- Install the hasp lockout on the energy cut off switch so that the equipment cannot be operated during maintenance.can be locked by multiple people at the same time.
- The equipment cannot be turned on unless the last person opens his/her padlock.

Model	Description
8316	External dimensions: Length 111mm, Width 46mm, Thickness 10mm

Aluminum Hasp Lockout

BD-8321

- Be made of spark-proof aluminum,can accommodate 6 padlocks.
- External dimensions: Length 188mm, Width 76mm, Thickness 3.6mm.
- Install the hasp lockout on the energy cut off switch so that the equipment cannot be operated during maintenance.
- Can be locked by multiple people at the same time.
- The equipment cannot be turned on unless the last person opens his/her padlock.
- Lock body has warning labels, can write user's information.



Aluminum Alloy Hasp Lockout

BD-8331

- Made of aluminum alloy.
- The traditional hasp and tag integration become one.
- The combination of label and hasp improve the applicability of the product, and the temperature-resistance design of tag can be applied to different environment.
- Both sides of the lable can be written.
- Color can be customized.



Heavy Steel Hasp Lockout with 7 Holes

BD-8352

- Made of hardened steel, galvanized rustproof surface.
- Pry proof design.



Description
Can accommodate 7 padlocks

Insulation Hasp Lockout


- ABS lock body with nylon shackle.
- Apply to where place electric power isolation locking, high requirement of corrosive or explosion-proof places.
- Advantages: small and exquisite. Write available on the front and back.
- Can accommodate 4 padlocks.



BD-8341

BD-8342

Model	Description
8341	Lock shackle diameter 3mm
8342	Lock shackle diameter 6mm

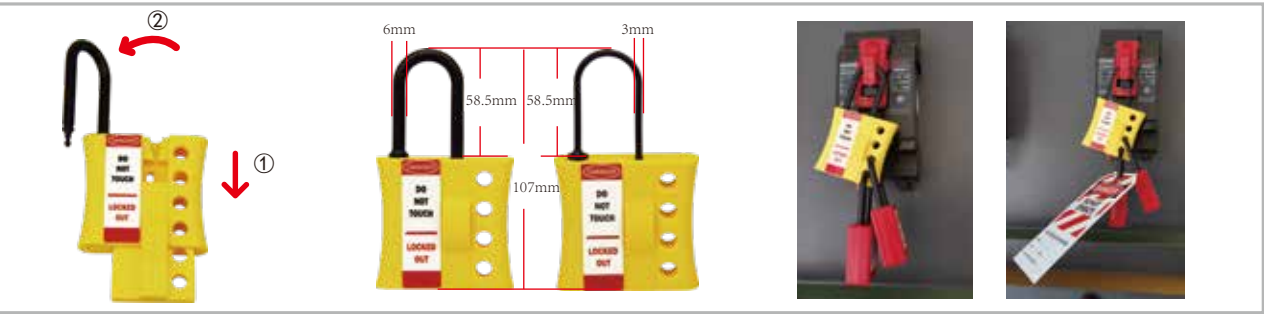

Stainless steel hasp lockout



BD-8353

- Made of SS304
- Not easy to be pried, strong, and durable
- The shackle diameter is 5mm

Model	Description
BD-8353	Can accommodate 6 padlocks



8 Cable Lockout



Cable Lockout




BD-8411



BD-8421

- Can lock valves of all sizes, electrical cabinet, and other locking points,easy to carry and widely used.
- Be made of ABS and stainless steel cable.
- Can accommodate 5 padlocks.
- Use with professional safety padlock and tag together.

Model	Description
BD-8411	Stainless steel cable with PVC cover, 3mm diameter, 1.8m length. The length can be customized as requests
BD-8421	Stainless steel cable with insulation cover, 3mm diameter, 1.8m length. The length can be customized as requests



Model	size(mm)						
	A	B	C	D	E	F	G
BD-8411	128	85	20	100	32	28	9
BD-8421	128	85	20	100	32	28	9

Universal Cable Lockout



BD-8412




BD-8422

- Can lock valves of all sizes, electrical cabinet, and other locking points, easy to carry and widely used.
- Be made of ABS and stainless steel cable.
- Can accommodate 5 padlocks.
- Use with professional safety padlock and tag together.



Model	Description
BD-8412	Stainless steel cable with PVC cover, 6mm diameter, 2m length. The length can be customized as requests
BD-8422	Stainless steel cable with insulation cover, 6mm diameter, 2m length. The length can be customized as requests



Model	size(mm)			
	A	B	C	D
BD-8412	85	34	13	7
BD-8422	85	34	13	7

Adjustable Cable Lockout



BD-8415



BD-8416

- Can lock valves of all sizes electrical cabinet, and other locking points,easy to carry and widely used.
- Be made of ABS and stainless steel cable.
- Can accommodate 4 padlocks.
- Use with professional safety padlock and tag together.

Model	Description
BD-8415	Stainless steel cable with PVC cover, 4mm diameter, 1.8m length. The length can be customized as requests
BD-8416	Stainless steel cable with PVC cover, 6mm diameter, 1.8m length. The length can be customized as requests




Universal Fish-shaped Insulation Cable Lockout



BD-8431

- Can lock valves of all sizes, electrical cabinet, and other locking points.easy to carry and widely used.
- Be made of ABS and stainless steel cable,with insulation cover.
- Can accommodate 6 padlocks.
- Use with professional safety padlock and tag together.
- Cable diameter 5mm, 2m length ,the length can be customized as requests.

Description				
Length 150mm, Width 57mm, Thickness 12mm				



Model	size(mm)			
	A	B	C	D
BD-8431	150	57	12	8.5

Pipeline High-pressure
Ball Valve Lockout



BD-8432

- Red tear-resistant nylon fabric, strong warning, PVC barrier in the bag.
- Suitable for locking of high pressure ball valves on densely arranged and small spacing pipeline groups (such as oil pipelines in hydraulic stations, gas pipelines in gas stations).
- According to actual pipeline spacing or demand, can lock one or more high-pressure ball valves .

Description
External dimensions: 457mm X 500mm Cable length: 2m, Diameter 5mm

Adjustable Cable Lockout



BD-8414

- Lock body is made of anti-impact nylon (PA);
- The cable is made of stainless steel with anti-UV PVC cover;
- Cable length: 2.4m or customized length;
- Diameter: 3.5mm;
- Color: red or customized other colors;
- Padlock hole quantity: 1, can accommodate 1 padlock with diameter less than 7mm;
- Customization: cable length and color can both be customized.

Description
Cable length: 2.4m, diameter: 3.5mm

Double Holes Cable Lockout



BD-8451

- Can lock all kinds of devices flexibly.
- More convenient than ordinary chain and easy to use.
- Red insulation stainless steel cable, colorful and durable.
- The length can be made as per requests.
- Use with professional safety padlock and tag together.

Description
Cable diameter 5mm, length 2m

Grip-cinching
Cable Lockout



BD-8413

- Made from impact resistant nylon.
- 1.6 meter stainless steel cable, the outer layer of cable is made from anti-UV PVC (diameter 4mm).
- Self-locking function, the cable lock is self-locking under the condition of not being operated, ensuring that the cable is not arbitrarily stretched, and the locking function is strong.
- Can write the label (in Chinese or in English) to identify the operator.
- Locked with 5 padlocks, which shackle diameter is less than 7mm.

Description
Include cable, the lock is open when the handle is in the bounce position

Miniature Cable Lockout



BD-8449

- Made from impact resistant nylon.
- 300mm stainless steel cable, the outer layer of cable is made from anti-UV PVC (diameter 1.5mm).
- Red part: push up to release the cable , push down to lock the cable.
- There is a "lockout" reminder faction on the bottom of red part.
- After locking, the cable can only be tightened.
- Can customize label (in Chinese or in English).
- Φ6mm and Φ8mm hole, suitable for different types of shackles.

Description
Include cable

Retractable Cable Lockout




BD-8461

- ABS lock body and stainless steel cable.
- Unique and scientific retractable design, easy to use and stock.
- 3mm diameter, 2m length cable with insulation cover. Structure design confirms to lock firmly.
- Use with professional safety padlock and tag together.

Description

External dimensions: Length 134mm, Width 105mm, Thickness 37mm

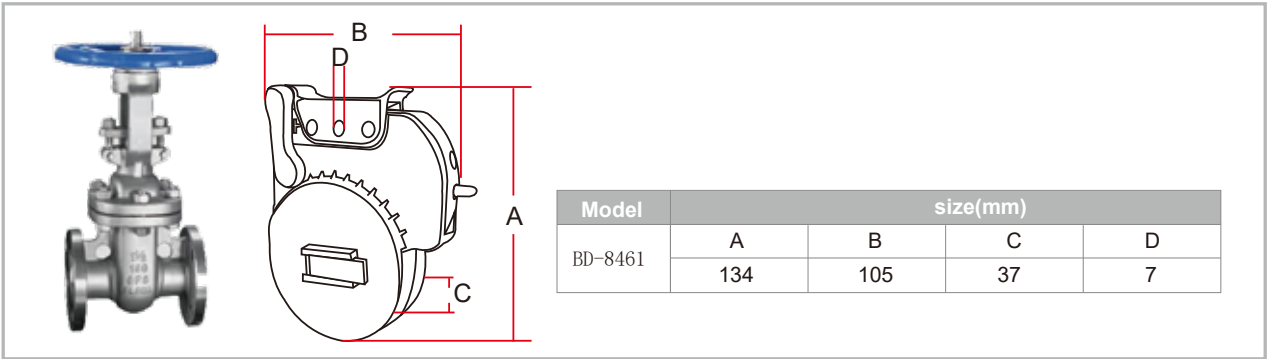


Automatic Retractable Cable Lockout



BD-8462

- The lock body is made by high-strength polycarbonate PC material.
- 1.8m stainless steel cable, the outer layer of the cable is made of UV-resistant PVC (diameter 2.0mm).
- This product has an automatic retraction function. After pressing the button, the excess cable will automatically retract and tightened. It is easy to operate, portable and durable.
- 2 safety padlocks with shackle diameter ≤ 7 mm can be locked.

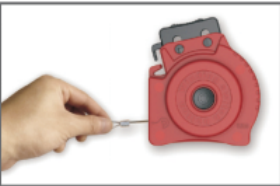

Press the button to pop up to open, the cable can be extended as needed



Press the side button lightly and the cable retracts automatically, leaving the length as needed



Take your finger off the side button, the cable will stop, and finally press the "up button" to use the padlock

Description

Include cable

Manhole Lockout



BD-8471

- The product is made of high-quality wear-resistant polyester cloth and uses high-quality technology to make the product more durable in harsh environments.
- Only need to penetrate the three straps into the side holes ≥ 16mm, then straighten the straps, and lock the corresponding hole position of each strap with padlocks to realize the lock.
- With professional design, different sizes of pipes can be locked (without changing their size).

Description

Belt with holes, use with professional safety padlock and tag together.
External dimensions: Side length 490mm The strap length is 830mm



BD-8472

- The product is made of high-quality wear-resistant polyester cloth and uses high-quality technology to make the product more durable in harsh environments.
- Only need to penetrate the three straps into the side holes ≥ 16mm, then straighten the straps, and lock the corresponding hole position of each strap with padlocks to realize the lock.
- With professional design, different sizes of pipes can be locked (without changing their size).

Description

Cable, use with professional safety padlock and tag together.
Cable length: 2m, Diameter 5mm

Disposable Steel Wire Lock



BD-8001~8003

- Easy to lock, insert the tip of the steel wire into the hole and lock it
- This product is a one-time product and cannot be opened after being locked unless it is maliciously damaged
- Special pressing, the special gear does not loosen, does not slip, and is not easy to break
- Anti-oxidation, Anti-exposure, Anti-corrosion
- Can print logo, code, word.




Model	Description
BD-8001	Single-use Cable Seal Lock (Flat Lock Body) Lock body dimensions: 22*26*6mm Cable diameter: 1.5mm
BD-8002	Single-use Cable Seal Lock (Line-type Lock Body) Lock body dimensions: 26*25*8mm Cable diameter: 1.8mm
BD-8003	Single-use Cable Seal Lock (Flat Lock Body) Lock body dimensions: 22*26*6mm Cable diameter: 2.0mm

BD-8001



BD-8002

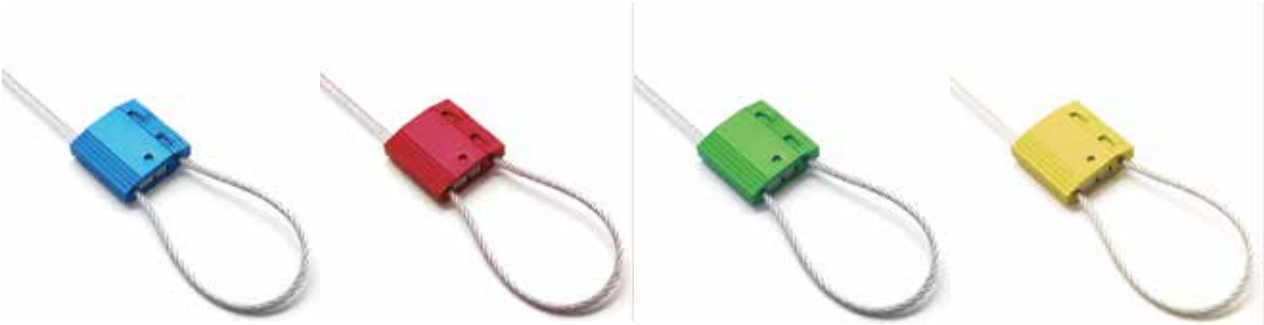


BD-8003



9 Lockout station



4 Padlock Lockout Station

Model	Description	Parts for reference	Reference picture
 Parts for Reference BD-8713	• Be made of ABS resin, corrosion resistant, impact resistant, easy for daily management. • External dimensions: Length 301mm, Width 221mm. • Four corners with holes, easy to install.	Safety Padlock (BD-8521)*4 pcs Hasp lockout (BD-8311)*3 pcs Warning Tags (BD-8611)*25 pcs	 4 pcs   25 pcs
 Parts for Reference BD-8714	• Be made of ABS resin, corrosion resistant, impact resistant. • With transparent polycarbonate cover, can be locked, easy for daily management. • External dimensions: Length 307mm, Width 228mm, Thickness 65mm. • Four corners with holes, easy to install		




10 Padlock Lockout Station

Model	Description	Parts for reference	Reference picture
 Parts for Reference BD-8723	• Be made of ABS resin, corrosion resistant, impact resistant, easy for daily management. • External dimensions: Length 480mm, Width 300mm. • Four corners with holes, easy to install.	Safety Padlock (BD-8521)*10 pcs Hasp lockout (BD-8311)*3 pcs Warning Tags (BD-8611)*25 pcs	 10 pcs   25 pcs
 Parts for Reference BD-8724	• Be made of ABS resin, corrosion resistant, impact resistant, easy for daily management. • External dimensions: Length 487mm, Width 308mm, Thickness 65mm. • Four corners with holes, easy to install.		

20 Padlock Lockout Station

Model	Description	Parts for reference	Reference picture
 Parts for Reference BD-8733	• Be made of ABS resin, corrosion resistant, impact resistant, easy for daily management. • External dimensions: Length 550mm, Width 480mm. • Four corners with holes, easy to install.	Safety Padlock (BD-8521)*20 pcs Hasp lockout (BD-8311)*3 pcs Hasp lockout (BD-8312)*3 pcs Warning Tags (BD-8611)*50 pcs	 20 pcs 50 pcs
 Parts for Reference BD-8734	• Be made of ABS resin, corrosion resistant, impact resistant. • With transparent polycarbonate cover, can lock, easy for daily management. • External dimensions: Length 558mm, Width 490mm, Thickness 65mm. • Four corners with holes, easy to install.		

36 Padlock Lockout Station

Model	Description	Parts for reference	Reference picture
 Parts for Reference BD-8742	• Be made of ABS resin, corrosion resistant, impact resistant. • External dimensions: Length 550mm, Width 480mm. • Four corners with holes, easy to install.	Safety Padlock (BD-8521)*36 pcs Hasp lockout (BD-8311)*3 pcs Hasp lockout (BD-8312)*3 pcs Warning Tags (BD-8611)*50 pcs	 36 pcs 50 pcs
 Parts for Reference BD-8743	• Be made of ABS resin, corrosion resistant, impact resistant. • With transparent polycarbonate cover, can lock, easy for daily management. • External dimensions: Length 550mm, Width 480mm. • Four corners with holes, easy to install.	Safety Padlock (BD-8521)*36 pcs Hasp lockout (BD-8311)*3 pcs Hasp lockout (BD-8312)*3 pcs Warning Tags (BD-8611)*50 pcs	 36 pcs 50 pcs

Model	Description	Parts for reference	Reference picture
 Parts for Reference BD-8752	• Be made of ABS resin, corrosion resistant, impact resistant. • With transparent polycarbonate cover, can lock, easy for daily management. • External dimensions: Length 500mm, Width 467mm, Thickness 104mm. • Four corners with holes, easy to install.	Safety Padlock (BD-8521)*20 pcs Hasp lockout (BD-8311)*3 pcs Hasp lockout (BD-8312)*3 pcs Warning Tags (BD-8611)*25 pcs Gate Valve Lockout(BD-8231)* 1 pc Gate Valve Lockout(BD-8232)* 1 pc Gate Valve Lockout(BD-8233)* 1 pc	 20 pcs 25 pcs

Metal Lockout Station

	BD-8737 ● Be made of steel sheet with high temperature sprayed. ● Warning yellow, beautiful and eye-catching. ● There are two pieces removable partition, can set interlayer space according to the requests flexibly. ● Can be hung on the wall or carried with you. ● There is a padlock hole on the station cover, easy to manage and lock.		
<table><tr><th>Description</th></tr><tr><td>External dimensions: Length 360mm, Width 450mm, Height 155mm</td></tr></table>		Description	External dimensions: Length 360mm, Width 450mm, Height 155mm
Description			
External dimensions: Length 360mm, Width 450mm, Height 155mm			
 BD-8737 Accessories for hook			

A yellow metal lockout station with a handle at the top and a rectangular opening in the center showing internal components.

BD-8738

- Be made of the steel with high temperature spraying.
- Warning yellow, beautiful and eye-catching.
- There are 30 hooks for locking, each hook can hang two padlocks or hasp lockout.
- Can be hung on the wall or carried with you.
- There has padlock hole on the station cover, easy to manage and lock.

Description

External dimensions: Length 560mm, Width 460mm, Height 70mm

A red metal lockout station with a handle at the top and a rectangular opening in the center showing internal components.

BD-8739

- Be made of steel sheet with resin sprayed.
- Warning red, beautiful and eye-catching.
- There has 22 hooks for padlock, each hook can hang two padlocks and hasp lockout, can put 4 warning signs.
- Can be hung on the wall or carried with you.
- There has padlock hole on the station cover, easy to manage and lock.

Description


External dimensions: Length 560mm, Width 430mm, Height 90mm

Combined Lock Management Station

It is made of ABS engineering plastic and PC material, one-piece design which is solid and durable

It can be used to hang safety padlock or hasp

It can be used to place marker pens and others

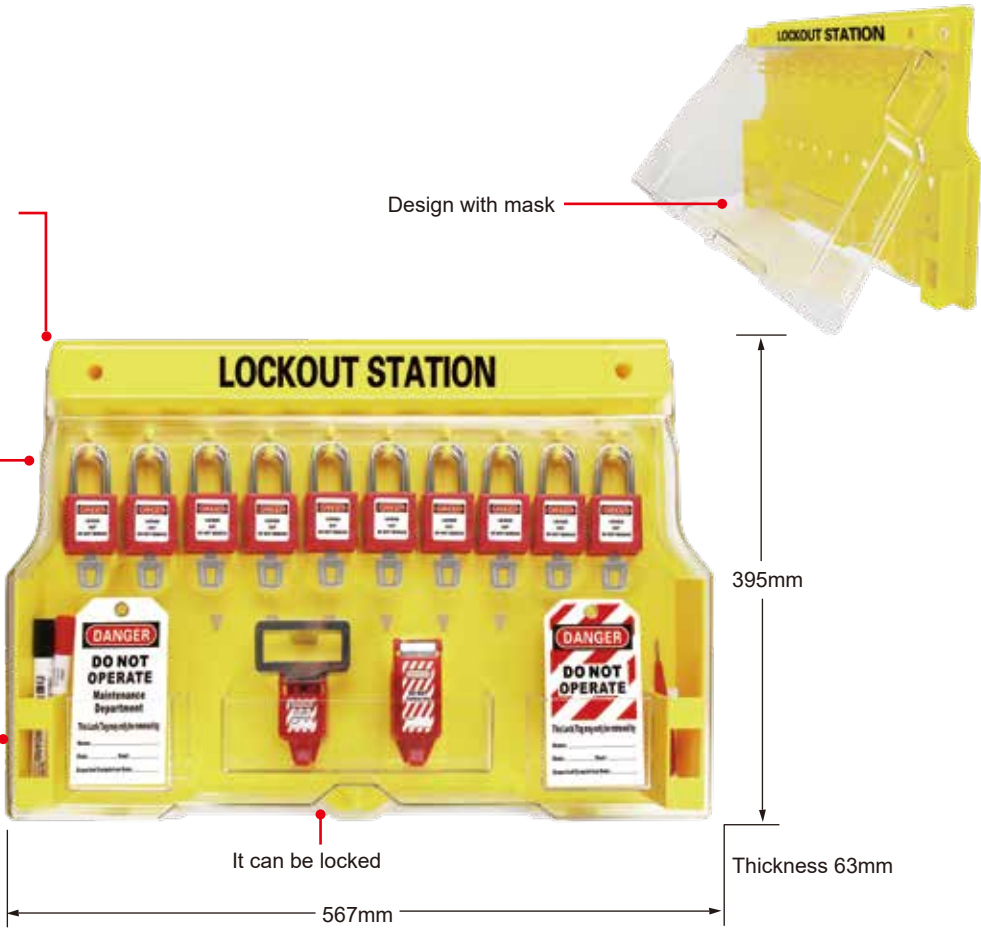

BD-8757A (Locks are not included when shipped)

Model	Description
BD-8757A	Equipped with 10 padlock hooks and 3 material boxes, it can hold up to 20 padlocks, some tags and small locks
BD-8757B	Equipped with 16 padlock hooks and 2 material boxes, it can hold up to 32 padlocks, some tags and small locks
BD-8757C	Equipped with 14 padlock hooks and 1 material box, it can hold up to 28 padlocks, some tags and small locks
BD-8757D	Equipped with 20 hook locks, up to 40 padlocks

Demo effect



BD-8757B
(Locks are not included when shipped)

Demo effect




BD-8757C
(Locks are not included when shipped)

Demo effect



BD-8757D
(Locks are not included when shipped)


LOTO Management Board

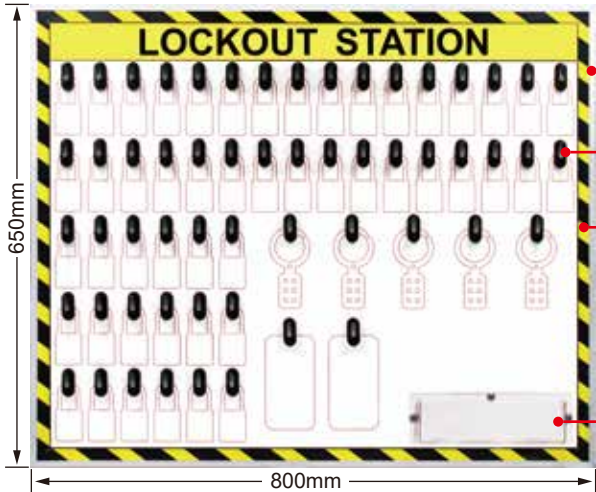


BD-87B7-5

Customize design and logo service available


- Aluminum edge: To prevent board from cracking
- Sturdy hook: Easy to hang padlocks and other lockouts, removable
- Black & Yellow sticker: Warning color, very conspicuous




BD-87B7-1




BD-87B7-2

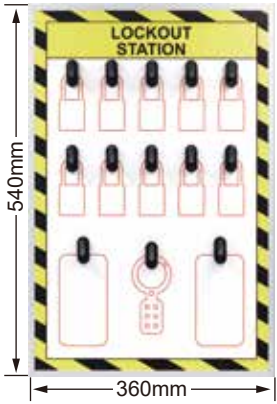

BD-87B7-3

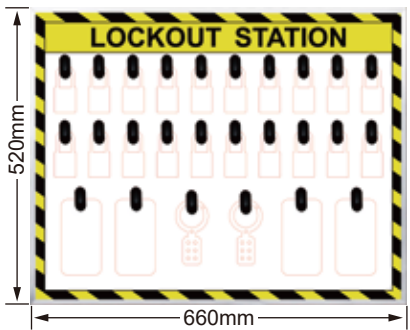

BD-87B7-4

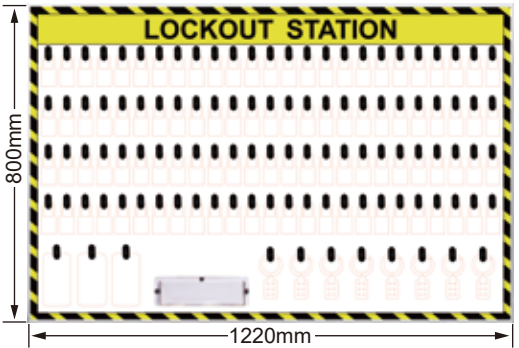

BD-87B7-6

Lockout Kit



Parts for reference



BD-8771

- Warning red, safe and eye-catching.
- External dimensions: Length 210mm, Width 145mm, Thickness 60mm.
- Small zipper bag, easy to carry, or wear the adjustable belt on waist.

Model	Description							
Parts for reference	BD-8521 red	1pcs	BD-8611	1pc	BD-8111	1pc	BD-8121A	1pc
	BD-8511 red	1pc	BD-8231	1pc	BD-8311	1pc	BD-8312	1pc

BD-8772

- The color is yellow and black.Printing Lock-Out Kit.There are multiple small pockets inside and outside the bag for easy storage of small locks.
- Double-layer thick Oxford cloth.
- External dimensions: Length 300mm, Width 220mm, Thickness 240mm.
- Large capacity, can pack many safety lockout, portable and easy to carry.
- Include many lockout parts, meet most of the application. Can be used for many people.

Model	Description							
Parts for reference	BD-8611	10pcs	BD-8111	2pcs	BD-8121A	2pcs	BD-8211	1pc
	BD-8421	1pc	BD-8231	1pc	BD-8232	1pc	BD-8233	1pc
	BD-8312	1pc	BD-8313	1pc	BD-8521 red	3pcs	BD-8511 red	2pcs
	BD-8311	2pcs	BD-8411	1pc				

Parts for reference



Medium Combination Lockout Box

Model	Description	Parts for reference	Reference picture
 BD-8773A	• Full plastic design, simplicity but not simple. • Rubber handle with one-piece part box. • BD - 8773A dimensions: Length 360 mm, Width 180 mm,Height 180 mm, net weight is 1.0 KG.	Safety Padlock (BD-8521)*2 pcs Safety Padlock (BD-8511)*1 pc Hasp lockout (BD-8311)*2 pcs Hasp lockout (BD-8312)*1 pcs Hasp lockout(BD-8313)* 1 pcs Miniature Circuit Breaker Lockout(BD-8111)*2 pcs Moulded Case Circuit Breaker Lockout(BD-8121A)* 2 pcs	
 BD-8773B	• Full plastic design, simplicity but not simple. • Rubber handle with one-piece part box. • BD - 8773B dimensions: Length 360 mm, Width 180 mm, Height 180 mm, net weight is 1.25 KG.	Universal Fish-shaped Insulation Cable Lockout(BD-8431)* 1 pcs Gate Valve Lockout(BD-8231)* 1pcs Warning Tags (BD-8611)*10 pcs	

Large Combination Lockout Box

Model	Description	Parts for reference	Reference picture
 BD-8774A	• Thicken new box, be made of high quality PP plastic. • Removable independent part box. • BD - 8774A dimensions: Length 450 mm, Width 230 mm, Height 200 mm, net weight is 1.6 KG.	Safety Padlock (BD-8521)*5 pcs Hasp Lockout (BD-8311)*2 pcs Hasp Lockout(BD-8312)* 1 pcs Hasp Lockout(BD-8313)* 1 pcs Multi-mini Breaker Lockout (BD-8113)* 3 pcs New Clamp-on Circuit Breaker Lockout(BD-8128A)*1 pcs New Clamp-on Circuit Breaker Lockout(BD-8128B)*1 pcs New Clamp-on Circuit Breaker Lockout(BD-8128C)*1 pcs	
 BD-8774B	• Thicken new box, be made of high quality PP plastic. • Removable independent part box. • BD - 8774B dimensions: Length 470 mm, Width 240 mm, Height 200 mm, net weight is 2.0 KG.	Universal Fish-shaped Insulation Cable Lockout(BD-8431)* 1 pcs Gate Valve Lockout(BD-8231)* 1 pcs Gate Valve Lockout(BD-8232)* 1 pcs Gate Valve Lockout(BD-8233)* 1 pcs Warning Tags (BD-8611)*10 pcs	

Maintenance Lockout Tool Box



BD-8775A

- Warning yellow color
- Removeable part box
- Made of coated iron and engineering plastic PP.
- Dimensions:Length 440mm, Width 220mm, Height 200mm.



Model	Parts for reference
 Electrical Lockout Combination Box	Safety Padlock (BD-8531)*3pcs Multi-mini Breaker Lockout(BD-8113)* 2 pcs Miniature Circuit Breaker Lockout(BD-8115)*1 pcs Lockout(BD-8116)*1 pcs Lockout(BD-8117)*1 pcs Big Plug Lockout(BD-8182)*1 pcs Hasp lockout(BD-8313)* 1 pcs Hasp lockout(BD-8317)* 1 pcs Hasp lockout(BD-8318)* 1 pcs Warning Tags (BD-8611)*5 pcs
 Valve Lockout Combination Box	Safety Padlock (BD-8521)*6pcs Hasp Lockout (BD-8311)*6 pcs Hasp Lockout (BD-8312)*6 pcs Grip-cinching Cable Lockout(BD-8413)*2 pcs Butterfly Valve Lockout(BD-8222)*1 pcs Universal Valve Lockout(BD-8237)*1 pcs Adjustable Gate Valve lockout(BD-8239)* 1 pcs Warning Tags (BD-8611)*10 pcs
 Mechanical Lockout Combination Box	Safety Padlock (BD-8521)*3pcs Hasp Lockout (BD-8311)*1 pcs Hasp Lockout (BD-8312)*1 pcs Grip-cinching Cable Lockout(BD-8413)*3 pcs Double Arms Universal Ball Valve Lockout(BD-8213)*1 pcs Gate Valve Lockout(BD-8231)* 1 pcs Gate Valve Lockout(BD-8232)* 1 pcs Gate Valve Lockout(BD-8233)* 1 pcs Warning Tags (BD-8611)*5 pcs

Combination Draw-bar Lockout Box


BD-8775

- Combination draw-bar lockout box, load-bearing ability, convenient and more practical, multi-story design, reasonable structure, suitable for different industries.
- High quality and light wheels, flexible mobile, three layers combination, solid metal connection, multi-functional.
- External dimensions: Length 520mm, Width 320mm, Height 720mm.
- The first layer internal dimensions: Length 440mm, Width 220mm, Height 200mm.
- The second layer internal dimensions: Length 390mm, Width 210mm, Height 60mm.
- The third layer internal dimensions: Length 410mm, Width 200mm, Height 280mm.
- Be made of carbon steel and ABS, net weight is 15.8 KG.




Portable Lockout Box

- Be made of carbon steel, red , can customize yellow or brown according to the requests.
- External dimensions: Length 260mm, Width 103mm, Height 152mm.
- Each locking point on equipment needs one padlock to secure the safety. Collect these keys and put into the box and each authorized worker locks his padlock on the box.
- After work, workers remove their own padlock from the box, then the keys can be got in the box.
- For BD-8812/8813, Only the last worker removes his/her padlock, can get the keys in the box.

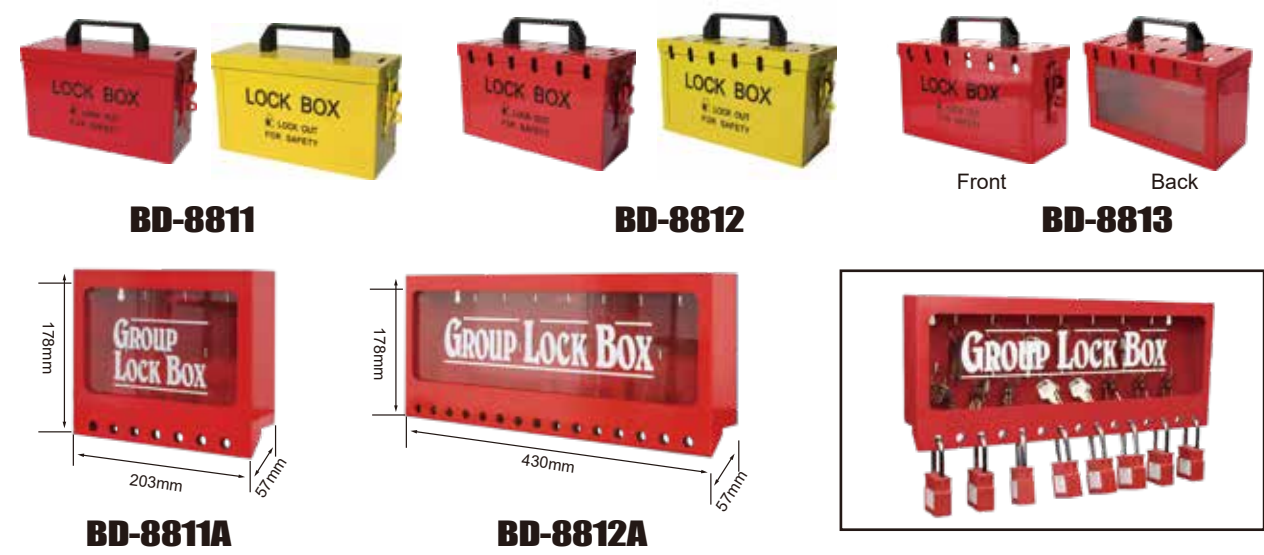


Model	Description
BD-8811	Only one lock hole, suitable for single management
BD-8812	13 lock holes easy for multi-person co-management. Only the last worker removes his/her padlock, can get the keys in the box
BD-8813	13 lock holes, One side is transparent and visual management, which is convenient for many people to manage together
BD-8811A	Wall-mounted lockout box. Only after all staff finish their work and remove the personal locks, the lockout box can be unlocked , with 7 hooks inside.
BD-8812A	Wall-mounted lockout box. Only after all staff finish their work and remove the personal locks, the lockout box can be unlocked , with 15 hooks inside.

Portable Safety Padlock Rack

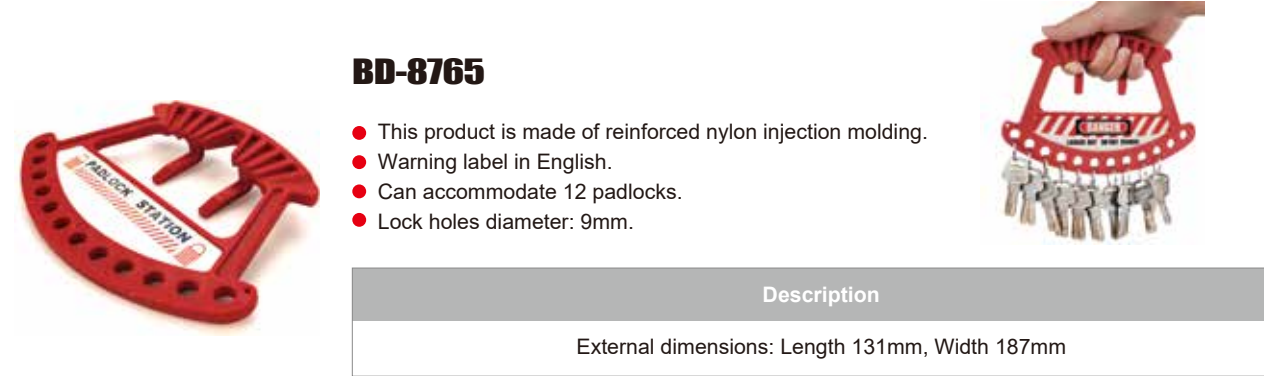

Safety Padlock Rack

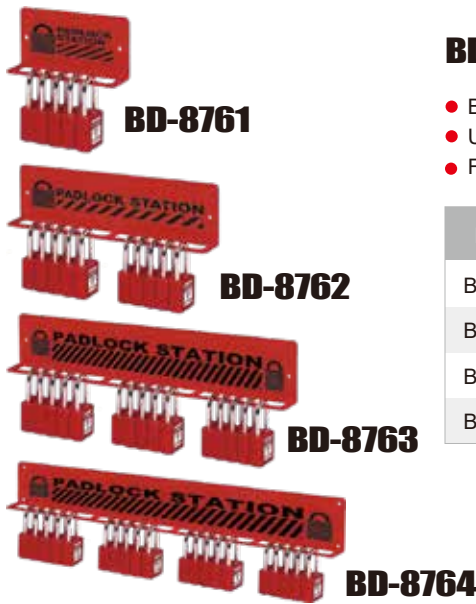

BD-8761~8764

- Be made of carbon steel with red spraying, safe and eye-catching.
- Used for hanging safety padlocks (padlocks need to be additionally configured).
- Four specifications to choose.

Model	Description
BD-8761	Length 140mm, Width 40mm, Height 80mm, can hang 5pcs padlocks
BD-8762	Length 270mm, Width 40mm, Height 80mm, can hang 10pcs padlocks
BD-8763	Length 400mm, Width 40mm, Height 80mm, can hang 15pcs padlocks
BD-8764	Length 530mm, Width 40mm, Height 80mm, can hang 20pcs padlocks

Multifunctional Pull Rod Management Box



BD-8776

- The pull rod lock box has strong bearing capacity, convenient and practical, reasonable structure, and is suitable for different industries.
- Big wheel design, strong and durable, flexible movement.
- 10 mm diameter solid metal rod is strong and durable, which is more suitable for people under 1.80m in height.
- The lock box is of inverted trapezoidal structure, with internal dimension of 42.5cm in length and 22.5cm in width at the bottom, 50cm in length and 24.5cm in width at the top, and 33cm in clear height.
- External dimension: length 54cm * width 30cm, height 39cm, this external dimension is the maximum distance measurement.
- Material: engineering plastics (ABS) + carbon steel rod, net weight 4.8kg.

Key Management Cabinet

BD-800

- Be made of the steel with high temperature spraying.
- Can be hung on the wall or easy to carry.
- There is a navel lock on the lock box door for easy management and locking.



BD-800(48)



Parts for reference



BD-800(80)



Parts for reference

Model	Product Name	External Dimensions
BD-800(30)	30 key box	380mm X 210mm X 50mm
BD-800(48)	48 key box	380mm X 300mm X 50mm
BD-800(64)	64 key box	480mm X 305mm X 50mm
BD-800(80)	80 key box	495mm X 370mm X 60mm
BD-800(100)	100 key box	610mm X 360mm X 60mm
BD-800(120)	120 key box	740mm X 360mm X 60mm
BD-800(160)	160 key box	610mm X 380mm X 90mm
BD-800(200)	200 key box	730mm X 370mm X 110mm
BD-800(240)	240 key box	620mm X 385mm X 140mm

10 Floor Marking Tape Dispenser



Figure 1 shows a yellow mechanical device with the following dimensions:

- Base width: 600mm
- Vertical height: 810mm
- Central rectangular component dimensions: 180mm by 180mm

- Use tape dispenser to mark line on the ground can improve the work efficiency, reduce workers intensity, ensure quality of the line, save time and labor.
- Metal frame structure, light and durable.
- The maximum tape width is 100 mm.

[illegible]