

September 2016



# MULTILAYER CERAMIC CAPACITORS



SAMSUNG  
ELECTRO-MECHANICS



We declare that all our MLCCs are produced  
in accordance with EU RoHS and REACH Directive.



#### RoHS Compliance and restriction of Br

The following restricted materials are not used in packaging materials as well as products in compliance with the law and restriction.

- Cd, Pb, Hg, Cr6+, As, Br and the compounds, PCB, asbestos

#### No use of materials breaking Ozone layer

The following ODS materials are not used in our fabrication process.

- ODS material : Freon, Haron, 1-1-1 TCE, CCl<sub>4</sub>, HCFC

If you want more detailed Information, Please Visit Samsung Electro-mechanics Website  
<http://www.semcr.com>

In order to move to the contents directly, please click each content icon

## Contents

Part Numbering System	04
Standard & High Capacitors	06
Low Profile Capacitors	34
Super Small Size Capacitors	39
High - Q Capacitors	47
Medium - High Voltage Capacitors	52
Soft - term Capacitors	62
Low Acoustic Noise Capacitors	65
High Effective Capacitance Capacitors	68
Low ESL Capacitors	71
Array Type Capacitors	76
Industrial Capacitors	79
Reliability Test Condition	128
Premium Capacitors for Automotive Applications	132
Packaging Specification	146
Application Manual for Surface Mounting	150
Certifications	154



※ Remarks : Symbols in this catalog have the following definition.

- Derating** This capacitor with derating is designed for 70% of the rated voltage or less.
- dv/dt** dv/dt means Pulse(dv/dt) Guarantee Capacitor, 10,000V/us(=10V/ns) max.10,000 cycles guarantee(@Vr, Room temp)
- Ref.** Reference means that CAP & TCC have the exceptional measurement conditions for Capacitance and Temperature Characteristics of Capacitance.  
So please refer to the individual specification for CAP and the individual characteristics data for TCC on Website.

# Part Numbering System

<b>CL</b>	<b>10</b>	<b>A</b>	<b>106</b>	<b>M</b>	<b>Q</b>	<b>8</b>	<b>N</b>	<b>N</b>	<b>N</b>	<b>C</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>

## 1 SERIES CODE

CL = Multilayer Ceramic Capacitors

## 2 SIZE CODE

Code	inch(mm)	Code	inch(mm)	Code	inch(mm)	Code	inch(mm)
02	01005(0402)	10	0603(1608)	32	1210(3225)	55	2220(5750)
03	0201(0603)	21	0805(2012)	42	1808(4520)		
05	0402(1005)	31	1206(3216)	43	1812(4532)		

## 3 DIELECTRIC CODE

Class I (Temperature Compensation)

Symbol	EIA Code	Operation Temperature Range(°C)	Temperature Coefficient(ppm / °C)
C	C0G	-55 ~ +125	0±30

Class II (High Dielectric Constant)

Symbol	EIA Code	Operation Temperature Range(°C)	Capacitance Change(%)
A	X5R	-55 ~ +85	±15
B	X7R	-55 ~ +125	±15
X	X6S	-55 ~ +105	±22
F	Y5V	-30 ~ +85	-82 ~ +22
Y	X7S	-55 ~ +125	±22
Z	X7T	-55 ~ +125	-33 ~ +22

## 4 CAPACITANCE CODE

Capacitance expressed in pF. 2 significant digits plus number of zeros.  
example) 106=10×10<sup>6</sup>=10,000,000pF

For Values <10pF, Letter R denotes decimal point  
example) 1R5 =1.5pF

## 5 CAPACITANCE TOLERANCE CODE

Code	Tolerance	Code	Tolerance	Code	Tolerance	Code	Tolerance
N	±0.03pF	H	+0.25pF	F*	±1%	V	-5%
A	±0.05pF	L	-0.25pF	G	±2%	K	±10%
B	±0.1pF	D	±0.5pF	J	±5%	M	±20%
C	±0.25pF	F	±1pF	U	+5%	Z	-20, +80%

\* For Values <10pF, F = ±1pF / Values ≥10pF, F = ±1%

Series	Capacitance Step											
E-3	1.0				2.2				4.7			
E-6	1.0		1.5		2.2		3.3		4.7		6.8	
E-12	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2
E-24	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2
	1.1	1.3	1.6	2.0	2.4	3.0	3.6	4.3	5.1	6.2	7.5	9.1

## 6 RATED VOLTAGE CODE

Code	Voltage	Code	Voltage	Code	Voltage	Code	Voltage
S	2.5Vdc	O	16Vdc	C	100Vdc	H	630Vdc
R	4.0Vdc	A	25Vdc	D	200Vdc	I	1kVdc
Q	6.3Vdc	L	35Vdc	E	250Vdc	J	2kVdc
P	10Vdc	B	50Vdc	G	500Vdc	K	3kVdc

## 7 THICKNESS CODE

(Unit:mm)

Size inch(mm)	Code	Thickness	Tolerance	Size inch(mm)	Code	Thickness	Tolerance
01005(0402)	2	0.20	±0.02	1210(3225)	C	0.85	±0.10*
0201(0603)	3	0.30	±0.03		9	0.90	±0.10*
0402(1005)	3	0.30	±0.03*		F	1.25	±0.20
	5	0.50	±0.05		S	1.35	±0.15*
0603(1608)	5	0.50	+0.0/-0.1*		H	1.60	±0.20
	8	0.80	±0.10		U	1.80	±0.20*
0805(2012)	A	0.65	±0.10		I	2.00	±0.20
	C	0.85	±0.10*		J	2.50	±0.20
	C	0.85	±0.10		V	2.50	±0.30
	M	1.15	±0.10		1808(4520)	F	1.25
	F	1.25	±0.10	G		1.40	±0.20
1206(3216)	Q	1.25	±0.15	1812(4532)	I	2.00	±0.20
	Y	1.25	±0.20		F	1.25	±0.20
	C	0.85	±0.15		H	1.60	±0.20
	C	0.85	±0.10*		I	2.00	±0.20
	E	1.10	±0.15	J	2.50	±0.20	
1206(3216)	E	1.10	±0.10*	2220(5750)	L	3.20	±0.30
	P	1.15	±0.10*		H	1.60	±0.20
	M	1.15	±0.15		I	2.00	±0.20
	F	1.25	±0.15		J	2.50	±0.20
	H	1.60	±0.20		L	3.20	±0.30

\* Mark is only applicable to "L", "Y", "F", 12<sup>th</sup> code in part number.

## 8 INNER ELECTRODE/TERMINATION/PLATING CODE

Code	Thickness division	Inner electrode	Termination	Plating material
N	Normal	Ni	Cu	Ni / Sn _100%
G	Normal	Cu	Cu	Ni / Sn _100%
S	Normal	Ni	Soft Termination	Ni / Sn _100%
C	Normal	Ni	Control Code	Ni / Sn _100%
L	Low profile	Ni	Cu	Ni / Sn _100%
Y	Low profile	Ni	Soft Termination	Ni / Sn _100%
Z	Normal	Ni	Soft Termination	Ni / Sn _100%
F	Low profile	Ni	Soft Termination	Ni / Sn _100%

## 9 PRODUCT CODE OR SIZE CONTROL CODE

(Unit:mm)

N = Normal  
A = Array(2 - element)  
B = Array(4 - element)  
L = LICC  
J = SLIC

Code	01005(0402)	0201(0603)	0402(1005)	0603(1608)	0805(2012)	1206(3216)
S	±0.03	±0.05	±0.07	±0.07		±0.30
Q	±0.05	±0.07	±0.10	±0.15	±0.15	
R	±0.07	±0.09	±0.15	±0.20	±0.20	
U	±0.09		±0.20	±0.25	±0.25	
Z			±0.40	±0.30	±0.30	
9			±0.30			

## 10 CONTROL CODE

N = Reserved for future use


## 11 PACKAGING CODE

Cardboard Tape (Paper)		Embossed Tape (Plastic)	
Code	Taping Type	Code	Taping Type
8 / C / H	Normal, 7" reel (Quantity option)	E / G	Normal, 7" reel (Quantity option)
J	1mm Pitch, 7" reel	R	Chip aligned for horizontal, 7" reel
Z	Chip aligned for horizontal, 7" reel	W	Chip aligned for vertical, 7" reel
Y	Chip aligned for vertical, 7" reel	S	Normal, 10" reel
0	Normal, 10" reel	F	Normal, 13" reel (Quantity option)
3 / D / L	Normal, 13" reel (Quantity option)		
2	1mm Pitch, 13" reel		
7	Chip aligned for vertical, 13" reel		

※ If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Standard & High Capacitors

## Feature




- Wide selection of size : from 0402(Inch) to 2220(Inch)
- Highly reliable tolerance and high speed automatic chip placement on PCBs
- Wide capacitance range
- Highly reliable performance
- Highly resistant termination metal
- Tape & reel for surface mount assembly

## Application

- Mobile Phone
- DC-DC Converter
- Tablet devices
- PC (Laptop, Desktop)
- HDD /SSD board
- Display

## Structure and Dimensions

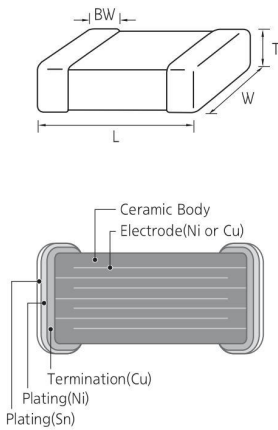

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00±0.05	0.50±0.05	0.0975±0.0125(*)	L	0.25±0.075
		1.00±0.10	0.50±0.05	0.19±0.03(*)	X	
		1.00±0.05	0.50±0.05	0.30±0.03(*)	3	0.25±0.10
		1.00±0.05	0.50±0.05	0.50±0.05	5	
10	0603	1.60±0.10	0.80±0.10	0.50+0.0/-0.1(*)	5	0.30±0.20
		1.60±0.10	0.80±0.10	0.80±0.10	8	
21	0805	2.00±0.10	1.25±0.10	0.70±0.10(*)	7	0.50+0.20/-0.30
		2.00±0.10	1.25±0.10	0.80±0.10(*)	8	
		2.00±0.10	1.25±0.10	0.85±0.10	C	
		2.00±0.10	1.25±0.10	0.90±0.10(*)	9	
		2.00±0.10	1.25±0.10	1.15±0.10	M	
		2.00±0.10	1.25±0.10	1.25±0.10	F	
		2.00±0.15	1.25±0.15	1.25±0.15	Q	
		2.00±0.20	1.25±0.20	1.25±0.20	Y	
31	1206	3.20±0.20	1.60±0.20	0.60±0.10(*)	6	0.50±0.30
		3.20±0.15	1.60±0.15	0.85±0.15	C	
		3.20±0.20	1.60±0.20	0.85±0.10(*)	C	
		3.20±0.20	1.60±0.20	0.90±0.10(*)	9	
		3.20±0.20	1.60±0.20	1.10±0.10(*)	E	
		3.20±0.20	1.60±0.20	1.15±0.10(*)	M	
		3.20±0.20	1.60±0.20	1.15±0.10(*)	P	
		3.20±0.15	1.60±0.15	1.25±0.15	F	
3.20±0.20	1.60±0.20	1.60±0.20	H			
32	1210	3.20±0.30	2.50±0.20	0.85±0.10(*)	C	0.60±0.30
		3.20±0.30	2.50±0.20	0.90±0.10(*)	9	
		3.20±0.30	2.50±0.20	1.60±0.20	H	
		3.20±0.30	2.50±0.20	1.80±0.20(*)	U	
		3.20±0.30	2.50±0.20	2.00±0.20	I	
		3.20±0.30	2.50±0.20	2.50±0.20	J	
42	1808	4.50±0.40	2.00±0.20	1.25±0.20	F	0.80±0.30
		4.50±0.40	2.00±0.20	1.40±0.20	G	
		4.50±0.40	2.00±0.20	2.00±0.20	I	
43	1812	4.50±0.40	3.20±0.30	1.25±0.20	F	0.80±0.30
		4.50±0.40	3.20±0.30	2.50±0.20	J	
		4.50±0.40	3.20±0.30	3.20±0.30	L	
55	2220	5.70±0.40	5.00±0.40	2.50±0.20	J	1.00±0.30
		5.70±0.40	5.00±0.40	3.20±0.30	L	

\* Mark is only applicable to "L", "F", 12<sup>th</sup> code in part number.

Standard & High Capacitance Table (COG)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																																			
		pF														nF																					
		0.5	1.0	10	15	27	33	56	68	120	180	220	270	330	470	560	750	910	1.0	1.2	1.5	1.8	2.2	3.9	4.7	6.8	8.2	10	15	27	33	39	47	68	100	120	
0402 (1005)	10																																				
	16																																				
	25																																				
	50																																				
0603 (1608)	16																																				
	25																																				
	50																																				
0805 (2012)	25																																				
	50																																				
1206 (3216)	16																																				
	25																																				
	50																																				
	100																																				
1210 (3225)	25																																				
	50																																				

Standard & High Capacitors

*www.richpcba.com*

# Standard & High Capacitors

Standard & High Capacitance Table (X5R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance												
		nF			uF									
		100	220	470	1.0	2.2	4.7	10	22	47	100	220		
0402 (1005)	4.0													
	6.3													
	10													
	16													
	25													
	35													
0603 (1608)	4.0													
	6.3													
	10													
	16													
	25													
	35													
0805 (2012)	4.0													
	6.3													
	10													
	16													
	25													
	35													
1206 (3216)	6.3												150	
	10													
	16													
	25													
	35													
	50													
1210 (3225)	6.3													
	10													
	16													
	25													
	35													
	50													
1812(4532)	6.3													
2220(5750)	6.3													
	10													



Standard & High Capacitance Table (X6S)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance												
		nF			uF									
		100	220	470	1.0	2.2	4.7	10	22	47	100			
0402 (1005)	2.5													
	4.0													
	6.3													
	10													
	25													
0603 (1608)	4.0													
	6.3													
	10													
	16													
	25													
0805 (2012)	2.5													
	4.0													
	6.3													
	10													
	16													
	25													
1206 (3216)	4.0													
	6.3													
	10													
	16													
	25													
1210 (3225)	4.0													
	6.3													
	10													
	16													
	25													

# Standard & High Capacitors

Standard & High Capacitance Table (X7R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance													
		nF					uF								
		47	100	220	330	470	1.0	2.2	3.3	4.7	10	22	47	100	
0402 (1005)	6.3						X7S								
	10														
	16														
	25														
	50														
0603 (1608)	6.3													X7S	
	10														
	16														
	25														
	50														
0805 (2012)	6.3														
	10														
	16														
	25														
	35														
	50														
1206 (3216)	6.3														
	10														
	16														
	25														
	35														
	50														
1210 (3225)	6.3													X7T	
	10														
	16														
	25														
	35														
	50														

Product Line Up (COG)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
0.55mm	10Vdc	560pF	±5%	CL05C561JP5N <sup>□</sup>	0.55mm	50Vdc	2.2pF	±0.1pF	CL05C2R2BB5N <sup>□</sup>	
		16Vdc	33pF	±5%			CL05C330JO5N <sup>□</sup>	2.2pF	±0.25pF	CL05C2R2CB5N <sup>□</sup>
			100pF	±5%			CL05C101JO5N <sup>□</sup>	2.4pF	±0.1pF	CL05C2R4BB5N <sup>□</sup>
			150pF	±5%			CL05C151JO5N <sup>□</sup>	2.4pF	±0.25pF	CL05C2R4CB5N <sup>□</sup>
			220pF	±5%			CL05C221JO5N <sup>□</sup>	2.5pF	±0.1pF	CL05C2R5BB5N <sup>□</sup>
			470pF	±5%			CL05C471JO5N <sup>□</sup>	2.5pF	±0.25pF	CL05C2R5CB5N <sup>□</sup>
	1.0nF	±5%	CL05C102JO5N <sup>□</sup>	2.7pF			±0.1pF	CL05C2R7BB5N <sup>□</sup>		
	25Vdc	10pF	±0.5pF	CL05C100DA5N <sup>□</sup>			2.7pF	±0.25pF	CL05C2R7CB5N <sup>□</sup>	
			±5%	CL05C100JA5N <sup>□</sup>			3.0pF	±0.1pF	CL05C030BB5N <sup>□</sup>	
		11pF	±5%	CL05C110JA5N <sup>□</sup>			3.0pF	±0.25pF	CL05C030CB5N <sup>□</sup>	
		12pF	±5%	CL05C120JA5N <sup>□</sup>			3.3pF	±0.1pF	CL05C3R3BB5N <sup>□</sup>	
		13pF	±5%	CL05C130JA5N <sup>□</sup>			3.3pF	±0.25pF	CL05C3R3CB5N <sup>□</sup>	
		15pF	±5%	CL05C150JA5N <sup>□</sup>			3.5pF	±0.25pF	CL05C3R5CB5N <sup>□</sup>	
		18pF	±2%	CL05C180GA5N <sup>□</sup>			3.6pF	±0.25pF	CL05C3R6CB5N <sup>□</sup>	
		20pF	±5%	CL05C200JA5N <sup>□</sup>			3.9pF	±0.1pF	CL05C3R9BB5N <sup>□</sup>	
		22pF	±5%	CL05C220JA5N <sup>□</sup>			3.9pF	±0.25pF	CL05C3R9CB5N <sup>□</sup>	
		27pF	±2%	CL05C270GA5N <sup>□</sup>			4.0pF	±0.1pF	CL05C040BB5N <sup>□</sup>	
		27pF	±5%	CL05C270JA5N <sup>□</sup>			4.0pF	±0.25pF	CL05C040CB5N <sup>□</sup>	
		33pF	±5%	CL05C330JA5N <sup>□</sup>			4.3pF	±0.25pF	CL05C4R3CB5N <sup>□</sup>	
		39pF	±5%	CL05C390JA5N <sup>□</sup>			4.7pF	±0.1pF	CL05C4R7BB5N <sup>□</sup>	
		43pF	±5%	CL05C430JA5N <sup>□</sup>			4.7pF	±0.25pF	CL05C4R7CB5N <sup>□</sup>	
		47pF	±5%	CL05C470JA5N <sup>□</sup>			4.7pF	±0.5pF	CL05C4R7DB5N <sup>□</sup>	
		68pF	±5%	CL05C680JA5N <sup>□</sup>			5.0pF	±0.1pF	CL05C050BB5N <sup>□</sup>	
		82pF	±5%	CL05C820JA5N <sup>□</sup>			5.0pF	±0.25pF	CL05C050CB5N <sup>□</sup>	
		91pF	±5%	CL05C910JA5N <sup>□</sup>			5.0pF	±0.5pF	CL05C050DB5N <sup>□</sup>	
		100pF	±5%	CL05C101JA5N <sup>□</sup>			5.1pF	±0.25pF	CL05C5R1CB5N <sup>□</sup>	
		100pF	±10%	CL05C101KA5N <sup>□</sup>			5.6pF	±0.1pF	CL05C5R6BB5N <sup>□</sup>	
		120pF	±5%	CL05C121JA5N <sup>□</sup>			5.6pF	±0.25pF	CL05C5R6CB5N <sup>□</sup>	
		150pF	±5%	CL05C151JA5N <sup>□</sup>			5.6pF	±0.5pF	CL05C5R6DB5N <sup>□</sup>	
		180pF	±5%	CL05C181JA5N <sup>□</sup>			6.0pF	±0.25pF	CL05C060CB5N <sup>□</sup>	
		220pF	±1%	CL05C221FA5N <sup>□</sup>			6.0pF	±0.5pF	CL05C060DB5N <sup>□</sup>	
		220pF	±5%	CL05C221JA5N <sup>□</sup>			6.2pF	±0.25pF	CL05C6R2CB5N <sup>□</sup>	
		270pF	±5%	CL05C271JA5N <sup>□</sup>			6.2pF	±0.5pF	CL05C6R2DB5N <sup>□</sup>	
		560pF	±5%	CL05C561JA5N <sup>□</sup>			6.8pF	±0.1pF	CL05C6R8BB5N <sup>□</sup>	
		1.0nF	±5%	CL05C102JA5N <sup>□</sup>			6.8pF	±0.25pF	CL05C6R8CB5N <sup>□</sup>	
		50Vdc	0.2pF	±0.1pF			CL05C0R2BB5N <sup>□</sup>	6.8pF	±0.5pF	CL05C6R8DB5N <sup>□</sup>
				±0.1pF			CL05C0R3BB5N <sup>□</sup>	7.0pF	±0.1pF	CL05C070BB5N <sup>□</sup>
			0.3pF	±0.25pF			CL05C0R3CB5N <sup>□</sup>	7.0pF	±0.25pF	CL05C070CB5N <sup>□</sup>
				±0.1pF			CL05C0R5BB5N <sup>□</sup>	7.0pF	±0.5pF	CL05C070DB5N <sup>□</sup>
			0.5pF	±0.25pF			CL05C0R5CB5N <sup>□</sup>	8.0pF	±0.25pF	CL05C080CB5N <sup>□</sup>
			0.7pF	±0.1pF			CL05C0R7BB5N <sup>□</sup>	8.0pF	±0.5pF	CL05C080DB5N <sup>□</sup>
	0.75pF		±0.1pF	CL05CR75BB5N <sup>□</sup>			8.2pF	±0.1pF	CL05C8R2BB5N <sup>□</sup>	
	0.75pF		±0.25pF	CL05CR75CB5N <sup>□</sup>			8.2pF	±0.25pF	CL05C8R2CB5N <sup>□</sup>	
	1.0pF		±0.1pF	CL05C010BB5N <sup>□</sup>			8.2pF	±0.5pF	CL05C8R2DB5N <sup>□</sup>	
	1.0pF		±0.25pF	CL05C010CB5N <sup>□</sup>			9.0pF	±0.25pF	CL05C090CB5N <sup>□</sup>	
	1.2pF		±0.1pF	CL05C1R2BB5N <sup>□</sup>			9.0pF	±0.5pF	CL05C090DB5N <sup>□</sup>	
	1.2pF		±0.25pF	CL05C1R2CB5N <sup>□</sup>			9.1pF	±0.1pF	CL05C9R1BB5N <sup>□</sup>	
	1.3pF		±0.1pF	CL05C1R3BB5N <sup>□</sup>			9.1pF	±0.25pF	CL05C9R1CB5N <sup>□</sup>	
	1.5pF		±0.1pF	CL05C1R5BB5N <sup>□</sup>			10pF	±0.25pF	CL05C100CB5N <sup>□</sup>	
	1.5pF		±0.25pF	CL05C1R5CB5N <sup>□</sup>			10pF	±0.5pF	CL05C100DB5N <sup>□</sup>	
	1.8pF		±0.1pF	CL05C1R8BB5N <sup>□</sup>			10pF	±5%	CL05C100JB5N <sup>□</sup>	
	1.8pF		±0.25pF	CL05C1R8CB5N <sup>□</sup>			11pF	±5%	CL05C110JB5N <sup>□</sup>	
2.0pF	±0.1pF		CL05C020BB5N <sup>□</sup>	12pF	±2%	CL05C120GB5N <sup>□</sup>				
2.0pF	±0.25pF		CL05C020CB5N <sup>□</sup>	12pF	±5%	CL05C120JB5N <sup>□</sup>				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Standard & High Capacitors

## Product Line Up (COG)

### ■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	50Vdc	13pF	±5%	CL05C130JB5N <sup>□</sup>
		14pF	±5%	CL05C140JB5N <sup>□</sup>
		15pF	±5%	CL05C150JB5N <sup>□</sup>
		16pF	±5%	CL05C160JB5N <sup>□</sup>
		17pF	±5%	CL05C170JB5N <sup>□</sup>
		18pF	±2%	CL05C180GB5N <sup>□</sup>
		18pF	±5%	CL05C180JB5N <sup>□</sup>
		20pF	±2%	CL05C200GB5N <sup>□</sup>
		20pF	±5%	CL05C200JB5N <sup>□</sup>
		22pF	±1%	CL05C220FB5N <sup>□</sup>
		22pF	±2%	CL05C220GB5N <sup>□</sup>
		22pF	±5%	CL05C220JB5N <sup>□</sup>
		24pF	±5%	CL05C240JB5N <sup>□</sup>
		26pF	±5%	CL05C260JB5N <sup>□</sup>
		27pF	±1%	CL05C270FB5N <sup>□</sup>
		27pF	±5%	CL05C270JB5N <sup>□</sup>
		30pF	±5%	CL05C300JB5N <sup>□</sup>
		33pF	±1%	CL05C330FB5N <sup>□</sup>
		33pF	±5%	CL05C330JB5N <sup>□</sup>
		36pF	±5%	CL05C360JB5N <sup>□</sup>
		39pF	±2%	CL05C390GB5N <sup>□</sup>
		39pF	±5%	CL05C390JB5N <sup>□</sup>
		43pF	±2%	CL05C430GB5N <sup>□</sup>
		43pF	±5%	CL05C430JB5N <sup>□</sup>
		47pF	±1%	CL05C470FB5N <sup>□</sup>
		47pF	±5%	CL05C470JB5N <sup>□</sup>
		51pF	±5%	CL05C510JB5N <sup>□</sup>
		56pF	±1%	CL05C560FB5N <sup>□</sup>
		56pF	±5%	CL05C560JB5N <sup>□</sup>
		62pF	±2%	CL05C620GB5N <sup>□</sup>
		62pF	±5%	CL05C620JB5N <sup>□</sup>
		68pF	±5%	CL05C680JB5N <sup>□</sup>
		75pF	±5%	CL05C750JB5N <sup>□</sup>
82pF	±5%	CL05C820JB5N <sup>□</sup>		
91pF	±5%	CL05C910JB5N <sup>□</sup>		
100pF	±1%	CL05C101FB5N <sup>□</sup>		
100pF	±2%	CL05C101GB5N <sup>□</sup>		
100pF	±5%	CL05C101JB5N <sup>□</sup>		
100pF	±10%	CL05C101KB5N <sup>□</sup>		
110pF	±5%	CL05C111JB5N <sup>□</sup>		
120pF	±2%	CL05C121GB5N <sup>□</sup>		
120pF	±5%	CL05C121JB5N <sup>□</sup>		
130pF	±5%	CL05C131JB5N <sup>□</sup>		
150pF	±5%	CL05C151JB5N <sup>□</sup>		
160pF	±5%	CL05C161JB5N <sup>□</sup>		
180pF	±5%	CL05C181JB5N <sup>□</sup>		
200pF	±5%	CL05C201JB5N <sup>□</sup>		
220pF	±1%	CL05C221FB5N <sup>□</sup>		
220pF	±2%	CL05C221GB5N <sup>□</sup>		
220pF	±5%	CL05C221JB5N <sup>□</sup>		
240pF	±5%	CL05C241JB5N <sup>□</sup>		
270pF	±5%	CL05C271JB5N <sup>□</sup>		
300pF	±5%	CL05C301JB5N <sup>□</sup>		
330pF	±5%	CL05C331JB5N <sup>□</sup>		

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	50Vdc	390pF	±5%	CL05C391JB5N <sup>□</sup>
		470pF	±1%	CL05C471FB5N <sup>□</sup>
		470pF	±5%	CL05C471JB5N <sup>□</sup>
		560pF	±5%	CL05C561JB5N <sup>□</sup>
		680pF	±5%	CL05C681JB5N <sup>□</sup>
		820pF	±5%	CL05C821JB5N <sup>□</sup>
		1.0nF	±1%	CL05C102FB5N <sup>□</sup>
		1.0nF	±5%	CL05C102JB5N <sup>□</sup>

### ■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
0.90mm	16Vdc	68pF	±1%	CL10C680F08N <sup>□</sup>	
		68pF	±2%	CL10C680G08N <sup>□</sup>	
		100pF	±2%	CL10C101G08N <sup>□</sup>	
		820pF	±5%	CL10C821J08N <sup>□</sup>	
		1.0nF	±5%	CL10C102J08N <sup>□</sup>	
		2.2nF	±5%	CL10C222J08N <sup>□</sup>	
		3.9nF	±5%	CL10C392J08N <sup>□</sup>	
		25Vdc	10pF	±0.5pF	CL10C100DA8N <sup>□</sup>
			10pF	±5%	CL10C100JA8N <sup>□</sup>
			15pF	±5%	CL10C150JA8N <sup>□</sup>
			20pF	±5%	CL10C200JA8N <sup>□</sup>
			33pF	±5%	CL10C330JA8N <sup>□</sup>
			47pF	±5%	CL10C470JA8N <sup>□</sup>
			68pF	±5%	CL10C680JA8N <sup>□</sup>
			100pF	±5%	CL10C101JA8N <sup>□</sup>
	100pF		±10%	CL10C101KA8N <sup>□</sup>	
	120pF		±5%	CL10C121JA8N <sup>□</sup>	
	150pF		±5%	CL10C151JA8N <sup>□</sup>	
	180pF		±5%	CL10C181JA8N <sup>□</sup>	
	270pF		±10%	CL10C271KA8N <sup>□</sup>	
	330pF		±10%	CL10C331KA8N <sup>□</sup>	
	390pF		±5%	CL10C391JA8N <sup>□</sup>	
	470pF		±5%	CL10C471JA8N <sup>□</sup>	
	560pF		±5%	CL10C561JA8N <sup>□</sup>	
	680pF		±5%	CL10C681JA8N <sup>□</sup>	
	820pF	±5%	CL10C821JA8N <sup>□</sup>		
	1.5nF	±2%	CL10C152GA8N <sup>□</sup>		
	1.5nF	±5%	CL10C152JA8N <sup>□</sup>		
	1.8nF	±5%	CL10C182JA8N <sup>□</sup>		
	10nF	±5%	CL10C103JA8N <sup>□</sup>		
	1.0nF	±2%	CL10C102GA8N <sup>□</sup>		
	1.0nF	±5%	CL10C102JA8N <sup>□</sup>		
	2.2nF	±2%	CL10C222GA8N <sup>□</sup>		
2.2nF	±5%	CL10C222JA8N <sup>□</sup>			
3.3nF	±2%	CL10C332GA8N <sup>□</sup>			
3.3nF	±5%	CL10C332JA8N <sup>□</sup>			
3.9nF	±5%	CL10C392JA8N <sup>□</sup>			
50Vdc	0.2pF	±0.1pF	CL10C0R2BB8N <sup>□</sup>		
	0.2pF	±0.25pF	CL10C0R2CB8N <sup>□</sup>		
	0.3pF	±0.1pF	CL10C0R3BB8N <sup>□</sup>		
	0.3pF	±0.25pF	CL10C0R3CB8N <sup>□</sup>		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (COG)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.90mm	50Vdc	0.47pF	±0.1pF	CL10CR47BB8NNN□	0.90mm	50Vdc	6.8pF	±0.25pF	CL10C6R8CB8NNN□
		0.5pF	±0.1pF	CL10C0R5BB8NNN□			6.8pF	±0.5pF	CL10C6R8DB8NNN□
		0.5pF	±0.25pF	CL10C0R5CB8NNN□			7.0pF	±0.1pF	CL10C070BB8NNN□
		0.56pF	±0.1pF	CL10CR56BB8NNN□			7.0pF	±0.25pF	CL10C070CB8NNN□
		0.68pF	±0.1pF	CL10CR68BB8NNN□			7.0pF	±0.5pF	CL10C070DB8NNN□
		0.75pF	±0.1pF	CL10CR75BB8NNN□			7.5pF	±0.1pF	CL10C7R5BB8NNN□
		0.75pF	±0.25pF	CL10CR75CB8NNN□			7.5pF	±0.25pF	CL10C7R5CB8NNN□
		0.8pF	±0.1pF	CL10C0R8BB8NNN□			7.5pF	±0.5pF	CL10C7R5DB8NNN□
		0.82pF	±0.1pF	CL10CR82BB8NNN□			8.0pF	±0.25pF	CL10C080CB8NNN□
		1.0pF	±0.1pF	CL10C010BB8NNN□			8.0pF	±0.5pF	CL10C080DB8NNN□
		1.0pF	±0.25pF	CL10C010CB8NNN□			8.2pF	±0.1pF	CL10C8R2BB8NNN□
		1.2pF	±0.1pF	CL10C1R2BB8NNN□			8.2pF	±0.25pF	CL10C8R2CB8NNN□
		1.2pF	±0.25pF	CL10C1R2CB8NNN□			8.2pF	±0.5pF	CL10C8R2DB8NNN□
		1.5pF	±0.1pF	CL10C1R5BB8NNN□			9.0pF	±0.25pF	CL10C090CB8NNN□
		1.5pF	±0.25pF	CL10C1R5CB8NNN□			9.0pF	±0.5pF	CL10C090DB8NNN□
		1.8pF	±0.1pF	CL10C1R8BB8NNN□			9.1pF	±0.25pF	CL10C9R1CB8NNN□
		1.8pF	±0.25pF	CL10C1R8CB8NNN□			9.1pF	±0.5pF	CL10C9R1DB8NNN□
		2.0pF	±0.1pF	CL10C020BB8NNN□			10pF	±0.1pF	CL10C100BB8NNN□
		2.0pF	±0.25pF	CL10C020CB8NNN□			10pF	±0.25pF	CL10C100CB8NNN□
		2.2pF	±0.1pF	CL10C2R2BB8NNN□			10pF	±0.5pF	CL10C100DB8NNN□
		2.2pF	±0.25pF	CL10C2R2CB8NNN□			10pF	±1%	CL10C100FB8NNN□
		2.4pF	±0.1pF	CL10C2R4BB8NNN□			10pF	±2%	CL10C100GB8NNN□
		2.4pF	±0.25pF	CL10C2R4CB8NNN□			10pF	±5%	CL10C100JB8NNN□
		2.5pF	±0.1pF	CL10C2R5BB8NNN□			10pF	±10%	CL10C100KB8NNN□
		2.5pF	±0.25pF	CL10C2R5CB8NNN□			11pF	±2%	CL10C110GB8NNN□
		2.7pF	±0.1pF	CL10C2R7BB8NNN□			11pF	±5%	CL10C110JB8NNN□
		2.7pF	±0.25pF	CL10C2R7CB8NNN□			12pF	±1%	CL10C120FB8NNN□
		3.0pF	±0.1pF	CL10C030BB8NNN□			12pF	±2%	CL10C120GB8NNN□
		3.0pF	±0.25pF	CL10C030CB8NNN□			12pF	±5%	CL10C120JB8NNN□
		3.3pF	±0.1pF	CL10C3R3BB8NNN□			13pF	±2%	CL10C130GB8NNN□
		3.3pF	±0.25pF	CL10C3R3CB8NNN□			13pF	±5%	CL10C130JB8NNN□
		3.5pF	±0.25pF	CL10C3R5CB8NNN□			14pF	±5%	CL10C140JB8NNN□
3.6pF	±0.1pF	CL10C3R6BB8NNN□	15pF	±1%	CL10C150FB8NNN□				
3.6pF	±0.25pF	CL10C3R6CB8NNN□	15pF	±2%	CL10C150GB8NNN□				
3.9pF	±0.1pF	CL10C3R9BB8NNN□	15pF	±5%	CL10C150JB8NNN□				
3.9pF	±0.25pF	CL10C3R9CB8NNN□	15pF	±10%	CL10C150KB8NNN□				
4.0pF	±0.1pF	CL10C040BB8NNN□	16pF	±5%	CL10C160JB8NNN□				
4.0pF	±0.25pF	CL10C040CB8NNN□	17pF	±5%	CL10C170JB8NNN□				
4.3pF	±0.1pF	CL10C4R3BB8NNN□	18pF	±1%	CL10C180FB8NNN□				
4.3pF	±0.25pF	CL10C4R3CB8NNN□	18pF	±2%	CL10C180GB8NNN□				
4.7pF	±0.1pF	CL10C4R7BB8NNN□	18pF	±5%	CL10C180JB8NNN□				
4.7pF	±0.25pF	CL10C4R7CB8NNN□	19pF	±5%	CL10C190JB8NNN□				
5.0pF	±0.1pF	CL10C050BB8NNN□	20pF	±1%	CL10C200FB8NNN□				
5.0pF	±0.25pF	CL10C050CB8NNN□	20pF	±2%	CL10C200GB8NNN□				
5.0pF	±0.5pF	CL10C050DB8NNN□	20pF	±5%	CL10C200JB8NNN□				
5.1pF	±0.25pF	CL10C5R1CB8NNN□	21pF	±5%	CL10C210JB8NNN□				
5.6pF	±0.1pF	CL10C5R6BB8NNN□	22pF	±1%	CL10C220FB8NNN□				
5.6pF	±0.25pF	CL10C5R6CB8NNN□	22pF	±2%	CL10C220GB8NNN□				
5.6pF	±0.5pF	CL10C5R6DB8NNN□	22pF	±5%	CL10C220JB8NNN□				
6.0pF	±0.25pF	CL10C060CB8NNN□	22pF	±10%	CL10C220KB8NNN□				
6.0pF	±0.5pF	CL10C060DB8NNN□	23pF	±5%	CL10C230JB8NNN□				
6.2pF	±0.25pF	CL10C6R2CB8NNN□	24pF	±2%	CL10C240GB8NNN□				
6.2pF	±0.5pF	CL10C6R2DB8NNN□	24pF	±5%	CL10C240JB8NNN□				
6.8pF	±0.1pF	CL10C6R8BB8NNN□	25pF	±5%	CL10C250JB8NNN□				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Standard & High Capacitors

## Product Line Up (COG)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.90mm	50Vdc	26pF	±5%	CL10C260JB8N <sup>□</sup>	0.90mm	50Vdc	91pF	±5%	CL10C910JB8N <sup>□</sup>
		27pF	±1%	CL10C270FB8N <sup>□</sup>			95pF	±5%	CL10C950JB8N <sup>□</sup>
		27pF	±2%	CL10C270GB8N <sup>□</sup>			100pF	±1%	CL10C101FB8N <sup>□</sup>
		27pF	±5%	CL10C270JB8N <sup>□</sup>			100pF	±2%	CL10C101GB8N <sup>□</sup>
		28pF	±2%	CL10C280GB8N <sup>□</sup>			100pF	±5%	CL10C101JB8N <sup>□</sup>
		28pF	±5%	CL10C280JB8N <sup>□</sup>			100pF	±10%	CL10C101KB8N <sup>□</sup>
		30pF	±1%	CL10C300FB8N <sup>□</sup>			110pF	±5%	CL10C111JB8N <sup>□</sup>
		30pF	±5%	CL10C300JB8N <sup>□</sup>			120pF	±1%	CL10C121FB8N <sup>□</sup>
		32pF	±2%	CL10C320GB8N <sup>□</sup>			120pF	±2%	CL10C121GB8N <sup>□</sup>
		32pF	±5%	CL10C320JB8N <sup>□</sup>			120pF	±5%	CL10C121JB8N <sup>□</sup>
		33pF	±1%	CL10C330FB8N <sup>□</sup>			120pF	±10%	CL10C121KB8N <sup>□</sup>
		33pF	±2%	CL10C330GB8N <sup>□</sup>			130pF	±1%	CL10C131FB8N <sup>□</sup>
		33pF	±5%	CL10C330JB8N <sup>□</sup>			130pF	±5%	CL10C131JB8N <sup>□</sup>
		33pF	±10%	CL10C330KB8N <sup>□</sup>			140pF	±5%	CL10C141JB8N <sup>□</sup>
		35pF	±2%	CL10C350GB8N <sup>□</sup>			150pF	±2%	CL10C151GB8N <sup>□</sup>
		35pF	±5%	CL10C350JB8N <sup>□</sup>			150pF	±5%	CL10C151JB8N <sup>□</sup>
		36pF	±2%	CL10C360GB8N <sup>□</sup>			160pF	±5%	CL10C161JB8N <sup>□</sup>
		36pF	±5%	CL10C360JB8N <sup>□</sup>			170pF	±2%	CL10C171GB8N <sup>□</sup>
		39pF	±1%	CL10C390FB8N <sup>□</sup>			170pF	±5%	CL10C171JB8N <sup>□</sup>
		39pF	±2%	CL10C390GB8N <sup>□</sup>			180pF	±1%	CL10C181FB8N <sup>□</sup>
		39pF	±5%	CL10C390JB8N <sup>□</sup>			180pF	±2%	CL10C181GB8N <sup>□</sup>
		41pF	±2%	CL10C410GB8N <sup>□</sup>			180pF	±5%	CL10C181JB8N <sup>□</sup>
		41pF	±5%	CL10C410JB8N <sup>□</sup>			190pF	±5%	CL10C191JB8N <sup>□</sup>
		42pF	±5%	CL10C420JB8N <sup>□</sup>			200pF	±1%	CL10C201FB8N <sup>□</sup>
		43pF	±5%	CL10C430JB8N <sup>□</sup>			200pF	±5%	CL10C201JB8N <sup>□</sup>
		47pF	±1%	CL10C470FB8N <sup>□</sup>			220pF	±1%	CL10C221FB8N <sup>□</sup>
		47pF	±2%	CL10C470GB8N <sup>□</sup>			220pF	±2%	CL10C221GB8N <sup>□</sup>
		47pF	±5%	CL10C470JB8N <sup>□</sup>			220pF	±5%	CL10C221JB8N <sup>□</sup>
		47pF	±10%	CL10C470KB8N <sup>□</sup>			220pF	±10%	CL10C221KB8N <sup>□</sup>
		50pF	±5%	CL10C500JB8N <sup>□</sup>			240pF	±5%	CL10C241JB8N <sup>□</sup>
		51pF	±2%	CL10C510GB8N <sup>□</sup>			250pF	±5%	CL10C251JB8N <sup>□</sup>
		51pF	±5%	CL10C510JB8N <sup>□</sup>			270pF	±1%	CL10C271FB8N <sup>□</sup>
		56pF	±1%	CL10C560FB8N <sup>□</sup>			270pF	±2%	CL10C271GB8N <sup>□</sup>
		56pF	±2%	CL10C560GB8N <sup>□</sup>			270pF	±5%	CL10C271JB8N <sup>□</sup>
		56pF	±5%	CL10C560JB8N <sup>□</sup>			280pF	±5%	CL10C281JB8N <sup>□</sup>
		56pF	±10%	CL10C560KB8N <sup>□</sup>			300pF	±5%	CL10C301JB8N <sup>□</sup>
		60pF	±5%	CL10C600JB8N <sup>□</sup>			330pF	±0.25pF	CL10C331CB8N <sup>□</sup>
		62pF	±2%	CL10C620GB8N <sup>□</sup>			330pF	±1%	CL10C331FB8N <sup>□</sup>
		62pF	±5%	CL10C620JB8N <sup>□</sup>			330pF	±2%	CL10C331GB8N <sup>□</sup>
		68pF	±1%	CL10C680FB8N <sup>□</sup>			330pF	±5%	CL10C331JB8N <sup>□</sup>
		68pF	±2%	CL10C680GB8N <sup>□</sup>			350pF	±5%	CL10C351JB8N <sup>□</sup>
		68pF	±5%	CL10C680JB8N <sup>□</sup>			360pF	±5%	CL10C361JB8N <sup>□</sup>
68pF	±10%	CL10C680KB8N <sup>□</sup>	390pF	±1%	CL10C391FB8N <sup>□</sup>				
70pF	±2%	CL10C700GB8N <sup>□</sup>	390pF	±2%	CL10C391GB8N <sup>□</sup>				
70pF	±5%	CL10C700JB8N <sup>□</sup>	390pF	±5%	CL10C391JB8N <sup>□</sup>				
75pF	±2%	CL10C750GB8N <sup>□</sup>	390pF	±10%	CL10C391KB8N <sup>□</sup>				
75pF	±5%	CL10C750JB8N <sup>□</sup>	430pF	±5%	CL10C431JB8N <sup>□</sup>				
80pF	±2%	CL10C800GB8N <sup>□</sup>	470pF	±1%	CL10C471FB8N <sup>□</sup>				
80pF	±5%	CL10C800JB8N <sup>□</sup>	470pF	±2%	CL10C471GB8N <sup>□</sup>				
82pF	±1%	CL10C820FB8N <sup>□</sup>	470pF	±5%	CL10C471JB8N <sup>□</sup>				
82pF	±2%	CL10C820GB8N <sup>□</sup>	470pF	±10%	CL10C471KB8N <sup>□</sup>				
82pF	±5%	CL10C820JB8N <sup>□</sup>	500pF	±5%	CL10C501JB8N <sup>□</sup>				
90pF	±5%	CL10C900JB8N <sup>□</sup>	510pF	±5%	CL10C511JB8N <sup>□</sup>				
91pF	±2%	CL10C910GB8N <sup>□</sup>	560pF	±1%	CL10C561FB8N <sup>□</sup>				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (COG)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.90mm	50Vdc	560pF	±2%	CL10C561GB8NNN □
		560pF	±5%	CL10C561JB8NNN □
		560pF	±10%	CL10C561KB8NNN □
		620pF	±5%	CL10C621JB8NNN □
		680pF	±1%	CL10C681FB8NNN □
		680pF	±2%	CL10C681GB8NNN □
		680pF	±5%	CL10C681JB8NNN □
		680pF	±10%	CL10C681KB8NNN □
		720pF	±5%	CL10C721JB8NNN □
		750pF	±5%	CL10C751JB8NNN □
		820pF	±1%	CL10C821FB8NNN □
		820pF	±2%	CL10C821GB8NNN □
		820pF	±5%	CL10C821JB8NNN □
		820pF	±10%	CL10C821KB8NNN □
		910pF	±5%	CL10C911JB8NNN □
		1.0nF	±1%	CL10C102FB8NNN □
		1.0nF	±2%	CL10C102GB8NNN □
		1.0nF	±5%	CL10C102JB8NNN □
		1.2nF	±5%	CL10C122JB8NNN □
		1.5nF	±5%	CL10C152JB8NNN □
		1.8nF	±5%	CL10C182JB8NNN □
		2.2nF	±5%	CL10C222JB8NNN □
		2.7nF	±5%	CL10C272JB8NNN □
		3.3nF	±5%	CL10C332JB8NNN □
4.7nF	±5%	CL10C472JB8NNN □		
5.6nF	±5%	CL10C562JB8NNN □		

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
0.75mm	25Vdc	220pF	±2%	CL21C221GAANNN □	
		220pF	±5%	CL21C221JAANNN □	
		270pF	±5%	CL21C271JAANNN □	
		680pF	±5%	CL21C681JAANNN □	
		1.5nF	±5%	CL21C152JAANNN □	
		3.9nF	±5%	CL21C392JAANNN □	
		50Vdc	0.47pF	±0.1pF	CL21CR47BBANNN □
			0.47pF	±0.25pF	CL21CR47CBANNN □
	0.5pF		±0.1pF	CL21C0R5BBANNN □	
	0.5pF		±0.25pF	CL21C0R5CBANNN □	
	0.68pF		±0.1pF	CL21CR68BBANNN □	
	0.75pF		±0.1pF	CL21CR75BBANNN □	
	0.82pF		±0.1pF	CL21CR82BBANNN □	
	0.82pF		±0.25pF	CL21CR82CBANNN □	
	1.0pF		±0.1pF	CL21C010BBANNN □	
	1.0pF		±0.25pF	CL21C010CBANNN □	
	1.2pF		±0.1pF	CL21C1R2BBANNN □	
	1.2pF		±0.25pF	CL21C1R2CBANNN □	
	1.5pF		±0.1pF	CL21C1R5BBANNN □	
	1.5pF		±0.25pF	CL21C1R5CBANNN □	
	1.8pF		±0.1pF	CL21C1R8BBANNN □	
	1.8pF		±0.25pF	CL21C1R8CBANNN □	
	1.8pF	±0.5pF	CL21C1R8DBANNN □		

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.75mm	50Vdc	2.0pF	±0.25pF	CL21C020CBANNN □
		2.2pF	±0.1pF	CL21C2R2BBANNN □
		2.2pF	±0.25pF	CL21C2R2CBANNN □
		2.4pF	±0.25pF	CL21C2R4CBANNN □
		2.5pF	±0.25pF	CL21C2R5CBANNN □
		2.7pF	±0.1pF	CL21C2R7BBANNN □
		2.7pF	±0.25pF	CL21C2R7CBANNN □
		3.0pF	±0.1pF	CL21C030BBANNN □
		3.0pF	±0.25pF	CL21C030CBANNN □
		3.2pF	±0.25pF	CL21C3R2CBANNN □
		3.3pF	±0.1pF	CL21C3R3BBANNN □
		3.3pF	±0.25pF	CL21C3R3CBANNN □
		3.6pF	±0.1pF	CL21C3R6BBANNN □
		3.6pF	±0.25pF	CL21C3R6CBANNN □
		3.9pF	±0.1pF	CL21C3R9BBANNN □
		3.9pF	±0.25pF	CL21C3R9CBANNN □
		4.0pF	±0.1pF	CL21C040BBANNN □
		4.0pF	±0.25pF	CL21C040CBANNN □
		4.7pF	±0.1pF	CL21C4R7BBANNN □
		4.7pF	±0.25pF	CL21C4R7CBANNN □
		5.0pF	±0.1pF	CL21C050BBANNN □
		5.0pF	±0.25pF	CL21C050CBANNN □
		5.1pF	±0.25pF	CL21C5R1CBANNN □
		5.6pF	±0.25pF	CL21C5R6CBANNN □
		5.6pF	±0.5pF	CL21C5R6DBANNN □
		6.0pF	±0.25pF	CL21C060CBANNN □
		6.0pF	±0.5pF	CL21C060DBANNN □
		6.2pF	±0.25pF	CL21C6R2CBANNN □
		6.8pF	±0.25pF	CL21C6R8CBANNN □
		6.8pF	±0.5pF	CL21C6R8DBANNN □
		7.0pF	±0.25pF	CL21C070CBANNN □
		7.0pF	±0.5pF	CL21C070DBANNN □
		7.5pF	±0.25pF	CL21C7R5CBANNN □
		7.5pF	±0.5pF	CL21C7R5DBANNN □
		8.0pF	±0.25pF	CL21C080CBANNN □
		8.0pF	±0.5pF	CL21C080DBANNN □
		8.2pF	±0.1pF	CL21C8R2BBANNN □
		8.2pF	±0.25pF	CL21C8R2CBANNN □
		8.2pF	±0.5pF	CL21C8R2DBANNN □
		9.0pF	±0.25pF	CL21C090CBANNN □
		9.0pF	±0.5pF	CL21C090DBANNN □
		10pF	±0.1pF	CL21C100BBANNN □
		10pF	±0.25pF	CL21C100CBANNN □
		10pF	±0.5pF	CL21C100DBANNN □
		10pF	±1%	CL21C100FBANNN □
		10pF	±2%	CL21C100GBANNN □
		10pF	±5%	CL21C100JBANNN □
		12pF	±1%	CL21C120FBANNN □
12pF	±2%	CL21C120GBANNN □		
12pF	±5%	CL21C120JBANNN □		
13pF	±5%	CL21C130JBANNN □		
14pF	±5%	CL21C140JBANNN □		
15pF	±2%	CL21C150GBANNN □		
15pF	±5%	CL21C150JBANNN □		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Standard & High Capacitors

## Product Line Up (COG)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.75mm	50Vdc	15pF	±10%	CL21C150KBANNN□	0.75mm	50Vdc	75pF	±5%	CL21C750JBANNN□
		16pF	±5%	CL21C160JBANNN□			80pF	±2%	CL21C800GBANNN□
		17pF	±5%	CL21C170JBANNN□			80pF	±5%	CL21C800JBANNN□
		18pF	±1%	CL21C180FBANNN□			82pF	±1%	CL21C820FBANNN□
		18pF	±2%	CL21C180GBANNN□			82pF	±2%	CL21C820GBANNN□
		18pF	±5%	CL21C180JBANNN□			82pF	±5%	CL21C820JBANNN□
		20pF	±2%	CL21C200GBANNN□			90pF	±5%	CL21C900JBANNN□
		20pF	±5%	CL21C200JBANNN□			91pF	±5%	CL21C910JBANNN□
		22pF	±1%	CL21C220FBANNN□			100pF	±1%	CL21C101FBANNN□
		22pF	±2%	CL21C220GBANNN□			100pF	±2%	CL21C101GBANNN□
		22pF	±5%	CL21C220JBANNN□			100pF	±5%	CL21C101JBANNN□
		22pF	±10%	CL21C220KBANNN□			100pF	±10%	CL21C101KBANNN□
		23pF	±5%	CL21C230JBANNN□			110pF	±5%	CL21C111JBANNN□
		24pF	±2%	CL21C240GBANNN□			120pF	±1%	CL21C121FBANNN□
		24pF	±5%	CL21C240JBANNN□			120pF	±2%	CL21C121GBANNN□
		25pF	±5%	CL21C250JBANNN□			120pF	±5%	CL21C121JBANNN□
		27pF	±1%	CL21C270FBANNN□			130pF	±5%	CL21C131JBANNN□
		27pF	±2%	CL21C270GBANNN□			150pF	±1%	CL21C151FBANNN□
		27pF	±5%	CL21C270JBANNN□			150pF	±2%	CL21C151GBANNN□
		28pF	±5%	CL21C280JBANNN□			150pF	±5%	CL21C151JBANNN□
		30pF	±5%	CL21C300JBANNN□			160pF	±5%	CL21C161JBANNN□
		32pF	±2%	CL21C320GBANNN□			180pF	±1%	CL21C181FBANNN□
		32pF	±5%	CL21C320JBANNN□			180pF	±2%	CL21C181GBANNN□
		33pF	±1%	CL21C330FBANNN□			180pF	±5%	CL21C181JBANNN□
		33pF	±2%	CL21C330GBANNN□			200pF	±5%	CL21C201JBANNN□
		33pF	±5%	CL21C330JBANNN□			220pF	±1%	CL21C221FBANNN□
		33pF	±10%	CL21C330KBANNN□			220pF	±2%	CL21C221GBANNN□
		36pF	±5%	CL21C360JBANNN□			220pF	±5%	CL21C221JBANNN□
		38pF	±2%	CL21C380GBANNN□			220pF	±10%	CL21C221KBANNN□
		38pF	±5%	CL21C380JBANNN□			240pF	±5%	CL21C241JBANNN□
		39pF	±2%	CL21C390GBANNN□			250pF	±5%	CL21C251JBANNN□
		39pF	±5%	CL21C390JBANNN□			260pF	±5%	CL21C261JBANNN□
		40pF	±2%	CL21C400GBANNN□			270pF	±1%	CL21C271FBANNN□
		40pF	±5%	CL21C400JBANNN□			270pF	±2%	CL21C271GBANNN□
		43pF	±5%	CL21C430JBANNN□			270pF	±5%	CL21C271JBANNN□
		47pF	±1%	CL21C470FBANNN□			300pF	±5%	CL21C301JBANNN□
		47pF	±2%	CL21C470GBANNN□			330pF	±1%	CL21C331FBANNN□
		47pF	±5%	CL21C470JBANNN□			330pF	±2%	CL21C331GBANNN□
		47pF	±10%	CL21C470KBANNN□			330pF	±5%	CL21C331JBANNN□
		50pF	±5%	CL21C500JBANNN□			360pF	±5%	CL21C361JBANNN□
		51pF	±2%	CL21C510GBANNN□			390pF	±1%	CL21C391FBANNN□
		51pF	±5%	CL21C510JBANNN□			390pF	±2%	CL21C391GBANNN□
		56pF	±1%	CL21C560FBANNN□			390pF	±5%	CL21C391JBANNN□
		56pF	±2%	CL21C560GBANNN□			430pF	±5%	CL21C431JBANNN□
		56pF	±5%	CL21C560JBANNN□			470pF	±1%	CL21C471FBANNN□
60pF	±5%	CL21C600JBANNN□	470pF	±2%	CL21C471GBANNN□				
62pF	±5%	CL21C620JBANNN□	470pF	±5%	CL21C471JBANNN□				
68pF	±1%	CL21C680FBANNN□	470pF	±10%	CL21C471KBANNN□				
68pF	±2%	CL21C680GBANNN□	510pF	±5%	CL21C511JBANNN□				
68pF	±5%	CL21C680JBANNN□	560pF	±1%	CL21C561FBANNN□				
68pF	±10%	CL21C680KBANNN□	560pF	±2%	CL21C561GBANNN□				
70pF	±5%	CL21C700JBANNN□	560pF	±5%	CL21C561JBANNN□				
70pF	±10%	CL21C700KBANNN□	680pF	±5%	CL21C681JBANNN□				
75pF	±2%	CL21C750GBANNN□	0.95mm	50Vdc	5.0pF	±0.25pF	CL21C050CBCNN□		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑



Product Line Up (COG)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.95mm	50Vdc	10pF	±0.1pF	CL21C100BBCNNN □
		10pF	±5%	CL21C100JBCNNN □
		11pF	±2%	CL21C110GBCNNN □
		11pF	±5%	CL21C110JBCNNN □
		12pF	±2%	CL21C120GBCNNN □
		12pF	±5%	CL21C120JBCNNN □
		13pF	±2%	CL21C130GBCNNN □
		15pF	±2%	CL21C150GBCNNN □
		15pF	±5%	CL21C150JBCNNN □
		16pF	±2%	CL21C160GBCNNN □
		18pF	±2%	CL21C180GBCNNN □
		18pF	±5%	CL21C180JBCNNN □
		20pF	±2%	CL21C200GBCNNN □
		20pF	±5%	CL21C200JBCNNN □
		22pF	±2%	CL21C220GBCNNN □
		22pF	±5%	CL21C220JBCNNN □
		24pF	±2%	CL21C240GBCNNN □
		30pF	±2%	CL21C300GBCNNN □
		30pF	±5%	CL21C300JBCNNN □
		36pF	±2%	CL21C360GBCNNN □
		36pF	±5%	CL21C360JBCNNN □
		39pF	±5%	CL21C390JBCNNN □
		43pF	±2%	CL21C430GBCNNN □
		43pF	±5%	CL21C430JBCNNN □
		47pF	±5%	CL21C470JBCNNN □
		51pF	±5%	CL21C510JBCNNN □
		51pF	±10%	CL21C510KBCNNN □
		56pF	±2%	CL21C560GBCNNN □
		56pF	±5%	CL21C560JBCNNN □
		68pF	±5%	CL21C680JBCNNN □
		82pF	±5%	CL21C820JBCNNN □
		100pF	±5%	CL21C101JBCNNN □
		120pF	±1%	CL21C121FBCNNN □
		120pF	±5%	CL21C121JBCNNN □
		120pF	±10%	CL21C121KBCNNN □
		150pF	±5%	CL21C151JBCNNN □
		180pF	±5%	CL21C181JBCNNN □
		220pF	±5%	CL21C221JBCNNN □
		300pF	±5%	CL21C301JBCNNN □
		330pF	±2%	CL21C331GBCNNN □
		470pF	±5%	CL21C471JBCNNN □
		510pF	±5%	CL21C511JBCNNN □
560pF	±5%	CL21C561JBCNNN □		
600pF	±5%	CL21C601JBCNNN □		
620pF	±5%	CL21C621JBCNNN □		
680pF	±1%	CL21C681FBCNNN □		
680pF	±2%	CL21C681GBCNNN □		
680pF	±5%	CL21C681JBCNNN □		
750pF	±5%	CL21C751JBCNNN □		
820pF	±1%	CL21C821FBCNNN □		
820pF	±2%	CL21C821GBCNNN □		
820pF	±5%	CL21C821JBCNNN □		
910pF	±5%	CL21C911JBCNNN □		
1.0nF	±1%	CL21C102FBCNNN □		

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
0.95mm	50Vdc	1.0nF	±2%	CL21C102GBCNNN □	
		1.0nF	±5%	CL21C102JBCNNN □	
1.0nF		±10%	CL21C102KBCNNN □		
1.35mm	25Vdc	270pF	±5%	CL21C271JAFNNN □	
		2.7nF	±5%	CL21C272JAFNNN □	
		3.3nF	±5%	CL21C332JAFNNN □	
		3.9nF	±5%	CL21C392JAFNNN □	
		4.7nF	±5%	CL21C472JAFNNN □	
		4.7nF	±10%	CL21C472KAFNNN □	
		8.2nF	±5%	CL21C822JAFNNN □	
		10nF	±2%	CL21C103GAFNNN □	
		10nF	±5%	CL21C103JAFNNN □	
		50Vdc	1.2nF	±1%	CL21C122FBFNNN □
			1.2nF	±2%	CL21C122GBFNNN □
			1.2nF	±5%	CL21C122JBFNNN □
	1.3nF		±5%	CL21C132JBFNNN □	
	1.5nF		±1%	CL21C152FBFNNN □	
	1.5nF		±2%	CL21C152GBFNNN □	
	1.5nF		±5%	CL21C152JBFNNN □	
	1.6nF		±5%	CL21C162JBFNNN □	
	1.8nF		±2%	CL21C182GBFNNN □	
	1.8nF	±5%	CL21C182JBFNNN □		
	2.0nF	±5%	CL21C202JBFNNN □		
	2.2nF	±2%	CL21C222GBFNNN □		
2.2nF	±5%	CL21C222JBFNNN □			
2.7nF	±5%	CL21C272JBFNNN □			
3.3nF	±5%	CL21C332JBFNNN □			
3.9nF	±5%	CL21C392JBFNNN □			
4.7nF	±5%	CL21C472JBFNNN □			
5.6nF	±5%	CL21C562JBFNNN □			
6.8nF	±5%	CL21C682JBFNNN □			
10nF	±5%	CL21C103JBFNNN □			

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
1.00mm	25Vdc	330pF	±5%	CL31C331JACNNN □
		470pF	±10%	CL31C471KACNNN □
	50Vdc	0.5pF	±0.25pF	CL31C0R5CBCNNN □
		1.0pF	±0.25pF	CL31C010CBCNNN □
		1.2pF	±0.25pF	CL31C1R2CBCNNN □
		1.8pF	±0.25pF	CL31C1R8CBCNNN □
		2.0pF	±0.25pF	CL31C020CBCNNN □
		2.2pF	±0.25pF	CL31C2R2CBCNNN □
		2.7pF	±0.1pF	CL31C2R7CBCNNN □
		2.7pF	±0.25pF	CL31C2R7CBCNNN □
		3.0pF	±0.25pF	CL31C030CBCNNN □
		3.3pF	±0.25pF	CL31C3R3CBCNNN □
		3.9pF	±0.1pF	CL31C3R9BBCNNN □
		4.3pF	±0.1pF	CL31C4R3BBCNNN □
		4.7pF	±0.25pF	CL31C4R7CBCNNN □
		5.6pF	±0.25pF	CL31C5R6CBCNNN □
		5.6pF	±0.5pF	CL31C5R6DBCNNN □

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. †

# Standard & High Capacitors

## Product Line Up (COG)

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number		
1.00mm	50Vdc	6.0pF	±0.5pF	CL31C060DBCNNN□	1.00mm	50Vdc	200pF	±5%	CL31C201JBCNNN□		
		6.8pF	±0.25pF	CL31C6R8CBCNNN□			220pF	±1%	CL31C221FBCNNN□		
		8.0pF	±0.25pF	CL31C080CBCNNN□			220pF	±2%	CL31C221GBCNNN□		
		8.2pF	±0.25pF	CL31C8R2CBCNNN□			220pF	±5%	CL31C221JBCNNN□		
		10pF	±0.5pF	CL31C100DBCNNN□			240pF	±5%	CL31C241JBCNNN□		
		10pF	±5%	CL31C100JBCNNN□			270pF	±5%	CL31C271JBCNNN□		
		11pF	±5%	CL31C110JBCNNN□			300pF	±5%	CL31C301JBCNNN□		
		12pF	±5%	CL31C120JBCNNN□			330pF	±1%	CL31C331FBCNNN□		
		13pF	±5%	CL31C130JBCNNN□			330pF	±2%	CL31C331GBCNNN□		
		15pF	±5%	CL31C150JBCNNN□			330pF	±5%	CL31C331JBCNNN□		
		15pF	±10%	CL31C150KBCNNN□			360pF	±1%	CL31C361FBCNNN□		
		16pF	±5%	CL31C160JBCNNN□			360pF	±5%	CL31C361JBCNNN□		
		18pF	±5%	CL31C180JBCNNN□			390pF	±1%	CL31C391FBCNNN□		
		20pF	±2%	CL31C200GBCNNN□			390pF	±2%	CL31C391GBCNNN□		
		20pF	±5%	CL31C200JBCNNN□			390pF	±5%	CL31C391JBCNNN□		
		22pF	±1%	CL31C220FBCNNN□			430pF	±5%	CL31C431JBCNNN□		
		22pF	±5%	CL31C220JBCNNN□			470pF	±1%	CL31C471FBCNNN□		
		24pF	±2%	CL31C240GBCNNN□			470pF	±2%	CL31C471GBCNNN□		
		24pF	±5%	CL31C240JBCNNN□			470pF	±5%	CL31C471JBCNNN□		
		25pF	±5%	CL31C250JBCNNN□			470pF	±10%	CL31C471KBCNNN□		
		27pF	±1%	CL31C270FBCNNN□			510pF	±5%	CL31C511JBCNNN□		
		27pF	±2%	CL31C270GBCNNN□			560pF	±1%	CL31C561FBCNNN□		
		27pF	±5%	CL31C270JBCNNN□			560pF	±5%	CL31C561JBCNNN□		
		30pF	±5%	CL31C300JBCNNN□			620pF	±5%	CL31C621JBCNNN□		
		33pF	±1%	CL31C330FBCNNN□			680pF	±1%	CL31C681FBCNNN□		
		33pF	±5%	CL31C330JBCNNN□			680pF	±2%	CL31C681GBCNNN□		
		36pF	±5%	CL31C360JBCNNN□			680pF	±5%	CL31C681JBCNNN□		
		38pF	±2%	CL31C380GBCNNN□			750pF	±5%	CL31C751JBCNNN□		
		39pF	±2%	CL31C390GBCNNN□			820pF	±5%	CL31C821JBCNNN□		
		39pF	±5%	CL31C390JBCNNN□			910pF	±5%	CL31C911JBCNNN□		
		43pF	±2%	CL31C430GBCNNN□			1.0nF	±1%	CL31C102FBCNNN□		
		43pF	±5%	CL31C430JBCNNN□			1.0nF	±2%	CL31C102GBCNNN□		
		47pF	±5%	CL31C470JBCNNN□			1.0nF	±5%	CL31C102JBCNNN□		
		47pF	±10%	CL31C470KBCNNN□			1.2nF	±2%	CL31C122GBCNNN□		
		51pF	±5%	CL31C510JBCNNN□			1.2nF	±5%	CL31C122JBCNNN□		
		56pF	±2%	CL31C560GBCNNN□			1.5nF	±2%	CL31C152GBCNNN□		
		56pF	±5%	CL31C560JBCNNN□			1.5nF	±5%	CL31C152JBCNNN□		
		62pF	±5%	CL31C620JBCNNN□			1.8nF	±2%	CL31C182GBCNNN□		
		68pF	±2%	CL31C680GBCNNN□			1.8nF	±5%	CL31C182JBCNNN□		
		68pF	±5%	CL31C680JBCNNN□			2.0nF	±5%	CL31C202JBCNNN□		
		82pF	±5%	CL31C820JBCNNN□			2.2nF	±1%	CL31C222FBCNNN□		
		91pF	±5%	CL31C910JBCNNN□			2.2nF	±2%	CL31C222GBCNNN□		
		100pF	±2%	CL31C101GBCNNN□			2.2nF	±5%	CL31C222JBCNNN□		
		100pF	±5%	CL31C101JBCNNN□			1.40mm	25Vdc	4.7nF	±2%	CL31C472GAFNNN□
		100pF	±10%	CL31C101KBCNNN□					8.2nF	±2%	CL31C822GAFNNN□
		110pF	±5%	CL31C111JBCNNN□					8.2nF	±5%	CL31C822JAFNNN□
		120pF	±5%	CL31C121JBCNNN□					10nF	±2%	CL31C103GAFNNN□
		130pF	±5%	CL31C131JBCNNN□					10nF	±5%	CL31C103JAFNNN□
150pF	±5%	CL31C151JBCNNN□	50Vdc	2.7nF	±5%	CL31C272JBFNNN□					
160pF	±5%	CL31C161JBCNNN□		3.0nF	±5%	CL31C302JBFNNN□					
160pF	±10%	CL31C161KBCNNN□		3.3nF	±1%	CL31C332FBNFNN□					
180pF	±1%	CL31C181FBCNNN□		3.3nF	±2%	CL31C332GFBFNN□					
180pF	±2%	CL31C181GBCNNN□		3.3nF	±5%	CL31C332JBFNNN□					
180pF	±5%	CL31C181JBCNNN□		3.3nF	±10%	CL31C332KBFNNN□					

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑

Product Line Up (COG)

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
1.40mm	50Vdc	3.6nF	±5%	CL31C362JBFNNN□	
		3.9nF	±5%	CL31C392JBFNNN□	
		4.7nF	±1%	CL31C472FBFNNN□	
		4.7nF	±2%	CL31C472GBFNNN□	
		4.7nF	±5%	CL31C472JBFNNN□	
1.80mm	16Vdc	120nF	±5%	CL31C124JOHNNN□	
		25Vdc	6.8nF	±2%	CL31C682GAHNNN□
			8.2nF	±5%	CL31C822JAHNNN□
			10nF	±5%	CL31C103JAHNNN□
			39nF	±5%	CL31C393JAHNNN□
			47nF	±5%	CL31C473JAHNNN□
			56nF	±5%	CL31C563JAHNNN□
			68nF	±5%	CL31C683JAHNNN□
			82nF	±5%	CL31C823JAHNNN□
	100nF	±5%	CL31C104JAHNNN□		
	50Vdc	5.6nF	±5%	CL31C562JBHNNN□	
		6.8nF	±5%	CL31C682JBHNNN□	
		10nF	±2%	CL31C103GBHNNN□	
		15nF	±5%	CL31C153JBHNNN□	
		18nF	±5%	CL31C183JBHNNN□	
		22nF	±5%	CL31C223JBHNNN□	
		27nF	±5%	CL31C273JBHNNN□	
33nF		±5%	CL31C333JBHNNN□		
47nF	±5%	CL31C473JBHNNN□			

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
1.45mm	25Vdc	10nF	±5%	CL32C103JAFNNN□
		50Vdc	1.0nF	±5%
	1.2nF		±5%	CL32C122JBFNNN□
	1.5nF		±5%	CL32C152JBFNNN□
	1.8nF		±5%	CL32C182JBFNNN□
	2.7nF		±5%	CL32C272JBFNNN□
	3.9nF		±5%	CL32C392JBFNNN□
	4.7nF		±5%	CL32C472JBFNNN□
	5.6nF		±5%	CL32C562JBFNNN□
	6.8nF		±5%	CL32C682JBFNNN□
	8.2nF		±1%	CL32C822FBFNNN□
	8.2nF		±5%	CL32C822JBFNNN□
	10nF		±1%	CL32C103FBFNNN□
	10nF		±2%	CL32C103GBFNNN□
	10nF	±5%	CL32C103JBFNNN□	
1.80mm	50Vdc	11nF	±5%	CL32C113JBHNNN□

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Standard & High Capacitors

## Product Line Up (X5R)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.11mm	6.3Vdc	220nF	±20%	CL05A224MQLHEC□	<a href="#">Derating</a> <a href="#">Ref</a>	0.55mm	16Vdc	100nF	±5%	CL05A104J05N11□		
0.22mm	6.3Vdc	470nF	±20%	CL05A474MQXLNN□	<a href="#">Derating</a> <a href="#">Ref</a>			100nF	±10%	CL05A104K05N11□		
		1.0uF	±20%	CL05A105MQXLNN□	<a href="#">Derating</a> <a href="#">Ref</a>			100nF	±20%	CL05A104M05N11□		
0.33mm	4.0Vdc	2.2uF	±20%	CL05A225MR3LRN□	<a href="#">Derating</a> <a href="#">Ref</a>			220nF	±10%	CL05A224K05N11□		
	6.3Vdc	1.0uF	±20%	CL05A105MR3LNN□	<a href="#">Derating</a> <a href="#">Ref</a>		470nF	±10%	CL05A474K05N11□	<a href="#">Derating</a>		
			2.2uF	±20%	CL05A225MQ3LRN□		<a href="#">Derating</a> <a href="#">Ref</a>	1.0uF	±10%	CL05A105K05N11□	<a href="#">Derating</a>	
0.35mm	6.3Vdc	4.7uF	±20%	CL05A475MQ3LUN□	<a href="#">Derating</a> <a href="#">Ref</a>				4.2uF	±10%	CL05A425K05LUN□	<a href="#">Derating</a> <a href="#">Ref</a>
0.55mm	4.0Vdc	100nF	±20%	CL05A104MR5N11□			25Vdc	100nF	±10%	CL05A104K5N11□		
		1.0uF	±20%	CL05A105MR5N11□	<a href="#">Derating</a>			220nF	±10%	CL05A224K5N11□		
		1.3uF	±10%	CL05A135KR5N11□	<a href="#">Derating</a>			330nF	±10%	CL05A334K5N11□		
		1.4uF	±10%	CL05A145KR5N11□	<a href="#">Derating</a>	330nF		±20%	CL05A334M5N11□			
		1.5uF	±10%	CL05A155KR5N11□	<a href="#">Derating</a>	470nF		±10%	CL05A474K5N11□			
		1.7uF	±10%	CL05A175KR5N11□	<a href="#">Derating</a>	1.0uF		±10%	CL05A105K5N11□	<a href="#">Derating</a>		
		1.8uF	±10%	CL05A185KR5N11□	<a href="#">Derating</a>							
		2.2uF	±20%	CL05A225MR5N11□	<a href="#">Derating</a> <a href="#">Ref</a>							
		3.3uF	±20%	CL05A335MR5N11□	<a href="#">Derating</a> <a href="#">Ref</a>							
			6.3Vdc	100nF	±10%	CL05A104K5N11□			0.57mm	4.0Vdc	2.2uF	±20%
		100nF	±20%	CL05A104M5N11□		6.3Vdc	2.2uF	±10%		CL05A225K5NSN□	<a href="#">Ref</a>	
		120nF	±10%	CL05A124K5N11□			2.2uF	±20%		CL05A225M5NSN□	<a href="#">Ref</a>	
		150nF	±10%	CL05A154K5N11□		10Vdc	2.2uF	±10%		CL05A225K5NSN□	<a href="#">Derating</a> <a href="#">Ref</a>	
		220nF	±5%	CL05A224J5N11□			2.2uF	±20%		CL05A225M5NSN□	<a href="#">Derating</a> <a href="#">Ref</a>	
		220nF	±10%	CL05A224K5N11□		0.60mm	4.0Vdc	4.7uF		±20%	CL05A475MR5NQN□	<a href="#">Derating</a> <a href="#">Ref</a>
		220nF	±20%	CL05A224M5N11□			6.3Vdc	4.7uF		±20%	CL05A475M5NQN□	<a href="#">Derating</a> <a href="#">Ref</a>
		330nF	±10%	CL05A334K5N11□			16Vdc	2.2uF		±10%	CL05A225K05NQN□	<a href="#">Derating</a> <a href="#">Ref</a>
		330nF	±20%	CL05A334M5N11□				2.2uF		±20%	CL05A225M05NQN□	<a href="#">Derating</a> <a href="#">Ref</a>
		470nF	±10%	CL05A474K5N11□			25Vdc	1uF		±10%	CL05A105K5NQN□	<a href="#">Derating</a>
		680nF	±10%	CL05A684K5N11□				1uF	±20%	CL05A105M5NQN□	<a href="#">Derating</a>	
		1.0uF	±5%	CL05A105J5N11□	<a href="#">Derating</a>		0.65mm	4.0Vdc	10uF	±20%	CL05A106MR5N11□	<a href="#">Derating</a> <a href="#">Ref</a>
		1.0uF	±10%	CL05A105K5N11□	<a href="#">Derating</a>			6.3Vdc	4.7uF	±10%	CL05A475K5N11□	<a href="#">Derating</a> <a href="#">Ref</a>
		1.0uF	±20%	CL05A105M5N11□	<a href="#">Derating</a>				4.7uF	±20%	CL05A475M5N11□	<a href="#">Derating</a> <a href="#">Ref</a>
		2.2uF	±10%	CL05A225K5N11□	<a href="#">Derating</a> <a href="#">Ref</a>				10uF	±20%	CL05A106M5N11□	<a href="#">Derating</a> <a href="#">Ref</a>
		2.2uF	±20%	CL05A225M5N11□	<a href="#">Derating</a> <a href="#">Ref</a>			13uF	±20%	CL05A136M5N11□	<a href="#">Derating</a> <a href="#">Ref</a>	
		10nF	±10%	CL05A103K5N11□		10Vdc		4.7uF	±10%	CL05A475K5N11□	<a href="#">Derating</a> <a href="#">Ref</a>	
		47nF	±10%	CL05A473K5N11□				4.7uF	±20%	CL05A475M5N11□	<a href="#">Derating</a> <a href="#">Ref</a>	
		47nF	±20%	CL05A473M5N11□				10uF	±20%	CL05A106M5N11□	<a href="#">Derating</a> <a href="#">Ref</a>	
		68nF	±10%	CL05A683K5N11□		35Vdc		1uF	±10%	CL05A105K5N11□	<a href="#">Derating</a> <a href="#">Ref</a>	
		82nF	±10%	CL05A823K5N11□		0.70mm		4.0Vdc	2.2uF	±20%	CL05A225MR5NUN□	<a href="#">Derating</a>
		100nF	±10%	CL05A104K5N11□			6.3Vdc	10uF	±20%	CL05A106MR5NUN□	<a href="#">Derating</a> <a href="#">Ref</a>	
		100nF	±20%	CL05A104M5N11□				10uF	±20%	CL05A106M5NUN□	<a href="#">Derating</a> <a href="#">Ref</a>	
		150nF	±10%	CL05A154K5N11□			10Vdc	10uF	±20%	CL05A106M5NUN□	<a href="#">Derating</a> <a href="#">Ref</a>	
		220nF	±10%	CL05A224K5N11□			16Vdc	4.7uF	±20%	CL05A475M05NUN□	<a href="#">Derating</a> <a href="#">Ref</a>	
		220nF	±20%	CL05A224M5N11□			25Vdc	2.2uF	±10%	CL05A225K5NUN□	<a href="#">Derating</a> <a href="#">Ref</a>	
		330nF	±10%	CL05A334K5N11□				2.2uF	±20%	CL05A225M5NUN□	<a href="#">Derating</a> <a href="#">Ref</a>	
		330nF	±20%	CL05A334M5N11□			0.75mm	6.3Vdc	22uF	±20%	CL05A226M5N6J□	<a href="#">Derating</a>
		470nF	±10%	CL05A474K5N11□				0.80mm	6.3Vdc	22uF	±20%	CL05A226M5N6J□
		1.0uF	±5%	CL05A105J5N11□					10Vdc	10uF	±20%	CL05A106M5N6J□
		1.0uF	±10%	CL05A105K5N11□		0.85mm	6.3Vdc	22uF	±20%	CL05A226M5N6J□	<a href="#">Derating</a>	
		1.0uF	±20%	CL05A105M5N11□			0.90mm	4.0Vdc	22uF	±20%	CL05A226M5N6J□	<a href="#">Derating</a> <a href="#">Ref</a>
		2.2uF	±10%	CL05A225K5N11□	<a href="#">Derating</a> <a href="#">Ref</a>							
		2.2uF	±20%	CL05A225M5N11□	<a href="#">Derating</a> <a href="#">Ref</a>							
	16Vdc	4.7nF	±10%	CL05A472K05N11□								
		22nF	±10%	CL05A223K05N11□								
		47nF	±10%	CL05A473K05N11□								
		47nF	±20%	CL05A473M05N11□								

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (X5R)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark		
0.50mm	4.0Vdc	10uF	±20%	CL10A106MR5LQN □	Derating Ref	0.90mm	16Vdc	1.0uF	±10%	CL10A105K08N1NN □			
		2.2uF	±10%	CL10A225KQ5L1NN □				1.0uF	±20%	CL10A105M08N1NN □			
		4.7uF	±10%	CL10A475KQ5L1NN □				2.2uF	±10%	CL10A225K08N1NN □			
		4.7uF	±20%	CL10A475MQ5L1NN □				4.7uF	±10%	CL10A475K08N1NN □	Derating		
		10uF	±20%	CL10A106MQ5L1RN □	Derating Ref			4.7uF	±20%	CL10A475M08N1NN □	Derating		
	10Vdc	1.0uF	±10%	CL10A105KP5L1NN □				25Vdc	100nF	±10%	CL10A104KA8N1NN □		
		2.2uF	±10%	CL10A225KP5L1NN □					220nF	±10%	CL10A224KA8N1NN □		
		4.7uF	±10%	CL10A475KP5L1NN □	Derating				220nF	±20%	CL10A224MA8N1NN □		
		4.7uF	±20%	CL10A475MP5L1NN □	Derating				330nF	±10%	CL10A334KA8N1NN □		
	16Vdc	1.0uF	±10%	CL10A105K05L1NN □					470nF	±10%	CL10A474KA8N1NN □		
		2.2uF	±10%	CL10A225K05L1NN □	Derating		1.0uF		±10%	CL10A105KA8N1NN □			
		1.0uF	±10%	CL10A105KA5L1NN □	Derating		2.2uF		±10%	CL10A225KA8N1NN □	Derating		
		2.2uF	±10%	CL10A225KA5L1NN □	Derating		35Vdc		1.0uF	±10%	CL10A105KL8N1NN □		
	0.60mm	6.3Vdc	4.7uF	±10%	CL10A475KQ5N1NN □					2.2uF	±10%	CL10A225KL8N1NN □	Derating
			4.7uF	±20%	CL10A475MQ5N1NN □					50Vdc	100nF	±10%	CL10A104KB8N1NN □
			0.80mm	6.3Vdc	22uF			±20%	CL10A226MQ7LUN □		Derating	220nF	±10%
10Vdc	22uF	±20%			CL10A226MP7LUN □	Derating	470nF	±10%	CL10A474KB8N1NN □				
16Vdc	22uF	±20%	CL10A226M07JZN □	Derating	0.95mm	4.0Vdc	22uF	±20%	CL10A225MR8N1NN □				
0.90mm	4.0Vdc	2.2uF	±20%	CL10A225MR8N1NN □				4.7uF	±20%	CL10A475MR8N1NN □	Derating		
		4.7uF	±20%	CL10A475MR8N1NN □			Derating	10uF	±10%	CL10A106KR8N1NN □	Derating Ref		
		10uF	±20%	CL10A106MR8N1NN □			Derating Ref	10uF	±20%	CL10A106MR8N1NN □	Derating Ref		
		2.2uF	±20%	CL10A226MR8N1NN □		Derating	2.2uF	±20%	CL10A226MR8N1NN □	Derating			
6.3Vdc	4.0Vdc	470nF	±10%	CL10A474KQ8N1NN □			16Vdc	4.7uF	±10%	CL10A475K08N1NN □	Derating		
		470nF	±20%	CL10A474MQ8N1NN □				10uF	±10%	CL10A106K08N1NN □	Derating Ref		
		680nF	±10%	CL10A684KQ8N1NN □				10uF	±20%	CL10A106M08N1NN □	Derating Ref		
		1.0uF	±10%	CL10A105KQ8N1NN □				25Vdc	4.7uF	±10%	CL10A475KA8N1NN □	Derating	
		1.0uF	±20%	CL10A105MQ8N1NN □			4.7uF		±20%	CL10A475MA8N1NN □	Derating		
		2.2uF	±10%	CL10A225KQ8N1NN □			1.00mm	4.0Vdc	47uF	±20%	CL10A476MR8N1NN □	Derating Ref	
		2.2uF	±20%	CL10A225MQ8N1NN □					6.3Vdc	10uF	±20%	CL10A106MQ8N1NN □	Ref
		2.2uF	±20%	CL10A225MQ8N1NN □						22uF	±10%	CL10A226KQ8N1NN □	Derating
		3.3uF	±10%	CL10A335KQ8N1NN □					22uF	±20%	CL10A226MQ8N1NN □	Derating	
		3.3uF	±20%	CL10A335MQ8N1NN □				47uF	±20%	CL10A476MQ8Q1NN □	Derating		
4.7uF	±10%	CL10A475KQ8N1NN □		10Vdc		22uF		±20%	CL10A226MP8N1NN □	Derating			
4.7uF	±20%	CL10A475MQ8N1NN □		25Vdc	10uF	±20%		CL10A106MA8N1NN □	Derating Ref				
10uF	±10%	CL10A106KQ8N1NN □	Ref		35Vdc	4.7uF		±10%	CL10A475KL8N1NN □	Derating			
10uF	±20%	CL10A106MQ8N1NN □	Ref	1.05mm		6.3Vdc		22uF	±20%	CL10A226MQ8N1UN □	Derating		
22uF	±20%	CL10A226MQ7N1NN □	Ref		10Vdc			22uF	±20%	CL10A226MP8N1UN □	Derating		
10Vdc	10Vdc	220nF	±10%	CL10A224KP8N1NN □		1.10mm	4.0Vdc	47uF	±20%	CL10A476MR8N1ZN □	Derating Ref		
		330nF	±10%	CL10A334KP8N1NN □				47uF	±20%	CL10A476MQ8C1NN □	Derating		
		470nF	±10%	CL10A474KP8N1NN □									
		680nF	±10%	CL10A684KP8N1NN □									
		820nF	±10%	CL10A824KP8N1NN □									
		1.0uF	±10%	CL10A105KP8N1NN □									
		1.0uF	±20%	CL10A105MP8N1NN □									
		2.2uF	±10%	CL10A225KP8N1NN □									
		2.2uF	±20%	CL10A225MP8N1NN □									
		3.3uF	±10%	CL10A335KP8N1NN □									
		3.3uF	±20%	CL10A335MP8N1NN □									
		4.7uF	±10%	CL10A475KP8N1NN □									
		4.7uF	±20%	CL10A475MP8N1NN □									
		10uF	±10%	CL10A106KP8N1NN □	Derating Ref								
		10uF	±20%	CL10A106MP8N1NN □	Derating Ref								
		16Vdc	16Vdc	330nF	±10%	CL10A334K08N1NN □							
470nF	±10%			CL10A474K08N1NN □									

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. †

# Standard & High Capacitors

## Product Line Up (X5R)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark		
0.70mm	10Vdc	2.2uF	±10%	CL21A225KP6LNN □		1.35mm	6.3Vdc	2.2uF	±20%	CL21A225MQFNNN □			
	16Vdc	1.0uF	±20%	CL21A105M06LNN □				3.3uF	±10%	CL21A335KQFNNN □			
		2.2uF	±10%	CL21A225K06LNN □				3.3uF	±20%	CL21A335MQFNNN □			
0.80mm	6.3Vdc	10uF	±10%	CL21A106KQ7LQN □				4.7uF	±10%	CL21A475KQFNNN □			
		47uF	±20%	CL21A476MQ7FRN □	Derating			4.7uF	±20%	CL21A475MQFNNN □			
		47uF	±20%	CL21A476MQ7LRN □	Derating			6.8uF	±10%	CL21A685KQFNNN □			
	10Vdc	10uF	±10%	CL21A106KP7LQN □	Derating			10uF	±10%	CL21A106KQFNNN □			
0.90mm	6.3Vdc	47uF	±20%	CL21A476MQ8LRN □	Derating			10uF	±20%	CL21A106MQFNNN □			
0.95mm	4.0Vdc	22uF	±20%	CL21A226MRCLRN □	Derating			10Vdc	22uF	±20%	CL21A226MQFNNN □		
		47uF	±20%	CL21A476MRCLRP □	Derating				1.0uF	±10%	CL21A105KQFNNN □		
	6.3Vdc	1.0uF	±10%	CL21A105KQCLNN □			2.2uF		±10%	CL21A225KQFNNN □			
		1.0uF	±10%	CL21A105KQCLNN □			2.2uF		±20%	CL21A225MPFNNN □			
		4.7uF	±10%	CL21A475KQCLNN □			3.3uF		±10%	CL21A335KQFNNN □			
	4.7uF	±20%	CL21A475MQCLNN □		4.7uF		±10%		CL21A475KQFNNN □				
	10uF	±10%	CL21A106KQCLNN □		4.7uF		±20%		CL21A475MPFNNN □				
	10uF	±10%	CL21A106KQCLRN □		10uF		±10%		CL21A106KQFNNN □				
	10uF	±20%	CL21A106MQCLNN □		10uF		±20%		CL21A106MPFNNN □				
	22uF	±10%	CL21A226KQCLRN □	Derating	10uF		±20%		CL21A106MPFNNN □				
	22uF	±20%	CL21A226MQCLQN □	Derating	16Vdc		680nF	±10%	CL21A684KQFNNN □				
	22uF	±20%	CL21A226MQCLRN □	Derating			1.0uF	±10%	CL21A105KQFNNN □				
	47uF	±20%	CL21A476MQCLRN □	Derating			2.2uF	±10%	CL21A225KQFNNN □				
	10Vdc	2.2uF	±10%	CL21A225KPCLNN □				2.2uF	±20%	CL21A225MOFNNN □			
		4.7uF	±10%	CL21A475KPCLNN □				3.3uF	±10%	CL21A335KQFNNN □			
		4.7uF	±20%	CL21A475MPCLNN □				4.7uF	±10%	CL21A475KQFNNN □			
		10uF	±10%	CL21A106KPCLNN □			Derating	10uF	±10%	CL21A106KQFNNN □	Derating		
		10uF	±10%	CL21A106KPCLQN □			Derating	25Vdc	470nF	±20%	CL21A474MAFNNN □		
		10uF	±20%	CL21A106MPCLNN □			Derating		1.0uF	±10%	CL21A105KQFNNN □		
		10uF	±20%	CL21A106MPCLQN □			Derating		2.2uF	±10%	CL21A225KQFNNN □		
		22uF	±10%	CL21A226KPCLRN □	Derating		50Vdc		1.0uF	±10%	CL21A105KQFNNN □	Derating	
		22uF	±20%	CL21A226MPCLRN □	Derating				2.2uF	±10%	CL21A225KQFNNN □	Derating	
		22uF	+80/-20%	CL21A226ZPCLRN □	Derating	2.2uF			±20%	CL21A226KQFNNN □	Derating		
	16Vdc	2.2uF	±10%	CL21A225KQCLNN □		1.40mm			4.0Vdc	22uF	±20%	CL21A226MRQNNN □	
		4.7uF	±10%	CL21A475KQCLNN □						47uF	±20%	CL21A476MRQNNN □	Derating
		4.7uF	±10%	CL21A475KQCLRN □					6.3Vdc	4.7uF	±10%	CL21A475KQQNNN □	Derating
		10uF	±10%	CL21A106KQCLNN □	Derating					10uF	±10%	CL21A106KQQNNN □	Derating
		10uF	±10%	CL21A106KQCLRN □	Derating			22uF		±10%	CL21A226KQQNNN □		
		10uF	±10%	CL21A106KQCLSN □	Derating			22uF		±20%	CL21A226MQQNNN □		
		22uF	±20%	CL21A226MOCLRN □	Derating			10Vdc	22uF	±20%	CL21A226MPQNNN □		
		25Vdc	1.0uF	±10%	CL21A105KQCLNN □				16Vdc	10uF	±10%	CL21A106KQQNNN □	Derating
			1.0uF	±10%	CL21A105KQCLRN □					22uF	±10%	CL21A226KQQNNN □	Derating
			2.2uF	±10%	CL21A225KQCLNN □		Derating			22uF	±20%	CL21A226MQQNNN □	Derating
	4.7uF		±10%	CL21A475KQCLRN □	Derating	22uF	±20%	CL21A226KQQNNN □		Derating			
	10uF	±10%	CL21A106KQCLRN □	Derating	25Vdc	4.7uF	±10%	CL21A475KQQNNN □	Derating				
	35Vdc	4.7uF	±10%	CL21A475KQCLRN □		Derating	4.7uF	±20%	CL21A475MAQNNN □	Derating			
		10uF	±10%	CL21A106KQCLRN □		Derating	22uF	±20%	CL21A226MAQNNN □	Derating			
		50Vdc	1.0uF	±10%		CL21A105KQCLNN □		50Vdc	2.2uF	±10%	CL21A225KQQNNN □	Derating	
			1.0uF	±10%	CL21A105KQCLRN □		4.7uF		±10%	CL21A475KQQNNN □	Derating		
	1.00mm	6.3Vdc	33uF	±20%	CL21A336MQ9LRN □	Derating	1.45mm	4.0Vdc	47uF	±20%	CL21A476MRYNNN □		
47uF			±20%	CL21A476MQ9LRN □	Derating	6.3Vdc			47uF	±10%	CL21A476KQYNNN □	Derating	
50Vdc		2.2uF	±10%	CL21A225KB9LNN □	Derating			47uF	±20%	CL21A476MQYNNN □	Derating		
1.20mm	6.3Vdc	33uF	±20%	CL21A336MQELRN □	Derating	25Vdc	10uF	±10%	CL21A106KAYNNN □	Derating			
	10Vdc	2.2uF	±10%	CL21A225KPENNN □									
1.25mm	6.3Vdc	47uF	±20%	CL21A476MQMNRN □	Derating								
1.35mm	4.0Vdc	10uF	±20%	CL21A106MRFNNN □									
	6.3Vdc	2.2uF	±10%	CL21A225KQFNNN □									

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (X5R)

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	6.3Vdc	10uF	±20%	CL31A106MQCLNN□		1.80mm	16Vdc	22uF	±20%	CL31A226MOHNNN□	Derating
		22uF	±10%	CL31A226KQCLNN□	Derating			25Vdc	2.2uF	±10%	CL31A225KAHNNN□
		22uF	±20%	CL31A226MQCLNN□	Derating		3.3uF		±10%	CL31A335KAHNNN□	
	10Vdc	10uF	±10%	CL31A106KPCLNN□			4.7uF	±10%	CL31A475KAHNNN□		
		10uF	±20%	CL31A106MPCLNN□			10uF	±10%	CL31A106KAHNNN□		
		10uF	±20%	CL31A106MPLNN□			10uF	±20%	CL31A106MAHNNN□		
	16Vdc	2.2uF	±10%	CL31A225KOCLNN□			22uF	±10%	CL31A226KAHNNN□	Derating	
		4.7uF	±10%	CL31A475KOCLNN□			22uF	±20%	CL31A226MAHNNN□	Derating	
		4.7uF	±20%	CL31A475MOCLNN□			35Vdc	2.2uF	±10%	CL31A225KLHNNN□	
		10uF	±10%	CL31A106KOCLNN□				50Vdc	2.2uF	±10%	CL31A225KBHNNN□
		22uF	±10%	CL31A226KOCLNN□	Derating		4.7uF		±10%	CL31A475KBHNNN□	
		22uF	±20%	CL31A226MOCLNN□	Derating		10uF		±10%	CL31A106KBHNNN□	
		25Vdc	4.7uF	±10%	CL31A475KACLNN□			10uF	±20%	CL31A106MBHNNN□	
	10uF		±10%	CL31A106KACLNN□	Derating						
1.00mm	35Vdc	4.7uF	±10%	CL31A475KL9LNN□	Derating	■ Size : 3.20 X 2.50mm (inch : 1210)					
		50Vdc	1.0uF	±10%	CL31A105KB9LNN□		Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
	100Vdc	2.2uF	±10%	CL31A225KB9LNN□		0.95mm	16Vdc	10uF	±10%	CL32A106KOCLNN□	
		4.7uF	±10%	CL31A475KOELNN□		22uF		±20%	CL32A226MOCLNN□	Derating	
1.20mm	16Vdc	4.7uF	±10%	CL31A475KOECLNN□		1.00mm	25Vdc	10uF	±10%	CL32A106KA9LNN□	
		4.7uF	±10%	CL31A475KOECLNN□	Derating	1.25mm	16Vdc	10uF	±10%	CL32A106KOMLNN□	
1.25mm	10Vdc	10uF	±10%	CL31A106KPPLNN□		1.50mm	10Vdc	22uF	±10%	CL32A226KPSLNN□	
		10uF	±20%	CL31A106MPPLNN□				22uF	±20%	CL32A226MPSLNN□	
	16Vdc	4.7uF	±10%	CL31A475KOPLNN□		25Vdc	6.8uF	±10%	CL32A685KASLNN□		
		4.7uF	±20%	CL31A475MOPLNN□		1.70mm	16Vdc	22uF	±10%	CL32A226KOTFNN□	Derating
25Vdc	1.0uF	±10%	CL31A105KAPLNN□		22uF			±20%	CL32A226MOTLNN□	Derating	
	2.2uF	±10%	CL31A225KAPLNN□		25Vdc	10uF	±10%	CL32A106KATLNN□			
4.7uF	±10%	CL31A475KAPLNN□		10uF		±20%	CL32A106MATLNN□				
1.70mm	50Vdc	2.2uF	±10%	CL31A225KBTLNN□		2.00mm	25Vdc	4.7uF	±10%	CL32A475KAULNN□	
1.80mm	6.3Vdc	3.3uF	±10%	CL31A335KQHNNN□				35Vdc	4.7uF	±10%	CL32A475KLULNN□
		10uF	±10%	CL31A106KQHNNN□		10uF	±10%		CL32A106KLULNN□		
		10uF	±20%	CL31A106MQHNNN□		10uF	±20%	CL32A106MLULNN□			
		15uF	±10%	CL31A156KQHNNN□			2.20mm	10Vdc	10uF	±10%	CL32A106KPINNN□
		15uF	±20%	CL31A156MQHNNN□		16Vdc			10uF	±10%	CL32A106KOILNN□
		22uF	±10%	CL31A226KQHNNN□			25Vdc	2.2uF	±20%	CL32A225MAINNNN□	Derating
		22uF	±20%	CL31A226MQHNNN□		4.7uF		±10%	CL32A475KAINNN□		
		33uF	±20%	CL31A336MQHNNN□		10uF	±10%	CL32A106KAILNN□			
		47uF	±10%	CL31A476KQHNNN□		10uF	±20%	CL32A106MAILNN□			
		47uF	±20%	CL31A476MQHNNN□		2.70mm	6.3Vdc	22uF	±10%	CL32A226KQJNNN□	
	100uF	±20%	CL31A107MQHNNN□	Derating	22uF			±20%	CL32A226MQJNNN□		
	10Vdc	3.3uF	±10%	CL31A335KPHNNN□		33uF	±20%	CL32A336MQJNNN□			
			±20%	CL31A335KPHNNN□		47uF	±10%	CL32A476KQJNNN□			
		10uF	±10%	CL31A106KPHNNN□		47uF	±20%	CL32A476MQJNNN□			
			±20%	CL31A106MPHNNN□		10Vdc	22uF	±10%	CL32A226KPJNNN□		
		22uF	±10%	CL31A226KPHNNN□			22uF	±20%	CL32A226MPJNNN□	Derating	
22uF		±20%	CL31A226MPHNNN□		47uF	±10%	CL32A476KPJNNN□	Derating			
47uF		±20%	CL31A476MPHNNN□	Derating	47uF	±20%	CL32A476MPJNNN□				
100uF		±20%	CL31A107MPHNNN□	Derating	16Vdc	10uF	±10%	CL32A106KOJNNN□			
2.2uF		±10%	CL31A225KOHNNN□			10uF	±20%	CL32A106MOJNNN□			
16Vdc		3.3uF	±10%	CL31A335KOHNNN□		22uF	±10%	CL32A226KOJNNN□			
	±20%		CL31A335KOHNNN□		22uF	±20%	CL32A226MOJNNN□				
	3.3uF	±20%	CL31A335MOHNNN□		47uF	±10%	CL32A476KOJNNN□				
		±10%	CL31A475KOHNNN□		47uF	±20%	CL32A476MOJNNN□				
	4.7uF	±10%	CL31A475MOHNNN□								
		±20%	CL31A475MOHNNN□								

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

# Standard & High Capacitors

## Product Line Up (X5R)

### ■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
2.70mm	16Vdc	47uF	±20%	CL32A476M0JNNN □		
		25Vdc	10uF	±10%	CL32A106KAJNNN □	
	10uF		±20%	CL32A106MAJNNN □		
	22uF		±10%	CL32A226KAJNNN □		
	22uF		±20%	CL32A226MAJNNN □		
	35Vdc	10uF	±10%	CL32A106KLJNNN □		
		50Vdc	2.2uF	±10%	CL32A225KBJNNN □	
			10uF	±10%	CL32A106KBJNNN □	
			10uF	±20%	CL32A106MBJNNN □	
	2.80mm	6.3Vdc	100uF	±20%	CL32A107MQVNNN □	Derating
150uF			±20%	CL32A157MQVNNN □	Derating	
220uF			±20%	CL32A227MQVNNN □	Derating	
10Vdc			100uF	±20%	CL32A107MPVNNN □	Derating

### ■ Size : 4.50 X 3.20mm (inch : 1812)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.70mm	6.3Vdc	33uF	±20%	CL43A336MQJNNN □	
		47uF	±10%	CL43A476KQJNNN □	
		47uF	±20%	CL43A476MQJNNN □	
	3.50mm	6.3Vdc	100uF	±20%	CL43A107MQLNNN □

### ■ Size : 5.70 X 5.00mm (inch : 2220)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.70mm	6.3Vdc	47uF	±20%	CL55A476MQJNNN □	
		68uF	±20%	CL55A686MQJNNN □	
		100uF	±20%	CL55A107MQJNNN □	
		10Vdc	47uF	±10%	CL55A476KPJNNN □

www.richpcb.com

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑



Product Line Up (X6S)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.33mm	6.3Vdc	1.0uF	±20%	CL05X105MQ3LNN □	Operating
0.55mm	4.0Vdc	2.2nF	±20%	CL05X222MR5NNN □	
		15nF	±20%	CL05X153MR5NNN □	
		47nF	±20%	CL05X473MR5NNN □	
		220nF	±20%	CL05X224MR5NNN □	
		2.2uF	±20%	CL05X225MR5NNN □	Operating
	6.3Vdc	680nF	±5%	CL05X684JQ5NNN □	
			1.0uF	±10%	CL05X105KQ5NNN □
	10Vdc	1.0uF	±10%	CL05X105KP5NNN □	Operating
0.57mm	2.5Vdc	2.2uF	±20%	CL05X225MS5NSN □	Operating Ref
0.60mm	25Vdc	1.0uF	±10%	CL05X105KA5NQN □	Operating Ref
0.70mm	4.0Vdc	4.7uF	±20%	CL05X475MR5NUN □	Operating Ref
		10uF	±20%	CL05X106MR5NUN □	Operating Ref

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	4.0Vdc	1.0uF	±20%	CL10X105MR8NNN □	
		4.7uF	±20%	CL10X475MR8NNN □	Operating
		10uF	±10%	CL10X106KR8NNN □	Operating Ref
		10uF	±20%	CL10X106MR8NNN □	Operating Ref
	6.3Vdc	1.0uF	±20%	CL10X105MQ8NNN □	
		2.2uF	±10%	CL10X225KQ8NNN □	
		2.2uF	±20%	CL10X225MQ8NNN □	
		4.7uF	±10%	CL10X475KQ8NNN □	Operating
		4.7uF	±20%	CL10X475MQ8NNN □	Operating
		10uF	±10%	CL10X106KQ8NNN □	Operating Ref
		10uF	±20%	CL10X106MQ8NNN □	Operating Ref
	10Vdc	2.2uF	±10%	CL10X225KP8NNN □	
	25Vdc	1.0uF	±10%	CL10X105KA8NNN □	
0.95mm	25Vdc	4.7uF	±10%	CL10X475KA8NQN □	Operating
1.00mm	10Vdc	10uF	±20%	CL10X106MP8NRRN □	Operating Ref
	16Vdc	4.7uF	±10%	CL10X475KQ8NRRN □	Operating
		10uF	±20%	CL10X106MQ8NRRN □	Operating Ref

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	2.5Vdc	22uF	±20%	CL21X226MSCLRNN □	Operating
	4.0Vdc	10uF	±10%	CL21X106KRCLRNN □	Operating
	10Vdc	10uF	±10%	CL21X106KPCLRNN □	Operating
1.35mm	4.0Vdc	4.7uF	±10%	CL21X475KRFNNNN □	
		10uF	±10%	CL21X106KRFNNNN □	
		10uF	±20%	CL21X106MRFNNNN □	
	16Vdc	2.2uF	±10%	CL21X225KOFNNNN □	
			10uF	±20%	CL21X226MRQNNNN □
1.40mm	4.0Vdc	22uF	±20%	CL21X226MRQNNNN □	Operating
	6.3Vdc	10uF	±10%	CL21X106KQQNNNN □	Operating
		22uF	±20%	CL21X226MQNNNN □	Operating
	16Vdc	10uF	±10%	CL21X106KQNNNN □	
		10uF	±20%	CL21X106MOQNNNN □	
	25Vdc	4.7uF	±10%	CL21X475KAQNNNN □	Operating
		4.7uF	±20%	CL21X475MAQNNNN □	Operating
1.45mm	2.5Vdc	47uF	±20%	CL21X476MSYNNNN □	Operating
	4.0Vdc	47uF	±20%	CL21X476MRYNNNN □	Operating
	10Vdc	10uF	±10%	CL21X106KPYNNNN □	
	25Vdc	10uF	±10%	CL21X106KAYNNNN □	Operating
		10uF	±20%	CL21X106MAYNNNN □	Operating

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	25Vdc	4.7uF	±10%	CL31X475KACLNN □	
1.80mm	4.0Vdc	10uF	±10%	CL31X106KRHNNN □	
		10uF	±20%	CL31X106MRHNNN □	
		22uF	±10%	CL31X226KRHNNN □	
		22uF	±20%	CL31X226MRHNNN □	
		47uF	±20%	CL31X476MRHNNN □	Operating
	6.3Vdc	10uF	±10%	CL31X106KQHNNN □	
		10uF	±20%	CL31X106MQHNNN □	
		22uF	±10%	CL31X226KQHNNN □	
		47uF	±10%	CL31X476KQHNNN □	Operating
		47uF	±20%	CL31X476MQHNNN □	Operating
16Vdc	22uF	±10%	CL31X226KOHNNN □	Operating	
25Vdc	10uF	±10%	CL31X106KAHNNN □		

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.70mm	6.3Vdc	22uF	±20%	CL32X226MQJNNN □	
	10Vdc	47uF	±10%	CL32X476KPJNNN □	
	16Vdc	10uF	±10%	CL32X106KQJNNN □	
2.80mm	4.0Vdc	100uF	±10%	CL32X107KRVNNN □	
	6.3Vdc	100uF	±20%	CL32X107MQVNNN □	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. †

# Standard & High Capacitors

## Product Line Up (X7R)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.33mm	16Vdc	100nF	±10%	CL05B104K03LNN □		0.55mm	16Vdc	47nF	±20%	CL05B473M05NNN □		
0.55mm	6.3Vdc	68nF	±10%	CL05B683KQ5NNN □				56nF	±10%	CL05B563K05NNN □		
		100nF	±10%	CL05B104KQ5NNN □				68nF	±10%	CL05B683K05NNN □		
		470nF	±10%	CL05B474KQ5NNN □	Ref.			82nF	±10%	CL05B823K05NNN □		
10Vdc	10Vdc	1.0nF	±10%	CL05B102KP5NNN □				100nF	±5%	CL05B104J05NNN □		
		2.2nF	±20%	CL05B222MP5NNN □				100nF	±10%	CL05B104K05NNN □		
		6.8nF	±20%	CL05B682MP5NNN □				100nF	±20%	CL05B104M05NNN □		
		10nF	±10%	CL05B103KP5NNN □				150nF	±10%	CL05B154K05NNN □		
		15nF	±20%	CL05B153MP5NNN □				220nF	±10%	CL05B224K05NNN □	Ref.	
		18nF	±10%	CL05B183KP5NNN □				25Vdc	220pF	±10%	CL05B221KA5NNN □	
		22nF	±10%	CL05B223KP5NNN □					270pF	±10%	CL05B271KA5NNN □	
		27nF	±10%	CL05B273KP5NNN □					330pF	±10%	CL05B331KA5NNN □	
		33nF	±10%	CL05B333KP5NNN □					470pF	±10%	CL05B471KA5NNN □	
		47nF	±10%	CL05B473KP5NNN □					560pF	±10%	CL05B561KA5NNN □	
		47nF	±20%	CL05B473MP5NNN □					1.0nF	±10%	CL05B102KA5NNN □	
		56nF	±10%	CL05B563KP5NNN □					1.5nF	±10%	CL05B152KA5NNN □	
		68nF	±10%	CL05B683KP5NNN □			1.8nF		±10%	CL05B182KA5NNN □		
		82nF	±10%	CL05B823KP5NNN □			2.2nF		±10%	CL05B222KA5NNN □		
		100nF	±5%	CL05B104JP5NNN □			2.2nF		±20%	CL05B222MA5NNN □		
		100nF	±10%	CL05B104KP5NNN □			3.3nF		±5%	CL05B332JA5NNN □		
		100nF	±20%	CL05B104MP5NNN □			3.3nF		±10%	CL05B332KA5NNN □		
		220nF	±10%	CL05B224KP5NNN □	Ref.		3.9nF		±10%	CL05B392KA5NNN □		
470nF	±10%	CL05B474KP5NNN □		4.7nF	±5%		CL05B472JA5NNN □					
16Vdc	16Vdc	220pF	±10%	CL05B221K05NNN □			4.7nF		±10%	CL05B472KA5NNN □		
		330pF	±10%	CL05B331K05NNN □			5.6nF		±10%	CL05B562KA5NNN □		
		820pF	±10%	CL05B821K05NNN □			6.8nF	±10%	CL05B682KA5NNN □			
		1.0nF	±10%	CL05B102K05NNN □			8.2nF	±10%	CL05B822KA5NNN □			
		2.2nF	±10%	CL05B222K05NNN □			10nF	±5%	CL05B103JA5NNN □			
		2.7nF	±10%	CL05B272K05NNN □			10nF	±10%	CL05B103KA5NNN □			
		3.9nF	±10%	CL05B392K05NNN □			10nF	±20%	CL05B103MA5NNN □			
		4.7nF	±10%	CL05B472K05NNN □			12nF	±10%	CL05B123KA5NNN □			
		4.7nF	±20%	CL05B472M05NNN □			15nF	±10%	CL05B153KA5NNN □			
		5.6nF	±10%	CL05B562K05NNN □			18nF	±10%	CL05B183KA5NNN □			
		6.8nF	±10%	CL05B682K05NNN □			22nF	±10%	CL05B223KA5NNN □			
		8.2nF	±10%	CL05B822K05NNN □			33nF	±10%	CL05B333KA5NNN □			
		10nF	±5%	CL05B103J05NNN □			47nF	±10%	CL05B473KA5NNN □			
		10nF	±10%	CL05B103K05NNN □			100nF	±10%	CL05B104KA5NNN □			
		10nF	±20%	CL05B103M05NNN □			50Vdc	12pF	±5%	CL05B120JB5NNN □		
		12nF	±10%	CL05B123K05NNN □				47pF	±5%	CL05B470JB5NNN □		
		15nF	±5%	CL05B153J05NNN □				100pF	±10%	CL05B101KB5NNN □		
		15nF	±10%	CL05B153K05NNN □				120pF	±10%	CL05B121KB5NNN □		
		18nF	±5%	CL05B183J05NNN □				150pF	±10%	CL05B151KB5NNN □		
		18nF	±10%	CL05B183K05NNN □				180pF	±10%	CL05B181KB5NNN □		
		22nF	±5%	CL05B223J05NNN □				200pF	±10%	CL05B201KB5NNN □		
		22nF	±10%	CL05B223K05NNN □				220pF	±5%	CL05B221JB5NNN □		
		22nF	±20%	CL05B223M05NNN □				220pF	±10%	CL05B221KB5NNN □		
		27nF	±5%	CL05B273J05NNN □				240pF	±10%	CL05B241KB5NNN □		
		27nF	±10%	CL05B273K05NNN □				270pF	±5%	CL05B271JB5NNN □		
		33nF	±5%	CL05B333J05NNN □				270pF	±10%	CL05B271KB5NNN □		
33nF	±10%	CL05B333K05NNN □		300pF	±10%			CL05B301KB5NNN □				
33nF	±20%	CL05B333M05NNN □		320pF	±10%			CL05B321KB5NNN □				
39nF	±10%	CL05B393K05NNN □		330pF	±5%			CL05B331JB5NNN □				
47nF	±5%	CL05B473J05NNN □		330pF	±10%	CL05B331KB5NNN □						
47nF	±10%	CL05B473K05NNN □		360pF	±10%	CL05B361KB5NNN □						

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (X7R)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.55mm	50Vdc	390pF	±5%	CL05B391JB5NNN□		0.90mm	10Vdc	100nF	±10%	CL10B104KP8NNN□		
		390pF	±10%	CL05B391KB5NNN□				150nF	±10%	CL10B154KP8NNN□		
		470pF	±5%	CL05B471JB5NNN□				220nF	±5%	CL10B224JP8NNN□		
		470pF	±10%	CL05B471KB5NNN□				220nF	±10%	CL10B224KP8NNN□		
		510pF	±10%	CL05B511KB5NNN□				330nF	±10%	CL10B334KP8NNN□		
		560pF	±5%	CL05B561JB5NNN□				470nF	±10%	CL10B474KP8NNN□		
		560pF	±10%	CL05B561KB5NNN□				1.0uF	±10%	CL10B105KP8NNN□		
		620pF	±10%	CL05B621KB5NNN□				2.2uF	±10%	CL10B225KP8NNN□	Ref	
		680pF	±5%	CL05B681JB5NNN□				16Vdc	470pF	±10%	CL10B471KO8NNN□	
		680pF	±10%	CL05B681KB5NNN□					820pF	±10%	CL10B821KO8NNN□	
		750pF	±10%	CL05B751KB5NNN□					1.0nF	±10%	CL10B102KO8NNN□	
		820pF	±10%	CL05B821KB5NNN□					2.2nF	±10%	CL10B222KO8NNN□	
		1.0nF	±5%	CL05B102JB5NNN□					3.3nF	±10%	CL10B332KO8NNN□	
		1.0nF	±10%	CL05B102KB5NNN□					3.9nF	±10%	CL10B392KO8NNN□	
		1.2nF	±5%	CL05B122JB5NNN□					10nF	±10%	CL10B103KO8NNN□	
		1.2nF	±10%	CL05B122KB5NNN□					15nF	±10%	CL10B153KO8NNN□	
		1.5nF	±5%	CL05B152JB5NNN□			16nF		±10%	CL10B163KO8NNN□		
		1.5nF	±10%	CL05B152KB5NNN□			18nF		±10%	CL10B183KO8NNN□		
		1.8nF	±10%	CL05B182KB5NNN□			22nF		±10%	CL10B223KO8NNN□		
		2.0nF	±10%	CL05B202KB5NNN□			27nF		±10%	CL10B273KO8NNN□		
		2.2nF	±5%	CL05B222JB5NNN□			33nF		±10%	CL10B333KO8NNN□		
		2.2nF	±10%	CL05B222KB5NNN□			39nF		±10%	CL10B393KO8NNN□		
		2.2nF	±20%	CL05B222MB5NNN□			47nF		±10%	CL10B473KO8NNN□		
		2.4nF	±10%	CL05B242KB5NNN□			56nF		±10%	CL10B563KO8NNN□		
		2.7nF	±10%	CL05B272KB5NNN□			68nF	±10%	CL10B683KO8NNN□			
		3.0nF	±10%	CL05B302KB5NNN□			68nF	±20%	CL10B683MO8NNN□			
		3.3nF	±5%	CL05B332JB5NNN□			75nF	±10%	CL10B753KO8NNN□			
		3.3nF	±10%	CL05B332KB5NNN□			82nF	±10%	CL10B823KO8NNN□			
		3.9nF	±5%	CL05B392JB5NNN□			100nF	±5%	CL10B104JO8NNN□			
		3.9nF	±10%	CL05B392KB5NNN□			100nF	±10%	CL10B104KO8NNN□			
		4.7nF	±5%	CL05B472JB5NNN□			100nF	±20%	CL10B104MO8NNN□			
		4.7nF	±10%	CL05B472KB5NNN□			120nF	±10%	CL10B124KO8NNN□			
4.7nF	±20%	CL05B472MB5NNN□		150nF	±10%	CL10B154KO8NNN□						
5.6nF	±10%	CL05B562KB5NNN□		180nF	±10%	CL10B184KO8NNN□						
6.8nF	±5%	CL05B682JB5NNN□		220nF	±5%	CL10B224JO8NNN□						
6.8nF	±10%	CL05B682KB5NNN□		220nF	±10%	CL10B224KO8NNN□						
8.2nF	±10%	CL05B822KB5NNN□		220nF	±20%	CL10B224MO8NNN□						
10nF	±5%	CL05B103JB5NNN□		330nF	±10%	CL10B334KO8NNN□						
10nF	±10%	CL05B103KB5NNN□		470nF	±10%	CL10B474KO8NNN□						
10nF	±20%	CL05B103MB5NNN□		470nF	±20%	CL10B474MO8NNN□						
15nF	±10%	CL05B153KB5NNN□		680nF	±10%	CL10B684KO8NNN□						
22nF	±10%	CL05B223KB5NNN□		1.0uF	±10%	CL10B105KO8NNN□						

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	6.3Vdc	4.7nF	±10%	CL10B472KQ8NNN□	
		470nF	±10%	CL10B474KQ8NNN□	
		680nF	±10%	CL10B684KQ8NNN□	
		820nF	±10%	CL10B824KQ8NNN□	
		1.0uF	±10%	CL10B105KQ8NNN□	
		1.0uF	±20%	CL10B105MQ8NNN□	
		2.2uF	±10%	CL10B225KQ8NNN□	
		220pF	±10%	CL10B221KA8NNN□	
		390pF	±10%	CL10B391KA8NNN□	
		470pF	±10%	CL10B471KA8NNN□	
		1.0nF	±5%	CL10B102JA8NNN□	
		1.0nF	±10%	CL10B102KA8NNN□	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

# Standard & High Capacitors

## Product Line Up (X7R)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	25Vdc	15nF	±5%	CL10B153JA8N111□		0.90mm	50Vdc	1.4nF	±5%	CL10B142JB8N111□	
		15nF	±10%	CL10B153KA8N111□				1.5nF	±5%	CL10B152JB8N111□	
		18nF	±10%	CL10B183KA8N111□				1.5nF	±10%	CL10B152KB8N111□	
		18nF	±20%	CL10B183MA8N111□				1.8nF	±5%	CL10B182JB8N111□	
		22nF	±5%	CL10B223JA8N111□				1.8nF	±10%	CL10B182KB8N111□	
		22nF	±10%	CL10B223KA8N111□				2.0nF	±10%	CL10B202KB8N111□	
		27nF	±10%	CL10B273KA8N111□				2.2nF	±5%	CL10B222JB8N111□	
		33nF	±5%	CL10B333JA8N111□				2.2nF	±10%	CL10B222KB8N111□	
		33nF	±10%	CL10B333KA8N111□				2.2nF	±20%	CL10B222MB8N111□	
		39nF	±10%	CL10B393KA8N111□				2.4nF	±10%	CL10B242KB8N111□	
		47nF	±10%	CL10B473KA8N111□				2.7nF	±5%	CL10B272JB8N111□	
		56nF	±5%	CL10B563JA8N111□				2.7nF	±10%	CL10B272KB8N111□	
		56nF	±10%	CL10B563KA8N111□				2.9nF	±10%	CL10B292KB8N111□	
		68nF	±10%	CL10B683KA8N111□				3.0nF	±10%	CL10B302KB8N111□	
		82nF	±10%	CL10B823KA8N111□				3.0nF	±20%	CL10B302MB8N111□	
		100nF	±5%	CL10B104JA8N111□				3.3nF	±5%	CL10B332JB8N111□	
		100nF	±10%	CL10B104KA8N111□				3.3nF	±10%	CL10B332KB8N111□	
		100nF	±20%	CL10B104MA8N111□				3.3nF	±20%	CL10B332MB8N111□	
		150nF	±10%	CL10B154KA8N111□				3.6nF	±5%	CL10B362JB8N111□	
		220nF	±10%	CL10B224KA8N111□				3.6nF	±10%	CL10B362KB8N111□	
470nF	±10%	CL10B474KA8N111□		3.9nF	±10%	CL10B392KB8N111□					
1.0uF	±10%	CL10B105KA8N111□		4.7nF	±5%	CL10B472JB8N111□					
50Vdc	50Vdc	100pF	±10%	CL10B101KB8N111□		4.7nF	±10%	CL10B472KB8N111□			
		120pF	±10%	CL10B121KB8N111□		4.7nF	±20%	CL10B472MB8N111□			
		150pF	±10%	CL10B151KB8N111□		5.1nF	±10%	CL10B512KB8N111□			
		180pF	±10%	CL10B181KB8N111□		5.6nF	±5%	CL10B562JB8N111□			
		200pF	±10%	CL10B201KB8N111□		5.6nF	±10%	CL10B562KB8N111□			
		220pF	±5%	CL10B221JB8N111□		5.6nF	±20%	CL10B562MB8N111□			
		220pF	±10%	CL10B221KB8N111□		6.2nF	±5%	CL10B622JB8N111□			
		270pF	±5%	CL10B271JB8N111□		6.2nF	±10%	CL10B622KB8N111□			
		270pF	±10%	CL10B271KB8N111□		6.8nF	±5%	CL10B682JB8N111□			
		300pF	±10%	CL10B301KB8N111□		6.8nF	±10%	CL10B682KB8N111□			
		330pF	±5%	CL10B331JB8N111□		6.8nF	±20%	CL10B682MB8N111□			
		330pF	±10%	CL10B331KB8N111□		7.5nF	±5%	CL10B752JB8N111□			
		360pF	±10%	CL10B361KB8N111□		8.2nF	±5%	CL10B822JB8N111□			
		390pF	±10%	CL10B391KB8N111□		8.2nF	±10%	CL10B822KB8N111□			
		430pF	±10%	CL10B431KB8N111□		9.1nF	±5%	CL10B912JB8N111□			
		470pF	±5%	CL10B471JB8N111□		10nF	±5%	CL10B103JB8N111□			
		470pF	±10%	CL10B471KB8N111□		10nF	±10%	CL10B103KB8N111□			
		500pF	±10%	CL10B501KB8N111□		10nF	±20%	CL10B103MB8N111□			
		510pF	±10%	CL10B511KB8N111□		12nF	±5%	CL10B123JB8N111□			
		560pF	±5%	CL10B561JB8N111□		12nF	±10%	CL10B123KB8N111□			
		560pF	±10%	CL10B561KB8N111□		15nF	±5%	CL10B153JB8N111□			
		620pF	±5%	CL10B621JB8N111□		15nF	±10%	CL10B153KB8N111□			
		680pF	±5%	CL10B681JB8N111□		15nF	±20%	CL10B153MB8N111□			
		680pF	±10%	CL10B681KB8N111□		18nF	±5%	CL10B183JB8N111□			
		750pF	±10%	CL10B751KB8N111□		18nF	±10%	CL10B183KB8N111□			
		820pF	±5%	CL10B821JB8N111□		20nF	±10%	CL10B203KB8N111□			
		820pF	±10%	CL10B821KB8N111□		22nF	±5%	CL10B223JB8N111□			
		910pF	±5%	CL10B911JB8N111□		22nF	±10%	CL10B223KB8N111□			
		1.0nF	±10%	CL10B102KB8N111□		22nF	±20%	CL10B223MB8N111□			
		1.0nF	±20%	CL10B102MB8N111□		27nF	±10%	CL10B273KB8N111□			
		1.2nF	±5%	CL10B122JB8N111□		33nF	±5%	CL10B333JB8N111□			
		1.2nF	±10%	CL10B122KB8N111□		33nF	±10%	CL10B333KB8N111□			

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

Product Line Up (X7R)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.90mm	50Vdc	39nF	±5%	CL10B393JB8NNN□		0.75mm	25Vdc	68nF	±10%	CL21B683KAANNN□		
		39nF	±10%	CL10B393KB8NNN□				50Vdc	18pF	±5%	CL21B180JBANNN□	
		47nF	±5%	CL10B473JB8NNN□					22pF	±5%	CL21B220JBANNN□	
		47nF	±10%	CL10B473KB8NNN□					56pF	±5%	CL21B560JBANNN□	
		47nF	±20%	CL10B473MB8NNN□					100pF	±5%	CL21B101JBANNN□	
		56nF	±5%	CL10B563JB8NNN□					100pF	±10%	CL21B101KBANNN□	
		56nF	±10%	CL10B563KB8NNN□					150pF	±10%	CL21B151KBANNN□	
		68nF	±5%	CL10B683JB8NNN□					180pF	±10%	CL21B181KBANNN□	
		68nF	±10%	CL10B683KB8NNN□					200pF	±10%	CL21B201KBANNN□	
		82nF	±5%	CL10B823JB8NNN□					220pF	±5%	CL21B221JBANNN□	
		82nF	±10%	CL10B823KB8NNN□					220pF	±10%	CL21B221KBANNN□	
		100nF	±5%	CL10B104JB8NNN□					270pF	±10%	CL21B271KBANNN□	
		100nF	±10%	CL10B104KB8NNN□					300pF	±10%	CL21B301KBANNN□	
		100nF	±20%	CL10B104MB8NNN□					330pF	±5%	CL21B331JBANNN□	
		220nF	±10%	CL10B224KB8NNN□					330pF	±10%	CL21B331KBANNN□	
330nF	±10%	CL10B334KB8NNN□		360pF	±10%	CL21B361KBANNN□						

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.75mm	16Vdc	15nF	±10%	CL21B153KOANNN□		0.75mm	25Vdc	68nF	±10%	CL21B683KAANNN□	
		22nF	±10%	CL21B223KOANNN□				18pF	±5%	CL21B180JBANNN□	
		33nF	±10%	CL21B333KOANNN□				22pF	±5%	CL21B220JBANNN□	
		39nF	±10%	CL21B393KOANNN□				56pF	±5%	CL21B560JBANNN□	
		47nF	±10%	CL21B473KOANNN□				100pF	±5%	CL21B101JBANNN□	
		56nF	±10%	CL21B563KOANNN□				100pF	±10%	CL21B101KBANNN□	
		68nF	±10%	CL21B683KOANNN□				150pF	±10%	CL21B151KBANNN□	
		100nF	±5%	CL21B104JOANNN□				180pF	±10%	CL21B181KBANNN□	
		100nF	±10%	CL21B104KOANNN□				200pF	±10%	CL21B201KBANNN□	
		100nF	±20%	CL21B104MOANNN□				220pF	±5%	CL21B221JBANNN□	
		120nF	±5%	CL21B124JOANNN□				220pF	±10%	CL21B221KBANNN□	
		150nF	±10%	CL21B154KOANNN□				270pF	±10%	CL21B271KBANNN□	
		180nF	±10%	CL21B184KOANNN□				300pF	±10%	CL21B301KBANNN□	
		220pF	±20%	CL21B221MAANNN□				330pF	±5%	CL21B331JBANNN□	
		1.0nF	±10%	CL21B102KAANNN□				330pF	±10%	CL21B331KBANNN□	
	1.0nF	±20%	CL21B102MAANNN□		360pF			±10%	CL21B361KBANNN□		
	2.2nF	±10%	CL21B222KAANNN□		390pF			±5%	CL21B391JBANNN□		
	2.2nF	±20%	CL21B222MAANNN□		390pF			±10%	CL21B391KBANNN□		
	4.7nF	±10%	CL21B472KAANNN□		470pF			±5%	CL21B471JBANNN□		
	5.6nF	±10%	CL21B562KAANNN□		470pF			±10%	CL21B471KBANNN□		
	6.8nF	±10%	CL21B682KAANNN□		500pF			±10%	CL21B501KBANNN□		
	6.8nF	±20%	CL21B682MAANNN□		510pF			±10%	CL21B511KBANNN□		
	10nF	±10%	CL21B103KAANNN□		560pF			±5%	CL21B561JBANNN□		
	12nF	±10%	CL21B123KAANNN□		560pF			±10%	CL21B561KBANNN□		
	15nF	±5%	CL21B153JAANNN□		620pF			±10%	CL21B621KBANNN□		
	15nF	±10%	CL21B153KAANNN□		680pF			±5%	CL21B681JBANNN□		
	18nF	±10%	CL21B183KAANNN□		680pF			±10%	CL21B681KBANNN□		
	22nF	±10%	CL21B223KAANNN□		750pF			±10%	CL21B751KBANNN□		
	27nF	±10%	CL21B273KAANNN□		820pF			±10%	CL21B821KBANNN□		
	33nF	±10%	CL21B333KAANNN□		910pF			±10%	CL21B911KBANNN□		
	39nF	±10%	CL21B393KAANNN□		1.0nF			±5%	CL21B102JBANNN□		
	47nF	±10%	CL21B473KAANNN□		1.0nF			±10%	CL21B102KBANNN□		
	56nF	±10%	CL21B563KAANNN□		1.0nF			±20%	CL21B102MBANNN□		
				1.2nF	±10%	CL21B122KBANNN□					
				1.3nF	±5%	CL21B132JBANNN□					
				1.5nF	±5%	CL21B152JBANNN□					
				1.5nF	±10%	CL21B152KBANNN□					
				1.8nF	±5%	CL21B182JBANNN□					
				1.8nF	±10%	CL21B182KBANNN□					
				2.0nF	±5%	CL21B202JBANNN□					
				2.0nF	±10%	CL21B202KBANNN□					
				2.2nF	±5%	CL21B222JBANNN□					
				2.2nF	±10%	CL21B222KBANNN□					
				2.2nF	±20%	CL21B222MBANNN□					
				2.4nF	±10%	CL21B242KBANNN□					
				2.4nF	±20%	CL21B242MBANNN□					
				2.7nF	±5%	CL21B272JBANNN□					
				2.7nF	±10%	CL21B272KBANNN□					
				3.0nF	±5%	CL21B302JBANNN□					
				3.0nF	±20%	CL21B302MBANNN□					
				3.3nF	±5%	CL21B332JBANNN□					
				3.3nF	±10%	CL21B332KBANNN□					
				3.6nF	±10%	CL21B362KBANNN□					
				3.9nF	±5%	CL21B392JBANNN□					

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

# Standard & High Capacitors

## Product Line Up (X7R)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark		
0.75mm	50Vdc	3.9nF	±10%	CL21B392KBANNN□		0.95mm	50Vdc	2.7nF	±10%	CL21B272KBCNNN□			
		4.7nF	±5%	CL21B472JBANNN□				3.3nF	±10%	CL21B332KBCNNN□			
		4.7nF	±10%	CL21B472KBANNN□				4.7nF	±5%	CL21B472JBCNNN□			
		5.0nF	±10%	CL21B502KBANNN□				6.8nF	±10%	CL21B682KBCNNN□			
		5.1nF	±10%	CL21B512KBANNN□				10nF	±5%	CL21B103JBCNNN□			
		5.6nF	±5%	CL21B562JBANNN□				10nF	±10%	CL21B103KBCNNN□			
		5.6nF	±10%	CL21B562KBANNN□				18nF	±5%	CL21B183JBCNNN□			
		6.8nF	±5%	CL21B682JBANNN□				22nF	±10%	CL21B223KBCNNN□			
		6.8nF	±10%	CL21B682KBANNN□				24nF	±5%	CL21B243JBCNNN□			
		7.5nF	±10%	CL21B752KBANNN□				33nF	±5%	CL21B333JBCNNN□			
		8.2nF	±5%	CL21B822JBANNN□				39nF	±5%	CL21B393JBCNNN□			
		8.2nF	±10%	CL21B822KBANNN□				39nF	±10%	CL21B393KBCNNN□			
		9.1nF	±10%	CL21B912KBANNN□				47nF	±5%	CL21B473JBCNNN□			
		10nF	±5%	CL21B103JBANNN□				47nF	±10%	CL21B473KBCNNN□			
		10nF	±10%	CL21B103KBANNN□				47nF	±20%	CL21B473MBCNNN□			
		10nF	±20%	CL21B103MBANNN□				51nF	±10%	CL21B513KBCNNN□			
		12nF	±5%	CL21B123JBANNN□				56nF	±5%	CL21B563JBCNNN□			
		12nF	±10%	CL21B123KBANNN□				56nF	±10%	CL21B563KBCNNN□			
		12nF	±20%	CL21B123MBANNN□				68nF	±5%	CL21B683JBCNNN□			
		15nF	±5%	CL21B153JBANNN□				68nF	±10%	CL21B683KBCNNN□			
		15nF	±10%	CL21B153KBANNN□				82nF	±5%	CL21B823JBCNNN□			
		15nF	±20%	CL21B153MBANNN□				82nF	±10%	CL21B823KBCNNN□			
		18nF	±10%	CL21B183KBANNN□				100nF	±5%	CL21B104JBCNNN□			
		20nF	±10%	CL21B203KBANNN□				100nF	±10%	CL21B104KBCNNN□			
		22nF	±5%	CL21B223JBANNN□				100nF	±20%	CL21B104MBCNNN□			
		22nF	±10%	CL21B223KBANNN□				1.0uF	±10%	CL21B105KQFNNN□			
		27nF	±5%	CL21B273JBANNN□				1.35mm	6.3Vdc	2.2uF	±5%	CL21B225JQFNNN□	
		27nF	±10%	CL21B273KBANNN□						2.2uF	±10%	CL21B225KQFNNN□	
		33nF	±5%	CL21B333JBANNN□						3.3uF	±10%	CL21B335KQFNNN□	
		33nF	±10%	CL21B333KBANNN□						3.3uF	±20%	CL21B335MQFNNN□	
33nF	±20%	CL21B333MBANNN□		4.7uF	±10%	CL21B475KQFNNN□	Ref.						
39nF	±5%	CL21B393JBANNN□		10Vdc	470nF	±10%	CL21B474KPFNNN□						
39nF	±10%	CL21B393KBANNN□			680nF	±10%	CL21B684KPFNNN□						
47nF	±10%	CL21B473KBANNN□			820nF	±10%	CL21B824KPFNNN□						
0.95mm	16Vdc	150nF	±10%		CL21B154KOCNNN□		1.0uF			±5%	CL21B105JPFNNN□		
		220nF	±5%		CL21B224JOCNNN□		1.0uF			±10%	CL21B105KPFNNN□		
		220nF	±10%		CL21B224KOCNNN□		1.0uF	±20%	CL21B105MPFNNN□				
		220nF	±20%		CL21B224MOCNNN□		2.2uF	±10%	CL21B225KPFNNN□				
		270nF	±5%		CL21B274JOCNNN□		2.2uF	±20%	CL21B225MPFNNN□				
		270nF	±10%	CL21B274KOCNNN□		3.3uF	±10%	CL21B335KPFNNN□					
		330nF	±5%	CL21B334JOCNNN□		4.7uF	±10%	CL21B475KPFNNN□	Ref.				
		330nF	±10%	CL21B334KOCNNN□		16Vdc	150nF	±10%	CL21B154KOFNNN□				
		1.0uF	±10%	CL21B105KOCNNN□			220nF	±10%	CL21B224KOFNNN□				
		25Vdc	47nF	±10%	CL21B473KACNNN□			330nF	±10%	CL21B334KOFNNN□			
			68nF	±10%	CL21B683KACNNN□			390nF	±10%	CL21B394KOFNNN□			
			82nF	±10%	CL21B823KACNNN□			470nF	±5%	CL21B474JOFNNN□			
	100nF		±5%	CL21B104JACNNN□			470nF	±10%	CL21B474KOFNNN□				
	100nF		±10%	CL21B104KACNNN□		470nF	±20%	CL21B474MOFNNN□					
	100nF		±20%	CL21B104MACNNN□		680nF	±5%	CL21B684JOFNNN□					
	120nF	±5%	CL21B124JACNNN□		680nF	±10%	CL21B684KOFNNN□						
	120nF	±10%	CL21B124KACNNN□		1.0uF	±10%	CL21B105KOFNNN□						
	150nF	±10%	CL21B154KACNNN□		2.2uF	±10%	CL21B225KOFNNN□						
50Vdc	1.0nF	±10%	CL21B102KBCNNN□		2.2uF	±20%	CL21B225MOFNNN□						
	2.2nF	±10%	CL21B222KBCNNN□		4.7uF	±10%	CL21B475KOFNNN□	Ref.					

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (X7R)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark		
1.35mm	25Vdc	18nF	±10%	CL21B183KAFNNN □		1.00mm	16Vdc	270nF	±20%	CL31B274MOCNNN □			
		47nF	±10%	CL21B473KAFNNN □				330nF	±10%	CL31B334KOCNNN □			
		100nF	±10%	CL21B104KAFNNN □				330nF	±20%	CL31B334MOCNNN □			
		150nF	±10%	CL21B154KAFNNN □				390nF	±10%	CL31B394KOCNNN □			
		180nF	±10%	CL21B184KAFNNN □				470nF	±10%	CL31B474KOCNNN □			
		220nF	±5%	CL21B224JAFNNN □				560nF	±10%	CL31B564KOCNNN □			
		220nF	±10%	CL21B224KAFNNN □				680nF	±10%	CL31B684KOCNNN □			
		220nF	±20%	CL21B224MAFNNN □				25Vdc	4.7nF	±10%	CL31B472KACNNN □		
		270nF	±10%	CL21B274KAFNNN □					22nF	±10%	CL31B223KACNNN □		
		330nF	±10%	CL21B334KAFNNN □					47nF	±10%	CL31B473KACNNN □		
		390nF	±10%	CL21B394KAFNNN □					68nF	±10%	CL31B683KACNNN □		
		470nF	±5%	CL21B474JAFNNN □					100nF	±10%	CL31B104KACNNN □		
		470nF	±10%	CL21B474KAFNNN □					120nF	±10%	CL31B124KACNNN □		
		1.0uF	±10%	CL21B105KAFNNN □					150nF	±10%	CL31B154KACNNN □		
		1.5uF	±10%	CL21B155KAFNNN □					180nF	±10%	CL31B184KACNNN □		
		2.2uF	±10%	CL21B225KAFNNN □					220nF	±5%	CL31B224JACNNN □		
		4.7uF	±10%	CL21B475KAFNNN □	Ref				220nF	±10%	CL31B224KACNNN □		
		35Vdc	1.0uF	±10%	CL21B105KLFNNN □					270nF	±10%	CL31B274KACNNN □	
	50Vdc		560pF	±10%	CL21B561KBFNNN □				330nF	±10%	CL31B334KACNNN □		
			47nF	±10%	CL21B473KBFNNN □				390nF	±10%	CL31B394KACNNN □		
			68nF	±5%	CL21B683JBFNNN □				50Vdc	120pF	±10%	CL31B121KBCNNN □	
			68nF	±10%	CL21B683KBFNNN □					180pF	±10%	CL31B181KBCNNN □	
			75nF	±10%	CL21B753KBFNNN □					220pF	±10%	CL31B221KBCNNN □	
			82nF	±10%	CL21B823KBFNNN □					270pF	±10%	CL31B271KBCNNN □	
			100nF	±5%	CL21B104JBFNNN □					330pF	±10%	CL31B331KBCNNN □	
			100nF	±10%	CL21B104KBFNNN □			390pF		±5%	CL31B391JBCNNN □		
			100nF	±20%	CL21B104MBFNNN □			390pF		±10%	CL31B391KBCNNN □		
			120nF	±10%	CL21B124KBFNNN □			470pF		±10%	CL31B471KBCNNN □		
			150nF	±10%	CL21B154KBFNNN □			560pF		±10%	CL31B561KBCNNN □		
			220nF	±5%	CL21B224JBFNNN □			680pF		±10%	CL31B681KBCNNN □		
			220nF	±10%	CL21B224KBFNNN □			820pF		±10%	CL31B821KBCNNN □		
			270nF	±10%	CL21B274KBFNNN □			1.0nF		±5%	CL31B102JBCNNN □		
			330nF	±10%	CL21B334KBFNNN □			1.0nF		±10%	CL31B102KBCNNN □		
		470nF	±10%	CL21B474KBFNNN □			1.0nF	±20%		CL31B102MBCNNN □			
680nF	±10%	CL21B684KBFNNN □		1.2nF	±10%	CL31B122KBCNNN □							
1.0uF	±10%	CL21B105KBFNNN □		1.5nF	±5%	CL31B152JBCNNN □							
1.0uF	±20%	CL21B105MBFNNN □		1.5nF	±10%	CL31B152KBCNNN □							
1.40mm	6.3Vdc	4.7uF	±10%	CL21B475KQNNN □	Ref	1.8nF	±10%	CL31B182KBCNNN □					
		10uF	±10%	CL21B106KQNNN □		2.0nF	±10%	CL31B202KBCNNN □					
	10Vdc	4.7uF	±10%	CL21B475KPQNNN □	Ref	2.2nF	±10%	CL31B222KBCNNN □					
		10uF	±10%	CL21B106KPQNNN □		2.4nF	±10%	CL31B242KBCNNN □					
		16Vdc	10uF	±10%	CL21B106KQNNN □		3.0nF	±10%	CL31B302KBCNNN □				
			1.8nF	±10%	CL31B182KBCNNN □		3.3nF	±5%	CL31B332JBCNNN □				
2.0nF	±10%		CL31B202KBCNNN □		3.3nF	±10%	CL31B332KBCNNN □						
2.2nF	±10%		CL31B222KBCNNN □		3.9nF	±5%	CL31B392JBCNNN □						
2.4nF	±10%		CL31B242KBCNNN □		3.9nF	±10%	CL31B392KBCNNN □						
3.0nF	±10%		CL31B302KBCNNN □		4.7nF	±5%	CL31B472JBCNNN □						
3.3nF	±5%	CL31B332JBCNNN □		4.7nF	±10%	CL31B472KBCNNN □							
3.3nF	±10%	CL31B332KBCNNN □		5.0nF	±20%	CL31B502MBCNNN □							
3.9nF	±5%	CL31B392JBCNNN □		5.6nF	±5%	CL31B562JBCNNN □							
3.9nF	±10%	CL31B392KBCNNN □		5.6nF	±10%	CL31B562KBCNNN □							
4.7nF	±5%	CL31B472JBCNNN □		6.8nF	±5%	CL31B682JBCNNN □							
4.7nF	±10%	CL31B472KBCNNN □		6.8nF	±10%	CL31B682KBCNNN □							
5.0nF	±20%	CL31B502MBCNNN □		8.2nF	±10%	CL31B822KBCNNN □							
5.6nF	±5%	CL31B562JBCNNN □											
5.6nF	±10%	CL31B562KBCNNN □											
6.8nF	±5%	CL31B682JBCNNN □											
6.8nF	±10%	CL31B682KBCNNN □											
8.2nF	±10%	CL31B822KBCNNN □											

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.00mm	10Vdc	1.0uF	±10%	CL31B105KPCNNN □	
		1.2uF	±10%	CL31B125KPCNNN □	
	16Vdc	22nF	±5%	CL31B223JOCNNN □	
		100nF	±10%	CL31B104KOCNNN □	
		220nF	±10%	CL31B224KOCNNN □	
		270nF	±10%	CL31B274KOCNNN □	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

# Standard & High Capacitors

## Product Line Up (X7R)

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.00mm	50Vdc	10nF	±5%	CL31B103JBCNND□		1.80mm	6.3Vdc	10uF	±10%	CL31B106KQHNDND□	
		10nF	±10%	CL31B103KBCNND□				10uF	±20%	CL31B106MQHNDND□	
		10nF	±20%	CL31B103MBCNND□				22uF	±10%	CL31B226KQHNDND□	
		15nF	±5%	CL31B153JBCNND□			10Vdc	4.7uF	±10%	CL31B475KPHNDND□	
		15nF	±10%	CL31B153KBCNND□				6.8uF	+80/-20%	CL31B685ZPHNDND□	
		18nF	±10%	CL31B183KBCNND□				10uF	±10%	CL31B106KPHNDND□	
		22nF	±5%	CL31B223JBCNND□				22uF	±10%	CL31B226KPHNDND□	
		22nF	±10%	CL31B223KBCNND□				22uF	±20%	CL31B226MPHNDND□	
		27nF	±5%	CL31B273JBCNND□				16Vdc	1.0uF	±20%	CL31B105MOHNDND□
		27nF	±10%	CL31B273KBCNND□			2.2uF		±10%	CL31B225KOHNDND□	
		33nF	±5%	CL31B333JBCNND□			2.2uF		±20%	CL31B225MOHNDND□	
		33nF	±10%	CL31B333KBCNND□			3.3uF		±10%	CL31B335KOHNDND□	
		39nF	±5%	CL31B393JBCNND□			4.7uF		±10%	CL31B475KOHNDND□	
		39nF	±10%	CL31B393KBCNND□			10uF		±10%	CL31B106KOHNDND□	
		47nF	±5%	CL31B473JBCNND□			10uF	±20%	CL31B106MOHNDND□		
		47nF	±10%	CL31B473KBCNND□			25Vdc	680nF	±10%	CL31B684KAHNDND□	
		56nF	±5%	CL31B563JBCNND□				1.0uF	±5%	CL31B105JAHNDND□	
		56nF	±10%	CL31B563KBCNND□				1.0uF	±10%	CL31B105KAHNDND□	
		68nF	±10%	CL31B683KBCNND□				1.0uF	±20%	CL31B105MAHNDND□	
		82nF	±10%	CL31B823KBCNND□				1.2uF	±20%	CL31B125MAHNDND□	
		100nF	±5%	CL31B104JBCNND□				2.2uF	±10%	CL31B225KAHNDND□	
		100nF	±10%	CL31B104KBCNND□				2.2uF	±20%	CL31B225MAHNDND□	
		100nF	±20%	CL31B104MBCNND□				4.7uF	±10%	CL31B475KAHNDND□	
		120nF	±10%	CL31B124KBCNND□				4.7uF	±20%	CL31B475MAHNDND□	
		150nF	±10%	CL31B154KBCNND□				10uF	±10%	CL31B106KAHNDND□	
		220nF	±10%	CL31B224KBCNND□			10uF	±10%	CL31B106KLHNDND□	Ref.	
		1.20mm	16Vdc	4.7uF	±10%		CL31B475KOELEND□		35Vdc	10uF	±10%
1.25mm	10Vdc	2.2uF	±10%	CL31B225KPELEND□		50Vdc	4.7nF	±10%	CL31B472KBHNDND□		
		2.2uF	±20%	CL31B225MPELEND□			390nF	±10%	CL31B394KBHNDND□		
25Vdc	1.0uF	±10%	CL31B105KAPLEND□		470nF		±5%	CL31B474JBHNDND□			
1.40mm	10Vdc	1.5uF	±10%	CL31B155KPFLEND□			470nF	±10%	CL31B474KBHNDND□		
		2.2uF	±10%	CL31B225KPFLEND□			680nF	±10%	CL31B684KBHNDND□		
		2.2uF	±20%	CL31B225MPFLEND□			1.0uF	±10%	CL31B105KBHNDND□		
	16Vdc	820nF	±10%	CL31B824KOFLEND□			2.2uF	±10%	CL31B225KBHNDND□		
		1.0uF	±5%	CL31B105JOFLEND□			4.7uF	±10%	CL31B475KBHNDND□		
		1.0uF	±10%	CL31B105KOFLEND□			10uF	±10%	CL31B106KBHNDND□	Ref.	
		1.0uF	±20%	CL31B105MOFLEND□							
	25Vdc	1.5uF	±10%	CL31B155KOFLEND□							
		10nF	±2%	CL31B103GAFLEND□							
		470nF	±5%	CL31B474JAFLEND□							
470nF		±10%	CL31B474KAFLEND□								
470nF		±20%	CL31B474MAFLEND□								
560nF		±10%	CL31B564KAFLEND□								
100nF		±10%	CL31B104KBFLEND□								
50Vdc	180nF	±10%	CL31B184KBFLEND□								
	200nF	±10%	CL31B204KBFLEND□								
	220nF	±5%	CL31B224JBFLEND□								
	220nF	±10%	CL31B224KBFLEND□								
	220nF	±20%	CL31B224MBFLEND□								
	270nF	±10%	CL31B274KBFLEND□								
	330nF	±5%	CL31B334JBFLEND□								
	330nF	±10%	CL31B334KBFLEND□								
1.80mm	6.3Vdc	3.3uF	±10%	CL31B335KQHNDND□							
		6.8uF	±10%	CL31B685KQHNDND□							

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑



Product Line Up (X7R)

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.45mm	16Vdc	100nF	±10%	CL32B104KOFNND		2.70mm	50Vdc	4.7uF	±10%	CL32B475KBJNND	
		220nF	±10%	CL32B224KOFNND				10uF	±10%	CL32B106KBJNND	
		470nF	±10%	CL32B474KOFNND							
		680nF	±10%	CL32B684KOFNND							
		1.0uF	±10%	CL32B105KOFNND							
		2.2uF	±10%	CL32B225KOFNND							
	25Vdc	220nF	±5%	CL32B224JAFNND							
		220nF	±10%	CL32B224KAFNND							
		470nF	±20%	CL32B474MAFNND							
		560nF	±5%	CL32B564JAFNND							
		1.0uF	±10%	CL32B105KAFNND							
		47nF	±10%	CL32B473KBFNND							
	50Vdc	100nF	±5%	CL32B104JBFNND							
		100nF	±10%	CL32B104KBFNND							
		100nF	±20%	CL32B104MBFNND							
		120nF	±5%	CL32B124JBFNND							
		120nF	±10%	CL32B124KBFNND							
		120nF	±20%	CL32B124MBFNND							
		150nF	±5%	CL32B154JBFNND							
		150nF	±10%	CL32B154KBFNND							
		220nF	±5%	CL32B224JBFNND							
		220nF	±10%	CL32B224KBFNND							
		270nF	±10%	CL32B274KBFNND							
		330nF	±5%	CL32B334JBFNND							
		330nF	±10%	CL32B334KBFNND							
		390nF	±10%	CL32B394KBFNND							
		470nF	±5%	CL32B474JBFNND							
		470nF	±10%	CL32B474KBFNND							
	1.80mm	16Vdc	3.3uF	±10%	CL32B335KOHNND						
		25Vdc	330nF	±10%	CL32B334KAHNND						
			2.2uF	±10%	CL32B225KAHNND						
		50Vdc	820nF	±10%	CL32B824KBHNND						
1.0uF			±10%	CL32B105KBHNND							
1.0uF			±20%	CL32B105MBHNND							
2.00mm	16Vdc	10uF	±10%	CL32B106KOULND							
	25Vdc	10uF	±10%	CL32B106KAULND							
	35Vdc	4.7uF	±10%	CL32B475KLULND							
		10uF	±10%	CL32B106KLULND							
2.20mm	10Vdc	4.7uF	±10%	CL32B475KPINND							
		10uF	±10%	CL32B106KPINND							
	16Vdc	4.7uF	±10%	CL32B475KOINND							
	25Vdc	2.2uF	±10%	CL32B225KAINND							
2.70mm	6.3Vdc	22uF	±20%	CL32B226MQJNND							
		47uF	±20%	CL32B476MQJNND	Ref.						
	10Vdc	22uF	±10%	CL32B226KPJNND							
		47uF	±20%	CL32B476MPJNND	Ref.						
	16Vdc	10uF	±10%	CL32B106KOJNND							
		22uF	±10%	CL32B226KOJNND							
		22uF	±20%	CL32B226MOJNND							
	25Vdc	3.3uF	±10%	CL32B335KAJNND							
		10uF	±10%	CL32B106KAJNND							
		22uF	±10%	CL32B226KAJNND							
35Vdc	10uF	±10%	CL32B106KLJNND								
50Vdc	2.2uF	±10%	CL32B225KBJNND								

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Low Profile Capacitors

## Feature





- Decoupling and filtering application where the thickness is limited
- A range of low – profile products as thin as 0.11mm in 1005mm

## Application

- Mobile phone
- Smart watch
- IC Package

## Structure and Dimensions

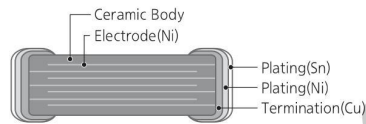

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00±0.05	0.50±0.05	0.0975±0.0125	L	0.25±0.075
		1.00±0.10	0.50±0.05	0.19±0.03	X	
		1.00±0.05	0.50±0.05	0.30±0.03	3	0.25±0.10
10	0603	1.60±0.10	0.80±0.10	0.50+0.0/-0.10	5	0.30±0.20
		1.60±0.10	0.80±0.10	0.60±0.10	6	
		1.60±0.10	0.80±0.10	0.70±0.10	7	
21	0805	2.00±0.10	1.25±0.10	0.60±0.10	6	0.50+0.20/-0.30
		2.00±0.10	1.25±0.10	0.70±0.10	7	
		2.00±0.10	1.25±0.10	0.80±0.10	8	
		2.00±0.10	1.25±0.10	0.85±0.10	C	
		2.00±0.10	1.25±0.10	1.10±0.10	E	
31	1206	3.20±0.20	1.60±0.20	0.85±0.10	C	0.50±0.30
		3.20±0.20	1.60±0.20	0.90±0.10	9	
		3.20±0.20	1.60±0.20	1.10±0.10	E	
		3.20±0.20	1.60±0.20	1.15±0.10	M	
32	1210	3.20±0.30	2.50±0.20	0.85±0.10	C	0.60±0.30
		3.20±0.30	2.50±0.20	0.90±0.10	9	
		3.20±0.30	2.50±0.20	1.15±0.10	M	
		3.20±0.30	2.50±0.20	1.35±0.15	S	
		3.20±0.30	2.50±0.20	1.60±0.10	T	
		3.20±0.30	2.50±0.20	1.80±0.20	U	
		3.20±0.30	2.50±0.20	2.00±0.20	I	

Low Profile Capacitance Table (X5R)

Size inch (mm)	T max. (mm)	Rated Voltage (Vdc)	Capacitance(μF)											
			0.22	0.47	1.0	2.2	4.7	10	22	47	68	100		
0402 (1005)	0.11	6.3	█											
	0.22	6.3		█	█									
	0.33	4.0				█								
		6.3					█	0.35 T max.						
0603 (1608)	0.50	4.0								█				
		6.3								█				
		10			█	█								
		16			█	█								
	0.60	25			█	█								
		6.3						█						
	0.80	6.3							█					
		10								█				
0805 (2012)	0.70	10								█				
		16								█				
	0.80	6.3									█			
		10									█			
	0.90	6.3									█			
	0.95	4.0										█		
		6.3										█		
		10										█		
		16										█		
		25										█		
		35										█		
	1.00	50										█		
		6.3											█	
	1.20	50											█	
1.20	6.3											█	33μF	
1206 (3216)	0.95	6.3												█
		10												█
		16												█
		25												█
	1.00	35												█
		50												█
		100												█
	1.20	16											█	
	1.25	10												█
16													█	
25												█		

# Low Profile Capacitors

Low Profile Capacitance Table (X5R)

Size inch (mm)	T max. (mm)	Rated Voltage (Vdc)	Capacitance(uF)												
			0.22	0.47	1.0	2.2	4.7	10	22	47	68	100			
1210 (3225)	0.95	16													
	1.00	25													
	1.25	16													
	1.50	10													
		25						6.8uF							
	1.70	16													
		25													
	2.00	25													
		35													
	2.20	10													
16															
	25														

Low Profile Capacitance Table (X6S)

Size inch (mm)	T max. (mm)	Rated Voltage (Vdc)	Capacitance(uF)											
			0.22	0.47	1.0	2.2	4.7	10	22	47	68	100		
0402(1005)	0.33	6.3												
0805 (2012)	0.95	2.5												
		4.0												
		10												
1206(3216)	0.95	25												

Product Line Up (X5R)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.11mm	6.3Vdc	220nF	±20%	CL05A224MQLHEC □	Derating Ref.
0.22mm	6.3Vdc	470nF	±20%	CL05A474MQXLNN □	Derating Ref.
		1.0uF	±20%	CL05A105MQXLNN □	Derating Ref.
		2.2uF	±20%	CL05A225MR3LRN □	Derating Ref.
0.33mm	4.0Vdc	2.2uF	±20%	CL05A225MR3LRN □	Derating Ref.
	6.3Vdc	1.0uF	±20%	CL05A105MQ3LNN □	Derating Ref.
		2.2uF	±20%	CL05A225MQ3LRN □	Derating Ref.
0.35mm	6.3Vdc	4.7uF	±20%	CL05A475MQ3LUN □	Derating Ref.

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.70mm	10Vdc	2.2uF	±10%	CL21A225KP6LNN □		
	16Vdc	1.0uF	±20%	CL21A105M06LNN □		
		2.2uF	±10%	CL21A225K06LNN □		
0.80mm	6.3Vdc	10uF	±10%	CL21A106KQ7LQN □		
		47uF	±20%	CL21A476MQ7FRN □	Derating	
		47uF	±20%	CL21A476MQ7LRN □	Derating	
	10Vdc	10uF	±10%	CL21A106KP7LQN □	Derating	
		47uF	±20%	CL21A476MQ8LRN □	Derating	
0.90mm	6.3Vdc	47uF	±20%	CL21A476MQ8LRN □	Derating	
	0.95mm	4.0Vdc	22uF	±20%	CL21A226MRCLRN □	Derating
47uF			±20%	CL21A476MRCLRP □	Derating	
1.00mm	6.3Vdc	1.0uF	±10%	CL21A105KQCLNN □		
		1.0uF	±10%	CL21A105KQCNNN □		
		4.7uF	±10%	CL21A475KQCLNN □		
		4.7uF	±20%	CL21A475MQCLNN □		
		10uF	±10%	CL21A106KQCLNN □		
		10uF	±10%	CL21A106KQCLRN □		
	10Vdc	10uF	±20%	CL21A106MQCLNN □	Derating	
		22uF	±10%	CL21A226KQCLRN □	Derating	
		22uF	±20%	CL21A226MQCLQN □	Derating	
		22uF	±20%	CL21A226MQCLRN □	Derating	
		47uF	±20%	CL21A476MQCLRN □	Derating	
		10Vdc	2.2uF	±10%	CL21A225KPCLNN □	
			4.7uF	±10%	CL21A475KPCLNN □	
			4.7uF	±20%	CL21A475MPCLNN □	
			10uF	±10%	CL21A106KPCLNN □	Derating
			10uF	±10%	CL21A106KPCLQN □	Derating
			10uF	±20%	CL21A106MPCLNN □	Derating
		16Vdc	10uF	±20%	CL21A106MPCLQN □	Derating
	22uF		±10%	CL21A226KPCLRN □	Derating	
	22uF		±20%	CL21A226MPCLRN □	Derating	
	22uF		+80/-20%	CL21A226ZPCLRN □	Derating	
	2.2uF		±10%	CL21A225KOCLNN □		
	4.7uF		±10%	CL21A475KOCLNN □		
	4.7uF		±10%	CL21A475KOCLRN □		
10uF	±10%		CL21A106KOCLNN □	Derating		
10uF	±10%		CL21A106KOCLRN □	Derating		
10uF	±10%		CL21A106KOCLSN □	Derating		
22uF	±20%		CL21A226MOCLRN □	Derating		
25Vdc	1.0uF		±10%	CL21A105KACLNN □		
	1.0uF	±10%	CL21A105KACNNN □			
	2.2uF	±10%	CL21A225KACLNN □	Derating		
	4.7uF	±10%	CL21A475KACLRN □	Derating		
	10uF	±10%	CL21A106KACLRN □	Derating		
	4.7uF	±10%	CL21A475KLCLQN □	Derating		
35Vdc	1.0uF	±10%	CL21A105KBCFNN □			
	1.0uF	±10%	CL21A105KBCLNN □			
50Vdc	33uF	±20%	CL21A336MQ9LRN □	Derating		
	47uF	±20%	CL21A476MQ9LRN □	Derating		
1.00mm	50Vdc	2.2uF	±10%	CL21A225KB9LNN □	Derating	
	1.20mm	6.3Vdc	33uF	±20%	CL21A336MQELRN □	Derating

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.50mm	4.0Vdc	10uF	±20%	CL10A106MR5LQN □	Derating Ref.	
		6.3Vdc	2.2uF	±10%	CL10A225KQ5LNN □	
			4.7uF	±10%	CL10A475KQ5LNN □	
			4.7uF	±20%	CL10A475MQ5LNN □	
	10Vdc	10uF	±20%	CL10A106MQ5LRN □	Derating Ref.	
		1.0uF	±10%	CL10A105KP5LNN □		
		2.2uF	±10%	CL10A225KP5LNN □		
		4.7uF	±10%	CL10A475KP5LNN □	Derating	
	16Vdc	4.7uF	±20%	CL10A475MP5LNN □	Derating	
		1.0uF	±10%	CL10A105KQ5LNN □		
			2.2uF	±10%	CL10A225KQ5LNN □	Derating
		25Vdc	1.0uF	±10%	CL10A105KA5LNN □	Derating
2.2uF	±10%		CL10A225KA5LNN □	Derating		
0.60mm	6.3Vdc	4.7uF	±10%	CL10A475KQ5NNN □		
		4.7uF	±20%	CL10A475MQ5NNN □		
0.80mm	6.3Vdc	22uF	±20%	CL10A226MQ7LUN □	Derating	
	10Vdc	22uF	±20%	CL10A226MP7LUN □	Derating	
	16Vdc	22uF	±20%	CL10A226M07JZN □	Derating	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Low Profile Capacitors

## Product Line Up (X5R)

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	6.3Vdc	10uF	±20%	CL31A106MQCLNN □	
		22uF	±10%	CL31A226KQCLNN □	Derating
		22uF	±20%	CL31A226MQCLNN □	Derating
	10Vdc	10uF	±10%	CL31A106KPCLNN □	
		10uF	±20%	CL31A106MPCLNN □	
		2.2uF	±10%	CL31A225KQCLNN □	
	16Vdc	4.7uF	±10%	CL31A475KQCLNN □	
		4.7uF	±20%	CL31A475MOCLNN □	
		10uF	±10%	CL31A106KQCLNN □	
		22uF	±10%	CL31A226KQCLNN □	Derating
		22uF	±20%	CL31A226MOCLNN □	Derating
		4.7uF	±10%	CL31A475KACLNN □	
25Vdc	10uF	±10%	CL31A106KACLNN □	Derating	
	4.7uF	±10%	CL31A475KL9LNN □	Derating	
1.00mm	50Vdc	1.0uF	±10%	CL31A105KB9LNN □	
	2.2uF	±10%	CL31A225KB9LNN □		
		±10%	CL31A475KB9LNN □	Derating	
	100Vdc	2.2uF	±10%	CL31A225KC9LNN □	Derating
1.20mm	16Vdc	4.7uF	±10%	CL31A475KOELNN □	
1.25mm	10Vdc	10uF	±10%	CL31A106KPPLNN □	
		10uF	±20%	CL31A106MPPLNN □	
	16Vdc	4.7uF	±10%	CL31A475KOPLNN □	
		4.7uF	±20%	CL31A475MOPLNN □	
	25Vdc	1.0uF	±10%	CL31A105KAPLNN □	
		2.2uF	±10%	CL31A225KAPLNN □	
4.7uF	±10%	CL31A475KAPLNN □			

### ■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	16Vdc	10uF	±10%	CL32A106KQCLNN □	
		22uF	±20%	CL32A226MOCLNN □	Derating
1.00mm	25Vdc	10uF	±10%	CL32A106KA9LNN □	
1.25mm	16Vdc	10uF	±10%	CL32A106KOMLNN □	
		22uF	±20%	CL32A226KPSLNN □	
1.50mm	10Vdc	22uF	±10%	CL32A226KPSLNN □	
		22uF	±20%	CL32A226MPSLNN □	
1.70mm	16Vdc	6.8uF	±10%	CL32A685KASLNN □	
		22uF	±10%	CL32A226KOTFNN □	Derating
	22uF	±20%	CL32A226MOTLNN □	Derating	
25Vdc	10uF	±10%	CL32A106KATLNN □		
		±20%	CL32A106MATLNN □		
	10uF	±10%	CL32A475KAULNN □		
2.00mm	25Vdc	10uF	±10%	CL32A106KAULNN □	
		4.7uF	±10%	CL32A475KLULNN □	
	35Vdc	10uF	±10%	CL32A106KLULNN □	
		10uF	±20%	CL32A106MLULNN □	
2.20mm	10Vdc	10uF	±10%	CL32A106KPINNN □	
	16Vdc	10uF	±10%	CL32A106KOILNN □	
		2.2uF	±20%	CL32A225MAINNN □	
	25Vdc	4.7uF	±10%	CL32A475KAINNN □	
		10uF	±10%	CL32A106KAILNN □	
10uF	±20%	CL32A106MAILNN □			

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

## Product Line Up ( X6S )

### ■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.33mm	6.3Vdc	1.0uF	±20%	CL05X105MQ3LNN □	Derating

### ■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	2.5Vdc	22uF	±20%	CL21X226MSCLRN □	Derating
	4.0Vdc	10uF	±10%	CL21X106KRCLRN □	Derating
	10Vdc	10uF	±10%	CL21X106KPCLRN □	Derating

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	25Vdc	4.7uF	±10%	CL31X475KACLNN □	

# Super Small Size Capacitors

## Feature





- Small size chip
- 02 and 03 Series (High - Q) MLCC shows very low ESR value
- 02 and 03 Series are suited to only reflow soldering
- 02 and 03 Series are suited to miniature RF module, portable equipment and high frequency circuit

## Application

- DC - DC Converter
- Mobile phone, Tablet devices
- PC (Laptop, Desktop)
- HDD /SSD Board

## Structure and Dimensions

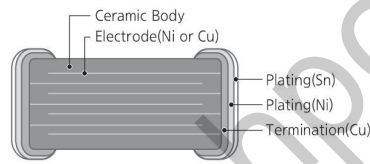

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
02	01005	0.40±0.02	0.20±0.02	0.20±0.02	2	0.10±0.03
03	0201	0.60±0.03	0.30±0.03	0.30±0.03	3	0.15±0.05

# Super Small Size Capacitors

Super Small Size Capacitance Table (C0G)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(pF)						
		0.2	0.5	1.0	10	22	47	100
01005 (0402)	6.3							
	16							
	25					27pF		
0201 (0603)	6.3							
	25							
	50							

Super Small Size Capacitance Table (X5R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																		
		pF				nF												uF		
		220	330	470	680	1.0	2.2	3.3	4.7	10	15	22	33	47	68	100	220	470	1.0	2.2
01005 (0402)	4.0																			
	6.3																			
	10																			
0201 (0603)	4.0																			
	6.3																			
	10																			
	16																			
	25																			

Super Small Size Capacitance Table (X7R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																		
		pF					nF													
		100	220	330	470	680	1.0	2.2	3.3	4.7	6.8	10								
01005(0402)	10																			
0201 (0603)	6.3																			
	10																			
	16																			
	25																			
	50																			

Super Small Size Capacitance Table (X6S)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(nF)											
		2.2	3.3	4.7	6.8	10	22	47	100				
01005(0402)	2.5												
0201 (0603)	4.0												
	6.3												



Product Line Up (COG)

■ Size : 0.40 X 0.20mm (inch : 01005)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.22mm	16Vdc	0.2pF	±0.1pF	CL02C0R2B02GNN □	0.22mm	16Vdc	5.1pF	±0.25pF	CL02C5R1C02GNN □
		0.3pF	±0.1pF	CL02C0R3B02GNN □			5.2pF	±0.1pF	CL02C5R2B02GNN □
		0.4pF	±0.1pF	CL02C0R4B02GNN □			5.3pF	±0.1pF	CL02C5R3B02GNN □
		0.5pF	±0.1pF	CL02C0R5B02GNN □			5.4pF	±0.1pF	CL02C5R4B02GNN □
		0.6pF	±0.1pF	CL02C0R6B02GNN □			5.5pF	±0.1pF	CL02C5R5B02GNN □
		0.7pF	±0.1pF	CL02C0R7B02GNN □			5.6pF	±0.1pF	CL02C5R6B02GNN □
		0.8pF	±0.1pF	CL02C0R8B02GNN □			5.6pF	±0.25pF	CL02C5R6C02GNN □
		0.9pF	±0.1pF	CL02C0R9B02GNN □			5.7pF	±0.1pF	CL02C5R7B02GNN □
		1.0pF	±0.1pF	CL02C010B02GNN □			5.7pF	±0.25pF	CL02C5R7C02GNN □
		1.1pF	±0.1pF	CL02C1R1B02GNN □			5.8pF	±0.1pF	CL02C5R8B02GNN □
		1.2pF	±0.1pF	CL02C1R2B02GNN □			5.9pF	±0.1pF	CL02C5R9B02GNN □
		1.3pF	±0.1pF	CL02C1R3B02GNN □			6.0pF	±0.1pF	CL02C060B02GNN □
		1.4pF	±0.1pF	CL02C1R4B02GNN □			6.1pF	±0.1pF	CL02C6R1B02GNN □
		1.5pF	±0.1pF	CL02C1R5B02GNN □			6.2pF	±0.1pF	CL02C6R2B02GNN □
		1.6pF	±0.1pF	CL02C1R6B02GNN □			6.3pF	±0.1pF	CL02C6R3B02GNN □
		1.7pF	±0.1pF	CL02C1R7B02GNN □			6.4pF	±0.1pF	CL02C6R4B02GNN □
		1.8pF	±0.1pF	CL02C1R8B02GNN □			6.5pF	±0.1pF	CL02C6R5B02GNN □
		1.9pF	±0.1pF	CL02C1R9B02GNN □			6.6pF	±0.1pF	CL02C6R6B02GNN □
		2.0pF	±0.1pF	CL02C020B02GNN □			6.7pF	±0.1pF	CL02C6R7B02GNN □
		2.1pF	±0.1pF	CL02C2R1B02GNN □			6.8pF	±0.1pF	CL02C6R8B02GNN □
		2.2pF	±0.1pF	CL02C2R2B02GNN □			6.9pF	±0.1pF	CL02C6R9B02GNN □
		2.3pF	±0.1pF	CL02C2R3B02GNN □			7.0pF	±0.1pF	CL02C070B02GNN □
		2.4pF	±0.1pF	CL02C2R4B02GNN □			7.1pF	±0.1pF	CL02C7R1B02GNN □
		2.5pF	±0.1pF	CL02C2R5B02GNN □			7.2pF	±0.1pF	CL02C7R2B02GNN □
		2.6pF	±0.1pF	CL02C2R6B02GNN □			7.3pF	±0.1pF	CL02C7R3B02GNN □
		2.7pF	±0.1pF	CL02C2R7B02GNN □			7.4pF	±0.1pF	CL02C7R4B02GNN □
		2.8pF	±0.1pF	CL02C2R8B02GNN □			7.5pF	±0.1pF	CL02C7R5B02GNN □
		2.9pF	±0.1pF	CL02C2R9B02GNN □			7.6pF	±0.1pF	CL02C7R6B02GNN □
		3.0pF	±0.1pF	CL02C030B02GNN □			7.7pF	±0.1pF	CL02C7R7B02GNN □
		3.1pF	±0.1pF	CL02C3R1B02GNN □			7.8pF	±0.1pF	CL02C7R8B02GNN □
		3.2pF	±0.1pF	CL02C3R2B02GNN □			7.9pF	±0.1pF	CL02C7R9B02GNN □
		3.3pF	±0.1pF	CL02C3R3B02GNN □			8.0pF	±0.1pF	CL02C080B02GNN □
3.3pF	±0.25pF	CL02C3R3C02GNN □	8.0pF	±0.25pF	CL02C080C02GNN □				
3.4pF	±0.1pF	CL02C3R4B02GNN □	8.1pF	±0.1pF	CL02C8R1B02GNN □				
3.5pF	±0.1pF	CL02C3R5B02GNN □	8.2pF	±0.1pF	CL02C8R2B02GNN □				
3.5pF	±0.25pF	CL02C3R5C02GNN □	8.2pF	±0.25pF	CL02C8R2C02GNN □				
3.6pF	±0.1pF	CL02C3R6B02GNN □	8.3pF	±0.1pF	CL02C8R3B02GNN □				
3.7pF	±0.1pF	CL02C3R7B02GNN □	8.4pF	±0.1pF	CL02C8R4B02GNN □				
3.7pF	±0.25pF	CL02C3R7C02GNN □	8.4pF	±0.25pF	CL02C8R4C02GNN □				
3.8pF	±0.1pF	CL02C3R8B02GNN □	8.5pF	±0.1pF	CL02C8R5B02GNN □				
3.9pF	±0.1pF	CL02C3R9B02GNN □	8.6pF	±0.1pF	CL02C8R6B02GNN □				
4.0pF	±0.1pF	CL02C040B02GNN □	8.7pF	±0.1pF	CL02C8R7B02GNN □				
4.1pF	±0.1pF	CL02C4R1B02GNN □	8.8pF	±0.1pF	CL02C8R8B02GNN □				
4.2pF	±0.1pF	CL02C4R2B02GNN □	8.9pF	±0.1pF	CL02C8R9B02GNN □				
4.3pF	±0.1pF	CL02C4R3B02GNN □	9.0pF	±0.1pF	CL02C090B02GNN □				
4.4pF	±0.1pF	CL02C4R4B02GNN □	9.1pF	±0.1pF	CL02C9R1B02GNN □				
4.5pF	±0.1pF	CL02C4R5B02GNN □	9.2pF	±0.1pF	CL02C9R2B02GNN □				
4.6pF	±0.1pF	CL02C4R6B02GNN □	9.3pF	±0.1pF	CL02C9R3B02GNN □				
4.7pF	±0.1pF	CL02C4R7B02GNN □	9.4pF	±0.1pF	CL02C9R4B02GNN □				
4.8pF	±0.1pF	CL02C4R8B02GNN □	9.5pF	±0.1pF	CL02C9R5B02GNN □				
4.9pF	±0.1pF	CL02C4R9B02GNN □	9.5pF	±0.25pF	CL02C9R5C02GNN □				
5.0pF	±0.1pF	CL02C050B02GNN □	9.6pF	±0.1pF	CL02C9R6B02GNN □				
5.0pF	±0.25pF	CL02C050C02GNN □	9.7pF	±0.1pF	CL02C9R7B02GNN □				
5.1pF	±0.1pF	CL02C5R1B02GNN □	9.8pF	±0.1pF	CL02C9R8B02GNN □				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Super Small Size Capacitors

## Product Line Up (COG)

### ■ Size : 0.40 X 0.20mm (inch : 01005)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.22mm	16Vdc	9.9pF	±0.1pF	CL02C9R9B02GNN□
		10pF	±5%	CL02C100J02GNN□
		18pF	±2%	CL02C180G02GNN□
		22pF	±2%	CL02C220G02GNN□

### ■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.33mm	16Vdc	33pF	±5%	CL03C330J03GNN□
		33pF	±5%	CL03C330J03NNN□
0.33mm	25Vdc	0.2pF	±0.1pF	CL03C0R2BA3GNN□
		0.2pF	±0.25pF	CL03C0R2CA3GNN□
		0.2pF	±0.03pF	CL03C0R2NA3GNN□
		0.3pF	±0.1pF	CL03C0R3BA3GNN□
		0.3pF	±0.25pF	CL03C0R3CA3GNN□
		0.3pF	±0.03pF	CL03C0R3NA3GNN□
		0.4pF	±0.1pF	CL03C0R4BA3GNN□
		0.4pF	±0.25pF	CL03C0R4CA3GNN□
		0.4pF	±0.03pF	CL03C0R4NA3GNN□
		0.5pF	±0.1pF	CL03C0R5BA3GNN□
		0.5pF	±0.25pF	CL03C0R5CA3GNN□
		0.5pF	±0.03pF	CL03C0R5NA3GNN□
		0.6pF	±0.1pF	CL03C0R6BA3GNN□
		0.6pF	±0.25pF	CL03C0R6CA3GNN□
		0.6pF	±0.03pF	CL03C0R6NA3GNN□
		0.7pF	±0.1pF	CL03C0R7BA3GNN□
		0.7pF	±0.03pF	CL03C0R7NA3GNN□
		0.75pF	±0.1pF	CL03CR75BA3GNN□
		0.8pF	±0.1pF	CL03C0R8BA3GNN□
		0.8pF	±0.25pF	CL03C0R8CA3GNN□
		0.8pF	±0.03pF	CL03C0R8NA3GNN□
		0.9pF	±0.1pF	CL03C0R9BA3GNN□
		0.9pF	±0.25pF	CL03C0R9CA3GNN□
		0.9pF	±0.03pF	CL03C0R9NA3GNN□
		1.0pF	±0.1pF	CL03C010BA3GNN□
		1.0pF	±0.25pF	CL03C010CA3GNN□
		1.0pF	±0.03pF	CL03C010NA3GNN□
		1.1pF	±0.1pF	CL03C1R1BA3GNN□
		1.1pF	±0.03pF	CL03C1R1NA3GNN□
		1.2pF	±0.1pF	CL03C1R2BA3GNN□
		1.2pF	±0.25pF	CL03C1R2CA3GNN□
		1.2pF	±0.03pF	CL03C1R2NA3GNN□
		1.3pF	±0.1pF	CL03C1R3BA3GNN□
		1.3pF	±0.25pF	CL03C1R3CA3GNN□
		1.3pF	±0.03pF	CL03C1R3NA3GNN□
		1.4pF	±0.03pF	CL03C1R4NA3GNN□
		1.5pF	±0.1pF	CL03C1R5BA3GNN□
		1.5pF	±0.25pF	CL03C1R5CA3GNN□
		1.5pF	±0.03pF	CL03C1R5NA3GNN□
		1.6pF	±0.05pF	CL03C1R6AA3GNN□
1.6pF	±0.1pF	CL03C1R6BA3GNN□		
1.6pF	±0.25pF	CL03C1R6CA3GNN□		
1.7pF	±0.05pF	CL03C1R7AA3GNN□		

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.33mm	25Vdc	1.7pF	±0.1pF	CL03C1R7BA3GNN□
		1.7pF	±0.25pF	CL03C1R7CA3GNN□
		1.8pF	±0.05pF	CL03C1R8AA3GNN□
		1.8pF	±0.1pF	CL03C1R8BA3GNN□
		1.8pF	±0.25pF	CL03C1R8CA3GNN□
		1.9pF	±0.05pF	CL03C1R9AA3GNN□
		1.9pF	±0.1pF	CL03C1R9BA3GNN□
		1.9pF	±0.25pF	CL03C1R9CA3GNN□
		2.0pF	±0.05pF	CL03C020AA3GNN□
		2.0pF	±0.1pF	CL03C020BA3GNN□
		2.0pF	±0.25pF	CL03C020CA3GNN□
		2.0pF	±0.1pF	CL03C2R0BA3GNN□
		2.1pF	±0.05pF	CL03C2R1AA3GNN□
		2.1pF	±0.1pF	CL03C2R1BA3GNN□
		2.2pF	±0.05pF	CL03C2R2AA3GNN□
		2.2pF	±0.1pF	CL03C2R2BA3GNN□
		2.2pF	±0.25pF	CL03C2R2CA3GNN□
		2.3pF	±0.05pF	CL03C2R3AA3GNN□
		2.3pF	±0.1pF	CL03C2R3BA3GNN□
		2.4pF	±0.05pF	CL03C2R4AA3GNN□
		2.4pF	±0.1pF	CL03C2R4BA3GNN□
		2.4pF	±0.25pF	CL03C2R4CA3GNN□
		2.5pF	±0.05pF	CL03C2R5AA3GNN□
		2.5pF	±0.1pF	CL03C2R5BA3GNN□
		2.6pF	±0.05pF	CL03C2R6AA3GNN□
		2.6pF	±0.1pF	CL03C2R6BA3GNN□
		2.7pF	±0.05pF	CL03C2R7AA3GNN□
		2.7pF	±0.1pF	CL03C2R7BA3GNN□
		2.7pF	±0.25pF	CL03C2R7CA3GNN□
		2.8pF	±0.05pF	CL03C2R8AA3GNN□
		2.8pF	±0.1pF	CL03C2R8BA3GNN□
		2.9pF	±0.05pF	CL03C2R9AA3GNN□
		2.9pF	±0.1pF	CL03C2R9BA3GNN□
		3.0pF	±0.05pF	CL03C030AA3GNN□
		3.0pF	±0.1pF	CL03C030BA3GNN□
		3.0pF	±0.25pF	CL03C030CA3GNN□
		3.1pF	±0.05pF	CL03C3R1AA3GNN□
		3.1pF	±0.1pF	CL03C3R1BA3GNN□
		3.2pF	±0.05pF	CL03C3R2AA3GNN□
		3.2pF	±0.1pF	CL03C3R2BA3GNN□
3.2pF	±0.25pF	CL03C3R2CA3GNN□		
3.3pF	±0.05pF	CL03C3R3AA3GNN□		
3.3pF	±0.1pF	CL03C3R3BA3GNN□		
3.3pF	±0.25pF	CL03C3R3CA3GNN□		
3.4pF	±0.05pF	CL03C3R4AA3GNN□		
3.4pF	±0.1pF	CL03C3R4BA3GNN□		
3.4pF	±0.25pF	CL03C3R4CA3GNN□		
3.5pF	±0.05pF	CL03C3R5AA3GNN□		
3.6pF	±0.05pF	CL03C3R6AA3GNN□		
3.6pF	±0.1pF	CL03C3R6BA3GNN□		
3.6pF	±0.25pF	CL03C3R6CA3GNN□		
3.7pF	±0.05pF	CL03C3R7AA3GNN□		
3.8pF	±0.05pF	CL03C3R8AA3GNN□		
3.8pF	±0.1pF	CL03C3R8BA3GNN□		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑

Product Line Up (COG)

■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.33mm	25Vdc	3.8pF	±0.25pF	CL03C3R8CA3GNN□	0.33mm	25Vdc	6.8pF	±0.25pF	CL03C6R8CA3GNN□
		3.9pF	±0.05pF	CL03C3R9AA3GNN□			6.9pF	±0.05pF	CL03C6R9AA3GNN□
		3.9pF	±0.1pF	CL03C3R9BA3GNN□			7.0pF	±0.05pF	CL03C070AA3GNN□
		3.9pF	±0.25pF	CL03C3R9CA3GNN□			7.0pF	±0.1pF	CL03C070BA3GNN□
		4.0pF	±0.05pF	CL03C040AA3GNN□			7.0pF	±0.25pF	CL03C070CA3GNN□
		4.0pF	±0.1pF	CL03C040BA3GNN□			7.1pF	±0.05pF	CL03C7R1AA3GNN□
		4.0pF	±0.25pF	CL03C040CA3GNN□			7.2pF	±0.05pF	CL03C7R2AA3GNN□
		4.1pF	±0.05pF	CL03C4R1AA3GNN□			7.2pF	±0.1pF	CL03C7R2BA3GNN□
		4.2pF	±0.05pF	CL03C4R2AA3GNN□			7.3pF	±0.05pF	CL03C7R3AA3GNN□
		4.3pF	±0.05pF	CL03C4R3AA3GNN□			7.4pF	±0.05pF	CL03C7R4AA3GNN□
		4.3pF	±0.1pF	CL03C4R3BA3GNN□			7.5pF	±0.05pF	CL03C7R5AA3GNN□
		4.3pF	±0.25pF	CL03C4R3CA3GNN□			7.5pF	±0.1pF	CL03C7R5BA3GNN□
		4.4pF	±0.05pF	CL03C4R4AA3GNN□			7.5pF	±0.25pF	CL03C7R5CA3GNN□
		4.5pF	±0.05pF	CL03C4R5AA3GNN□			7.6pF	±0.05pF	CL03C7R6AA3GNN□
		4.6pF	±0.05pF	CL03C4R6AA3GNN□			7.7pF	±0.05pF	CL03C7R7AA3GNN□
		4.7pF	±0.05pF	CL03C4R7AA3GNN□			7.8pF	±0.05pF	CL03C7R8AA3GNN□
		4.7pF	±0.1pF	CL03C4R7BA3GNN□			7.9pF	±0.05pF	CL03C7R9AA3GNN□
		4.7pF	±0.25pF	CL03C4R7CA3GNN□			8.0pF	±0.05pF	CL03C080AA3GNN□
		4.8pF	±0.05pF	CL03C4R8AA3GNN□			8.0pF	±0.25pF	CL03C080CA3GNN□
		4.9pF	±0.05pF	CL03C4R9AA3GNN□			8.0pF	±0.5pF	CL03C080DA3GNN□
		5.0pF	±0.05pF	CL03C050AA3GNN□			8.1pF	±0.05pF	CL03C8R1AA3GNN□
		5.0pF	±0.1pF	CL03C050BA3GNN□			8.2pF	±0.05pF	CL03C8R2AA3GNN□
		5.0pF	±0.25pF	CL03C050CA3GNN□			8.2pF	±0.1pF	CL03C8R2BA3GNN□
		5.1pF	±0.05pF	CL03C5R1AA3GNN□			8.2pF	±0.25pF	CL03C8R2CA3GNN□
		5.1pF	±0.1pF	CL03C5R1BA3GNN□			8.2pF	±0.5pF	CL03C8R2DA3GNN□
		5.1pF	±0.25pF	CL03C5R1CA3GNN□			8.3pF	±0.05pF	CL03C8R3AA3GNN□
		5.1pF	±0.25pF	CL03C5R1CA3NNN□			8.4pF	±0.05pF	CL03C8R4AA3GNN□
		5.2pF	±0.05pF	CL03C5R2AA3GNN□			8.5pF	±0.05pF	CL03C8R5AA3GNN□
		5.3pF	±0.05pF	CL03C5R3AA3GNN□			8.5pF	±0.25pF	CL03C8R5CA3GNN□
		5.4pF	±0.05pF	CL03C5R4AA3GNN□			8.6pF	±0.05pF	CL03C8R6AA3GNN□
		5.5pF	±0.05pF	CL03C5R5AA3GNN□			8.7pF	±0.05pF	CL03C8R7AA3GNN□
		5.6pF	±0.05pF	CL03C5R6AA3GNN□			8.8pF	±0.05pF	CL03C8R8AA3GNN□
		5.6pF	±0.1pF	CL03C5R6BA3GNN□			8.9pF	±0.05pF	CL03C8R9AA3GNN□
		5.6pF	±0.25pF	CL03C5R6CA3GNN□			9.0pF	±0.05pF	CL03C090AA3GNN□
		5.7pF	±0.05pF	CL03C5R7AA3GNN□			9.0pF	±0.1pF	CL03C090BA3GNN□
		5.8pF	±0.05pF	CL03C5R8AA3GNN□			9.0pF	±0.25pF	CL03C090CA3GNN□
		5.9pF	±0.05pF	CL03C5R9AA3GNN□			9.0pF	±0.5pF	CL03C090DA3GNN□
		6.0pF	±0.05pF	CL03C060AA3GNN□			9.1pF	±0.05pF	CL03C9R1AA3GNN□
		6.0pF	±0.1pF	CL03C060BA3GNN□			9.1pF	±0.1pF	CL03C9R1BA3GNN□
		6.0pF	±0.25pF	CL03C060CA3GNN□			9.1pF	±0.25pF	CL03C9R1CA3GNN□
6.0pF	±0.5pF	CL03C060DA3GNN□	9.1pF	±0.5pF	CL03C9R1DA3GNN□				
6.1pF	±0.05pF	CL03C6R1AA3GNN□	9.2pF	±0.05pF	CL03C9R2AA3GNN□				
6.2pF	±0.05pF	CL03C6R2AA3GNN□	9.3pF	±0.05pF	CL03C9R3AA3GNN□				
6.2pF	±0.1pF	CL03C6R2BA3GNN□	9.4pF	±0.05pF	CL03C9R4AA3GNN□				
6.2pF	±0.25pF	CL03C6R2CA3GNN□	9.5pF	±0.05pF	CL03C9R5AA3GNN□				
6.3pF	±0.05pF	CL03C6R3AA3GNN□	9.6pF	±0.05pF	CL03C9R6AA3GNN□				
6.4pF	±0.05pF	CL03C6R4AA3GNN□	9.7pF	±0.05pF	CL03C9R7AA3GNN□				
6.4pF	±0.25pF	CL03C6R4CA3GNN□	9.8pF	±0.05pF	CL03C9R8AA3GNN□				
6.5pF	±0.05pF	CL03C6R5AA3GNN□	9.9pF	±0.05pF	CL03C9R9AA3GNN□				
6.6pF	±0.05pF	CL03C6R6AA3GNN□	10pF	±0.05pF	CL03C100AA3GNN□				
6.7pF	±0.05pF	CL03C6R7AA3GNN□	10pF	±0.25pF	CL03C100CA3GNN□				
6.8pF	±0.05pF	CL03C6R8AA3GNN□	10pF	±0.5pF	CL03C100DA3GNN□				
6.8pF	±0.1pF	CL03C6R8BA3GNN□	10pF	±2%	CL03C100GA3GNN□				
6.8pF	±0.1pF	CL03C6R8BA3NNN□	10pF	±5%	CL03C100JA3GNN□				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Super Small Size Capacitors

## Product Line Up (COG)

■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.33mm	25Vdc	11pF	±2%	CL03C110GA3GNN□	0.33mm	50Vdc	6.0pF	±0.5pF	CL03C060DB3GNN□
		11pF	±5%	CL03C110JA3GNN□			6.2pF	±0.1pF	CL03C6R2BB3GNN□
		12pF	±2%	CL03C120GA3GNN□			6.5pF	±0.1pF	CL03C6R5BB3GNN□
		12pF	±5%	CL03C120JA3GNN□			7.0pF	±0.1pF	CL03C070BB3GNN□
		12pF	±5%	CL03C120JA3NINN□			7.0pF	±0.5pF	CL03C070DB3GNN□
		13pF	±2%	CL03C130GA3GNN□			7.5pF	±0.1pF	CL03C7R5BB3GNN□
		13pF	±5%	CL03C130JA3GNN□			8.0pF	±0.1pF	CL03C080BB3GNN□
		15pF	±2%	CL03C150GA3GNN□			8.0pF	±0.5pF	CL03C080DB3GNN□
		15pF	±5%	CL03C150JA3GNN□			8.2pF	±0.1pF	CL03C8R2BB3GNN□
		15pF	±5%	CL03C150JA3NINN□			8.2pF	±0.5pF	CL03C8R2DB3GNN□
		16pF	±2%	CL03C160GA3GNN□			10pF	±5%	CL03C100JB3GNN□
		16pF	±5%	CL03C160JA3GNN□			10pF	±5%	CL03C100JB3NINN□
		16pF	+5%	CL03C160UA3GNN□			12pF	±5%	CL03C120JB3NINN□
		18pF	±2%	CL03C180GA3GNN□			15pF	±5%	CL03C150JB3NINN□
		18pF	±5%	CL03C180JA3GNN□			33pF	±5%	CL03C330JB3NINN□
		18pF	±5%	CL03C180JA3NINN□			100pF	±5%	CL03C101JB3NINN□
		20pF	±2%	CL03C200GA3GNN□					
		20pF	±5%	CL03C200JA3GNN□					
		22pF	±2%	CL03C220GA3GNN□					
		22pF	±5%	CL03C220JA3GNN□					
		22pF	±5%	CL03C220JA3NINN□					
		24pF	±5%	CL03C240JA3GNN□					
		27pF	±5%	CL03C270JA3GNN□					
		27pF	±5%	CL03C270JA3NINN□					
		30pF	±5%	CL03C300JA3GNN□					
		33pF	±5%	CL03C330JA3GNN□					
		33pF	±5%	CL03C330JA3NINN□					
		39pF	±5%	CL03C390JA3NINN□					
	47pF	±5%	CL03C470JA3NINN□						
	56pF	±5%	CL03C560JA3NINN□						
	68pF	±5%	CL03C680JA3NINN□						
	82pF	±5%	CL03C820JA3NINN□						
	100pF	±5%	CL03C101JA3NINN□						
	50Vdc	0.5pF	±0.25pF	CL03C0R5CB3GNN□					
		0.75pF	±0.1pF	CL03CR75BB3GNN□					
		0.8pF	±0.25pF	CL03C0R8CB3GNN□					
		1.0pF	±0.1pF	CL03C010BB3GNN□					
		1.2pF	±0.1pF	CL03C1R2BB3GNN□					
		1.2pF	±0.25pF	CL03C1R2CB3GNN□					
		1.5pF	±0.1pF	CL03C1R5BB3GNN□					
		1.5pF	±0.25pF	CL03C1R5CB3GNN□					
		1.8pF	±0.1pF	CL03C1R8BB3GNN□					
		2.0pF	±0.1pF	CL03C020BB3GNN□					
		2.0pF	±0.25pF	CL03C020CB3GNN□					
2.2pF		±0.05pF	CL03C2R2AB3GNN□						
2.7pF		±0.1pF	CL03C2R7BB3GNN□						
3.0pF		±0.1pF	CL03C030BB3GNN□						
3.0pF		±0.25pF	CL03C030CB3GNN□						
3.3pF		±0.1pF	CL03C3R3BB3GNN□						
4.0pF		±0.1pF	CL03C040BB3GNN□						
4.7pF		±0.1pF	CL03C4R7BB3GNN□						
5.0pF		±0.1pF	CL03C050BB3GNN□						
5.6pF		±0.1pF	CL03C5R6BB3GNN□						
6.0pF	±0.1pF	CL03C060BB3GNN□							

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (X5R)

■ Size : 0.40 X 0.20mm (inch : 01005)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark			
0.22mm	4.0Vdc	15nF	± 10%	CL02A153KR2N11		0.33mm	6.3Vdc	1.0uF	± 10%	CL03A105KQ3C11	Operating Ref.			
		33nF	± 10%	CL02A333KR2N11				1.0uF	± 10%	CL03A105MQ3C11	Operating Ref.			
		47nF	± 10%	CL02A473KR2N11			10Vdc	330pF	± 20%	CL03A331KP3N11				
		100nF	± 10%	CL02A104KR2N11	Operating			1.5nF	± 10%	CL03A152KP3N11				
		100nF	± 20%	CL02A104MR2N11	Operating			2.2nF	± 20%	CL03A222KP3N11				
	6.3Vdc	680pF	± 10%	CL02A681KQ2N11				3.3nF	± 5%	CL03A332KP3N11				
		820pF	± 10%	CL02A821KQ2N11				4.7nF	± 10%	CL03A472KP3N11				
		1.0nF	± 10%	CL02A102KQ2N11				8.2nF	± 20%	CL03A822KP3N11				
		1.2nF	± 10%	CL02A122KQ2N11				10nF	± 10%	CL03A103KP3N11				
		1.8nF	± 10%	CL02A182KQ2N11				15nF	± 10%	CL03A153KP3N11				
		2.2nF	± 10%	CL02A222KQ2N11				22nF	± 10%	CL03A223KP3N11	Operating			
		2.7nF	± 10%	CL02A272KQ2N11				33nF	± 10%	CL03A333KP3N11	Operating			
		3.9nF	± 10%	CL02A392KQ2N11				47nF	± 20%	CL03A473KP3N11	Operating			
		5.6nF	± 10%	CL02A562KQ2N11				100nF	± 5%	CL03A104KP3N11	Operating			
		10nF	± 10%	CL02A103KQ2N11				100nF	± 10%	CL03A104MP3N11	Operating			
		15nF	± 10%	CL02A153KQ2N11	Operating			220nF	± 10%	CL03A224KP3N11	Operating Ref.			
		33nF	± 10%	CL02A333KQ2N11	Operating			220nF	± 5%	CL03A224MP3N11	Operating Ref.			
		47nF	± 10%	CL02A473KQ2N11	Operating		470nF	± 10%	CL03A474KP3N11	Operating Ref.				
		68nF	± 10%	CL02A683KQ2N11	Operating		470nF	± 20%	CL03A474MP3N11	Operating Ref.				
		100nF	± 10%	CL02A104KQ2N11	Operating		16Vdc	220pF	± 10%	CL03A221K03N11	Operating			
		100nF	± 20%	CL02A104MQ2N11	Operating			330pF	± 10%	CL03A331K03N11	Operating			
		10Vdc	470pF	± 10%	CL02A471KP2N11				470pF	± 10%	CL03A471K03N11	Operating		
	820pF		± 10%	CL02A821KP2N11				10nF	± 10%	CL03A103K03N11	Operating			
	1.0nF		± 10%	CL02A102KP2N11				22nF	± 10%	CL03A223K03N11	Operating			
	2.2nF		± 10%	CL02A222KP2N11				47nF	± 20%	CL03A473K03N11	Operating			
	5.6nF		± 10%	CL02A562KP2N11				100nF	± 10%	CL03A104K03N11	Operating			
	10nF		± 10%	CL02A103KP2N11				100nF	± 10%	CL03A104M03N11	Operating			
	0.33mm		4.0Vdc	100nF	± 10%			CL03A104KR3N11		25Vdc	1.0nF	± 10%	CL03A102KA3N11	Operating
				470nF	± 10%			CL03A474KR3N11	Ref.		4.7nF	± 10%	CL03A472KA3N11	Operating
				470nF	± 20%			CL03A474MR3N11	Ref.		10nF	± 20%	CL03A103KA3N11	Operating
				6.3Vdc	330pF			± 10%	CL03A331KQ3N11			22nF	± 10%	CL03A223KA3N11
		10nF			± 10%			CL03A103KQ3N11			100nF	± 10%	CL03A104KA3N11	Operating
12nF		± 10%	CL03A123KQ3N11			100nF		± 10%	CL03A104MA3N11	Operating				
15nF		± 10%	CL03A153KQ3N11			0.35mm		4.0Vdc	1.0uF	± 20%	CL03A105MR3CS11	Operating Ref.		
22nF		± 5%	CL03A223Q3N11				6.3Vdc		1.0uF	± 10%	CL03A105KQ3CS11	Operating Ref.		
22nF		± 10%	CL03A223Q3N11						1.0uF	± 20%	CL03A105MQ3NS11	Operating Ref.		
33nF		± 10%	CL03A333Q3N11					2.2uF	± 20%	CL03A225MQ3CS11	Operating Ref.			
47nF		± 10%	CL03A473Q3N11				10Vdc	1.0uF	± 20%	CL03A105MP3NS11	Operating Ref.			
82nF		± 10%	CL03A823Q3N11					0.39mm	6.3Vdc	2.2uF	± 20%	CL03A225MQ3CR11	Operating Ref.	
100nF		± 5%	CL03A104JQ3N11		Operating					2.2uF	± 20%	CL03A225MQ3CR6	Operating Ref.	
100nF		± 10%	CL03A104KQ3N11	Operating	10Vdc		2.2uF		± 20%	CL03A225MP3CR11	Operating Ref.			
100nF		± 20%	CL03A104MQ3N11	Operating	16Vdc		1.0uF		± 20%	CL03A105M03NR11	Operating Ref.			
220nF	± 10%	CL03A224KQ3N11	Operating Ref.											
220nF	± 20%	CL03A224MQ3N11	Operating Ref.											
470nF	± 5%	CL03A474JQ3N11	Operating Ref.											
470nF	± 10%	CL03A474KQ3N11	Operating Ref.											
470nF	± 20%	CL03A474MQ3N11	Operating Ref.											
1.5uF	± 20%	CL03A155MQ3N11	Operating Ref.											

■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.33mm	4.0Vdc	100nF	± 10%	CL03A104KR3N11		
		470nF	± 10%	CL03A474KR3N11	Ref.	
		470nF	± 20%	CL03A474MR3N11	Ref.	
		6.3Vdc	330pF	± 10%	CL03A331KQ3N11	
			10nF	± 10%	CL03A103KQ3N11	
	12nF		± 10%	CL03A123KQ3N11		
	15nF		± 10%	CL03A153KQ3N11		
	22nF		± 5%	CL03A223Q3N11		
	22nF		± 10%	CL03A223Q3N11		
	33nF		± 10%	CL03A333Q3N11		
	47nF		± 10%	CL03A473Q3N11		
	82nF		± 10%	CL03A823Q3N11		
	100nF		± 5%	CL03A104JQ3N11	Operating	
	100nF	± 10%	CL03A104KQ3N11	Operating		
	100nF	± 20%	CL03A104MQ3N11	Operating		
	220nF	± 10%	CL03A224KQ3N11	Operating Ref.		
	220nF	± 20%	CL03A224MQ3N11	Operating Ref.		
	470nF	± 5%	CL03A474JQ3N11	Operating Ref.		
	470nF	± 10%	CL03A474KQ3N11	Operating Ref.		
	470nF	± 20%	CL03A474MQ3N11	Operating Ref.		
	1.5uF	± 20%	CL03A155MQ3N11	Operating Ref.		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

# Super Small Size Capacitors

## Product Line Up (X6S)

■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.33mm	4.0Vdc	2.2nF	±20%	CL03X222MR3N3NN □		0.33mm	16Vdc	390pF	±10%	CL03B391KO3N3NN □	
		4.7nF	±20%	CL03X472MR3N3NN □				470pF	±10%	CL03B471KO3N3NN □	
		6.8nF	±20%	CL03X682MR3N3NN □				560pF	±10%	CL03B561KO3N3NN □	
		15nF	±20%	CL03X153MR3N3NN □				820pF	±10%	CL03B821KO3N3NN □	
		22nF	±20%	CL03X223MR3N3NN □				1.0nF	±10%	CL03B102KO3N3NN □	
		47nF	±20%	CL03X473MR3N3NN □				3.3nF	±10%	CL03B332KO3N3NN □	
		100nF	±10%	CL03X104KR3N3NN □	Derating			10nF	±10%	CL03B103KO3N3NN □	
	6.3Vdc	100nF	±10%	CL03X104KQ3N3NN □	Derating			25Vdc	120pF	±10%	CL03B121KA3N3NN □
0.39mm	4.0Vdc	1.0uF	±20%	CL03X105MR3N3NN □	Derating Ref		150pF	±10%	CL03B151KA3N3NN □		
							180pF	±10%	CL03B181KA3N3NN □		
							200pF	±10%	CL03B201KA3N3NN □		
							220pF	±10%	CL03B221KA3N3NN □		
							270pF	±10%	CL03B271KA3N3NN □		
							330pF	±10%	CL03B331KA3N3NN □		
							390pF	±10%	CL03B391KA3N3NN □		
							470pF	±10%	CL03B471KA3N3NN □		
						680pF	±5%	CL03B681JA3N3NN □			
						680pF	±10%	CL03B681KA3N3NN □			
						1.0nF	±5%	CL03B102JA3N3NN □			
						1.0nF	±10%	CL03B102KA3N3NN □			
						50Vdc	220pF	±10%	CL03B221KB3N3NN □		
						330pF	±10%	CL03B331KB3N3NN □			

## Product Line Up (X7R)

■ Size : 0.40 X 0.20mm (inch : 01005)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.22mm	6.3Vdc	1.0nF	±10%	CL02B102KQ2N3NN □	
	10Vdc	100pF	±10%	CL02B101KP2N3NN □	
		120pF	±10%	CL02B121KP2N3NN □	
		180pF	±10%	CL02B181KP2N3NN □	
		220pF	±10%	CL02B221KP2N3NN □	
		330pF	±10%	CL02B331KP2N3NN □	
		390pF	±10%	CL02B391KP2N3NN □	
		1.0nF	±10%	CL02B102KP2N3NN □	

■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.33mm	6.3Vdc	2.2nF	±10%	CL03B222KQ3N3NN □	
		3.3nF	±10%	CL03B332KQ3N3NN □	
		4.7nF	±10%	CL03B472KQ3N3NN □	
		6.8nF	±10%	CL03B682KQ3N3NN □	
		10nF	±10%	CL03B103KQ3N3NN □	
	10Vdc	470pF	±10%	CL03B471KP3N3NN □	
		1.5nF	±10%	CL03B152KP3N3NN □	
		2.2nF	±10%	CL03B222KP3N3NN □	
		3.3nF	±10%	CL03B332KP3N3NN □	
		4.7nF	±10%	CL03B472KP3N3NN □	
		6.8nF	±10%	CL03B682KP3N3NN □	
		10nF	±10%	CL03B103KP3N3NN □	
		10nF	±20%	CL03B103MP3N3NN □	
	16Vdc	100pF	±10%	CL03B101KO3N3NN □	
		120pF	±10%	CL03B121KO3N3NN □	
		150pF	±10%	CL03B151KO3N3NN □	
		180pF	±10%	CL03B181KO3N3NN □	
		220pF	±10%	CL03B221KO3N3NN □	
		270pF	±10%	CL03B271KO3N3NN □	
		330pF	±10%	CL03B331KO3N3NN □	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

# High Q Capacitors

## Feature





- High Q and low ESR in high frequency range
- Tight tolerance available
- High efficiency and low power consumption in RF circuit

## Application

- Mobile Phone
- Set Top Box
- Wireless Equipment
- GPS, Bluetooth

## Structure and Dimensions

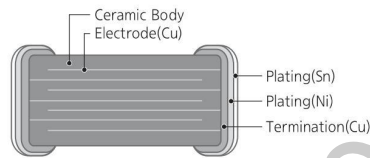

Size Code	EIA Code	Rated Voltage (Vdc)	Dimension(mm)			
			L	W	T	BW
02	01005	16	0.40±0.02	0.20±0.02	0.20±0.02	0.10±0.03
03	0201	25 / 50	0.60±0.03	0.30±0.03	0.30±0.03	0.15±0.05

## High Q Capacitance Table (COG)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(pF)																			
		0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0
01005(0402)	16																				
0201 (0603)	25																				
	50																				

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(pF)																			
		4.2	4.4	4.6	4.8	5.0	5.2	5.4	5.6	5.8	6.0	6.2	6.4	6.6	6.8	7.0	7.2	7.4	7.6	7.8	8.0
01005(0402)	16																				
0201 (0603)	25																				
	50																				

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(pF)																			
		8.2	8.4	8.6	8.8	9.0	9.2	9.4	9.7	10	11	12	14	16	18	20	22	24	27	30	33
01005(0402)	16																				
0201 (0603)	25																				
	50																				

# High Q Capacitors

## Product Line Up (COG)

■ Size : 0.40 X 0.20mm (inch : 01005)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.22mm	16Vdc	0.2pF	±0.1pF	CL02C0R2B02GNN□	0.22mm	16Vdc	5.1pF	±0.25pF	CL02C5R1C02GNN□
		0.3pF	±0.1pF	CL02C0R3B02GNN□			5.2pF	±0.1pF	CL02C5R2B02GNN□
		0.4pF	±0.1pF	CL02C0R4B02GNN□			5.3pF	±0.1pF	CL02C5R3B02GNN□
		0.5pF	±0.1pF	CL02C0R5B02GNN□			5.4pF	±0.1pF	CL02C5R4B02GNN□
		0.6pF	±0.1pF	CL02C0R6B02GNN□			5.5pF	±0.1pF	CL02C5R5B02GNN□
		0.7pF	±0.1pF	CL02C0R7B02GNN□			5.6pF	±0.1pF	CL02C5R6B02GNN□
		0.8pF	±0.1pF	CL02C0R8B02GNN□			5.6pF	±0.25pF	CL02C5R6C02GNN□
		0.9pF	±0.1pF	CL02C0R9B02GNN□			5.7pF	±0.1pF	CL02C5R7B02GNN□
		1.0pF	±0.1pF	CL02C0I0B02GNN□			5.7pF	±0.25pF	CL02C5R7C02GNN□
		1.1pF	±0.1pF	CL02C1R1B02GNN□			5.8pF	±0.1pF	CL02C5R8B02GNN□
		1.2pF	±0.1pF	CL02C1R2B02GNN□			5.9pF	±0.1pF	CL02C5R9B02GNN□
		1.3pF	±0.1pF	CL02C1R3B02GNN□			6.0pF	±0.1pF	CL02C060B02GNN□
		1.4pF	±0.1pF	CL02C1R4B02GNN□			6.1pF	±0.1pF	CL02C6R1B02GNN□
		1.5pF	±0.1pF	CL02C1R5B02GNN□			6.2pF	±0.1pF	CL02C6R2B02GNN□
		1.6pF	±0.1pF	CL02C1R6B02GNN□			6.3pF	±0.1pF	CL02C6R3B02GNN□
		1.7pF	±0.1pF	CL02C1R7B02GNN□			6.4pF	±0.1pF	CL02C6R4B02GNN□
		1.8pF	±0.1pF	CL02C1R8B02GNN□			6.5pF	±0.1pF	CL02C6R5B02GNN□
		1.9pF	±0.1pF	CL02C1R9B02GNN□			6.6pF	±0.1pF	CL02C6R6B02GNN□
		2.0pF	±0.1pF	CL02C020B02GNN□			6.7pF	±0.1pF	CL02C6R7B02GNN□
		2.1pF	±0.1pF	CL02C2R1B02GNN□			6.8pF	±0.1pF	CL02C6R8B02GNN□
		2.2pF	±0.1pF	CL02C2R2B02GNN□			6.9pF	±0.1pF	CL02C6R9B02GNN□
		2.3pF	±0.1pF	CL02C2R3B02GNN□			7.0pF	±0.1pF	CL02C070B02GNN□
		2.4pF	±0.1pF	CL02C2R4B02GNN□			7.1pF	±0.1pF	CL02C7R1B02GNN□
		2.5pF	±0.1pF	CL02C2R5B02GNN□			7.2pF	±0.1pF	CL02C7R2B02GNN□
		2.6pF	±0.1pF	CL02C2R6B02GNN□			7.3pF	±0.1pF	CL02C7R3B02GNN□
		2.7pF	±0.1pF	CL02C2R7B02GNN□			7.4pF	±0.1pF	CL02C7R4B02GNN□
		2.8pF	±0.1pF	CL02C2R8B02GNN□			7.5pF	±0.1pF	CL02C7R5B02GNN□
		2.9pF	±0.1pF	CL02C2R9B02GNN□			7.6pF	±0.1pF	CL02C7R6B02GNN□
		3.0pF	±0.1pF	CL02C030B02GNN□			7.7pF	±0.1pF	CL02C7R7B02GNN□
		3.1pF	±0.1pF	CL02C3R1B02GNN□			7.8pF	±0.1pF	CL02C7R8B02GNN□
		3.2pF	±0.1pF	CL02C3R2B02GNN□			7.9pF	±0.1pF	CL02C7R9B02GNN□
		3.3pF	±0.1pF	CL02C3R3B02GNN□			8.0pF	±0.1pF	CL02C080B02GNN□
		3.3pF	±0.25pF	CL02C3R3C02GNN□			8.0pF	±0.25pF	CL02C080C02GNN□
		3.4pF	±0.1pF	CL02C3R4B02GNN□			8.1pF	±0.1pF	CL02C8R1B02GNN□
3.5pF	±0.1pF	CL02C3R5B02GNN□	8.2pF	±0.1pF	CL02C8R2B02GNN□				
3.5pF	±0.25pF	CL02C3R5C02GNN□	8.2pF	±0.25pF	CL02C8R2C02GNN□				
3.6pF	±0.1pF	CL02C3R6B02GNN□	8.3pF	±0.1pF	CL02C8R3B02GNN□				
3.7pF	±0.1pF	CL02C3R7B02GNN□	8.4pF	±0.1pF	CL02C8R4B02GNN□				
3.7pF	±0.25pF	CL02C3R7C02GNN□	8.4pF	±0.25pF	CL02C8R4C02GNN□				
3.8pF	±0.1pF	CL02C3R8B02GNN□	8.5pF	±0.1pF	CL02C8R5B02GNN□				
3.9pF	±0.1pF	CL02C3R9B02GNN□	8.6pF	±0.1pF	CL02C8R6B02GNN□				
4.0pF	±0.1pF	CL02C040B02GNN□	8.7pF	±0.1pF	CL02C8R7B02GNN□				
4.1pF	±0.1pF	CL02C4R1B02GNN□	8.8pF	±0.1pF	CL02C8R8B02GNN□				
4.2pF	±0.1pF	CL02C4R2B02GNN□	8.9pF	±0.1pF	CL02C8R9B02GNN□				
4.3pF	±0.1pF	CL02C4R3B02GNN□	9.0pF	±0.1pF	CL02C090B02GNN□				
4.4pF	±0.1pF	CL02C4R4B02GNN□	9.1pF	±0.1pF	CL02C9R1B02GNN□				
4.5pF	±0.1pF	CL02C4R5B02GNN□	9.2pF	±0.1pF	CL02C9R2B02GNN□				
4.6pF	±0.1pF	CL02C4R6B02GNN□	9.3pF	±0.1pF	CL02C9R3B02GNN□				
4.7pF	±0.1pF	CL02C4R7B02GNN□	9.4pF	±0.1pF	CL02C9R4B02GNN□				
4.8pF	±0.1pF	CL02C4R8B02GNN□	9.5pF	±0.1pF	CL02C9R5B02GNN□				
4.9pF	±0.1pF	CL02C4R9B02GNN□	9.5pF	±0.25pF	CL02C9R5C02GNN□				
5.0pF	±0.1pF	CL02C050B02GNN□	9.6pF	±0.1pF	CL02C9R6B02GNN□				
5.0pF	±0.25pF	CL02C050C02GNN□	9.7pF	±0.1pF	CL02C9R7B02GNN□				
5.1pF	±0.1pF	CL02C5R1B02GNN□	9.8pF	±0.1pF	CL02C9R8B02GNN□				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑



Product Line Up ( COG )

■ Size : 0.40 X 0.20mm (inch : 01005)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.22mm	16Vdc	9.9pF	±0.1pF	CL02C9R9B02GNN □
		10pF	±5%	CL02C100J02GNN □
		18pF	±2%	CL02C180G02GNN □
		22pF	±2%	CL02C220G02GNN □

■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.33mm	25Vdc	0.2pF	±0.1pF	CL03C0R2BA3GNN □
		0.2pF	±0.25pF	CL03C0R2CA3GNN □
		0.2pF	±0.03pF	CL03C0R2NA3GNN □
		0.3pF	±0.1pF	CL03C0R3BA3GNN □
		0.3pF	±0.25pF	CL03C0R3CA3GNN □
		0.3pF	±0.03pF	CL03C0R3NA3GNN □
		0.4pF	±0.1pF	CL03C0R4BA3GNN □
		0.4pF	±0.25pF	CL03C0R4CA3GNN □
		0.4pF	±0.03pF	CL03C0R4NA3GNN □
		0.5pF	±0.1pF	CL03C0R5BA3GNN □
		0.5pF	±0.25pF	CL03C0R5CA3GNN □
		0.5pF	±0.03pF	CL03C0R5NA3GNN □
		0.6pF	±0.1pF	CL03C0R6BA3GNN □
		0.6pF	±0.25pF	CL03C0R6CA3GNN □
		0.6pF	±0.03pF	CL03C0R6NA3GNN □
		0.7pF	±0.1pF	CL03C0R7BA3GNN □
		0.7pF	±0.03pF	CL03C0R7NA3GNN □
		0.75pF	±0.1pF	CL03CR75BA3GNN □
		0.8pF	±0.1pF	CL03C0R8BA3GNN □
		0.8pF	±0.25pF	CL03C0R8CA3GNN □
		0.8pF	±0.03pF	CL03C0R8NA3GNN □
		0.9pF	±0.1pF	CL03C0R9BA3GNN □
		0.9pF	±0.25pF	CL03C0R9CA3GNN □
		0.9pF	±0.03pF	CL03C0R9NA3GNN □
		1.0pF	±0.1pF	CL03C010BA3GNN □
		1.0pF	±0.25pF	CL03C010CA3GNN □
		1.0pF	±0.03pF	CL03C010NA3GNN □
		1.1pF	±0.1pF	CL03C1R1BA3GNN □
		1.1pF	±0.03pF	CL03C1R1NA3GNN □
		1.2pF	±0.1pF	CL03C1R2BA3GNN □
		1.2pF	±0.25pF	CL03C1R2CA3GNN □
		1.2pF	±0.03pF	CL03C1R2NA3GNN □
		1.3pF	±0.1pF	CL03C1R3BA3GNN □
		1.3pF	±0.25pF	CL03C1R3CA3GNN □
		1.3pF	±0.03pF	CL03C1R3NA3GNN □
		1.4pF	±0.03pF	CL03C1R4NA3GNN □
		1.5pF	±0.1pF	CL03C1R5BA3GNN □
		1.5pF	±0.25pF	CL03C1R5CA3GNN □
		1.5pF	±0.03pF	CL03C1R5NA3GNN □
		1.6pF	±0.05pF	CL03C1R6AA3GNN □
1.6pF	±0.1pF	CL03C1R6BA3GNN □		
1.6pF	±0.25pF	CL03C1R6CA3GNN □		
1.7pF	±0.05pF	CL03C1R7AA3GNN □		
1.7pF	±0.1pF	CL03C1R7BA3GNN □		
1.7pF	±0.25pF	CL03C1R7CA3GNN □		

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.33mm	25Vdc	1.8pF	±0.05pF	CL03C1R8AA3GNN □
		1.8pF	±0.1pF	CL03C1R8BA3GNN □
		1.8pF	±0.25pF	CL03C1R8CA3GNN □
		1.9pF	±0.05pF	CL03C1R9AA3GNN □
		1.9pF	±0.1pF	CL03C1R9BA3GNN □
		1.9pF	±0.25pF	CL03C1R9CA3GNN □
		2.0pF	±0.05pF	CL03C020AA3GNN □
		2.0pF	±0.1pF	CL03C020BA3GNN □
		2.0pF	±0.25pF	CL03C020CA3GNN □
		2.0pF	±0.1pF	CL03C2R0BA3GNN □
		2.1pF	±0.05pF	CL03C2R1AA3GNN □
		2.1pF	±0.1pF	CL03C2R1BA3GNN □
		2.2pF	±0.05pF	CL03C2R2AA3GNN □
		2.2pF	±0.1pF	CL03C2R2BA3GNN □
		2.2pF	±0.25pF	CL03C2R2CA3GNN □
		2.3pF	±0.05pF	CL03C2R3AA3GNN □
		2.3pF	±0.1pF	CL03C2R3BA3GNN □
		2.4pF	±0.05pF	CL03C2R4AA3GNN □
		2.4pF	±0.1pF	CL03C2R4BA3GNN □
		2.4pF	±0.25pF	CL03C2R4CA3GNN □
		2.5pF	±0.05pF	CL03C2R5AA3GNN □
		2.5pF	±0.1pF	CL03C2R5BA3GNN □
		2.6pF	±0.05pF	CL03C2R6AA3GNN □
		2.6pF	±0.1pF	CL03C2R6BA3GNN □
		2.7pF	±0.05pF	CL03C2R7AA3GNN □
		2.7pF	±0.1pF	CL03C2R7BA3GNN □
		2.7pF	±0.25pF	CL03C2R7CA3GNN □
		2.8pF	±0.05pF	CL03C2R8AA3GNN □
		2.8pF	±0.1pF	CL03C2R8BA3GNN □
		2.9pF	±0.05pF	CL03C2R9AA3GNN □
		2.9pF	±0.1pF	CL03C2R9BA3GNN □
		3.0pF	±0.05pF	CL03C030AA3GNN □
		3.0pF	±0.1pF	CL03C030BA3GNN □
		3.0pF	±0.25pF	CL03C030CA3GNN □
		3.1pF	±0.05pF	CL03C3R1AA3GNN □
		3.1pF	±0.1pF	CL03C3R1BA3GNN □
		3.2pF	±0.05pF	CL03C3R2AA3GNN □
		3.2pF	±0.1pF	CL03C3R2BA3GNN □
		3.2pF	±0.25pF	CL03C3R2CA3GNN □
		3.3pF	±0.05pF	CL03C3R3AA3GNN □
3.3pF	±0.1pF	CL03C3R3BA3GNN □		
3.3pF	±0.25pF	CL03C3R3CA3GNN □		
3.4pF	±0.05pF	CL03C3R4AA3GNN □		
3.4pF	±0.1pF	CL03C3R4BA3GNN □		
3.4pF	±0.25pF	CL03C3R4CA3GNN □		
3.5pF	±0.05pF	CL03C3R5AA3GNN □		
3.6pF	±0.05pF	CL03C3R6AA3GNN □		
3.6pF	±0.1pF	CL03C3R6BA3GNN □		
3.6pF	±0.25pF	CL03C3R6CA3GNN □		
3.7pF	±0.05pF	CL03C3R7AA3GNN □		
3.8pF	±0.05pF	CL03C3R8AA3GNN □		
3.8pF	±0.1pF	CL03C3R8BA3GNN □		
3.8pF	±0.25pF	CL03C3R8CA3GNN □		
3.9pF	±0.05pF	CL03C3R9AA3GNN □		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# High Q Capacitors

## Product Line Up (COG)

■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.33mm	25Vdc	3.9pF	±0.1pF	CL03C3R9BA3GNN□	0.33mm	25Vdc	7.0pF	±0.25pF	CL03C070CA3GNN□
		3.9pF	±0.25pF	CL03C3R9CA3GNN□			7.1pF	±0.05pF	CL03C7R1AA3GNN□
		4.0pF	±0.05pF	CL03C040AA3GNN□			7.2pF	±0.05pF	CL03C7R2AA3GNN□
		4.0pF	±0.1pF	CL03C040BA3GNN□			7.2pF	±0.1pF	CL03C7R2BA3GNN□
		4.0pF	±0.25pF	CL03C040CA3GNN□			7.3pF	±0.05pF	CL03C7R3AA3GNN□
		4.1pF	±0.05pF	CL03C4R1AA3GNN□			7.4pF	±0.05pF	CL03C7R4AA3GNN□
		4.2pF	±0.05pF	CL03C4R2AA3GNN□			7.5pF	±0.05pF	CL03C7R5AA3GNN□
		4.3pF	±0.05pF	CL03C4R3AA3GNN□			7.5pF	±0.1pF	CL03C7R5BA3GNN□
		4.3pF	±0.1pF	CL03C4R3BA3GNN□			7.5pF	±0.25pF	CL03C7R5CA3GNN□
		4.3pF	±0.25pF	CL03C4R3CA3GNN□			7.6pF	±0.05pF	CL03C7R6AA3GNN□
		4.4pF	±0.05pF	CL03C4R4AA3GNN□			7.7pF	±0.05pF	CL03C7R7AA3GNN□
		4.5pF	±0.05pF	CL03C4R5AA3GNN□			7.8pF	±0.05pF	CL03C7R8AA3GNN□
		4.6pF	±0.05pF	CL03C4R6AA3GNN□			7.9pF	±0.05pF	CL03C7R9AA3GNN□
		4.7pF	±0.05pF	CL03C4R7AA3GNN□			8.0pF	±0.05pF	CL03C080AA3GNN□
		4.7pF	±0.1pF	CL03C4R7BA3GNN□			8.0pF	±0.25pF	CL03C080CA3GNN□
		4.7pF	±0.25pF	CL03C4R7CA3GNN□			8.0pF	±0.5pF	CL03C080DA3GNN□
		4.8pF	±0.05pF	CL03C4R8AA3GNN□			8.1pF	±0.05pF	CL03C8R1AA3GNN□
		4.9pF	±0.05pF	CL03C4R9AA3GNN□			8.2pF	±0.05pF	CL03C8R2AA3GNN□
		5.0pF	±0.05pF	CL03C050AA3GNN□			8.2pF	±0.1pF	CL03C8R2BA3GNN□
		5.0pF	±0.1pF	CL03C050BA3GNN□			8.2pF	±0.25pF	CL03C8R2CA3GNN□
		5.0pF	±0.25pF	CL03C050CA3GNN□			8.2pF	±0.5pF	CL03C8R2DA3GNN□
		5.1pF	±0.05pF	CL03C5R1AA3GNN□			8.3pF	±0.05pF	CL03C8R3AA3GNN□
		5.1pF	±0.1pF	CL03C5R1BA3GNN□			8.4pF	±0.05pF	CL03C8R4AA3GNN□
		5.1pF	±0.25pF	CL03C5R1CA3GNN□			8.5pF	±0.05pF	CL03C8R5AA3GNN□
		5.2pF	±0.05pF	CL03C5R2AA3GNN□			8.5pF	±0.25pF	CL03C8R5CA3GNN□
		5.3pF	±0.05pF	CL03C5R3AA3GNN□			8.6pF	±0.05pF	CL03C8R6AA3GNN□
		5.4pF	±0.05pF	CL03C5R4AA3GNN□			8.7pF	±0.05pF	CL03C8R7AA3GNN□
		5.5pF	±0.05pF	CL03C5R5AA3GNN□			8.8pF	±0.05pF	CL03C8R8AA3GNN□
		5.6pF	±0.05pF	CL03C5R6AA3GNN□			8.9pF	±0.05pF	CL03C8R9AA3GNN□
		5.6pF	±0.1pF	CL03C5R6BA3GNN□			9.0pF	±0.05pF	CL03C090AA3GNN□
		5.6pF	±0.25pF	CL03C5R6CA3GNN□			9.0pF	±0.1pF	CL03C090BA3GNN□
		5.7pF	±0.05pF	CL03C5R7AA3GNN□			9.0pF	±0.25pF	CL03C090CA3GNN□
		5.8pF	±0.05pF	CL03C5R8AA3GNN□			9.0pF	±0.5pF	CL03C090DA3GNN□
		5.9pF	±0.05pF	CL03C5R9AA3GNN□			9.1pF	±0.05pF	CL03C9R1AA3GNN□
		6.0pF	±0.05pF	CL03C060AA3GNN□			9.1pF	±0.1pF	CL03C9R1BA3GNN□
		6.0pF	±0.1pF	CL03C060BA3GNN□			9.1pF	±0.25pF	CL03C9R1CA3GNN□
		6.0pF	±0.25pF	CL03C060CA3GNN□			9.1pF	±0.5pF	CL03C9R1DA3GNN□
		6.0pF	±0.5pF	CL03C060DA3GNN□			9.2pF	±0.05pF	CL03C9R2AA3GNN□
		6.1pF	±0.05pF	CL03C6R1AA3GNN□			9.3pF	±0.05pF	CL03C9R3AA3GNN□
		6.2pF	±0.05pF	CL03C6R2AA3GNN□			9.4pF	±0.05pF	CL03C9R4AA3GNN□
		6.2pF	±0.1pF	CL03C6R2BA3GNN□			9.5pF	±0.05pF	CL03C9R5AA3GNN□
		6.2pF	±0.25pF	CL03C6R2CA3GNN□			9.6pF	±0.05pF	CL03C9R6AA3GNN□
		6.3pF	±0.05pF	CL03C6R3AA3GNN□			9.7pF	±0.05pF	CL03C9R7AA3GNN□
		6.4pF	±0.05pF	CL03C6R4AA3GNN□			9.8pF	±0.05pF	CL03C9R8AA3GNN□
		6.4pF	±0.25pF	CL03C6R4CA3GNN□			9.9pF	±0.05pF	CL03C9R9AA3GNN□
		6.5pF	±0.05pF	CL03C6R5AA3GNN□			10pF	±0.05pF	CL03C100AA3GNN□
		6.6pF	±0.05pF	CL03C6R6AA3GNN□			10pF	±0.25pF	CL03C100CA3GNN□
		6.7pF	±0.05pF	CL03C6R7AA3GNN□			10pF	±0.5pF	CL03C100DA3GNN□
6.8pF	±0.05pF	CL03C6R8AA3GNN□	10pF	±2%	CL03C100GA3GNN□				
6.8pF	±0.1pF	CL03C6R8BA3GNN□	10pF	±5%	CL03C100JA3GNN□				
6.8pF	±0.25pF	CL03C6R8CA3GNN□	11pF	±2%	CL03C110GA3GNN□				
6.9pF	±0.05pF	CL03C6R9AA3GNN□	11pF	±5%	CL03C110JA3GNN□				
7.0pF	±0.05pF	CL03C070AA3GNN□	12pF	±2%	CL03C120GA3GNN□				
7.0pF	±0.1pF	CL03C070BA3GNN□	12pF	±5%	CL03C120JA3GNN□				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (COG)


■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.33mm	25Vdc	13pF	±2%	CL03C130GA3GNN □
		13pF	±5%	CL03C130JA3GNN □
		15pF	±2%	CL03C150GA3GNN □
		15pF	±5%	CL03C150JA3GNN □
		16pF	±2%	CL03C160GA3GNN □
		16pF	±5%	CL03C160JA3GNN □
		16pF	±5%	CL03C160UA3GNN □
		18pF	±2%	CL03C180GA3GNN □
		18pF	±5%	CL03C180JA3GNN □
		20pF	±2%	CL03C200GA3GNN □
		20pF	±5%	CL03C200JA3GNN □
		22pF	±2%	CL03C220GA3GNN □
		22pF	±5%	CL03C220JA3GNN □
		24pF	±5%	CL03C240JA3GNN □
		27pF	±5%	CL03C270JA3GNN □
		30pF	±5%	CL03C300JA3GNN □
		33pF	±5%	CL03C330JA3GNN □
		50Vdc	0.5pF	±0.25pF
	0.75pF		±0.1pF	CL03CR75BB3GNN □
	0.8pF		±0.25pF	CL03C0R8CB3GNN □
	1.0pF		±0.1pF	CL03C010BB3GNN □
	1.2pF		±0.1pF	CL03C1R2BB3GNN □
	1.2pF		±0.25pF	CL03C1R2CB3GNN □
	1.5pF		±0.1pF	CL03C1R5BB3GNN □
	1.5pF		±0.25pF	CL03C1R5CB3GNN □
	1.8pF		±0.1pF	CL03C1R8BB3GNN □
	2.0pF		±0.1pF	CL03C020BB3GNN □
	2.0pF		±0.25pF	CL03C020CB3GNN □
	2.2pF		±0.05pF	CL03C2R2AB3GNN □
	2.7pF		±0.1pF	CL03C2R7BB3GNN □
	3.0pF		±0.1pF	CL03C030BB3GNN □
	3.0pF		±0.25pF	CL03C030CB3GNN □
	3.3pF		±0.1pF	CL03C3R3BB3GNN □
	4.0pF		±0.1pF	CL03C040BB3GNN □
	4.7pF		±0.1pF	CL03C4R7BB3GNN □
	5.0pF		±0.1pF	CL03C050BB3GNN □
	5.6pF		±0.1pF	CL03C5R6BB3GNN □
	6.0pF		±0.1pF	CL03C060BB3GNN □
	6.0pF	±0.5pF	CL03C060DB3GNN □	
6.2pF	±0.1pF	CL03C6R2BB3GNN □		
6.5pF	±0.1pF	CL03C6R5BB3GNN □		
7.0pF	±0.1pF	CL03C070BB3GNN □		
7.0pF	±0.5pF	CL03C070DB3GNN □		
7.5pF	±0.1pF	CL03C7R5BB3GNN □		
8.0pF	±0.1pF	CL03C080BB3GNN □		
8.0pF	±0.5pF	CL03C080DB3GNN □		
8.2pF	±0.1pF	CL03C8R2BB3GNN □		
8.2pF	±0.5pF	CL03C8R2DB3GNN □		
10pF	±5%	CL03C100JB3GNN □		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Medium – High Voltage Capacitors

## Feature





- Highly reliable performance
- Operating at high voltage level
- Wide voltage level : from 100V to 3kV
- High withstanding voltage
- Tape & reel surface mount assembly

## Application

- Switching Power Circuit (SMPS)
- Lighting Ballast, LCD Back Lighting Inverter
- DC – DC converter input filter, Snubber Circuit
- Network (IEEE802.3)

## Structure and Dimensions

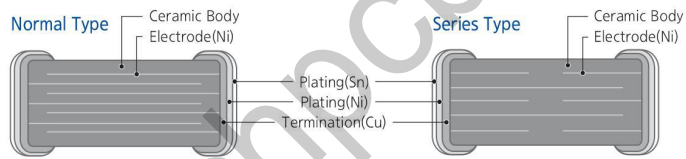

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00±0.05	0.50±0.05	0.50±0.05	5	0.25±0.10
10	0603	1.60±0.10	0.80±0.10	0.80±0.10	8	0.30±0.20
21	0805	2.00±0.10	1.25±0.10	0.65±0.10	A	0.50+0.20/-0.30
		2.00±0.10	1.25±0.10	0.85±0.10	C	
		2.00±0.10	1.25±0.10	1.15±0.10	M	
		2.00±0.10	1.25±0.10	1.25±0.10	F	
31	1206	3.20±0.15	1.60±0.15	0.85±0.15	C	0.50±0.30
		3.20±0.15	1.60±0.15	1.25±0.15	F	
		3.20±0.20	1.60±0.20	1.60±0.20	H	
32	1210	3.20±0.30	2.50±0.20	1.25±0.20	F	0.60±0.30
		3.20±0.30	2.50±0.20	1.60±0.20	H	
		3.20±0.30	2.50±0.20	2.00±0.20	I	
		3.20±0.30	2.50±0.20	2.50±0.20	J	
42	1808	4.50±0.40	2.00±0.20	1.25±0.20	F	0.80±0.30
		4.50±0.40	2.00±0.20	1.60±0.20	H	
		4.50±0.40	2.00±0.20	2.00±0.20	I	
43	1812	4.50±0.40	3.20±0.30	1.25±0.20	F	0.80±0.30
		4.50±0.40	3.20±0.30	1.60±0.20	H	
		4.50±0.40	3.20±0.30	2.00±0.20	I	
		4.50±0.40	3.20±0.30	2.50±0.20	J	
55	2220	5.70±0.40	5.00±0.40	2.50±0.20	J	1.00±0.30



# Medium – High Voltage Capacitors

Medium – High Voltage Capacitance Table (X7R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																									
		nF																uF									
		1.0	1.5	2.2	3.3	4.7	6.8	10	15	22	33	47	68	100	150	220	330	470	680	1.0	1.5	2.2	3.3	4.7			
0603(1608)	100																										
	200																										
0805 (2012)	100																										
	200																										
	250																										
1206 (3216)	100																										
	200																										
	250																										
	350																										
	500																										
	630																										
	1k																										
	2k																										
1210 (3225)	100																										
	200																										
	250																										
	500																										
	630																										
	1k																										
	2k																										
1808 (4520)	2k																										
	3k																										
1812 (4532)	100																										
	200																										
	250																										
	500																										
	630																										
	1k																										
	2k																										
2220 (5750)	100																										
	200																										
	250																										
	500																										
	630																										
	1k																										
	2k																										

Product Line Up (COG)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	100Vdc	1.8pF	±0.25pF	CL05C1R8CC5N111□
		2.2pF	±0.25pF	CL05C2R2CC5N111□
		3.0pF	±0.25pF	CL05C030CC5N111□
		3.3pF	±0.25pF	CL05C3R3CC5N111□
		4.0pF	±0.25pF	CL05C040CC5N111□
		15pF	±5%	CL05C150JC5N111□
		33pF	±5%	CL05C330JC5N111□
		39pF	±5%	CL05C390JC5N111□
		47pF	±5%	CL05C470JC5N111□
		82pF	±5%	CL05C820JC5N111□
		100pF	±5%	CL05C101JC5N111□

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
0.90mm	100Vdc	270pF	±5%	CL10C271JC8N111□	
		330pF	±5%	CL10C331JC8N111□	
		390pF	±5%	CL10C391JC8N111□	
		470pF	±5%	CL10C471JC8N111□	
		1.0nF	±5%	CL10C102JC8N111□	
	200Vdc	220pF	±10%	CL10C221KD8N111□	
		250Vdc	470pF	±5%	CL10C471JE8N111□

■ Size : 2.00 X 1.25mm (inch : 0805)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.90mm	100Vdc	10pF	±0.25pF	CL10C100CC8N111□
		10pF	±0.5pF	CL10C100DC8N111□
		10pF	±5%	CL10C100JC8N111□
		12pF	±5%	CL10C120JC8N111□
		13pF	±5%	CL10C130JC8N111□
		15pF	±5%	CL10C150JC8N111□
		18pF	±5%	CL10C180JC8N111□
		20pF	±5%	CL10C200JC8N111□
		22pF	±5%	CL10C220JC8N111□
		24pF	±5%	CL10C240JC8N111□
		27pF	±5%	CL10C270JC8N111□
		30pF	±5%	CL10C300JC8N111□
		32pF	±2%	CL10C320GC8N111□
		33pF	±1%	CL10C330FC8N111□
		33pF	±5%	CL10C330JC8N111□
		39pF	±1%	CL10C390FC8N111□
		39pF	±5%	CL10C390JC8N111□
		47pF	±5%	CL10C470JC8N111□
		50pF	±5%	CL10C500JC8N111□
		52pF	±5%	CL10C520JC8N111□
		56pF	±5%	CL10C560JC8N111□
		62pF	±5%	CL10C620JC8N111□
		62pF	±10%	CL10C620KC8N111□
		68pF	±2%	CL10C680GC8N111□
		68pF	±5%	CL10C680JC8N111□
		82pF	±5%	CL10C820JC8N111□
		91pF	±5%	CL10C910JC8N111□
		95pF	±5%	CL10C950JC8N111□
		100pF	±5%	CL10C101JC8N111□
		110pF	±5%	CL10C111JC8N111□
		120pF	±5%	CL10C121JC8N111□
		150pF	±5%	CL10C151JC8N111□
		180pF	±5%	CL10C181JC8N111□
		180pF	±10%	CL10C181KC8N111□
		190pF	±5%	CL10C191JC8N111□
		200pF	±5%	CL10C201JC8N111□
		220pF	±5%	CL10C221JC8N111□
		220pF	±10%	CL10C221KC8N111□

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.75mm	100Vdc	2.7pF	±0.25pF	CL21C2R7CCAN111□
		4.7pF	±0.1pF	CL21C4R7BCAN111□
		10pF	±0.25pF	CL21C100CCAN111□
		10pF	±5%	CL21C100JCAN111□
		11pF	±2%	CL21C110GCAN111□
		11pF	±5%	CL21C110JCAN111□
		12pF	±2%	CL21C120GCAN111□
		13pF	±2%	CL21C130GCAN111□
		13pF	±5%	CL21C130JCAN111□
		14pF	±5%	CL21C140JCAN111□
		15pF	±5%	CL21C150JCAN111□
		16pF	±2%	CL21C160GCAN111□
		16pF	±5%	CL21C160JCAN111□
		17pF	±5%	CL21C170JCAN111□
		18pF	±2%	CL21C180GCAN111□
		18pF	±5%	CL21C180JCAN111□
		20pF	±5%	CL21C200JCAN111□
		22pF	±5%	CL21C220JCAN111□
		24pF	±2%	CL21C240GCAN111□
		24pF	±5%	CL21C240JCAN111□
		25pF	±5%	CL21C250JCAN111□
		27pF	±5%	CL21C270JCAN111□
		30pF	±5%	CL21C300JCAN111□
		33pF	±2%	CL21C330GCAN111□
		33pF	±5%	CL21C330JCAN111□
		36pF	±5%	CL21C360JCAN111□
		38pF	±2%	CL21C380GCAN111□
		39pF	±2%	CL21C390GCAN111□
		39pF	±5%	CL21C390JCAN111□
		39pF	±10%	CL21C390KCAN111□
		40pF	±2%	CL21C400GCAN111□
		43pF	±2%	CL21C430GCAN111□
		43pF	±5%	CL21C430JCAN111□
		47pF	±5%	CL21C470JCAN111□
		51pF	±2%	CL21C510GCAN111□
		51pF	±5%	CL21C510JCAN111□
		56pF	±5%	CL21C560JCAN111□
		62pF	±5%	CL21C620JCAN111□
		68pF	±5%	CL21C680JCAN111□
		75pF	±5%	CL21C750JCAN111□
82pF	±5%	CL21C820JCAN111□		
91pF	±2%	CL21C910GCAN111□		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Medium – High Voltage Capacitors

## Product Line Up (COG)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
0.75mm	100Vdc	91pF	±5%	CL21C910JCANN□	
		100pF	±5%	CL21C101JCANN□	
		110pF	±5%	CL21C111JCANN□	
		120pF	±5%	CL21C121JCANN□	
		130pF	±5%	CL21C131JCANN□	
		150pF	±1%	CL21C151FCANN□	
		150pF	±5%	CL21C151JCANN□	
		160pF	±5%	CL21C161JCANN□	
		180pF	±2%	CL21C181GCANN□	
		180pF	±5%	CL21C181JCANN□	
		200pF	±5%	CL21C201JCANN□	
		220pF	±5%	CL21C221JCANN□	
		240pF	±5%	CL21C241JCANN□	
		270pF	±5%	CL21C271JCANN□	
		270pF	±10%	CL21C271KCANNN□	
		300pF	±5%	CL21C301JCANN□	
		330pF	±5%	CL21C331JCANN□	
		360pF	±5%	CL21C361JCANN□	
		390pF	±5%	CL21C391JCANN□	
		0.95mm	100Vdc	15pF	±5%
470pF	±2%			CL21C471GCCN□	
470pF	±5%			CL21C471JCCN□	
510pF	±5%			CL21C511JCCN□	
560pF	±1%			CL21C561FCCN□	
620pF	±5%			CL21C621JCCN□	
680pF	±5%			CL21C681JCCN□	
10pF	±0.5pF			CL21C100DDCN□	
200Vdc	15pF		±5%	CL21C150JDCN□	
	18pF		±2%	CL21C180GDCN□	
	18pF		±5%	CL21C180JDCN□	
	20pF		±2%	CL21C200GDCN□	
	36pF		±2%	CL21C360GDCN□	
	39pF		±2%	CL21C390GDCN□	
	43pF		±2%	CL21C430GDCN□	
	47pF		±5%	CL21C470JDCN□	
	51pF		±5%	CL21C510JDCN□	
	56pF		±2%	CL21C560GDCN□	
	56pF		±5%	CL21C560JDCN□	
	62pF		±2%	CL21C620GDCN□	
250Vdc	100pF	±2%	CL21C101GDCN□		
	100pF	±5%	CL21C101JDCN□		
	120pF	±5%	CL21C121JDCN□		
	150pF	±5%	CL21C151JDCN□		
	200pF	±5%	CL21C201JDCN□		
	220pF	±5%	CL21C221JDCN□		
	100pF	±10%	CL21C101KECN□		
	1.35mm	100Vdc	100pF	±5%	CL21C101JCFN□
			1.0nF	±2%	CL21C102GCFN□
			1.0nF	±5%	CL21C102JCFN□
1.2nF			±5%	CL21C122JCFN□	
2.2nF			±5%	CL21C222JCFN□	
200Vdc		470pF	±5%	CL21C471JDFN□	
		1.0nF	±5%	CL21C102JDFN□	

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
1.35mm	250Vdc	1.0nF	±5%	CL21C102JEFN□
	630Vdc	27pF	±5%	CL21C270JHFN□
		33pF	±5%	CL21C330JHFN□
		68pF	±5%	CL21C680JHFN□
		150pF	±5%	CL21C151JHFN□
		560pF	±5%	CL21C561JHFN□

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
1.00mm	100Vdc	10pF	±0.25pF	CL31C100CCN□
		10pF	±0.5pF	CL31C100DCN□
		10pF	±5%	CL31C100JCN□
		11pF	±5%	CL31C110JCN□
		12pF	±2%	CL31C120GCCN□
		12pF	±5%	CL31C120JCN□
		15pF	±2%	CL31C150GCCN□
		15pF	±5%	CL31C150JCN□
		18pF	±2%	CL31C180GCCN□
		18pF	±5%	CL31C180JCN□
		20pF	±5%	CL31C200JCN□
		22pF	±5%	CL31C220JCN□
		24pF	±5%	CL31C240JCN□
		27pF	±1%	CL31C270FCCN□
		27pF	±2%	CL31C270GCCN□
		27pF	±5%	CL31C270JCN□
		30pF	±2%	CL31C300GCCN□
		30pF	±5%	CL31C300JCN□
		30pF	±10%	CL31C300KCN□
		33pF	±5%	CL31C330JCN□
		36pF	±5%	CL31C360JCN□
		39pF	±5%	CL31C390JCN□
		43pF	±5%	CL31C430JCN□
		51pF	±5%	CL31C510JCN□
		56pF	±5%	CL31C560JCN□
		62pF	±5%	CL31C620JCN□
		68pF	±5%	CL31C680JCN□
		75pF	±5%	CL31C750JCN□
		82pF	±5%	CL31C820JCN□
		91pF	±1%	CL31C910FCCN□
		91pF	±2%	CL31C910GCCN□
		91pF	±5%	CL31C910JCN□
		100pF	±5%	CL31C101JCN□
		110pF	±5%	CL31C111JCN□
		120pF	±5%	CL31C121JCN□
		130pF	±5%	CL31C131JCN□
		180pF	±1%	CL31C181FCCN□
		180pF	±5%	CL31C181JCN□
		200pF	±5%	CL31C201JCN□
		220pF	±5%	CL31C221JCN□
240pF	±5%	CL31C241JCN□		
270pF	±5%	CL31C271JCN□		
300pF	±5%	CL31C301JCN□		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑



Product Line Up (COG)

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
1.00mm	100Vdc	330pF	±1%	CL31C331FCCNNN□		1.40mm	500Vdc	470pF	±10%	CL31C471KGFNNN□		
		330pF	±5%	CL31C331JCCNNN□				560pF	±2%	CL31C561GGFNNN□		
		360pF	±5%	CL31C361JCCNNN□				560pF	±5%	CL31C561JGFNNN□		
		390pF	±5%	CL31C391JCCNNN□				630Vdc	10pF	±5%	CL31C100JHFNNN□	
		390pF	±10%	CL31C391KCCNNN□					12pF	±5%	CL31C120JHFNNN□	
		470pF	±1%	CL31C471FCCNNN□			15pF		±5%	CL31C150JHFNNN□		
		470pF	±2%	CL31C471GCCNNN□			18pF		±5%	CL31C180JHFNNN□		
		470pF	±5%	CL31C471JCCNNN□			22pF		±5%	CL31C220JHFNNN□		
		470pF	±10%	CL31C471KCCNNN□			22pF		±5%	CL31C220JHFNNC□	dv/dt	
		510pF	±5%	CL31C511JCCNNN□			27pF		±5%	CL31C270JHFNNN□		
		560pF	±5%	CL31C561JCCNNN□			33pF		±5%	CL31C330JHFNNN□		
		680pF	±5%	CL31C681JCCNNN□			39pF		±5%	CL31C390JHFNNN□		
		750pF	±5%	CL31C751JCCNNN□			47pF		±2%	CL31C470GHFNNN□		
		820pF	±1%	CL31C821FCCNNN□			47pF		±5%	CL31C470JHFNNN□		
		910pF	±5%	CL31C911JCCNNN□			47pF		±5%	CL31C470JHFNNC□	dv/dt	
		1.0nF	±5%	CL31C102JCCNNN□			47pF		±10%	CL31C470KHFNNN□		
		1.2nF	±5%	CL31C122JCCNNN□			56pF	±5%	CL31C560JHFNNN□			
		1.5nF	±5%	CL31C152JCCNNN□			68pF	±5%	CL31C680JHFNNN□			
		1.8nF	±5%	CL31C182JCCNNN□			82pF	±5%	CL31C820JHFNNN□			
		2.2nF	±5%	CL31C222JCCNNN□			100pF	±5%	CL31C101JHFNNN□			
	200Vdc	10pF	±0.5pF	CL31C100DDCNNN□			120pF	±5%	CL31C121JHFNNN□			
		15pF	±5%	CL31C150JDCNNN□			150pF	±5%	CL31C151JHFNNN□			
		36pF	±5%	CL31C360JDCNNN□			180pF	±5%	CL31C181JHFNNN□			
		51pF	±5%	CL31C510JDCNNN□			220pF	±5%	CL31C221JHFNNN□			
		100pF	±5%	CL31C101JDCNNN□			220pF	±10%	CL31C221KHFNNN□			
		200pF	±5%	CL31C201JDCNNN□			330pF	±5%	CL31C331JHFNNN□			
220pF		±5%	CL31C221JDCNNN□		390pF	±5%	CL31C391JHFNNN□					
1.30mm		630Vdc	1.0nF	±5%	CL31C102JHMLNN□		470pF	±5%	CL31C471JHFNNN□			
1.40mm	200Vdc	1.0nF	±5%	CL31C102JDFNNN□		1kVdc	10pF	±5%	CL31C100JIFNNN□			
		1.5nF	±5%	CL31C152JDFNNN□			12pF	±5%	CL31C120JIFNNN□			
500Vdc	10pF	±5%	CL31C100JGFNNN□		15pF		±5%	CL31C150JIFNNN□				
	15pF	±2%	CL31C150GGFNNN□		18pF		±5%	CL31C180JIFNNN□				
	15pF	±5%	CL31C150JGFNNN□		22pF		±5%	CL31C220JIFNNN□				
	20pF	±5%	CL31C200JGFNNN□		33pF		±5%	CL31C330JIFNNN□				
	22pF	±5%	CL31C220JGFNNN□		39pF		±5%	CL31C390JIFNNN□				
	39pF	±2%	CL31C390GGFNNN□		47pF		±5%	CL31C470JIFNNN□				
	39pF	±5%	CL31C390JGFNNN□		56pF		±5%	CL31C560JIFNNN□				
	47pF	±2%	CL31C470GGFNNN□		68pF		±5%	CL31C680JIFNNN□				
	47pF	±5%	CL31C470JGFNNN□		82pF		±5%	CL31C820JIFNNN□				
	68pF	±2%	CL31C680GGFNNN□		100pF		±5%	CL31C101JIFNNN□				
	68pF	±5%	CL31C680JGFNNN□		100pF		±5%	CL31C101JIFNNC□	dv/dt			
	82pF	±5%	CL31C820JGFNNN□		120pF		±5%	CL31C121JIFNNN□				
	100pF	±2%	CL31C101GGFNNN□		150pF		±5%	CL31C151JIFNNN□				
	100pF	±5%	CL31C101JGFNNN□		470pF		±5%	CL31C471JIFNNN□				
	100pF	±10%	CL31C101KGFNNN□		1.80mm		100Vdc	3.9nF	±5%	CL31C392JCHNNN□		
	150pF	±5%	CL31C151JGFNNN□					4.7nF	±5%	CL31C472JCHNNN□		
	220pF	±2%	CL31C221GGFNNN□					10nF	±5%	CL31C103JCHNNN□		
	220pF	±5%	CL31C221JGFNNN□					200Vdc	2.2nF	±5%	CL31C222JDHNNN□	
	220pF	±10%	CL31C221KGFNNN□						2.2nF	±10%	CL31C222KDHNNN□	
	270pF	±2%	CL31C271GGFNNN□				250Vdc		2.2nF	±5%	CL31C222JEHNNN□	
270pF	±5%	CL31C271JGFNNN□		3.9nF				±5%	CL31C392JEHNNN□			
330pF	±5%	CL31C331JGFNNN□		4.7nF				±5%	CL31C472JEHNNN□			
470pF	±2%	CL31C471GGFNNN□		5.6nF				±5%	CL31C562JEHNNN□			
470pF	±5%	CL31C471JGFNNN□		6.8nF				±5%	CL31C682JEHNNN□			

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

# Medium – High Voltage Capacitors

## Product Line Up (COG)

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
1.80mm	250Vdc	8.2nF	±5%	CL31C822JEHNNN□		
		500Vdc	1.0nF	±2%	CL31C102GGHNNN□	
			1.0nF	±5%	CL31C102JGHNNN□	
			1.5nF	±5%	CL31C152JGHNNN□	
	630Vdc	2.2nF	±5%	CL31C222JGHNNN□		
		680pF	±5%	CL31C681JHHNNN□		
		1.0nF	±5%	CL31C102JHHNNN□		
		1.0nF	±5%	CL31C102JHHNNC□	dv/dt	
		1.2nF	±5%	CL31C122JHHNNN□		
		1.5nF	±5%	CL31C152JHHNNN□		
		2.2nF	±5%	CL31C222JHHNNN□		
		2.7nF	±5%	CL31C272JHHNNN□		
		3.3nF	±5%	CL31C332JHHNNN□		
		1kVdc	33pF	±5%	CL31C330JHHNNN□	
	150pF		±5%	CL31C151JHHNNN□		
	180pF		±5%	CL31C181JHHNNN□		
	220pF		±5%	CL31C221JHHNNN□		
	220pF		±5%	CL31C221JHHNNC□	dv/dt	
	270pF		±5%	CL31C271JHHNNN□		
	270pF		±5%	CL31C271JHHNNC□	dv/dt	
	330pF		±5%	CL31C331JHHNNN□		
	330pF		±5%	CL31C331JHHNNC□	dv/dt	
	470pF		±5%	CL31C471JHHNNN□		
	470pF		±5%	CL31C471JHHNNC□	dv/dt	
	2kVdc		10pF	±5%	CL31C100JHHNNN□	
		10pF	±5%	CL31C100JHHNNC□	dv/dt	
		15pF	±5%	CL31C150JHHNNN□		
		22pF	±5%	CL31C220JHHNNN□		
33pF		±5%	CL31C330JHHNNN□			
47pF		±5%	CL31C470JHHNNN□			
47pF		±5%	CL31C470JHHNNC□	dv/dt		
100pF		±5%	CL31C101JHHNNN□			

### ■ Size : 4.50 X 2.00mm (inch : 1808)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark		
1.45mm	3kVdc	5pF	±5%	CL42C050JKFNNN□			
		10pF	±5%	CL42C100JKFNNN□			
		12pF	±5%	CL42C120JKFNNN□			
		15pF	±5%	CL42C150JKFNNN□			
		18pF	±5%	CL42C180JKFNNN□			
		22pF	±5%	CL42C220JKFNNN□			
		27pF	±5%	CL42C270JKFNNN□			
		33pF	±5%	CL42C330JKFNNN□			
		47pF	±5%	CL42C470JKFNNN□			
		68pF	±5%	CL42C680JKFNNN□			
		100pF	±5%	CL42C101JKFNNN□			
		1.80mm	2kVdc	220pF	±5%	CL42C221JHHNNN□	
		2.20mm	3kVdc	150pF	±5%	CL42C151JKINNN□	

### ■ Size : 4.50 X 3.20mm (inch : 1812)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.45mm	100Vdc	10nF	±5%	CL43C103JCFNNN□	
1.80mm	1kVdc	820pF	±5%	CL43C821JHHNNN□	
		1.0nF	±5%	CL43C102JHHNNN□	
2.20mm	1kVdc	1.2nF	±5%	CL43C122JHHNNN□	
2.70mm	630Vdc	22nF	±5%	CL43C223JHHNNN□	
		1kVdc	1.3nF	±5%	CL43C132JHHNNN□
	1kVdc	1.5nF	±5%	CL43C152JHHNNN□	
		1.6nF	±5%	CL43C162JHHNNN□	
		1.8nF	±5%	CL43C182JHHNNN□	

### ■ Size : 5.70 X 5.00mm (inch : 2220)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.70mm	3kVdc	1.0nF	±5%	CL55C102JKJNNN□	

### ■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.45mm	100Vdc	1.0nF	±10%	CL32C102KCFNNN□	
		1.5nF	±10%	CL32C152KCFNNN□	
		4.7nF	±5%	CL32C472JCFNNN□	
	500Vdc	680pF	±5%	CL32C681JGFNNN□	
	1kVdc	330pF	±5%	CL32C331JGFNNN□	
	2kVdc	100pF	±5%	CL32C101JGFNNN□	
		100pF	±10%	CL32C101KJFNNN□	
150pF		±5%	CL32C151JGFNNN□		
1.80mm	630Vdc	1.8nF	±5%	CL32C182JHHNNN□	
	1kVdc	470pF	±5%	CL32C471JHHNNN□	
	2kVdc	220pF	±5%	CL32C221JHHNNN□	
2.20mm	2kVdc	330pF	±5%	CL32C331JHHNNN□	
2.70mm	630Vdc	6.8nF	±10%	CL32C682KHJNNN□	
		8.2nF	±5%	CL32C822JHHNNN□	
		470pF	±5%	CL32C471JHHNNN□	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑

Product Line Up (X7R)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	100Vdc	220pF	±10%	CL10B221KC8NNN□	
		470pF	±10%	CL10B471KC8NNN□	
		680pF	±5%	CL10B681JC8NNN□	
		1.0nF	±10%	CL10B102KC8NNN□	
		1.5nF	±10%	CL10B152KC8NNN□	
		1.8nF	±10%	CL10B182KC8NNN□	
		2.2nF	±10%	CL10B222KC8NNN□	
		2.7nF	±10%	CL10B272KC8NNN□	
		3.3nF	±5%	CL10B332JC8NNN□	
		3.3nF	±10%	CL10B332KC8NNN□	
		3.9nF	±10%	CL10B392KC8NNN□	
		4.7nF	±10%	CL10B472KC8NNN□	
		10nF	±10%	CL10B103KC8NNN□	
		100nF	±10%	CL10B104KC8NNN□	

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.35mm	100Vdc	100nF	±10%	CL21B104KCFNNN□	
		220nF	±10%	CL21B224KCFNNN□	
	250Vdc	4.7nF	±10%	CL21B472KEFNNN□	
		10nF	±10%	CL21B103KEFNNN□	
		15nF	±10%	CL21B153KEFNNN□	

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark		
1.00mm	100Vdc	330pF	±10%	CL31B331KCCNNN□			
		470pF	±10%	CL31B471KCCNNN□			
		1.0nF	±10%	CL31B102KCCNNN□			
		1.5nF	±10%	CL31B152KCCNNN□			
		2.2nF	±10%	CL31B222KCCNNN□			
		2.7nF	±5%	CL31B272JCCNNN□			
		3.3nF	±10%	CL31B332KCCNNN□			
		3.9nF	±10%	CL31B392KCCNNN□			
		4.7nF	±10%	CL31B472KCCNNN□			
		6.8nF	±10%	CL31B682KCCNNN□			
		10nF	±10%	CL31B103KCCNNN□			
		18nF	±10%	CL31B183KCCNNN□			
		22nF	±10%	CL31B223KCCNNN□			
		33nF	±10%	CL31B333KCCNNN□			
	200Vdc	100Vdc	47nF	±5%	CL31B473JCCNNN□		
			47nF	±10%	CL31B473KCCNNN□		
			47nF	±20%	CL31B473MCCNNN□		
			200Vdc	470pF	±10%	CL31B471KDCNNN□	
				680pF	±10%	CL31B681KDCNNN□	
				1.0nF	±10%	CL31B102KDCNNN□	
				2.2nF	±10%	CL31B222KDCNNN□	
				3.3nF	±10%	CL31B332KDCNNN□	
				4.7nF	±10%	CL31B472KDCNNN□	
				6.8nF	±10%	CL31B682KDCNNN□	
		10nF		±10%	CL31B103KDCNNN□		
		15nF		±10%	CL31B153KDCNNN□		
		18nF		±10%	CL31B183KDCNNN□		
		1.40mm	100Vdc	22nF	±5%	CL31B223JCFNNN□	
				22nF	±10%	CL31B223KCFNNN□	
				100nF	±5%	CL31B104JCFNNN□	
				100nF	±10%	CL31B104KCFNNN□	
				33nF	±10%	CL31B333KDFNNN□	
			200Vdc	47nF	±10%	CL31B473KDFNNN□	
				250Vdc	22nF	±10%	CL31B223KEFNNN□
500Vdc	220pF				±10%	CL31B221KGFNNN□	
	470pF				±10%	CL31B471KGFNNN□	
	470pF				±20%	CL31B471MGFNNN□	
	560pF	±10%	CL31B561KGFNNN□				
	680pF	±10%	CL31B681KGFNNN□				
1.40mm	100Vdc	1.0nF	±10%	CL31B102KGFNNN□			
		1.0nF	±20%	CL31B102MGFNNN□			
		1.5nF	±10%	CL31B152KGFNNN□			
		1.8nF	±5%	CL31B182JGFNNN□			

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.75mm	100Vdc	100pF	±5%	CL21B101JCANNN□		
		220pF	±10%	CL21B221KCANNN□		
		270pF	±10%	CL21B271KCANNN□		
		330pF	±5%	CL21B331JCANNN□		
		330pF	±10%	CL21B331KCANNN□		
		470pF	±10%	CL21B471KCANNN□		
		1.0nF	±5%	CL21B102JCANNN□		
		1.0nF	±10%	CL21B102KCANNN□		
		1.5nF	±10%	CL21B152KCANNN□		
		2.2nF	±10%	CL21B222KCANNN□		
		3.3nF	±10%	CL21B332KCANNN□		
		3.9nF	±10%	CL21B392KCANNN□		
		4.7nF	±10%	CL21B472KCANNN□		
		6.8nF	±10%	CL21B682KCANNN□		
		8.2nF	±10%	CL21B822KCANNN□		
		10nF	±5%	CL21B103JCANNN□		
		10nF	±10%	CL21B103KCANNN□		
		0.95mm	100Vdc	15nF	±10%	CL21B153KCCNNN□
200Vdc	330pF			±10%	CL21B331KDCNNN□	
	470pF			±10%	CL21B471KDCNNN□	
	560pF			±10%	CL21B561KDCNNN□	
	1.0nF			±5%	CL21B102JDCNNN□	
	1.0nF			±10%	CL21B102KDCNNN□	
	1.5nF			±10%	CL21B152KDCNNN□	
	2.2nF			±10%	CL21B222KDCNNN□	
	3.3nF			±10%	CL21B332KDCNNN□	
	4.7nF		±10%	CL21B472KDCNNN□		
250Vdc	560pF		±10%	CL21B561KECNNN□		
	100Vdc		22nF	±10%	CL21B223KCFNNN□	
			27nF	±10%	CL21B273KCFNNN□	
			33nF	±10%	CL21B333KCFNNN□	
			47nF	±10%	CL21B473KCFNNN□	
			68nF	±10%	CL21B683KCFNNN□	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Medium – High Voltage Capacitors

## Product Line Up (X7R)

■ Size : 3.20 X 1.60mm (inch : 1206)

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
1.40mm	500Vdc	1.8nF	±10%	CL31B182KGFNNN □		1.45mm	100Vdc	2.2nF	±10%	CL32B222KCFNNN □		
		2.2nF	±10%	CL31B222KGFNNN □				4.7nF	±10%	CL32B472KCFNNN □		
		2.2nF	±20%	CL31B222MGFNNN □				10nF	±10%	CL32B103KCFNNN □		
		2.7nF	±10%	CL31B272KGFNNN □				47nF	±10%	CL32B473KCFNNN □		
		3.3nF	±10%	CL31B332KGFNNN □				100nF	±5%	CL32B104JCFNNN □		
		4.7nF	±10%	CL31B472KGFNNN □				100nF	±10%	CL32B104KCFNNN □		
		6.8nF	±10%	CL31B682KGFNNN □				150nF	±10%	CL32B154KCFNNN □		
		8.2nF	±10%	CL31B822KGFNNN □				200Vdc	10nF	±10%	CL32B103KDFNNN □	
		10nF	±10%	CL31B103KGFNNN □				500Vdc	1.8nF	±5%	CL32B182JGFNNN □	
		12nF	±10%	CL31B123KGFNNN □			10nF		±10%	CL32B103KGFNNN □		
		15nF	±10%	CL31B153KGFNNN □			10nF		±20%	CL32B103MGFNNN □		
		220pF	±10%	CL31B221KHFNNN □			15nF		±20%	CL32B153MGFNNN □		
		330pF	±10%	CL31B331KHFNNN □			22nF		±10%	CL32B223KGFNNN □		
		470pF	±10%	CL31B471KHFNNN □			630Vdc		4.7nF	±20%	CL32B472MHFNNN □	
		560pF	±10%	CL31B561KHFNNN □			1kVdc	4.7nF	±10%	CL32B472KIFNNN □	Derating	
	680pF	±10%	CL31B681KHFNNN □		2kVdc	1.0nF	±10%	CL32B102KJFNNN □				
	1.0nF	±10%	CL31B102KHFNNN □		1.80mm	100Vdc	220nF	±5%	CL32B224JCHNNN □			
	1.5nF	±10%	CL31B152KHFNNN □				220nF	±10%	CL32B224KCHNNN □			
	2.2nF	±10%	CL31B222KHFNNN □				330nF	±10%	CL32B334KCHNNN □			
	3.3nF	±10%	CL31B332KHFNNN □			250Vdc	47nF	±10%	CL32B473KEHNNN □			
	4.7nF	±10%	CL31B472KHFNNN □			500Vdc	47nF	±10%	CL32B473KGHNNN □			
	6.8nF	±10%	CL31B682KHFNNN □			630Vdc	33nF	±10%	CL32B333KHHNNN □			
	8.2nF	±5%	CL31B822JHFNNN □		2.20mm	100Vdc	330nF	±10%	CL32B334KJFNNN □			
	10nF	±10%	CL31B103KHFNNN □				470nF	±10%	CL32B474KJFNNN □			
	15nF	±10%	CL31B153KHFNNN □			2.70mm	100Vdc	430nF	±10%	CL32B434KJFNNN □		
	680pF	±10%	CL31B681KIFNNN □	Derating	430nF			±20%	CL32B434MCJFNNN □			
	1.0nF	±10%	CL31B102KIFNNN □	Derating	470nF			±10%	CL32B474KJFNNN □			
	2.2nF	±10%	CL31B222KIFNNN □	Derating	1.0uF			±10%	CL32B105KJFNNN □			
	2.5nF	±10%	CL31B252KIFNNN □	Derating	250Vdc			100nF	±10%	CL32B104KEJFNNN □		
	3.3nF	±5%	CL31B332JIFNNN □	Derating		150nF	±10%	CL32B154KEJFNNN □				
	4.7nF	±10%	CL31B472KIFNNN □	Derating								
	1.80mm	100Vdc	150nF	±10%	CL31B154KCHNNN □							
			220nF	±10%	CL31B224KCHNNN □							
470nF			±10%	CL31B474KCHNNN □								
1.0uF			±10%	CL31B105KCHNNN □								
200Vdc		68nF	±10%	CL31B683KDHNNN □								
		100nF	±10%	CL31B104KDHNNN □								
250Vdc		33nF	±10%	CL31B333KEHNNN □								
		39nF	±10%	CL31B393KEHNNN □								
		47nF	±10%	CL31B473KEHNNN □								
500Vdc		100nF	±10%	CL31B104KEHNNN □								
		33nF	±10%	CL31B333KGHNNN □								
630Vdc		22nF	±10%	CL31B223KHHNNN □								
2kVdc		220pF	±10%	CL31B221KJHNNN □	Derating							
		470pF	±10%	CL31B471KJHNNN □	Derating							
		1.0nF	±10%	CL31B102KJHNNN □	Derating							
		1.0nF	±20%	CL31B102MJHNNN □	Derating							
		1.5nF	±10%	CL31B152KJHNNN □	Derating							

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑

Product Line Up (X7R)

■ Size : 4.50 X 2.00mm (inch : 1808)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.45mm	1kVdc	1.0nF	± 10%	CL42B102KIFNNN □	Derating
	2kVdc	1.0nF	± 10%	CL42B102KJFNNN □	Derating

■ Size : 5.70 X 5.00mm (inch : 2220)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.80mm	100Vdc	820nF	± 10%	CL55B824KCHNNN □	
	2kVdc	10nF	± 10%	CL55B103KJHNNN □	Derating
2.70mm	100Vdc	470nF	± 10%	CL55B474KJNNN □	
		2.2uF	± 10%	CL55B225KJNNN □	
		3.3uF	± 10%	CL55B335KJNNN □	
		4.7uF	± 10%	CL55B475KJNNN □	
	630Vdc	220nF	± 10%	CL55B224KHJNNN □	

■ Size : 4.50 X 3.20mm (inch : 1812)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.45mm	100Vdc	100nF	± 10%	CL43B104KCFNNN □	
		100nF	± 20%	CL43B104MCFNNN □	
		220nF	± 10%	CL43B224KCFNNN □	
		330nF	± 10%	CL43B334KCFNNN □	
	200Vdc	1.0nF	± 10%	CL43B102KDFNNN □	
		47nF	± 10%	CL43B473KDFNNN □	
		47nF	± 20%	CL43B473MDFNNN □	
		100nF	± 10%	CL43B104KDFNNN □	
	500Vdc	3.3nF	± 10%	CL43B332KGFNNN □	
		10nF	± 10%	CL43B103KGFNNN □	
		22nF	± 10%	CL43B223KGFNNN □	
		33nF	± 10%	CL43B333KGFNNN □	
	1kVdc	47nF	± 10%	CL43B473KGFNNN □	
			± 20%	CL43B473MGFNNN □	
		1.0nF	± 10%	CL43B102KIFNNN □	Derating
		1.5nF	± 10%	CL43B152KIFNNN □	Derating
		2.2nF	± 10%	CL43B222KIFNNN □	Derating
		2.7nF	± 10%	CL43B272KIFNNN □	Derating
		3.3nF	± 10%	CL43B332KIFNNN □	Derating
		4.7nF	± 10%	CL43B472KIFNNN □	Derating
		5.0nF	± 10%	CL43B502KIFNNN □	Derating
		10nF	± 10%	CL43B103KIFNNN □	Derating
	2kVdc	10nF	± 20%	CL43B103MIFNNN □	Derating
		1.0nF	± 10%	CL43B102KJFNNN □	Derating
1.5nF		± 10%	CL43B152KJFNNN □	Derating	
2.2nF		± 10%	CL43B222KJFNNN □	Derating	
2.2nF		± 10%	CL43B222KJFNNN □	Derating	
2.2nF		± 10%	CL43B222KJFNNN □	Derating	
1.80mm	100Vdc	470nF	± 10%	CL43B474KCHNNN □	
		470nF	± 20%	CL43B474MCHNNN □	
2.20mm	500Vdc	100nF	± 10%	CL43B104KGINNN □	
2.70mm	100Vdc	680nF	± 10%	CL43B684KJNNN □	
		820nF	± 10%	CL43B824KJNNN □	
		1.0uF	± 10%	CL43B105KJNNN □	
	200Vdc	470nF	± 10%	CL43B474KDJNNN □	
	250Vdc	220nF	± 10%	CL43B224KEJNNN □	
		220nF	± 20%	CL43B224MEJNNN □	
		470nF	± 10%	CL43B474KEJNNN □	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Soft – term Capacitors

## Feature





- Soft – Termination relaxes the applied thermal/mechanical stresses by ductile properties of metal-polymer composites.
- Excellent bending strength
- Durability against thermal shock / cycles.

## Application

- Mobile Phone
- DC – DC Converter
- Tablet devices
- PC (Laptop, Desktop)
- HDD /SSD board
- Display

## Structure and Dimensions

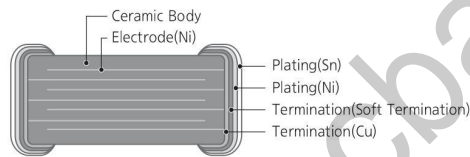

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
03	0201	0.60±0.03	0.30±0.03	0.30±0.03	3	0.15±0.05
		1.00±0.05	0.50±0.05	0.50±0.05	5	
05	0402	1.00±0.05	0.50±0.05	0.60±0.10	6	0.25±0.10
		1.00±0.05	0.50±0.05	0.70±0.10	7	
10	0603	1.60±0.10	0.80±0.10	0.80±0.10	8	0.30±0.20
21	0805	2.00±0.10	1.25±0.10	0.60±0.10	6	0.50+0.2/-0.3
		2.00±0.10	1.25±0.10	0.85±0.10	C	
		2.00±0.10	1.25±0.10	1.25±0.10	F	
		2.00±0.15	1.25±0.15	1.25±0.15	Q	
		2.00±0.20	1.25±0.20	1.25±0.20	Y	
31	1206	3.20±0.15	1.60±0.15	0.85±0.15	C	0.50±0.30
		3.20±0.15	1.60±0.15	1.10±0.15	E	
		3.20±0.15	1.60±0.15	1.25±0.15	F	
		3.20±0.20	1.60±0.20	1.60±0.20	H	
		3.20±0.15	1.60±0.15	1.15±0.10	P	

Soft - term Capacitance Table (X5R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																		
		nF						uF												
		100	150	220	330	470	680	1.0	1.5	2.2	3.3	4.7	6.8	10	15	22	33	47	68	100
0201 (0603)	6.3																			
	10																			
0402 (1005)	6.3																			
	10																			
0603 (1608)	6.3																			
	10																			
1206(3216)	25																			

Soft - term Capacitance Table (X7R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																				
		nF												uF								
		1.0	1.5	6.8	10	15	22	33	47	68	100	150	220	330	470	680	1.0	1.5	2.2	3.3	4.7	6.8
0805(2012)	250																					
1206 (3216)	25																					
	50																					
	100																					
	250																					
	350																					
1210 (3225)	35																					
	50																					
	100																					

# Soft – term Capacitors

## Product Line Up (X5R)

### ■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.33mm	10Vdc	100nF	±10%	CL03A104KP3ZNN□	Derating
0.35mm	6.3Vdc	1.0uF	±20%	CL03A105MQ3ZSN□	Derating Ref
	10Vdc	1.0uF	±20%	CL03A105MP3ZSN□	Derating Ref
0.39mm	6.3Vdc	2.2uF	±20%	CL03A225MQ3ZRN□	Derating Ref

### ■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.57mm	10Vdc	2.2uF	±10%	CL05A225KP5ZSN□	Derating Ref
	6.3Vdc	4.7uF	±20%	CL05A475MQ5ZRN□	Derating Ref
0.65mm	10Vdc	4.7uF	±10%	CL05A475KP5ZRN□	Derating Ref
	6.3Vdc	10uF	±20%	CL05A106MQ5ZUN□	Derating Ref
0.70mm	10Vdc	10uF	±20%	CL05A106MP5ZUN□	Derating Ref
	6.3Vdc	22uF	±20%	CL05A226MQ6ZUN□	Derating
0.90mm	6.3Vdc	22uF	±20%	CL05A226MQ7ZUN□	Derating

### ■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	6.3Vdc	10uF	±20%	CL10A106MQ8ZQN□	Ref.
1.05mm	6.3Vdc	22uF	±20%	CL10A226MQ8ZUN□	Derating
	10Vdc	22uF	±20%	CL10A226MP8ZUN□	Derating

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.80mm	25Vdc	22uF	±10%	CL31A226KAHSNN□	
		22uF	±10%	CL31A226KAHZNN□	

## Product Line Up (X7R)

### ■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	250Vdc	1.0nF	±10%	CL21B102KECSNN□	

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.00mm	350Vdc	10nF	±10%	CL31B103KFCSSNN□	
		22nF	±10%	CL31B223KFCSSNN□	
1.25mm	350Vdc	33nF	±10%	CL31B333KFESNN□	
1.80mm	25Vdc	10uF	±10%	CL31B106KAHSNN□	
		50Vdc	1.0uF	±10%	CL31B105KBHSNN□
	100Vdc	220nF	±10%	CL31B224KCHSNN□	
		1.0uF	±10%	CL31B105KCHSNN□	
		2.2uF	±10%	CL31B225KCHSNN□	
250Vdc	100nF	±10%	CL31B104KEHSNN□		

### ■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.00mm	35Vdc	4.7uF	±10%	CL32B475KLUYNN□	
	50Vdc	4.7uF	±10%	CL32B475KBUYNN□	
2.70mm	100Vdc	1.0uF	±10%	CL32B105KJJSNN□	
		2.2uF	±10%	CL32B225KJJSNN□	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑



# Low Acoustic Noise Capacitor

## Feature



- Equivalent electrical characteristics as general products.
- Reduced acoustic noise due to the thick bottom cover.
- Pin-to-pin replacement without changing the substrate land pattern.

## Application

- PAM (GSM / TD-SCDMA / TDD-LTE)
- PMIC
- DC-DC Converter
- Tablet devices
- PC (Laptop, Desktop)
- HDD / SSD board

## Structure and Dimensions



### Structure (Size & Thickness)


Same Dielectric Thickness as Standard MLCC  
Normal Bottom Cover

Same Dielectric Thickness as Standard MLCC  
Thick Bottom Cover

### Performance

Acoustic Noise Reduction without Changing Layout

Significant Acoustic Noise Reduction without Changing Layout



Size Code	EIA Code	Dimension(mm)					
		L	W	T	Thickness Code	Size Tol. Code	BW
03	0201	0.60±0.05	0.30±0.05	0.30±0.05	3	S	0.15±0.05
		1.00±0.07	0.50±0.07	0.50±0.07	5	S	
05	0402	1.00±0.15	0.50±0.15	0.50±0.15	5	R	0.25±0.10
		1.00±0.20	0.50±0.20	0.50±0.20	5	U	
		1.00±0.07	0.50±0.07	0.70±0.10	7	S	
		1.00±0.15	0.50±0.15	0.70±0.10	7	R	
		1.00±0.20	0.50±0.20	0.80±0.10	8	U	
		1.60±0.10	0.80±0.10	0.80±0.10	8	N	
10	0603	1.60±0.20	0.80±0.20	0.80±0.20	8	R	0.30±0.20
		1.60±0.25	0.80±0.25	0.80±0.25	8	U	
		1.60±0.10	0.80±0.10	0.90±0.10	9	H	
		1.60±0.20	0.80±0.20	0.85±0.10	C	R	
		1.60±0.25	0.80±0.25	0.85±0.10	C	U	
		1.60±0.10	0.80±0.10	0.95±0.10	N	H	
		1.60±0.25	0.80±0.25	1.05±0.10	O	U	
		1.60±0.20	0.80±0.20	1.10±0.10	E	R	
21	0805	2.00±0.20	1.25±0.20	1.10±0.10	E	R	0.50 +0.20 / -0.30
		2.00±0.20	1.25±0.20	1.15±0.10	M	R	
		2.00±0.15	1.25±0.15	1.25±0.15	Q	N	

# Low Acoustic Noise Capacitor

Low Acoustic Noise Capacitance Table (HMC\* / X5R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(uF)				
		2.2	4.7	10	22	47
0402 (1005)	6.3					
	10					
0603 (1608)	6.3					
	10					
0805 (2012)	6.3					
	25					

\* HMC : Horizontally Mounted Capacitor

Low Acoustic Noise Capacitance Table (T - HMC\* / X5R)

Size inch (mm)	T max. (mm)	Rated Voltage (Vdc)	Capacitance(uF)				
			2.2	4.7	10	22	47
0402 (1005)	0.8	6.3					
		10					
	0.9	6.3					
		10					
0603 (1608)	0.95	10					
	1.0	10					
	1.05	6.3					
		10					
	1.2	6.3					
	1.25	10					
0805 (2012)	1.2	25					
	1.7	25					

\* T- HMC : Thick & Horizontally Mounted Capacitor

Product Line Up (HMC\* / X5R)

Size L x W (mm / inch)	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.6 x 0.3 (0201)	0.35mm	10Vdc	1.0uF	±20%	CL03A105MP3NSNZ	Derating Ref.
1.0 x 0.5 (0402)	0.57mm	6.3Vdc	2.2uF	±20%	CL05A225MQ5NSNZ	Derating Ref.
		10Vdc	2.2uF	±10%	CL05A225KP5NSNZ	Derating Ref.
	0.65mm	6.3Vdc	4.7uF	±20%	CL05A475MQ5NRNZ	Derating Ref.
		10Vdc	4.7uF	±10%	CL05A475KP5NRNZ	Derating Ref.
	0.70mm	6.3Vdc	10uF	±20%	CL05A106MQ5NUNZ	Derating Ref.
		10Vdc	10uF	±20%	CL05A106MP5NUNZ	Derating Ref.
		25Vdc	2.2uF	±20%	CL05A225MA5NUNZ	Derating Ref.
1.6 x 0.8 (0603)	0.90mm	6.3Vdc	2.2uF	±10%	CL10A225KQ8NNNZ	
			4.7uF	±10%	CL10A475KQ8NNNZ	
		10Vdc	2.2uF	±10%	CL10A225KP8NNNZ	
			4.7uF	±10%	CL10A475KP8NNNZ	
			10uF	±10%	CL10A106KP8NNNZ	Derating Ref.
	1.00mm	6.3Vdc	22uF	±20%	CL10A226MQ8NRNR	Derating Ref.
		10Vdc	22uF	±20%	CL10A226MP8NUNR	Derating Ref.
	2.0 x 1.25 (0805)	1.35mm	6.3Vdc	47uF	±20%	CL21A476MQMNRNR
6.3Vdc			22uF	±20%	CL21A226MQQNNNR	Derating Ref.
1.40mm		25Vdc	4.7uF	±10%	CL21A475KAQNNNR	Derating Ref.

\* HMC : Horizontally Mounted Capacitor

Product Line Up ( T - HMC\* / X5R)

Size L x W (mm / inch)	Thickness Max. (mm)	Rated Voltage (Vdc)	Capacitance	Capacitance Tolerance	Part Number	Remark
1.0 x 0.5 (0402)	0.80mm	6.3Vdc	2.2uF	±10%	CL05A225KQ7NSB8	Ref.
			4.7uF	±20%	CL05A475MQ7NRB8	Derating Ref.
		10Vdc	2.2uF	±10%	CL05A225KP7NSB8	Derating Ref.
			4.7uF	±20%	CL05A475MP7NRB8	Derating Ref.
	0.90mm	6.3Vdc	10uF	±20%	CL05A106MQ8NUB8	Derating Ref.
		10Vdc	10uF	±20%	CL05A106MP8NUB8	Derating Ref.
1.6 x 0.8 (0603)	0.95mm	6.3Vdc	22uF	±20%	CL10A226MQCNRBE	Derating Ref.
		10Vdc	22uF	±20%	CL10A226MPCNUBE	Derating Ref.
	1.00mm	10Vdc	4.7uF	±10%	CL10A475KP9NHBC	
		1.05mm	6.3Vdc	10uF	±20%	CL10A106MQNNHBC
	10Vdc		10uF	±20%	CL10A106MPNNHBC	Derating Ref.
	1.15mm	6.3Vdc	22uF	±20%	CL10A226MQONUBE	Derating Ref.
	1.20mm	6.3Vdc	47uF	±20%	CL10A476MQENRBE	Derating Ref.
	1.25mm	10Vdc	22uF	±20%	CL10A226MPMNUBE	Derating Ref.
		6.3Vdc	22uF	±20%	CL10A226MQMNUBE	Derating Ref.
2.0 x 1.25 (0805)	1.20mm	25Vdc	10uF	±10%	CL21A106KAENRBE	Derating Ref.


\* T- HMC : Thick & Horizontally Mounted Capacitor

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148


In order to move to the page directly, please click the here. ↑

# High Effective Capacitance Capacitors

## Feature




- Wide selection of size : from 0402(inch) to 1210(inch)
- When a DC bias is applied, a capacitance is higher than conventional products.
- Highly reliable performance
- Reduced capacitance degradation by bias and aging
- DC - bias performance (Graph) :

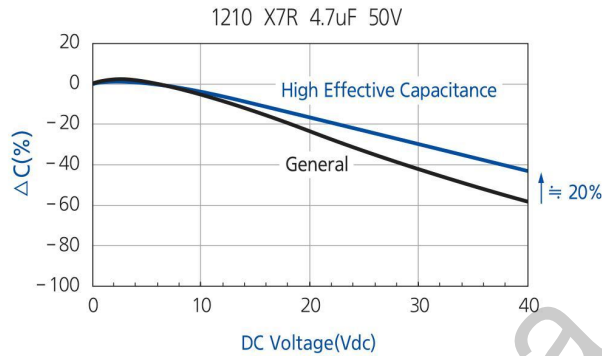

## Application

- HDD / SSD board
- Display
- Digital Camera
- Lighting
- Mobile Phone
- PC (Laptop, Desktop)

## Structure and Dimensions

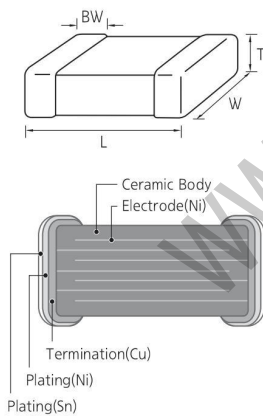

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00±0.05	0.50±0.05	0.50±0.05	5	0.25±0.10
10	0603	1.60±0.10	0.80±0.10	0.80±0.10	8	0.30±0.20
		2.00±0.20	1.25±0.20	0.85±0.10(*)	C	
21	0805	2.00±0.10	1.25±0.10	1.25±0.10	F	0.50+0.2/-0.30
		2.00±0.15	1.25±0.15	1.25±0.15	Q	
		3.20±0.20	1.60±0.20	0.85±0.10(*)	C	
31	1206	3.20±0.20	1.60±0.20	1.60±0.20	H	0.50±0.30
		3.20±0.30	2.50±0.20	1.80±0.20(*)	U	
32	1210	3.20±0.30	2.50±0.20	2.50±0.20	J	0.60±0.30
		3.20±0.30	2.50±0.20	2.50±0.20	J	

\* Mark is only applicable to "L", "Y", "F", 12<sup>th</sup> code in part number.

High Effective Capacitance Table (X5R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(nF)		Capacitance(uF)				
		680	820	1.0	2.2	4.7	10	22
0402 (1005)	6.3			1.0				
	16			1.0				
0603 (1608)	6.3			1.0	2.2			
	10			1.0	2.2		10	22
	16			1.0	2.2		10	22
0805 (2012)	25			1.0				
	4.0			1.0	2.2			
	6.3			1.0	2.2			
	10			1.0	2.2			
1206 (3216)	16						10	22
	25						10	22

High Effective Capacitance Table (X6S)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(uF)				
		1.0	2.2	4.7	10	22
0402(1005)	10	1.0				
0603 (1608)	6.3			4.7		
	10			4.7		
	16			4.7		
1206 (3216)	25			4.7		
	10				10	22
	16				10	22
	25				10	22

High Effective Capacitance Table (X7R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(uF)				
		1.0	2.2	4.7	10	22
0805 (2012)	10			4.7		
	25			4.7		
	50			4.7		
1206 (3216)	10				10	22
	50			4.7		
1210 (3225)	25				10	22
	50			4.7		

# High Effective Capacitance Capacitors

## Product Line Up (X5R)

### ■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	6.3Vdc	1.0uF	±10%	CL10A105KQ8N3N□	
	10Vdc	680nF	±10%	CL10A684KP8N3N□	
		820nF	±10%	CL10A824KP8N3N□	
	16Vdc	1.0uF	±10%	CL10A105KQ8N3N□	
		2.2uF	±10%	CL10A225KQ8N3N□	

### ■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	6.3Vdc	10uF	±10%	CL21A106KQCL3R□	
	10Vdc	10uF	±10%	CL21A106KPCL3R□	Operating
	16Vdc	10uF	±10%	CL21A106KOCL3R□	Operating
1.35mm	6.3Vdc	10uF	±10%	CL21A106KQFN3N□	
	10Vdc	10uF	±10%	CL21A106KPFN3N□	
	16Vdc	10uF	±10%	CL21A106KOFN3N□	Operating
	25Vdc	4.7uF	±10%	CL21A475KAFN3N□	Operating
		10uF	±10%	CL21A106KAFN3N□	Operating
1.40mm	4.0Vdc	10uF	±10%	CL21A106KRQN3N□	
	6.3Vdc	4.7uF	±10%	CL21A475KQQN3N□	Ref.
		10uF	±10%	CL21A106KQQN3N□	Ref.

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	16Vdc	10uF	±10%	CL31A106KOCL3N□	Operating
	25Vdc	4.7uF	±10%	CL31A475KACL3N□	
		10uF	±10%	CL31A106KACL3N□	Operating
1.80mm	25Vdc	22uF	±10%	CL31A226KAHN3N□	Operating

## Product Line Up (X6S)

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	25Vdc	10uF	±10%	CL31X106KACL3N□	Operating
1.80mm	10Vdc	22uF	±10%	CL31X226KPHN3N□	Operating
	16Vdc	22uF	±10%	CL31X226KOHN3N□	Operating
	25Vdc	22uF	±10%	CL31X226KAHN3N□	Operating

## Product Line Up (X7R)

### ■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.35mm	10Vdc	4.7uF	±10%	CL21B475KPFN3N□	Ref.
	25Vdc	1.0uF	±10%	CL21B105KAFN3N□	
		2.2uF	±10%	CL21B225KAFN3N□	
	50Vdc	1.0uF	±10%	CL21B105KBFN3N□	

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.80mm	10Vdc	10uF	±10%	CL31B106KPHN3N□	
	50Vdc	4.7uF	±10%	CL31B475KBHN3N□	

### ■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.00mm	25Vdc	10uF	±10%	CL32B106KAUL3N□	
2.70mm	50Vdc	4.7uF	±10%	CL32B475KBJN3N□	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Low ESL Capacitors \_ LICC

Low Inductance Ceramic Capacitor

## Feature




- Low ESL, good for noise reduction for high frequency
- Highly reliable performance
- Tape & reel for surface mount assembly

## Application

- High Speed Microprocessor
- High Frequency Digital Equipment

## Structure and Dimensions



Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
L5	0204	0.52±0.05	1.00±0.05	0.30±0.05	3	0.18±0.06
L6	0304	0.60±0.05	1.00±0.05	0.40±0.05	4	0.18±0.10
O1	0306	0.80±0.05	1.60±0.20	0.50+0.05/-0.10	5	0.25±0.15

## Low ESL Capacitance Table

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(uF)						
		0.01	0.1	0.22	0.47	1.0	2.2	4.3
0204 (0510)	2.5					X7S		
	4.0				X6S			
	6.3		X7T					
0304(0610)	4.0							X5R
0306 (0816)	4.0			X7S				
	6.3		X7R					
	10		X7R					
	25		X7R					

## Product Line Up

EIA Code	Size L x W	Thickness Max.	Rated Voltage	TC Code	Capacitance	Capacitance Tolerance	Part Number	Remark
0204	0.50mm x 1.00mm	0.35mm	2.5Vdc	X7T	1.0uF	±20%	CLL5Z105MS3NLN □	Derating
			4.0Vdc	X6S	470nF	±20%	CLL5X474MR3NLN □	Derating
				X6S	1.0uF	±20%	CLL5X105MR3NLN □	Derating
			6.3Vdc	X7S	100nF	±20%	CLL5Y104MQ3NLN □	
0304	0.60mm x 1.00mm	0.45mm	4.0Vdc	X5R	4.3uF	±20%	CLL6A435MR4NLN □	Derating
0306	0.80mm x 1.60mm	0.55mm	4.0Vdc	X7S	100nF	±20%	CL01Y104MR5NLN □	
				X7S	1.0uF	±20%	CL01Y105MR5NLN □	Derating
			6.3Vdc	X7R	100nF	±10%	CL01B104KQ5NLN □	
			10Vdc	X7R	100nF	±10%	CL01B104KP5NLN □	
	25Vdc	X7R	10nF	±10%	CL01B103KA5NLN □			

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑

# Low ESL Capacitors \_ SLIC

Super Low Inductance Capacitor

## Feature




- Low ESL, good for noise reduction for high frequency
- Highly reliable performance
- Tape & reel for surface mount assembly

## Application

- High Speed Microprocessor
- High Frequency Digital Equipment

## Structure and Dimensions

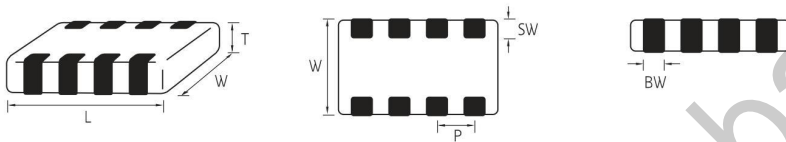

Size Code	EIA Code	Dimension(mm)						
		L	W	T	Thickness Code	BW	SW	P
10	0603	1.60±0.10	0.80±0.10	0.50+0.05/-0.10	5	0.25±0.10	0.15±0.10	0.40±0.10
21	0805	2.00±0.10	1.25±0.10	0.50+0.05/-0.10	5	0.25+0.15/-0.10	0.20+0.15/-0.10	0.50±0.10

## Low ESL Capacitance Table

Size inch (mm)	T max. (mm)	Rated Voltage (Vdc)	Capacitance(μF)						
			0.1	0.22	0.47	0.68	1.0	2.2	4.3
0603(1608)	0.55	4.0		X7S				X7S	
0805(2012)	0.55	4.0			X7R			X7S	

## Product Line Up

EIA Code	Size L × W	Thickness Max.	Rated Voltage	TC Code	Capacitance	Capacitance Tolerance	Part Number
0603	1.60mm × 0.80mm	0.55mm	4.0Vdc	X7S	100nF	±20%	CL10Y104MR5NJK□
				X7S	470nF	±20%	CL10Y474MR5NJK□
				X7S	1.0μF	±20%	CL10Y105MR5NJK□
				X7S	2.2μF	±20%	CL10Y225MR5NJK□
0805	2.00mm × 1.25mm	0.55mm	4.0Vdc	X7S	2.2μF	±20%	CL21Y225MR5NJK□
			6.3Vdc	X7R	470nF	±20%	CL21B474MQ5NJK□
				X7R	680nF	±20%	CL21B684MQ5NJK□

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑



### Feature





- Low ESL, good for noise reduction for high frequency
- Highly reliable performance
- Tape & reel for surface mount assembly

### Application

- High Speed Microprocessor
  - CPU / GPU for PC & Game console
  - AP for Smartphone
  - Network IC
- High Frequency Digital Equipment

### Structure and Dimensions



Size Code	EIA Code	Dimension(mm)						
		L	W	T	Thickness Code	BW		
						A	B	C
05	0402	1.05±0.05	0.65±0.05	0.45±0.05	5	0.17±0.10	0.35±0.10	0.15±0.10
19	0503	1.20±0.05	0.90±0.05	0.75±0.05	7	0.15±0.10	0.50±0.10	0.20±0.10

### Low ESL Capacitance Table

Size inch (mm)	T max. (mm)	Rated Voltage (Vdc)	Capacitance(μF)					
			1.0	2.2	4.3	10	22	47
0402(1005)	0.5	4.0			X5R			
0503(1209)	0.8	4.0					X5R	

### Product Line Up

EIA Code	Size L × W	Thickness Max.	Rated Voltage	TC Code	Capacitance	Capacitance Tolerance	Part Number
0402	1.00mm × 0.50mm	0.50mm	4.0Vdc	X5R	4.3μF	±20%	CL05A435MR5NWN□
0503	1.20mm × 0.90mm	0.80mm	4.0Vdc	X5R	22μF	±20%	CL19A226MR7NWN□


※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

# Low ESL Capacitors \_ VLC

Vertically Laminated Capacitor

## Feature





- Lowest ESL, good for noise reduction for high frequency
- Highly reliable performance
- Tape & reel for surface mount assembly

## Application

- High Speed Microprocessor
  - CPU / GPU for PC & Game console
  - AP for Smartphone
  - Network IC
- High Frequency Digital Equipment

## Structure and Dimensions



Size Code	EIA Code	Dimension(mm)						
		L	W	T	Thickness Code	Band Width		Band Gap
						A	B	C
21	0805	2.00±0.10	1.25±0.10	0.70±0.10	7	0.42±0.10	0.74±0.10	0.21±0.05
				0.90±0.10	9			

## Low ESL Capacitance Table

Size inch (mm)	T max. (mm)	Rated Voltage (Vdc)	Capacitance(µF)						
			1.0	2.2	3.3	4.7	10	22	47
0805(2012)	0.8	4.0							X5R
	1.0	4.0							X5R

## Product Line Up

EIA Code	Size L x W	Thickness Max.	Rated Voltage	TC Code	Capacitance	Capacitance Tolerance	Part Number
0805	2.00mm x 1.25mm	0.80mm	4.0Vdc	X5R	47µF	±20%	CL21A476MR7NVN□
		1.00mm		X5R	47µF	±20%	CL21A476MR9NVN□

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑

# Low ESL Capacitors \_ X2Y®

## Feature





- One device for EMI suppression or decoupling
- Differential and common mode attenuation
- Matched capacitance line to ground, both lines

## Application

- Amplifier Filter & Decoupling
- High Speed Data Filtering
- EMC I / O Filtering
- FPGA / ASIC / u - P Decoupling
- DDR Memory Decoupling

## Structure and Dimensions

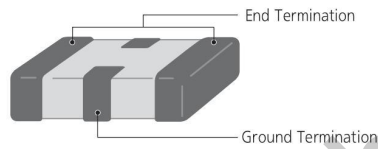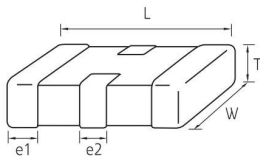

Size Code	EIA Code	Dimension(mm)					
		L	W	T	Thickness Code	e1	e2
10	0603	1.60±0.15	0.80±0.10	0.60±0.10	6	0.25±0.15	0.45±0.15

## Low ESL Capacitance Table

Size inch (mm)	T max. (mm)	Rated Voltage (Vdc)	Capacitance							
			nF			uF				
			1.0	2.2	4.7	0.1	0.22	0.47	1.0	
0603 (1608)	0.7	6.3					X7R			X5R
		10							X5R	
		16					X7R			
		25								
		50	X7R							
		100			X7R					

## Product Line Up

EIA Code	Size L x W	Thickness Max.	Rated Voltage	TC Code	Capacitance	Capacitance Tolerance	Part Number
0603	1.60mm x 0.80mm	0.70mm	6.3Vdc	X7R	220nF	±20%	CL10B224MQ6NXN□
				X5R	1.0uF	±20%	CL10A105MQ6NXN□
			10Vdc	X5R	470nF	±20%	CL10A474MP6NXN□
				X5R	1.0uF	±20%	CL10A105MP6NXN□
			16Vdc	X7R	100nF	±20%	CL10B104MO6NXN□
				X7R	220nF	±20%	CL10B224MO6NXN□
			50Vdc	X7R	1.0nF	±20%	CL10B102MB6NXN□
			100Vdc	X7R	2.2nF	±20%	CL10B222MC6NXN□
X7R	4.7nF	±20%		CL10B472MC6NXN□			

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. †

# Array Type Capacitors

## Feature



- Reduction in required space (more than 50%)
- Reduction in cost and time for replacement of PCB
- Reduction in amount of solder joints
- Easier PCB design
- Reduced waste from tape and reel packaging process
- It protect EMI bypassing digital signal line nose


## Application

- A bypass for digital and analog signal line noise generated by telecommunication equipment and other common electronic circuits


## Structure and Dimensions

CL	14	A	105	M	A	5	N	A	N	C
1	2	3	4	5	6	7	8	9	10	11

### ■ A : ARRAY (2 - element)

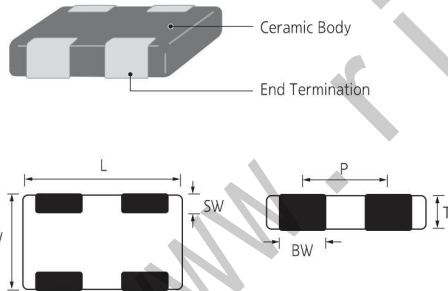

### ■ B : ARRAY (4 - element)

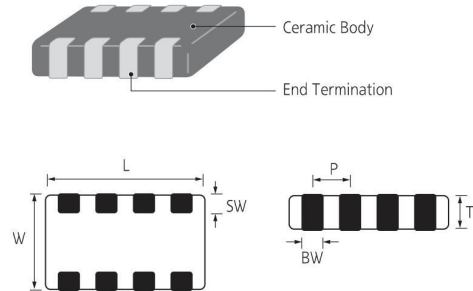

Code	Size (mm)	EIA Code	Dimension(mm)					
			L	W	T	BW	SW	P
A	0906	0302	0.90±0.05	0.60±0.05	0.45±0.05	0.25±0.05	0.15±0.10	0.45±0.05
A	1410	0504	1.37±0.15	1.00±0.15	0.35±0.05	0.36±0.10	0.20±0.10	0.64±0.10
					0.50±0.05			
					0.60±0.06			
A	2012	0805	2.00±0.15	1.25±0.15	0.85±0.10	0.50±0.20	0.25±0.15	1.00±0.10
B	2012	0805	2.00±0.15	1.25±0.15	0.85±0.10	0.25±0.10	0.25±0.15	0.50±0.10
B	3216	1206	3.20±0.15	1.60±0.15	0.85±0.15	0.40±0.20	0.30±0.15	0.80±0.20

Array Type capacitance Table (COG / X5R / X7R)

TC	Size inch (mm)	Type	Rated Voltage (Vdc)	T max. (mm)	Capacitance(pF)						
					10	22	27	47	100	470	
COG	0504(1410)	2 - element	25	0.88							
	1206(3216)	4 - element	50	1.00							

TC	Size inch (mm)	Type	Rated Voltage (Vdc)	T max. (mm)	Capacitance(nF)															
					1.0	2.2	4.7	10	22	47	100	220	470	1000	2200					
X5R	0302(0906)	2 - element	4.0	0.50																
			6.3																	
			10																	
	0504(1410)	2 - element	6.3	0.88																
				0.66																
				0.55																
				0.40																
				10	0.88															
					0.66															
			0.55																	
			16	0.40																
				0.88																
				0.66																
				0.55																
				0.40																
				0.88																
			0805(2012)	2 - element	6.3	0.95														
					10															
	16																			
	X7R	0805(2012)	4 - element	10	0.95															
				16																
1206(3216)		4 - element	16	1.00																
			25																	
			50																	

# Array Type Capacitors

## Product Line Up (COG / X5R)

### ■ Size : 0.90 X 0.60mm (inch : 0302)

Element Type	Thickness Max.	Rated Voltage	TC Code	Capacitance	Capacitance Tolerance	Part Number	Remark
2-Array	0.50mm	4.0Vdc	X5R	1.0uF	±20%	CL09A105MR4NAN □	Derating
		6.3Vdc	X5R	100nF	±10%	CL09A104KQ4SAN □	Derating
			X5R	1.0uF	±20%	CL09A105MQ4NAN □	Derating
		10Vdc	X5R	100nF	±10%	CL09A104KP4SAN □	

### ■ Size : 1.40 X 1.00mm (inch : 0504)

Element Type	Thickness Max.	Rated Voltage	TC Code	Capacitance	Capacitance Tolerance	Part Number	Remark
2-Array	0.66mm	25Vdc	COG	27pF	±10%	CL14C270KA6NAN □	
	0.40mm	10Vdc	X5R	1.0uF	±20%	CL14A105MP3NAN □	Derating
		16Vdc	X5R	1.0uF	±20%	CL14A105MO3NAN □	Derating
	0.55mm	25Vdc	X5R	1.0uF	±20%	CL14A105MA5NAN □	Derating
	0.66mm	10Vdc	X5R	100nF	±10%	CL14A104KP6NAN □	
		25Vdc	X5R	100nF	±10%	CL14A104KA6NAN □	
	0.88mm	10Vdc	X5R	1.0uF	±10%	CL14A105KP8NAN □	Derating
			X5R	2.2uF	±10%	CL14A225KP8NAN □	Derating
		16Vdc	X5R	1.0uF	±20%	CL14A105MO8NAN □	Derating

## Product Line Up (COG / X5R / X7R)

### ■ Size : 2.00 X 1.25mm (inch : 0805)

Element Type	Thickness Max.	Rated Voltage	TC Code	Capacitance	Capacitance Tolerance	Part Number	Remark
2-Array	0.95mm	10Vdc	X5R	1.0uF	±20%	CL21A105MPCNAN □	
		16Vdc	X5R	1.0uF	±10%	CL21A105KOCNAN □	
4-Array	0.95mm	10Vdc	X7R	100nF	±20%	CL21B104MPCNBN □	
		16Vdc	X7R	100nF	±10%	CL21B104KOCNBN □	
		50Vdc	X7R	470pF	±10%	CL21B471KBCNBN □	

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Element Type	Thickness Max.	Rated Voltage	TC Code	Capacitance	Capacitance Tolerance	Part Number	Remark	
4-Array	1.00mm	50Vdc	COG	10pF	±5%	CL31C100JBCNBN □		
			COG	15pF	±5%	CL31C150JBCNBN □		
			COG	22pF	±5%	CL31C220JBCNBN □		
			COG	27pF	±5%	CL31C270JBCNBN □		
			COG	33pF	±10%	CL31C330KBCNBN □		
			COG	39pF	±10%	CL31C390KBCNBN □		
			COG	68pF	±5%	CL31C680JBCNBN □		
			COG	82pF	±5%	CL31C820JBCNBN □		
			COG	100pF	±5%	CL31C101JBCNBN □		
			COG	150pF	±10%	CL31C151KBCNBN □		
			COG	180pF	±5%	CL31C181JBCNBN □		
			COG	330pF	±5%	CL31C331JBCNBN □		
			COG	470pF	±5%	CL31C471JBCNBN □		
	1.00mm	16Vdc	X7R	100nF	±10%	CL31B104KOCNBN □		
			25Vdc	X7R	47nF	±10%	CL31B473KACNBN □	
				X7R	100nF	±10%	CL31B104KACNBN □	
		50Vdc	X7R	1.0nF	±20%	CL31B102MBCNBN □		
			X7R	10nF	±20%	CL31B103MBCNBN □		
			X7R	15nF	±10%	CL31B153KBCNBN □		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.143

In order to move to the page directly, please click the here. ↑

# Industrial Capacitors Part Numbering System

<b>CL</b>	<b>32</b>	<b>B</b>	<b>106</b>	<b>K</b>	<b>A</b>	<b>J</b>	<b>N</b>	<b>N</b>	<b>W</b>	<b>E</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>

\* SEMCO MLCC use 15 – digit Part Numbering system.

	8 9 10 Code	Meaning
Standard Termination	NNW	Industrial Capacitors (Networks, Power, etc)
	NFN	Industrial Capacitors for Power Application
	GQW / GNW	High Q Industrial Capacitors
	N3W	High Effective Capacitance Industrial Capacitors
Soft Termination	ZW6 / SW6	Soft – Termination(3mm) Industrial Capacitors
	ZNW / SNW	Soft – termination Industrial Capacitors
	ZFN / SFN / YFN	Soft – termination Capacitors for Power Application
Reinforced Soft Termination	Z46	Reinforced Soft – Termination(3mm) Industrial Capacitors
	Z4J	Reinforced Soft – Termination(5mm) Industrial Capacitors

\* For the meaning of 8 (N, G, S, Z, and Y), please refer to the Page 05 (Part Numbering System).

## Feature




- Rated voltage 6.3V~250V  
temperature range -55°C to +125°C (X7R/COG), -55°C to +85°C (X5R),  
case size 0201 to 2220
- Special outgoing inspection for industrial application (HALT, etc)

## Application

- Network, Power application and etc.
- Ideal for decoupling and filtering applications (Class II : X5R/X7R/X6S)
- Impedance matching, tuning, coupling in high frequency circuit (Class I : COG)

## Structure and Dimensions

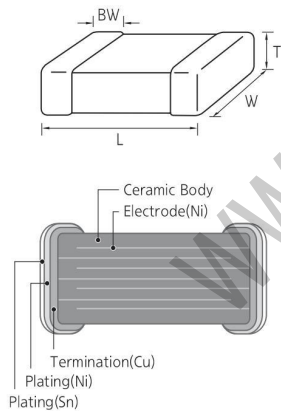

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
03	0201	0.60±0.03	0.30±0.03	0.30±0.03	3	0.15±0.05
05	0402	1.00±0.05	0.50±0.05	0.50±0.05	5	0.25±0.10
10	0603	1.60±0.10	0.80±0.10	0.80±0.10	8	0.30±0.20
21	0805	2.00±0.10	1.25±0.10	0.65±0.10	A	0.50±0.20/-0.30
				0.85±0.10	C	
				1.15±0.10	M	
				1.25±0.10	F	
31	1206	3.20±0.15	1.60±0.15	0.85±0.15	C	0.50±0.30
				1.25±0.15	F	
				3.20±0.20	1.60±0.20	
32	1210	3.20±0.30	2.50±0.20	1.25±0.20	F	0.60±0.30
				1.60±0.20	H	
				2.00±0.20	I	
				2.50±0.20	J	
42	1808	4.50±0.40	2.00±0.20	1.25±0.20	F	0.80±0.30
				1.60±0.20	H	
				2.00±0.20	I	
43	1812	4.50±0.40	3.20±0.30	1.25±0.20	F	0.80±0.30
				1.60±0.20	H	
				2.00±0.20	I	
55	2220	5.70±0.40	5.00±0.40	2.50±0.20	J	1.00±0.30
				2.50±0.20	J	

# Industrial Capacitors

NNW – C0G / X5R / X6S / X7R / X7S

Industrial Capacitance Table (C0G)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(PF)								
		0.2	0.5	1.0	10	22	47	100		
0201(0603)	25									

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																																			
		pF																		nF																	
		1.0	1.0	10	12	15	18	22	33	47	56	91	100	120	180	220	240	270	330	390	470	560	680	910	1.0	1.2	1.8	2.2	2.7	4.7	5.6	8.2	10	27	33	47	68
0402 (1005)	25																																				
	50																																				
	100																																				
0603 (1608)	25																																				
	50																																				
	100																																				
0805 (2012)	25																																				
	50																																				
	100																																				
	200																																				
	250																																				
1206 (3216)	25																																				
	50																																				
	100																																				
	200																																				
	500																																				
	2k																																				
1210 (3225)	50																																				
	100																																				
	1k																																				
1812(4532)	50																																				



Industrial Capacitance Table (X5R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																					
		pF				nF										uF							
		220	330	470	680	1.0	2.2	3.3	4.7	10	15	22	33	47	68	100	220	470	1.0	2.2	3.3	4.7	
0201 (0603)	4.0																						
	6.3																						
	10																						

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																				
		nF			uF																	
		100	220	470	1.0	2.2	4.7	10	22	47	100	220										
0402 (1005)	4.0																					
	6.3																					
	10																					
	16																					
0603 (1608)	4.0																					
	6.3																					
	10																					
	16																					
	25																					
0805 (2012)	4.0																					
	6.3																					
	10																					
	16																					
	25																					
1206 (3216)	6.3																					
	10																					
	16																					
	25																					
1210 (3225)	6.3																					
	10																					
	16																					
	25																					

# Industrial Capacitors

NNW – C0G / X5R / X6S / X7R / X7S

Industrial Capacitance Table (X6S)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(uF)												
		0.1	0.22	0.47	1.0	2.2	4.7	10	22	47	100	220		
0402 (1005)	4.0													
	6.3													
	10													
0603 (1608)	4.0													
	6.3													
	10													
0805 (2012)	4.0													
	6.3													
1206(3216)	4.0													
1210 (3225)	6.3													
	10													
	16													

Industrial Capacitance Table (X7R / X7S)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance													
		pF						nF							
		100	220	330	470	680	1.0	2.2	3.3	4.7	6.8	10	22	47	100
0201 (0603)	10														
	16														
	25														

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																							
		nF										uF													
		4.7	10	15	22	33	47	68	100	120	150	220	330	470	680	1.0	2.2	3.3	4.7	6.8	10	22	47	100	
0402 (1005)	6.3																								
	10																								
	16																								
	25																								
	50																								
0603 (1608)	6.3																								
	10																								
	16																								
	25																								
	50																								
	100																								

Industrial Capacitance Table (X7R/X7S)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																						
		nF										uF												
		4.7	10	15	22	33	47	68	100	120	150	220	330	470	680	1.0	2.2	3.3	4.7	6.8	10	22	47	100
0805 (2012)	6.3																							
	10																							
	16																							
	25																							
	50																							
	100																							
	200																							
1206 (3216)	6.3																							
	10																							
	16																							
	25																							
	35																							
	50																							
	100																							
	200																							
	250																							
	500																					6.8		
	2k																							2.2
1210 (3225)	6.3																							
	10																							
	16																							
	25																							
	50																							
	100																							
	200																							
	500																							
	630																							
	2k																							1
1812 (4532)	100																							
	200																							
	500																							
	630																							
	1k																							
2220(5750)	100																							

## Product Line Up (COG)

### ■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.33mm	25Vdc	4.7pF	±0.25pF	CL03C4R7CA3GNW□
		10pF	±0.50pF	CL03C100DA3GNW□
		12pF	±5%	CL03C120JA3NNW□
		15pF	±5%	CL03C150JA3NNW□
		27pF	±5%	CL03C270JA3NNW□
		33pF	±5%	CL03C330JA3NNW□
		47pF	±5%	CL03C470JA3NNW□
		56pF	±5%	CL03C560JA3NNW□
		68pF	±5%	CL03C680JA3NNW□
		82pF	±5%	CL03C820JA3NNW□
100pF	±5%	CL03C101JA3NNW□		

### ■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	25Vdc	82pF	±10%	CL05C820KA5NNW□
		150pF	±5%	CL05C151JA5NNW□
		220pF	±5%	CL05C221JA5NNW□
0.55mm	50Vdc	0.1pF	±0.05pF	CL05C0R1AB5GNW□
		0.1pF	±0.1pF	CL05C0R1BB5GNW□
		0.2pF	±0.05pF	CL05C0R2AB5GNW□
		0.2pF	±0.1pF	CL05C0R2BB5GNW□
		0.3pF	±0.05pF	CL05C0R3AB5GNW□
		0.3pF	±0.1pF	CL05C0R3BB5GNW□
		0.4pF	±0.05pF	CL05C0R4AB5GNW□
		0.4pF	±0.1pF	CL05C0R4BB5GNW□
		0.5pF	±0.05pF	CL05C0R5AB5GNW□
		0.5pF	±0.1pF	CL05C0R5BB5GNW□
		0.6pF	±0.05pF	CL05C0R6AB5GNW□
		0.6pF	±0.1pF	CL05C0R6BB5GNW□
		0.7pF	±0.05pF	CL05C0R7AB5GNW□
		0.7pF	±0.1pF	CL05C0R7BB5GNW□
		0.8pF	±0.05pF	CL05C0R8AB5GNW□
		0.8pF	±0.1pF	CL05C0R8BB5GNW□
		0.9pF	±0.05pF	CL05C0R9AB5GNW□
		0.9pF	±0.1pF	CL05C0R9BB5GNW□
		1.0pF	±0.05pF	CL05C010AB5GNW□
		1.0pF	±0.1pF	CL05C010BB5GNW□
		1.0pF	±0.25pF	CL05C010CB5NNW□
		1.0pF	±0.25pF	CL05C010CB5GNW□
		1.1pF	±0.05pF	CL05C1R1AB5GNW□
		1.1pF	±0.1pF	CL05C1R1BB5GNW□
		1.1pF	±0.25pF	CL05C1R1CB5GNW□
		1.2pF	±0.05pF	CL05C1R2AB5GNW□
		1.2pF	±0.1pF	CL05C1R2BB5GNW□
		1.2pF	±0.25pF	CL05C1R2CB5GNW□
		1.3pF	±0.05pF	CL05C1R3AB5GNW□
		1.3pF	±0.1pF	CL05C1R3BB5GNW□
		1.3pF	±0.25pF	CL05C1R3CB5GNW□
		1.5pF	±0.05pF	CL05C1R5AB5GNW□
		1.5pF	±0.1pF	CL05C1R5BB5GNW□
		1.5pF	±0.25pF	CL05C1R5CB5GNW□
		1.6pF	±0.05pF	CL05C1R6AB5GNW□

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	50Vdc	1.6pF	±0.1pF	CL05C1R6BB5GNW□
		1.6pF	±0.25pF	CL05C1R6CB5GNW□
		1.8pF	±0.05pF	CL05C1R8AB5GNW□
		1.8pF	±0.1pF	CL05C1R8BB5NNW□
		1.8pF	±0.1pF	CL05C1R8BB5GNW□
		1.8pF	±0.25pF	CL05C1R8CB5GNW□
		2.0pF	±0.05pF	CL05C020AB5GNW□
		2.0pF	±0.1pF	CL05C020BB5GNW□
		2.0pF	±0.25pF	CL05C020CB5GNW□
		2.2pF	±0.05pF	CL05C2R2AB5GNW□
		2.2pF	±0.1pF	CL05C2R2BB5GNW□
		2.2pF	±0.25pF	CL05C2R2CB5NNW□
		2.2pF	±0.25pF	CL05C2R2CB5GNW□
		2.4pF	±0.05pF	CL05C2R4AB5GNW□
		2.4pF	±0.1pF	CL05C2R4BB5NNW□
		2.4pF	±0.1pF	CL05C2R4BB5GNW□
		2.4pF	±0.25pF	CL05C2R4CB5GNW□
		2.7pF	±0.05pF	CL05C2R7AB5GNW□
		2.7pF	±0.1pF	CL05C2R7BB5NNW□
		2.7pF	±0.1pF	CL05C2R7BB5GNW□
		2.7pF	±0.25pF	CL05C2R7CB5NNW□
		2.7pF	±0.25pF	CL05C2R7CB5GNW□
		3.0pF	±0.05pF	CL05C030AB5GNW□
		3.0pF	±0.1pF	CL05C030BB5GNW□
		3.0pF	±0.25pF	CL05C030CB5GNW□
		3.3pF	±0.05pF	CL05C3R3AB5GNW□
		3.3pF	±0.1pF	CL05C3R3BB5NNW□
		3.3pF	±0.1pF	CL05C3R3BB5GNW□
		3.3pF	±0.25pF	CL05C3R3CB5NNW□
		3.3pF	±0.25pF	CL05C3R3CB5GNW□
		3.6pF	±0.05pF	CL05C3R6AB5GNW□
		3.6pF	±0.1pF	CL05C3R6BB5NNW□
		3.6pF	±0.1pF	CL05C3R6BB5GNW□
		3.6pF	±0.25pF	CL05C3R6CB5GNW□
		3.9pF	±0.05pF	CL05C3R9AB5GNW□
		3.9pF	±0.1pF	CL05C3R9BB5GNW□
		3.9pF	±0.25pF	CL05C3R9CB5GNW□
		4.0pF	±0.05pF	CL05C040AB5GNW□
		4.0pF	±0.1pF	CL05C040BB5GNW□
		4.0pF	±0.25pF	CL05C040CB5GNW□
		4.3pF	±0.05pF	CL05C4R3AB5GNW□
		4.3pF	±0.1pF	CL05C4R3BB5GNW□
		4.3pF	±0.25pF	CL05C4R3CB5GNW□
		4.7pF	±0.05pF	CL05C4R7AB5GNW□
		4.7pF	±0.1pF	CL05C4R7BB5GNW□
		4.7pF	±0.25pF	CL05C4R7CB5NNW□
		4.7pF	±0.25pF	CL05C4R7CB5GNW□
		5.0pF	±0.05pF	CL05C050AB5GNW□
		5.0pF	±0.1pF	CL05C050BB5GNW□
		5.0pF	±0.25pF	CL05C050CB5GNW□
5.1pF	±0.05pF	CL05C5R1AB5GNW□		
5.1pF	±0.1pF	CL05C5R1BB5GNW□		
5.1pF	±0.25pF	CL05C5R1CB5GNW□		
5.1pF	±0.5pF	CL05C5R1DB5GNW□		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑

Product Line Up (COG)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	50Vdc	5.6pF	±0.05pF	CL05C5R6AB5GNW □	0.55mm	50Vdc	12pF	±5%	CL05C120JB5NNW □
		5.6pF	±0.1pF	CL05C5R6BB5GNW □			12pF	±5%	CL05C120JB5GNW □
		5.6pF	±0.25pF	CL05C5R6CB5NNW □			15pF	±1%	CL05C150FB5GNW □
		5.6pF	±0.25pF	CL05C5R6CB5GNW □			15pF	±2%	CL05C150GB5GNW □
		5.6pF	±0.5pF	CL05C5R6DB5GNW □			15pF	±5%	CL05C150JB5GNW □
		6.0pF	±0.05pF	CL05C060AB5GNW □			18pF	±1%	CL05C180FB5GNW □
		6.0pF	±0.1pF	CL05C060BB5GNW □			18pF	±2%	CL05C180GB5GNW □
		6.0pF	±0.25pF	CL05C060CB5GNW □			18pF	±5%	CL05C180JB5NNW □
		6.0pF	±0.5pF	CL05C060DB5GNW □			18pF	±5%	CL05C180JB5GNW □
		6.2pF	±0.05pF	CL05C6R2AB5GNW □			20pF	±1%	CL05C200FB5GNW □
		6.2pF	±0.1pF	CL05C6R2BB5GNW □			20pF	±2%	CL05C200GB5GNW □
		6.2pF	±0.25pF	CL05C6R2CB5GNW □			20pF	±5%	CL05C200JB5GNW □
		6.2pF	±0.5pF	CL05C6R2DB5GNW □			22pF	±1%	CL05C220FB5GNW □
		6.8pF	±0.05pF	CL05C6R8AB5GNW □			22pF	±2%	CL05C220GB5GNW □
		6.8pF	±0.1pF	CL05C6R8BB5NNW □			22pF	±5%	CL05C220JB5NNW □
		6.8pF	±0.1pF	CL05C6R8BB5GNW □			22pF	±5%	CL05C220JB5GNW □
		6.8pF	±0.25pF	CL05C6R8CB5NNW □			24pF	±1%	CL05C240FB5GNW □
		6.8pF	±0.25pF	CL05C6R8CB5GNW □			24pF	±2%	CL05C240GB5GNW □
		6.8pF	±0.5pF	CL05C6R8DB5GNW □			24pF	±5%	CL05C240JB5NNW □
		7.0pF	±0.05pF	CL05C070AB5GNW □			24pF	±5%	CL05C240JB5GNW □
		7.0pF	±0.1pF	CL05C070BB5GNW □			27pF	±1%	CL05C270FB5GNW □
		7.0pF	±0.25pF	CL05C070CB5GNW □			27pF	±2%	CL05C270GB5GNW □
		7.0pF	±0.5pF	CL05C070DB5GNW □			27pF	±5%	CL05C270JB5NNW □
		7.5pF	±0.05pF	CL05C7R5AB5GNW □			27pF	±5%	CL05C270JB5GNW □
		7.5pF	±0.1pF	CL05C7R5BB5GNW □			33pF	±1%	CL05C330FB5GNW □
		7.5pF	±0.25pF	CL05C7R5CB5GNW □			33pF	±2%	CL05C330GB5GNW □
		7.5pF	±0.5pF	CL05C7R5DB5GNW □			33pF	±5%	CL05C330JB5NNW □
		8.0pF	±0.05pF	CL05C080AB5GNW □			33pF	±5%	CL05C330JB5GNW □
		8.0pF	±0.1pF	CL05C080BB5GNW □			39pF	±1%	CL05C390FB5GNW □
		8.0pF	±0.25pF	CL05C080CB5GNW □			39pF	±2%	CL05C390GB5GNW □
		8.0pF	±0.5pF	CL05C080DB5GNW □			39pF	±5%	CL05C390JB5NNW □
		8.2pF	±0.05pF	CL05C8R2AB5GNW □			39pF	±5%	CL05C390JB5GNW □
		8.2pF	±0.1pF	CL05C8R2BB5NNW □			47pF	±1%	CL05C470FB5GNW □
		8.2pF	±0.1pF	CL05C8R2BB5GNW □			47pF	±2%	CL05C470GB5GNW □
		8.2pF	±0.25pF	CL05C8R2CB5GNW □			47pF	±5%	CL05C470JB5NNW □
		8.2pF	±0.5pF	CL05C8R2DB5GNW □			47pF	±5%	CL05C470JB5GNW □
		9.0pF	±0.05pF	CL05C090AB5GNW □			51pF	±5%	CL05C510JB5NNW □
		9.0pF	±0.1pF	CL05C090BB5GNW □			56pF	±5%	CL05C560JB5NNW □
		9.0pF	±0.25pF	CL05C090CB5GNW □			68pF	±5%	CL05C680JB5NNW □
		9.0pF	±0.5pF	CL05C090DB5GNW □			82pF	±5%	CL05C820JB5NNW □
9.1pF	±0.05pF	CL05C9R1AB5GNW □	82pF	±10%	CL05C820KB5NNW □				
9.1pF	±0.1pF	CL05C9R1BB5GNW □	100pF	±5%	CL05C101JB5NNW □				
9.1pF	±0.25pF	CL05C9R1CB5GNW □	120pF	±5%	CL05C121JB5NNW □				
9.1pF	±0.5pF	CL05C9R1DB5GNW □	150pF	±5%	CL05C151JB5NNW □				
10pF	±1%	CL05C100FB5GNW □	180pF	±5%	CL05C181JB5NNW □				
10pF	±2%	CL05C100GB5GNW □	270pF	±1%	CL05C271FB5NNW □				
10pF	±5%	CL05C100JB5NNW □	270pF	±5%	CL05C271JB5NNW □				
10pF	±5%	CL05C100JB5GNW □	330pF	±5%	CL05C331JB5NNW □				
11pF	±1%	CL05C110FB5GNW □	390pF	±1%	CL05C391FB5NNW □				
11pF	±2%	CL05C110GB5GNW □	390pF	±5%	CL05C391JB5NNW □				
11pF	±5%	CL05C110JB5GNW □	470pF	±1%	CL05C471FB5NNW □				
12pF	±1%	CL05C120FB5GNW □	470pF	±5%	CL05C471JB5NNW □				
12pF	±2%	CL05C120GB5NNW □	560pF	±5%	CL05C561JB5NNW □				
12pF	±2%	CL05C120GB5GNW □	680pF	±5%	CL05C681JB5NNW □				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

## Product Line Up (COG)

### ■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	50Vdc	820pF	±5%	CL05C821JB5NNW□
		1.0nF	±5%	CL05C102JB5NNW□
	100Vdc	47pF	±5%	CL05C470JC5NNW□

### ■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.90mm	50Vdc	1.0pF	±0.25pF	CL10C010CB8NNW□
		1.2pF	±0.25pF	CL10C1R2CB8NNW□
		1.5pF	±0.1pF	CL10C1R5BB8NNW□
		1.5pF	±0.25pF	CL10C1R5CB8NNW□
		2.2pF	±0.1pF	CL10C2R2BB8NNW□
		2.2pF	±0.25pF	CL10C2R2CB8NNW□
		2.7pF	±0.1pF	CL10C2R7BB8NNW□
		2.7pF	±0.25pF	CL10C2R7CB8NNW□
		3.3pF	±0.1pF	CL10C3R3BB8NNW□
		3.3pF	±0.25pF	CL10C3R3CB8NNW□
		3.3pF	±0.5pF	CL10C3R3DB8NNW□
		3.6pF	±0.25pF	CL10C3R6CB8NNW□
		3.9pF	±0.1pF	CL10C3R9BB8NNW□
		3.9pF	±0.25pF	CL10C3R9CB8NNW□
		4.7pF	±0.1pF	CL10C4R7BB8NNW□
		4.7pF	±0.25pF	CL10C4R7CB8NNW□
		4.7pF	±0.5pF	CL10C4R7DB8NNW□
		5.0pF	±0.1pF	CL10C050BB8NNW□
		5.6pF	±0.25pF	CL10C5R6CB8NNW□
		6.2pF	±0.25pF	CL10C6R2CB8NNW□
		6.8pF	±0.25pF	CL10C6R8CB8NNW□
		6.8pF	±0.5pF	CL10C6R8DB8NNW□
		8.2pF	±0.25pF	CL10C8R2CB8NNW□
		9.0pF	±5%	CL10C090JB8NNW□
		10pF	±0.25pF	CL10C100CB8NNW□
		10pF	±5%	CL10C100JB8NNW□
		15pF	±1%	CL10C150FB8NNW□
		15pF	±5%	CL10C150JB8NNW□
		20pF	±5%	CL10C200JB8NNW□
		22pF	±1%	CL10C220FB8NNW□
		22pF	±2%	CL10C220GB8NNW□
		22pF	±5%	CL10C220JB8NNW□
		27pF	±5%	CL10C270JB8NNW□
		30pF	±5%	CL10C300JB8NNW□
		33pF	±5%	CL10C330JB8NNW□
		33pF	±10%	CL10C330KB8NNW□
		47pF	±5%	CL10C470JB8NNW□
		47pF	±10%	CL10C470KB8NNW□
		56pF	±5%	CL10C560JB8NNW□
		68pF	±5%	CL10C680JB8NNW□
82pF	±1%	CL10C820FB8NNW□		
82pF	±5%	CL10C820JB8NNW□		
100pF	±1%	CL10C101FB8NNW□		
100pF	±5%	CL10C101JB8NNW□		
100pF	±10%	CL10C101KB8NNW□		
120pF	±5%	CL10C121JB8NNW□		

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.90mm	50Vdc	150pF	±1%	CL10C151FB8NNW□
		150pF	±2%	CL10C151GB8NNW□
		150pF	±5%	CL10C151JB8NNW□
		180pF	±5%	CL10C181JB8NNW□
		220pF	±2%	CL10C221GB8NNW□
		220pF	±5%	CL10C221JB8NNW□
		270pF	±1%	CL10C271FB8NNW□
		270pF	±5%	CL10C271JB8NNW□
		330pF	±5%	CL10C331JB8NNW□
		390pF	±5%	CL10C391JB8NNW□
		390pF	±10%	CL10C391KB8NNW□
		470pF	±5%	CL10C471JB8NNW□
		680pF	±5%	CL10C681JB8NNW□
		820pF	±10%	CL10C821KB8NNW□
		1.0nF	±5%	CL10C102JB8NNW□
		1.2nF	±5%	CL10C122JB8NNW□
		1.5nF	±5%	CL10C152JB8NNW□
	100Vdc	10pF	±5%	CL10C100JC8NNW□
		33pF	±5%	CL10C330JC8NNW□
		47pF	±5%	CL10C470JC8NNW□
		82pF	±5%	CL10C820JC8NNW□
		100pF	±5%	CL10C101JC8NNW□
		150pF	±5%	CL10C151JC8NNW□
		220pF	±5%	CL10C221JC8NNW□
		270pF	±5%	CL10C271JC8NNW□
		330pF	±5%	CL10C331JC8NNW□

### ■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number		
0.75mm	50Vdc	1.0pF	±0.25pF	CL21C010CBANNW□		
		1.5pF	±0.1pF	CL21C1R5BBANNW□		
		10pF	±0.5pF	CL21C100DBANNW□		
		10pF	±5%	CL21C100JBANNW□		
		15pF	±5%	CL21C150JBANNW□		
		22pF	±1%	CL21C220FBANNW□		
		22pF	±5%	CL21C220JBANNW□		
		33pF	±5%	CL21C330JBANNW□		
		47pF	±5%	CL21C470JBANNW□		
		47pF	±10%	CL21C470KBANNW□		
		100pF	±2%	CL21C101GBANNW□		
		100pF	±5%	CL21C101JBANNW□		
		120pF	±5%	CL21C121JBANNW□		
		150pF	±5%	CL21C151JBANNW□		
		220pF	±5%	CL21C221JBANNW□		
	100Vdc	220pF	±10%	CL21C221KBANNW□		
		330pF	±1%	CL21C331FBANNW□		
		1.0nF	±5%	CL21C102JBANNW□		
		15pF	±5%	CL21C150JCANNW□		
		100pF	±5%	CL21C101JCANNW□		
		150pF	±5%	CL21C151JCANNW□		
		0.95mm	50Vdc	680pF	±5%	CL21C681JBCNNW□
				1.0nF	±5%	CL21C102JBCNNW□

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑

Product Line Up (COG)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.95mm	100Vdc	470pF	±5%	CL21C471JCCNWW □	0.95mm	250Vdc	3.3pF	±0.05pF	CL21C3R3AECGNW □
		680pF	±5%	CL21C681JCCNWW □			3.3pF	±0.1pF	CL21C3R3BECGNW □
	200Vdc	220pF	±5%	CL21C221JDCNWW □			3.3pF	±0.25pF	CL21C3R3CECGNW □
		250Vdc	0.5pF	±0.05pF			CL21C0R5AECGNW □	3.6pF	±0.05pF
	0.5pF		±0.1pF	CL21C0R5BECGNW □			3.6pF	±0.1pF	CL21C3R6BECGNW □
	0.5pF		±0.25pF	CL21C0R5CECGNW □			3.6pF	±0.25pF	CL21C3R6CECGNW □
	0.6pF		±0.05pF	CL21C0R6AECGNW □			3.9pF	±0.05pF	CL21C3R9AECGNW □
	0.6pF		±0.1pF	CL21C0R6BECGNW □			3.9pF	±0.1pF	CL21C3R9BECGNW □
	0.6pF		±0.25pF	CL21C0R6CECGNW □			3.9pF	±0.25pF	CL21C3R9CECGNW □
	0.7pF		±0.05pF	CL21C0R7AECGNW □			4.0pF	±0.05pF	CL21C040AECGNW □
	0.7pF		±0.1pF	CL21C0R7BECGNW □			4.0pF	±0.1pF	CL21C040BECGNW □
	0.7pF		±0.25pF	CL21C0R7CECGNW □			4.0pF	±0.25pF	CL21C040CECGNW □
	0.8pF		±0.05pF	CL21C0R8AECGNW □			4.3pF	±0.05pF	CL21C4R3AECGNW □
	0.8pF		±0.1pF	CL21C0R8BECGNW □			4.3pF	±0.1pF	CL21C4R3BECGNW □
	0.8pF		±0.25pF	CL21C0R8CECGNW □			4.3pF	±0.25pF	CL21C4R3CECGNW □
	0.9pF		±0.05pF	CL21C0R9AECGNW □			4.7pF	±0.05pF	CL21C4R7AECGNW □
	0.9pF		±0.1pF	CL21C0R9BECGNW □			4.7pF	±0.1pF	CL21C4R7BECGNW □
	0.9pF		±0.25pF	CL21C0R9CECGNW □			4.7pF	±0.25pF	CL21C4R7CECGNW □
	1.0pF		±0.05pF	CL21C010AECGNW □			5.0pF	±0.05pF	CL21C050AECGNW □
	1.0pF		±0.1pF	CL21C010BECGNW □			5.0pF	±0.1pF	CL21C050BECGNW □
	1.0pF		±0.25pF	CL21C010CECGNW □			5.0pF	±0.25pF	CL21C050CECGNW □
	1.1pF		±0.05pF	CL21C1R1AECGNW □			5.1pF	±0.05pF	CL21C5R1AECGNW □
	1.1pF		±0.1pF	CL21C1R1BECGNW □			5.1pF	±0.1pF	CL21C5R1BECGNW □
	1.1pF		±0.25pF	CL21C1R1CECGNW □			5.1pF	±0.25pF	CL21C5R1CECGNW □
	1.2pF		±0.05pF	CL21C1R2AECGNW □			5.1pF	±0.5pF	CL21C5R1DECGNW □
	1.2pF		±0.1pF	CL21C1R2BECGNW □			5.6pF	±0.05pF	CL21C5R6AECGNW □
	1.2pF		±0.25pF	CL21C1R2CECGNW □			5.6pF	±0.1pF	CL21C5R6BECGNW □
	1.3pF		±0.05pF	CL21C1R3AECGNW □			5.6pF	±0.25pF	CL21C5R6CECGNW □
	1.3pF		±0.1pF	CL21C1R3BECGNW □			5.6pF	±0.5pF	CL21C5R6DECGNW □
	1.3pF		±0.25pF	CL21C1R3CECGNW □			6.0pF	±0.05pF	CL21C060AECGNW □
	1.5pF		±0.05pF	CL21C1R5AECGNW □			6.0pF	±0.1pF	CL21C060BECGNW □
	1.5pF		±0.1pF	CL21C1R5BECGNW □			6.0pF	±0.25pF	CL21C060CECGNW □
	1.5pF		±0.25pF	CL21C1R5CECGNW □			6.0pF	±0.5pF	CL21C060DECGNW □
	1.6pF		±0.05pF	CL21C1R6AECGNW □			6.2pF	±0.05pF	CL21C6R2AECGNW □
	1.6pF		±0.1pF	CL21C1R6BECGNW □			6.2pF	±0.1pF	CL21C6R2BECGNW □
	1.6pF		±0.25pF	CL21C1R6CECGNW □			6.2pF	±0.25pF	CL21C6R2CECGNW □
	1.8pF		±0.05pF	CL21C1R8AECGNW □			6.2pF	±0.5pF	CL21C6R2DECGNW □
	1.8pF		±0.1pF	CL21C1R8BECGNW □			6.8pF	±0.05pF	CL21C6R8AECGNW □
	1.8pF		±0.25pF	CL21C1R8CECGNW □			6.8pF	±0.1pF	CL21C6R8BECGNW □
	2.0pF		±0.05pF	CL21C020AECGNW □			6.8pF	±0.25pF	CL21C6R8CECGNW □
2.0pF	±0.1pF		CL21C020BECGNW □	6.8pF	±0.5pF	CL21C6R8DECGNW □			
2.0pF	±0.25pF	CL21C020CECGNW □	7.0pF	±0.05pF	CL21C070AECGNW □				
2.2pF	±0.05pF	CL21C2R2AECGNW □	7.0pF	±0.1pF	CL21C070BECGNW □				
2.2pF	±0.1pF	CL21C2R2BECGNW □	7.0pF	±0.25pF	CL21C070CECGNW □				
2.2pF	±0.25pF	CL21C2R2CECGNW □	7.0pF	±0.5pF	CL21C070DECGNW □				
2.4pF	±0.05pF	CL21C2R4AECGNW □	7.5pF	±0.05pF	CL21C7R5AECGNW □				
2.4pF	±0.1pF	CL21C2R4BECGNW □	7.5pF	±0.1pF	CL21C7R5BECGNW □				
2.4pF	±0.25pF	CL21C2R4CECGNW □	7.5pF	±0.25pF	CL21C7R5CECGNW □				
2.7pF	±0.05pF	CL21C2R7AECGNW □	7.5pF	±0.5pF	CL21C7R5DECGNW □				
2.7pF	±0.1pF	CL21C2R7BECGNW □	8.0pF	±0.05pF	CL21C080AECGNW □				
2.7pF	±0.25pF	CL21C2R7CECGNW □	8.0pF	±0.1pF	CL21C080BECGNW □				
3.0pF	±0.05pF	CL21C030AECGNW □	8.0pF	±0.25pF	CL21C080CECGNW □				
3.0pF	±0.1pF	CL21C030BECGNW □	8.0pF	±0.5pF	CL21C080DECGNW □				
3.0pF	±0.25pF	CL21C030CECGNW □	8.2pF	±0.05pF	CL21C8R2AECGNW □				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

## Product Line Up (COG)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number		
0.95mm	250Vdc	8.2pF	±0.1pF	CL21C8R2BECGNW□	0.95mm	250Vdc	68pF	±5%	CL21C680JECGNW□		
		8.2pF	±0.25pF	CL21C8R2CECGNW□			82pF	±1%	CL21C820FECGNW□		
		8.2pF	±0.5pF	CL21C8R2DECGNW□			82pF	±2%	CL21C820GECGNW□		
		9.0pF	±0.05pF	CL21C090AECGNW□			82pF	±5%	CL21C820JECGNW□		
		9.0pF	±0.1pF	CL21C090BECGNW□			100pF	±1%	CL21C101FECGNW□		
		9.0pF	±0.25pF	CL21C090CECGNW□			100pF	±2%	CL21C101GECGNW□		
		9.0pF	±0.5pF	CL21C090DECGNW□			100pF	±5%	CL21C101JECGNW□		
		9.1pF	±0.05pF	CL21C9R1AECGNW□			100pF	±5%	CL21C101JECNNW□		
		9.1pF	±0.1pF	CL21C9R1BECGNW□			1.35mm	25Vdc	3.3nF	±1%	CL21C332JAFNNW□
		9.1pF	±0.25pF	CL21C9R1CECGNW□					50Vdc	1.2nF	±5%
		9.1pF	±0.5pF	CL21C9R1DECGNW□				1.2nF		±5%	CL21C122JBFNNW□
		10pF	±1%	CL21C100FECGNW□				1.5nF		±5%	CL21C152JBFNNW□
		10pF	±2%	CL21C100GECGNW□				2.2nF		±5%	CL21C222JBFNNW□
		10pF	±5%	CL21C100JECGNW□				2.7nF		±5%	CL21C272JBFNNW□
		10pF	±5%	CL21C100JECNNW□	2.7nF	±5%		CL21C272JBFNNW□			
		11pF	±1%	CL21C110FECGNW□	3.3nF	±5%		CL21C332JBFNNW□			
		11pF	±2%	CL21C110GECGNW□	3.3nF	±5%		CL21C332JBFNNW□			
		11pF	±5%	CL21C110JECGNW□	3.9nF	±5%		CL21C392JBFNNW□			
		12pF	±1%	CL21C120FECGNW□	4.7nF	±5%	CL21C472JBFNNW□				
		12pF	±2%	CL21C120GECGNW□	4.7nF	±5%	CL21C472JBFNNW□				
		12pF	±5%	CL21C120JECGNW□	100Vdc	1.0nF	±5%	CL21C102JCFNNW□			
		15pF	±1%	CL21C150FECGNW□		200Vdc	470pF	±5%	CL21C471JDFNNW□		
		15pF	±2%	CL21C150GECGNW□			630Vdc	39pF	±5%	CL21C390JHFNNW□	
		15pF	±5%	CL21C150JECGNW□							
		18pF	±1%	CL21C180FECGNW□							
		18pF	±2%	CL21C180GECGNW□							
		18pF	±5%	CL21C180JECGNW□							
		20pF	±1%	CL21C200FECGNW□							
		20pF	±2%	CL21C200GECGNW□							
		20pF	±5%	CL21C200JECGNW□							
		22pF	±1%	CL21C220FECGNW□							
		22pF	±2%	CL21C220GECGNW□							
		22pF	±5%	CL21C220JECGNW□							
24pF	±1%	CL21C240FECGNW□									
24pF	±2%	CL21C240GECGNW□									
24pF	±5%	CL21C240JECGNW□									
27pF	±1%	CL21C270FECGNW□									
27pF	±2%	CL21C270GECGNW□									
27pF	±5%	CL21C270JECGNW□									
33pF	±1%	CL21C330FECGNW□									
33pF	±2%	CL21C330GECGNW□									
33pF	±5%	CL21C330JECGNW□									
33pF	±5%	CL21C330JECNNW□									
39pF	±1%	CL21C390FECGNW□									
39pF	±2%	CL21C390GECGNW□									
39pF	±5%	CL21C390JECGNW□									
47pF	±1%	CL21C470FECGNW□									
47pF	±2%	CL21C470GECGNW□									
47pF	±5%	CL21C470JECGNW□									
62pF	±1%	CL21C620FECGNW□									
62pF	±2%	CL21C620GECGNW□									
62pF	±5%	CL21C620JECGNW□									
68pF	±1%	CL21C680FECGNW□									
68pF	±2%	CL21C680GECGNW□									

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑



Product Line Up (COG)

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
1.00mm	50Vdc	1.0nF	±5%	CL31C102JBCNNW□	
		1.5nF	±2%	CL31C152GBCNNW□	
	100Vdc	100pF	±5%	CL31C101JCCNNW□	
		220pF	±5%	CL31C221JCCNNW□	
		560pF	±5%	CL31C561JCCNNW□	
		680pF	±5%	CL31C681JCCNNW□	
1.40mm	25Vdc	10nF	±1%	CL31C103FAFNNW□	
		10nF	±2%	CL31C103GAFNNW□	
	50Vdc	3.3nF	±5%	CL31C332JBFNNW□	
	200Vdc	1.0nF	±5%	CL31C102JDFNNW□	
	500Vdc	10pF	±5%	CL31C100JGFNNW□	
		39pF	±5%	CL31C390JGFNNW□	
		220pF	±5%	CL31C221JGFNNW□	
		330pF	±5%	CL31C331JGFNNW□	
		470pF	±5%	CL31C471JGFNNW□	
	630Vdc	220pF	±5%	CL31C221JHFNNW□	
	1.80mm	25Vdc	47nF	±5%	CL31C473JAHNNW□
			100nF	±5%	CL31C104JAHNNW□
		50Vdc	5.6nF	±5%	CL31C562JBHNNW□
			6.8nF	±5%	CL31C682JBHNNW□
12nF			±5%	CL31C123JBHNNW□	
22nF			±5%	CL31C223JBHNNW□	
27nF			±5%	CL31C273JBHNNW□	
2kVdc		33nF	±5%	CL31C333JBHNNW□	
		22pF	±10%	CL31C220KJHNNW□	

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
1.45mm	1kVdc	100pF	±10%	CL32C101KIFNNW□
2.70mm	100Vdc	47nF	±5%	CL32C473JCJNNW□

www.rspcba.com

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Industrial Capacitors

NNW – COG / X5R / X6S / X7R / X7S

## Product Line Up (X5R)

### ■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.33mm	6.3Vdc	10nF	±10%	CL03A103KQ3NNW □		1.35mm	10Vdc	4.7uF	±10%	CL21A475KPFNNW □		
		100nF	±10%	CL03A104KQ3NNW □	Derating		25Vdc	2.2uF	±10%	CL21A225KAFNNW □		
		220nF	±10%	CL03A224KQ3NNW □	Derating Ref	1.40mm	6.3Vdc	22uF	±20%	CL21A226MQNNW □		
		220nF	±20%	CL03A224MQ3NNW □	Derating Ref		16Vdc	10uF	±10%	CL21A106KQNNW □	Derating	
	10Vdc	100nF	±10%	CL03A104KP3NNW □	Derating	22uF	±10%	CL21A226KQNNW □	Derating			
		25Vdc	180pF	±10%	CL03A181KA3NNW □	Derating	25Vdc	22uF	±20%	CL21A226MAQNNW □	Derating	
			330pF	±10%	CL03A331KA3NNW □	Derating	1.45mm	6.3Vdc	47uF	±20%	CL21A476MQYNNW □	Derating
			1.8nF	±10%	CL03A182KA3NNW □	Derating						

### ■ Size : 3.20 X 1.60mm (inch : 1206)

### ■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.55mm	6.3Vdc	220nF	±10%	CL05A224KQ5NNW □		1.25mm	10Vdc	10uF	±10%	CL31A106KPPLNW □		
		330nF	±10%	CL05A334KQ5NNW □		1.80mm	6.3Vdc	10uF	±10%	CL31A106KQHNNW □		
		470nF	±10%	CL05A474KQ5NNW □				10uF	±20%	CL31A106MQHNNW □		
		1.0uF	±10%	CL05A105KQ5NNW □	Derating			22uF	±20%	CL31A226MQHNNW □		
		1.0uF	±20%	CL05A105MQ5NNW □	Derating			47uF	±20%	CL31A476MQHNNW □	Derating	
		2.2uF	±20%	CL05A225MQ5NNW □	Derating Ref		100uF	±20%	CL31A107MQHNNW □	Derating		
		10Vdc	100nF	±10%	CL05A104KP5NNW □			10Vdc	4.7uF	±10%	CL31A475KPHNNW □	
			220nF	±10%	CL05A224KP5NNW □			10uF	±10%	CL31A106KPHNNW □		
	16Vdc		22nF	±10%	CL05A223K05NNW □			16Vdc	3.3uF	±10%	CL31A335KOHNNW □	
			100nF	±10%	CL05A104K05NNW □		4.7uF	±20%	CL31A475MOHNNW □			
						10uF	±10%	CL31A106KOHNNW □				
						10uF	±20%	CL31A106MOHNNW □				
					22uF	±20%	CL31A226MOHNNW □	Derating				
					25Vdc	10uF	±10%	CL31A106KAHNNW □				
					22uF	±10%	CL31A226KAHNNW □	Derating				

### ■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.90mm	6.3Vdc	470nF	±10%	CL10A474KQ8NNW □		2.70mm	6.3Vdc	22uF	±20%	CL32A226MQJNNW □		
		1.0uF	±10%	CL10A105KQ8NNW □				47uF	±20%	CL32A476MQJNNW □		
		2.2uF	±10%	CL10A225KQ8NNW □				10Vdc	22uF	±20%	CL32A226MPJNNW □	
		4.7uF	±10%	CL10A475KQ8NNW □					47uF	±20%	CL32A476MPJNNW □	Derating
		10uF	±10%	CL10A106KQ8NNW □	Ref		16Vdc		10uF	±20%	CL32A106MOJNNW □	
		10uF	±20%	CL10A106MQ8NNW □	Ref				22uF	±10%	CL32A226K0JNNW □	
		220nF	±10%	CL10A224KP8NNW □				22uF	±20%	CL32A226MOJNNW □		
		470nF	±10%	CL10A474KP8NNW □				47uF	±10%	CL32A476K0JNNW □		
	1.0uF	±10%	CL10A105KP8NNW □		47uF		±20%	CL32A476MOJNNW □				
	2.2uF	±10%	CL10A225KP8NNW □		25Vdc		22uF	±10%	CL32A226KAJNNW □			
	10uF	±10%	CL10A106KP8NNW □	Derating Ref			2.80mm	6.3Vdc	100uF	±20%	CL32A107MQVNNW □	Derating
	16Vdc	1.0uF	±10%	CL10A105K08NNW □					10Vdc	100uF	±20%	CL32A107MPVNNW □
	2.2uF	±10%	CL10A225K08NNW □									
	4.7uF	±10%	CL10A475K08NNW □	Derating								

### ■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	16Vdc	2.2uF	±10%	CL21A225K0CLNW □		3.50mm	6.3Vdc	100uF	±20%	CL43A107MQLNNW □	
1.35mm	6.3Vdc	10uF	±10%	CL21A106KQFNNW □							
		10uF	±20%	CL21A106MQFNNW □							
		4.7uF	±10%	CL21A475KQFNNW □							
		4.7uF	±20%	CL21A475MQFNNW □							
10Vdc	10uF	±10%	CL21A106KPFNNW □								
	2.2uF	±10%	CL21A225KPFNNW □								

### ■ Size : 4.50 X 3.20mm (inch : 1812)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
3.50mm	6.3Vdc	100uF	±20%	CL43A107MQLNNW □	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑

Product Line Up (X6S)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.55mm	10Vdc	1.0uF	±10%	CL05X105KP5NNW□	Derating

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.80mm	4.0Vdc	47uF	±20%	CL31X476MRHNNW□	Derating

■ Size : 1.60 X 0.80 (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	6.3Vdc	10uF	±20%	CL10X106MQ8NNW□	Derating

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.80mm	6.3Vdc	100uF	±20%	CL32X107MQVNNW□	Derating

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.40mm	4.0Vdc	22uF	±20%	CL21X226MRQNNW□	Derating
	6.3Vdc	22uF	±20%	CL21X226MQQNNW□	Derating

www.richpcba.com

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Industrial Capacitors

NNW – COG / X5R / X6S / X7R / X7S

## Product Line Up (X7R)

### ■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.33mm	10Vdc	10nF	±10%	CL03B103KP3NNW□	
	25Vdc	330pF	±10%	CL03B331KA3NNW□	
		470pF	±10%	CL03B471KA3NNW□	
		1.00nF	±10%	CL03B102KA3NNW□	
		2.20nF	±10%	CL03B222KA3NNW□	

### ■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.90mm	10Vdc	220nF	±10%	CL10B224KP8NNW□		
		330nF	±10%	CL10B334KP8NNW□		
		2.2uF	±10%	CL10B225KP8NNW□	Ref.	
		18nF	±10%	CL10B183KO8NNW□		
	16Vdc	22nF	±10%	CL10B223KO8NNW□		
		27nF	±10%	CL10B273KO8NNW□		
		33nF	±10%	CL10B333KO8NNW□		
		47nF	±10%	CL10B473KO8NNW□		
		100nF	±10%	CL10B104KO8NNW□		
		100nF	±20%	CL10B104MO8NNW□		
		120nF	±10%	CL10B124KO8NNW□		
		150nF	±10%	CL10B154KO8NNW□		
		220nF	±10%	CL10B224KO8NNW□		
		330nF	±10%	CL10B334KO8NNW□		
		470nF	±10%	CL10B474KO8NNW□		
		1.0uF	±20%	CL10B105MO8NNW□		
		25Vdc	18nF	±10%	CL10B183KA8NNW□	
			22nF	±10%	CL10B223KA8NNW□	
			27nF	±10%	CL10B273KA8NNW□	
			47nF	±10%	CL10B473KA8NNW□	
	100nF		±5%	CL10B104JA8NNW□		
	100nF		±10%	CL10B104KA8NNW□		
	100nF		±20%	CL10B104MA8NNW□		
	470nF		±10%	CL10B474KA8NNW□		
	1.0uF		±10%	CL10B105KA8NNW□		
	50Vdc		100pF	±10%	CL10B101KB8NNW□	
			150pF	±10%	CL10B151KB8NNW□	
			220pF	±10%	CL10B221KB8NNW□	
		270pF	±10%	CL10B271KB8NNW□		
		330pF	±10%	CL10B331KB8NNW□		
		470pF	±10%	CL10B471KB8NNW□		
		560pF	±10%	CL10B561KB8NNW□		
		680pF	±10%	CL10B681KB8NNW□		
		1.0nF	±5%	CL10B102JB8NNW□		
		1.0nF	±10%	CL10B102KB8NNW□		
		1.2nF	±10%	CL10B122KB8NNW□		
		1.5nF	±10%	CL10B152KB8NNW□		
		1.8nF	±10%	CL10B182KB8NNW□		
		2.2nF	±10%	CL10B222KB8NNW□		
		2.7nF	±10%	CL10B272KB8NNW□		
		3.3nF	±10%	CL10B332KB8NNW□		
		4.7nF	±10%	CL10B472KB8NNW□		
		5.6nF	±10%	CL10B562KB8NNW□		
	5.6nF	±20%	CL10B562MB8NNW□			
	6.8nF	±10%	CL10B682KB8NNW□			
	10nF	±10%	CL10B103KB8NNW□			
	12nF	±10%	CL10B123KB8NNW□			
	15nF	±10%	CL10B153KB8NNW□			
	22nF	±10%	CL10B223KB8NNW□			
	33nF	±10%	CL10B333KB8NNW□			
47nF	±10%	CL10B473KB8NNW□				
100nF	±10%	CL10B104KB8NNW□				
100Vdc	100nF	±10%	CL10B104KC8NNW□			

### ■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.55mm	6.3Vdc	220nF	±10%	CL05B224KQ5NNW□		
		470nF	±10%	CL05B474KQ5NNW□	Ref.	
	10Vdc	33nF	±10%	CL05B333KP5NNW□		
		100nF	±10%	CL05B104KP5NNW□		
	16Vdc	1.0nF	±10%	CL05B102KO5NNW□		
		5.6nF	±10%	CL05B562KO5NNW□		
		6.8nF	±10%	CL05B682KO5NNW□		
		10nF	±5%	CL05B103JO5NNW□		
		10nF	±10%	CL05B103KO5NNW□		
		10nF	±20%	CL05B103MO5NNW□		
		15nF	±10%	CL05B153KO5NNW□		
		22nF	±10%	CL05B223KO5NNW□		
		33nF	±10%	CL05B333KO5NNW□		
		33nF	±20%	CL05B333MO5NNW□		
		47nF	±10%	CL05B473KO5NNW□		
		47nF	±20%	CL05B473MO5NNW□		
		100nF	±10%	CL05B104KO5NNW□		
		25Vdc	560pF	±10%	CL05B561KA5NNW□	
			1.0nF	±10%	CL05B102KA5NNW□	
			4.7nF	±10%	CL05B472KA5NNW□	
	8.2nF		±10%	CL05B822KA5NNW□		
	10nF		±10%	CL05B103KA5NNW□		
	15nF		±10%	CL05B153KA5NNW□		
	18nF		±10%	CL05B183KA5NNW□		
	33nF		±10%	CL05B333KA5NNW□		
	50Vdc		100pF	±10%	CL05B101KB5NNW□	
			330pF	±10%	CL05B331KB5NNW□	
		470pF	±10%	CL05B471KB5NNW□		
		560pF	±10%	CL05B561KB5NNW□		
		680pF	±10%	CL05B681KB5NNW□		
		820pF	±10%	CL05B821KB5NNW□		
		1.0nF	±10%	CL05B102KB5NNW□		
		1.5nF	±10%	CL05B152KB5NNW□		
		1.8nF	±10%	CL05B182KB5NNW□		
		2.2nF	±5%	CL05B222JB5NNW□		
		2.2nF	±10%	CL05B222KB5NNW□		
		2.7nF	±10%	CL05B272KB5NNW□		
		3.3nF	±10%	CL05B332KB5NNW□		
		3.9nF	±10%	CL05B392KB5NNW□		
		5.6nF	±10%	CL05B562KB5NNW□		
		6.8nF	±10%	CL05B682KB5NNW□		
		8.2nF	±10%	CL05B822KB5NNW□		
		10nF	±10%	CL05B103KB5NNW□		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (X7R)

■ Size : 2.00 X 1.25mm (inch : 0805)

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark		
0.75mm	16Vdc	150nF	±10%	CL21B154KOANNW□		1.00mm	16Vdc	470nF	±10%	CL31B474KOCNNW□			
		10nF	±10%	CL21B103KAANNW□				47nF	±10%	CL31B473KOCNNW□			
	50Vdc	390pF	±10%	CL21B391KBANNW□			50Vdc	100nF	±5%	CL31B104JBCNNW□			
		1.0nF	±10%	CL21B102KBANNW□				100nF	±10%	CL31B104KBCNNW□			
		2.2nF	±10%	CL21B222KBANNW□				10nF	±10%	CL31B103KBCNNW□			
		3.3nF	±5%	CL21B332JBANNW□				120nF	±10%	CL31B124KBCNNW□			
		3.3nF	±10%	CL21B332KBANNW□				150nF	±10%	CL31B154KBCNNW□			
		4.7nF	±10%	CL21B472KBANNW□				1.0nF	±10%	CL31B102KBCNNW□			
		6.8nF	±10%	CL21B682KBANNW□				3.3nF	±5%	CL31B332JBCNNW□			
		10nF	±10%	CL21B103KBANNW□				47nF	±10%	CL31B473KBCNNW□			
		10nF	±20%	CL21B103MBANNW□				100Vdc	10nF	±5%	CL31B103JCCNNW□		
		15nF	±10%	CL21B153KBANNW□					10nF	±20%	CL31B103MCCNNW□		
	22nF	±10%	CL21B223KBANNW□		15nF		±10%		CL31B153KCCNNW□				
	33nF	±10%	CL21B333KBANNW□		1.0nF		±10%		CL31B102KCCNNW□				
	100Vdc	330pF	±10%	CL21B331KANNW□			22nF		±10%	CL31B223KCCNNW□			
		1.0nF	±10%	CL21B102KANNW□			33nF		±10%	CL31B333KCCNNW□			
			2.2nF	±10%	CL21B222KANNW□				47nF	±10%	CL31B473KCCNNW□		
	0.95mm	16Vdc	100nF	±5%	CL21B104JOCNNW□				1.25mm	25Vdc	1.0uF	±10%	CL31B105KAPLNNW□
220nF			±10%	CL21B224KOCNNW□		1.40mm	10Vdc	2.2uF			±10%	CL31B225KPFNNW□	
330nF			±10%	CL21B334KOCNNW□				16Vdc			1.0uF	±10%	CL31B105KOFNNW□
25Vdc		100nF	±10%	CL21B104KACNNW□				1.0uF		±20%	CL31B105MOFNNW□		
		50Vdc	47nF	±10%	CL21B473KBCNNW□		50Vdc	220nF		±10%	CL31B224KBFNNW□		
			100nF	±10%	CL21B104KBCNNW□			220nF		±20%	CL31B224MBFNNW□		
200Vdc	100nF	±20%	CL21B104MBCNNW□		100Vdc	330nF	±10%	CL31B334KBFNNW□					
	1.0nF	±10%	CL21B102KDCNNW□			200Vdc	100nF	±10%	CL31B104KCFNNW□				
	2.2nF	±10%	CL21B222KDCNNW□				33nF	±10%	CL31B333KDFNNW□				
	4.7nF	±10%	CL21B472KDCNNW□			500Vdc	47nF	±10%	CL31B473KDFNNW□				
10nF	±10%	CL21B103KDCNNW□		6.8nF	±10%		CL31B682KGFNNW□						
1.35mm	10Vdc	1.0uF	±10%	CL21B105KPFNNW□		1.80mm	6.3Vdc	22uF	±10%	CL31B226KQHNNW□			
		1.0uF	±20%	CL21B105MPFNNW□				10Vdc	10uF	±10%	CL31B106KPHNNW□		
		2.2uF	±10%	CL21B225KPFNNW□					22uF	±10%	CL31B226KPHNNW□		
	16Vdc	470nF	±10%	CL21B474KOFNNW□			4.7uF		±10%	CL31B475KPHNNW□			
		680nF	±10%	CL21B684KOFNNW□			16Vdc	10uF	±10%	CL31B106KOHNNW□			
		1.0uF	±10%	CL21B105KOFNNW□				2.2uF	±10%	CL31B225KOHNNW□			
	2.2uF	±10%	CL21B225KOFNNW□		4.7uF			±10%	CL31B475KOHNNW□				
	25Vdc	4.7uF	±10%	CL21B475KOFNNW□	Ref.		25Vdc	10uF	±10%	CL31B106KAHNNW□			
		150nF	±10%	CL21B154KAFNNW□				1.0uF	±5%	CL31B105JAHNNW□			
		220nF	±10%	CL21B224KAFNNW□				1.0uF	±10%	CL31B105KAHNNW□			
		470nF	±10%	CL21B474KAFNNW□				1.0uF	±20%	CL31B105MAHNNW□			
		1.0uF	±10%	CL21B105KAFNNW□				2.2uF	±10%	CL31B225KAHNNW□			
		2.2uF	±10%	CL21B225KAFNNW□				4.7uF	±10%	CL31B475KAHNNW□			
	50Vdc	220nF	±10%	CL21B224KBFNNW□			50Vdc	1.0uF	±10%	CL31B105KBHNNW□			
		330nF	±10%	CL21B334KBFNNW□				2.2uF	±10%	CL31B225KBHNNW□			
		470nF	±10%	CL21B474KBFNNW□				470nF	±10%	CL31B474KBHNNW□			
		680nF	±10%	CL21B684KBFNNW□				100Vdc	1.0uF	±10%	CL31B105KCHNNW□		
	100Vdc	18nF	±10%	CL21B183KCFNNW□			200Vdc		68nF	±10%	CL31B683KDHNNW□		
22nF		±10%	CL21B223KCFNNW□		250Vdc	47nF	±10%		CL31B473KEHNNW□				
47nF		±10%	CL21B473KCFNNW□			2kVdc	2.2nF	±10%	CL31B222KJHNNW□	Derating			
100nF	±10%	CL21B104KCFNNW□											
1.40mm	6.3Vdc	10uF	±10%	CL21B106KQNNW□									
	10Vdc	10uF	±10%	CL21B106KQNNW□									

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

## Product Line Up (X7R)

### ■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
1.45mm	25Vdc	470nF	±10%	CL32B474KAFNNW□		
		470nF	±20%	CL32B474MAFNNW□		
		1.0uF	±10%	CL32B105KAFNNW□		
	50Vdc	100nF	±20%	CL32B104MBFNNW□		
		220nF	±10%	CL32B224KBFNNW□		
		330nF	±10%	CL32B334KBFNNW□		
		470nF	±10%	CL32B474KBFNNW□		
		100Vdc	100nF	±10%	CL32B104KCFNNW□	
	500Vdc	150nF	±10%	CL32B154KCFNNW□		
		22nF	±10%	CL32B223KGFNNW□		
	2kVdc	1.0nF	±10%	CL32B102KJFNNW□		
	1.80mm	100Vdc	220nF	±10%	CL32B224KCHNNW□	
330nF			±10%	CL32B334KCHNNW□		
200Vdc		47nF	±10%	CL32B473KDHNNW□		
	250Vdc	47nF	±10%	CL32B473KEHNNW□		
2.00mm	50Vdc	4.7uF	±10%	CL32B475KBUYNW□		
2.20mm	16Vdc	4.7uF	±10%	CL32B475KOINNW□		
	25Vdc	2.2uF	±10%	CL32B225KAINNW□		
	630Vdc	47nF	±10%	CL32B473KHNNW□		
2.70mm	10Vdc	47uF	±10%	CL32B476KPJNNW□	Ref	
		16Vdc	22uF	±10%	CL32B226KOJNNW□	
			22uF	±20%	CL32B226MOJNNW□	
	25Vdc	10uF	±10%	CL32B106KAJNNW□		
		22uF	±10%	CL32B226KAJNNW□		
		22uF	±20%	CL32B226MAJNNW□		
	50Vdc	3.3uF	±10%	CL32B335KBJNNW□		
		10uF	±10%	CL32B106KBJNNW□		
	100Vdc	680nF	±10%	CL32B684KJNNW□		
		1.0uF	±10%	CL32B105KJNNW□		
200Vdc	100nF	±10%	CL32B104KDJNNW□			

### ■ Size : 4.50 X 3.20mm (inch : 1812)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.45mm	200Vdc	100nF	±10%	CL43B104KDFNNW□	
	1kVdc	10nF	±10%	CL43B103KIFNNW□	Derating
1.80mm	100Vdc	470nF	±10%	CL43B474KCHNNW□	
2.70mm	250Vdc	220nF	±10%	CL43B224KEJNNW□	
	1kVdc	22nF	±10%	CL43B223KIJNNW□	Derating

### ■ Size : 5.70 X 5.00mm (inch : 2220)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.80mm	100Vdc	1.0uF	±10%	CL55B105KCHNNW□	

## Product Line Up (X7S)

### ■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.70mm	50Vdc	10uF	±10%	CL32Y106KBJNNW□	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Soft-Termination Industrial Capacitors

ZNW / SNW – X6S / X7R

## Feature





- Soft - Termination relaxes the applied thermal / mechanical stresses by ductile properties of metal - polymer composites.
- Can be applied to power (SMPS, DC - DC Converter) and industrial equipment
- ZNW, SNW series : Metal Epoxy
- Special outgoing inspection for industrial application (HALT, etc)

## Application

- Power(SMPS, DC - DC converter)
- Ideal for decoupling and filtering applications(Class II : X7R / X6S)

## Structure and Dimensions

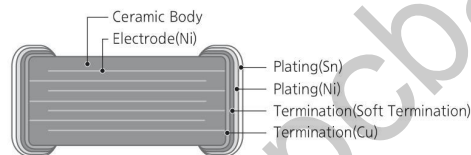

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
21	0805	2.00±0.10	1.25±0.10	0.65±0.10	A	0.50+0.20/-0.30
		2.00±0.10	1.25±0.10	0.85±0.10	C	
		2.00±0.10	1.25±0.10	1.15±0.10	M	
		2.00±0.10	1.25±0.10	1.25±0.10	F	
31	1206	3.20±0.15	1.60±0.15	0.85±0.15	C	0.50±0.30
		3.20±0.15	1.60±0.15	1.25±0.15	F	
		3.20±0.20	1.60±0.20	1.60±0.20	H	
32	1210	3.20±0.30	2.50±0.20	1.25±0.20	F	0.60±0.30
		3.20±0.30	2.50±0.20	1.60±0.20	H	
		3.20±0.30	2.50±0.20	2.00±0.20	I	
		3.20±0.30	2.50±0.20	2.50±0.20	J	

# Soft-Termination Industrial Capacitors

ZNW / SNW – X6S / X7R

Industrial Capacitance Table (X6S / X7R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance												
		nF				uF								
		68	100	220	470	1.0	2.2	4.7	10	22	47			
0805(2012)	100													
1206(3216)	100													
1210 (3225)	16													X6S
	100													

Product Line Up (X6S)

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.80mm	10Vdc	47uF	±10%	CL32X476KOVZNW □	Derating

Product Line Up (X7R)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.35mm	100Vdc	100nF	±10%	CL21B104KCFSNW □	
		220nF	±10%	CL21B224KCFSNW □	

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.80mm	100Vdc	1.0uF	±10%	CL31B105KCHSNW □	
		2.2uF	±10%	CL31B225KCHSNW □	

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.70mm	100Vdc	1.0uF	±10%	CL32B105KCJSNW □	
		2.2uF	±10%	CL32B225KCJSNW □	
2.80mm	100Vdc	4.7uF	±10%	CL32B475KCVZNW □	Derating

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑



## Feature





- Rated voltage 6.3V~100V,  
Temperature range -55°C to +125°C (COG / X7R), -55°C to +105°C (X6S), -55°C to +85°C (X5R),  
Case size 0201 to 1210.
- Special outgoing inspection for Power application  
(Bending Test : Sampling Test upto 2mm : X7R, 3mm : COG)

## Application

- Power supply (SMPS, DC – DC converter)
- Ideal for decoupling and filtering applications (Class II : X7R / X6S / X5R)
- Impedance matching, tuning, coupling in high frequency circuit (Class I : COG)

## Structure and Dimensions

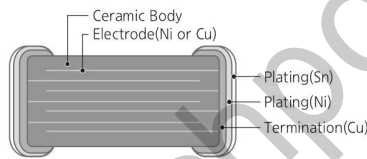

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
03	0201	0.60±0.03	0.30±0.03	0.30±0.03	3	0.15±0.05
05	0402	1.00±0.05	0.50±0.05	0.50±0.05	5	0.25±0.10
10	0603	1.60±0.10	0.80±0.10	0.80±0.10	8	0.30±0.20
21	0805	2.00±0.10	1.25±0.10	0.65±0.10	A	0.50+0.20/-0.30
		2.00±0.10	1.25±0.10	0.85±0.10	C	
		2.00±0.10	1.25±0.10	1.15±0.10	M	
		2.00±0.10	1.25±0.10	1.25±0.10	F	
31	1206	3.20±0.15	1.60±0.15	0.85±0.15	C	0.50±0.30
		3.20±0.15	1.60±0.15	1.25±0.15	F	
		3.20±0.20	1.60±0.20	1.60±0.20	H	
32	1210	3.20±0.30	2.50±0.20	1.25±0.20	F	0.60±0.30
		3.20±0.30	2.50±0.20	1.60±0.20	H	
		3.20±0.30	2.50±0.20	2.00±0.20	I	
		3.20±0.30	2.50±0.20	2.50±0.20	J	

Industrial Capacitance Table (C0G)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																																								
		pF													nF																											
		1.0	1.0	10	12	18	22	27	33	56	100	180	220	270	330	470	560	680	910	1.0	1.2	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2	10	15	18	22	27	33	39	47	56			
0402 (1005)	25																			1.0																						
	50																			1.0																						
0603 (1608)	25																		1.0																							
	50																		1.0																							
	100																		1.0																							
	250																		1.0																							
0805 (2012)	25																		1.0																							
	50																		1.0																							
	100																		1.0																							
	200																		1.0																							
1206 (3216)	50																		1.0																							
	100																		1.0																							
	200																		1.0																							
	500																		1.0																							
1206 (3216)	1k																		1.0																							
	100																		1.0																							
1210(3225)	100																		1.0																							

Industrial Capacitance Table (X5R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance											
		nF			uF								
		100	220	470	1.0	2.2	4.7	10	22	47	100	150	220
0201 (0603)	4.0												
	6.3												
	10												
0402 (1005)	4.0												
	6.3												
	10												
	16												
0603 (1608)	6.3												
	10												
	16												
	25												
	50												
0805 (2012)	6.3												
	10												
	16												
	25												
1206 (3216)	6.3												
	10												
	16												
	25							3.3					
	50												
1210 (3225)	6.3												
	10												
	16												
	25												

Industrial Capacitance Table (X6S)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance(uF)											
		0.1	0.22	0.47	1.0	2.2	4.7	10	22	47	100	220	
0402(1005)	6.3												
0805 (2012)	4.0												
	25												
1206(3216)	6.3												



Product Line Up (COG)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	25Vdc	1.0nF	±5%	CL05C102JA5NFN □	0.90mm	50Vdc	180pF	±5%	CL10C181JB8NFN □
		50Vdc	0.5pF	±0.1pF			CL05C0R5BB5NFN □	200pF	±5%
	0.5pF	±0.25pF	CL05C0R5CB5NFN □	220pF			±5%	CL10C221JB8NFN □	
	1.0pF	±0.25pF	CL05C010CB5NFN □	270pF			±5%	CL10C271JB8NFN □	
	2.0pF	±0.25pF	CL05C020CB5NFN □	330pF			±5%	CL10C331JB8NFN □	
	10pF	±0.25pF	CL05C100CB5NFN □	390pF			±5%	CL10C391JB8NFN □	
	10pF	±5%	CL05C100JB5NFN □	430pF			±5%	CL10C431JB8NFN □	
	15pF	±5%	CL05C150JB5NFN □	470pF			±5%	CL10C471JB8NFN □	
	18pF	±5%	CL05C180JB5NFN □	560pF			±5%	CL10C561JB8NFN □	
	20pF	±5%	CL05C200JB5NFN □	680pF			±5%	CL10C681JB8NFN □	
	22pF	±5%	CL05C220JB5NFN □	820pF			±5%	CL10C821JB8NFN □	
	27pF	±5%	CL05C270JB5NFN □	1.0nF			±5%	CL10C102JB8NFN □	
	33pF	±5%	CL05C330JB5NFN □	1.2nF			±5%	CL10C122JB8NFN □	
	47pF	±5%	CL05C470JB5NFN □	1.5nF			±5%	CL10C152JB8NFN □	
	56pF	±5%	CL05C560JB5NFN □	1.8nF			±5%	CL10C182JB8NFN □	
	68pF	±5%	CL05C680JB5NFN □	2.2nF			±5%	CL10C222JB8NFN □	
	100pF	±5%	CL05C101JB5NFN □	2.7nF			±5%	CL10C272JB8NFN □	
	120pF	±5%	CL05C121JB5NFN □	3.3nF			±5%	CL10C332JB8NFN □	
	150pF	±5%	CL05C151JB5NFN □	47pF			±5%	CL10C470JC8NFN □	
	180pF	±5%	CL05C181JB5NFN □	220pF			±5%	CL10C221JC8NFN □	
220pF	±5%	CL05C221JB5NFN □	470pF	±5%	CL10C471JC8NFN □				
270pF	±5%	CL05C271JB5NFN □	470pF	±5%	CL10C471JE8NFN □				
330pF	±5%	CL05C331JB5NFN □							
680pF	±5%	CL05C681JB5NFN □							

■ Size : 2.00 X 1.25mm (inch : 0805)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.90mm	25Vdc	1.0nF	±5%	CL10C102JA8NFN □	0.75mm	50Vdc	0.5pF	±0.25pF	CL21C0R5CBANFN □
		50Vdc	0.5pF	±0.25pF			CL10C0R5CB8NFN □	1.0pF	±0.25pF
	1.0pF	±0.25pF	CL10C010CB8NFN □	1.8pF			±0.25pF	CL21C1R8CBANFN □	
	3.9pF	±0.25pF	CL10C3R9CB8NFN □	2.0pF			±0.25pF	CL21C020CBANFN □	
	4.7pF	±0.25pF	CL10C4R7CB8NFN □	3.0pF			±0.25pF	CL21C030CBANFN □	
	5.0pF	±0.1pF	CL10C050BB8NFN □	3.9pF			±0.25pF	CL21C3R9CBANFN □	
	5.0pF	±0.25pF	CL10C050CB8NFN □	4.0pF			±0.25pF	CL21C040CBANFN □	
	10pF	±5%	CL10C100JB8NFN □	4.7pF			±0.25pF	CL21C4R7CBANFN □	
	12pF	±1%	CL10C120FB8NFN □	6.0pF			±0.5pF	CL21C060DBANFN □	
	12pF	±5%	CL10C120JB8NFN □	7.0pF			±0.5pF	CL21C070DBANFN □	
	15pF	±5%	CL10C150JB8NFN □	7.5pF			±0.5pF	CL21C7R5DBANFN □	
	18pF	±5%	CL10C180JB8NFN □	8.0pF			±0.5pF	CL21C080DBANFN □	
	20pF	±5%	CL10C200JB8NFN □	8.2pF			±0.5pF	CL21C8R2DBANFN □	
	22pF	±5%	CL10C220JB8NFN □	10pF			±5%	CL21C100JBANFN □	
	27pF	±5%	CL10C270JB8NFN □	12pF			±5%	CL21C120JBANFN □	
	33pF	±5%	CL10C330JB8NFN □	15pF			±5%	CL21C150JBANFN □	
	39pF	±5%	CL10C390JB8NFN □	18pF			±5%	CL21C180JBANFN □	
	47pF	±5%	CL10C470JB8NFN □	20pF			±5%	CL21C200JBANFN □	
	56pF	±5%	CL10C560JB8NFN □	22pF			±5%	CL21C220JBANFN □	
	62pF	±5%	CL10C620JB8NFN □	25pF			±5%	CL21C250JBANFN □	
68pF	±5%	CL10C680JB8NFN □	27pF	±5%	CL21C270JBANFN □				
82pF	±5%	CL10C820JB8NFN □	30pF	±5%	CL21C300JBANFN □				
100pF	±5%	CL10C101JB8NFN □	33pF	±5%	CL21C330JBANFN □				
120pF	±5%	CL10C121JB8NFN □	39pF	±5%	CL21C390JBANFN □				
150pF	±5%	CL10C151JB8NFN □	47pF	±5%	CL21C470JBANFN □				
			51pF	±5%	CL21C510JBANFN □				
			56pF	±5%	CL21C560JBANFN □				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. †

# Industrial Capacitors for Power Application

NFN – COG / X5R / X6S / X7R

## Product Line Up (COG)

### ■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number		
0.75mm	50Vdc	68pF	±5%	CL21C680JBANFN □		
		82pF	±5%	CL21C820JBANFN □		
		100pF	±5%	CL21C101JBANFN □		
		120pF	±5%	CL21C121JBANFN □		
		150pF	±5%	CL21C151JBANFN □		
		180pF	±5%	CL21C181JBANFN □		
		200pF	±5%	CL21C201JBANFN □		
		220pF	±5%	CL21C221JBANFN □		
		240pF	±5%	CL21C241JBANFN □		
		270pF	±5%	CL21C271JBANFN □		
		300pF	±5%	CL21C301JBANFN □		
		330pF	±5%	CL21C331JBANFN □		
	100Vdc	390pF	±5%	CL21C391JBANFN □		
		470pF	±5%	CL21C471JBANFN □		
		560pF	±5%	CL21C561JBANFN □		
		22pF	±5%	CL21C220JCANFN □		
		33pF	±5%	CL21C330JCANFN □		
		100pF	±5%	CL21C101JCANFN □		
		0.95mm	50Vdc	680pF	±5%	CL21C681JBCNFN □
				820pF	±5%	CL21C821JBCNFN □
1.0nF	±5%			CL21C102JBCNFN □		
100Vdc	470pF		±5%	CL21C471JCCNFN □		
	200Vdc	47pF	±5%	CL21C470JDCNFN □		
1.35mm	50Vdc	100pF	±5%	CL21C101JDCNFN □		
		220pF	±5%	CL21C221JDCNFN □		
		4.7nF	±5%	CL21C472JAFNFN □		
		1.5nF	±5%	CL21C152JBFNFN □		
		1.8nF	±5%	CL21C182JBFNFN □		
		2.2nF	±5%	CL21C222JBFNFN □		
	200Vdc	3.9nF	±5%	CL21C392JBFNFN □		
		4.7nF	±5%	CL21C472JBFNFN □		
		10nF	±5%	CL21C103JBFNFN □		
		1.0nF	±5%	CL21C102JDFNFN □		

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
1.00mm	50Vdc	12pF	±5%	CL31C120JBCNFN □
		15pF	±5%	CL31C150JBCNFN □
		18pF	±5%	CL31C180JBCNFN □
		22pF	±5%	CL31C220JBCNFN □
		33pF	±5%	CL31C330JBCNFN □
		47pF	±5%	CL31C470JBCNFN □
		56pF	±5%	CL31C560JBCNFN □
		100pF	±5%	CL31C101JBCNFN □
		100pF	±10%	CL31C101KBCNFN □
		120pF	±5%	CL31C121JBCNFN □
		220pF	±5%	CL31C221JBCNFN □
		270pF	±5%	CL31C271JBCNFN □
		330pF	±5%	CL31C331JBCNFN □
		470pF	±5%	CL31C471JBCNFN □
		560pF	±5%	CL31C561JBCNFN □

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number		
1.00mm	50Vdc	1.0nF	±5%	CL31C102JBCNFN □		
		1.5nF	±5%	CL31C152JBCNFN □		
		100Vdc	100pF	±5%	CL31C101JCCNFN □	
			330pF	±5%	CL31C331JCCNFN □	
		200Vdc	470pF	±5%	CL31C471JCCNFN □	
			100pF	±5%	CL31C101JDCNFN □	
	1.40mm	50Vdc	220pF	±5%	CL31C221JDCNFN □	
			4.7nF	±5%	CL31C472JBFNFN □	
			500Vdc	33pF	±5%	CL31C330JGFNFN □
				47pF	±5%	CL31C470JGFNFN □
			630Vdc	100pF	±5%	CL31C101JGFNFN □
				180pF	±5%	CL31C181JGFNFN □
220pF		±5%		CL31C221JGFNFN □		
330pF		±5%		CL31C331JGFNFN □		
390pF		±5%		CL31C391JGFNFN □		
470pF		±5%		CL31C471JGFNFN □		
1kVdc		560pF	±5%	CL31C561JGFNFN □		
		10pF	±5%	CL31C100JHFNFN □		
		15pF	±5%	CL31C150JHFNFN □		
		33pF	±5%	CL31C330JHFNFN □		
		47pF	±5%	CL31C470JHFNFN □		
		100pF	±5%	CL31C101JHFNFN □		
1.80mm		500Vdc	150pF	±5%	CL31C151JHFNFN □	
			220pF	±5%	CL31C221JHFNFN □	
	220pF		±10%	CL31C221KHFNFN □		
	330pF		±5%	CL31C331JHFNFN □		
	470pF		±5%	CL31C471JHFNFN □		
	10pF		±5%	CL31C100JIFNFN □		
	630Vdc	18pF	±5%	CL31C180JIFNFN □		
		22pF	±5%	CL31C220JIFNFN □		
		33pF	±5%	CL31C330JIFNFN □		
		47pF	±5%	CL31C470JIFNFN □		
		56pF	±5%	CL31C560JIFNFN □		
		68pF	±5%	CL31C680JIFNFN □		
1kVdc	100pF	±5%	CL31C101JIFNFN □			
	680pF	±5%	CL31C681JGHFNFN □			
	1.0nF	±5%	CL31C102JGHFNFN □			
	2.2nF	±5%	CL31C222JGHFNFN □			
	680pF	±5%	CL31C681JHFNFN □			
	1.0nF	±5%	CL31C102JHFNFN □			
1kVdc	1.2nF	±5%	CL31C122JHFNFN □			
	1.5nF	±5%	CL31C152JHFNFN □			
	2.2nF	±5%	CL31C222JHFNFN □			
	3.3nF	±5%	CL31C332JHFNFN □			
	220pF	±5%	CL31C221JHFNFN □			

### ■ Size : 4.50 X 3.20mm (inch : 1812)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
2.70mm	630Vdc	22nF	±5%	CL43C223JHJNFN □

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (X5R)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.55mm	4.0Vdc	2.2uF	±20%	CL05A225MR5NFN □	Operating
		470nF	±10%	CL05A474KQ5NFN □	
	6.3Vdc	1.0uF	±10%	CL05A105KQ5NFN □	Operating
		2.2uF	±10%	CL05A225KQ5NFN □	Operating, Ref.
		100nF	±10%	CL05A104KP5NFN □	
	10Vdc	220nF	±10%	CL05A224KP5NFN □	
470nF		±10%	CL05A474KP5NFN □		
16Vdc	1.0uF	±10%	CL05A105KQ5NFN □	Operating	

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	16Vdc	22uF	±10%	CL31A226KOCFLFN □	Operating
		22uF	±20%	CL31A226MOCFLFN □	Operating
1.80mm	6.3Vdc	10uF	±10%	CL31A106KQHNFN □	
		22uF	±10%	CL31A226KQHNFN □	
		22uF	±20%	CL31A226MQHNFN □	
		4.7uF	±10%	CL31A475KPHNFN □	
	10Vdc	10uF	±10%	CL31A106KPHNFN □	
		4.7uF	±10%	CL31A475KOHNFN □	
		4.7uF	±20%	CL31A475MOHNFN □	
		10uF	±10%	CL31A106KOHNFN □	
	16Vdc	22uF	±10%	CL31A226KOHNFN □	
		4.7uF	±10%	CL31A475KAHNFN □	
		4.7uF	±10%	CL31A475KAHNFN □	
		10uF	±10%	CL31A106KAHNFN □	
25Vdc	22uF	±10%	CL31A226KAHNFN □	Operating	
	4.7uF	±10%	CL31A475KAHNFN □		
	10uF	±10%	CL31A106KAHNFN □		
	22uF	±10%	CL31A226KAHNFN □		
50Vdc	10uF	±10%	CL31A106KBHNFN □		

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	6.3Vdc	1.0uF	±10%	CL10A105KQ8NFN □	
		2.2uF	±10%	CL10A225KQ8NFN □	
	10Vdc	1.0uF	±10%	CL10A105KP8NFN □	
		2.2uF	±10%	CL10A225KP8NFN □	
		4.7uF	±10%	CL10A475KP8NFN □	
		10uF	±10%	CL10A106KP8NFN □	Operating, Ref.
	16Vdc	10uF	±20%	CL10A106MP8NFN □	Operating, Ref.
		1.0uF	±10%	CL10A105KQ8NFN □	
	25Vdc	2.2uF	±10%	CL10A225KQ8NFN □	
		4.7uF	±10%	CL10A475KQ8NFN □	Operating
	50Vdc	470nF	±10%	CL10A474KA8NFN □	
		1.0uF	±10%	CL10A105KA8NFN □	
		1.0uF	±10%	CL10A105KB8NFN □	

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.70mm	6.3Vdc	22uF	±10%	CL32A226KQJNFN □	
		22uF	±20%	CL32A226MQJNFN □	
	10Vdc	22uF	±10%	CL32A226KJNFN □	
		10uF	±10%	CL32A106KQJNFN □	
	16Vdc	22uF	±10%	CL32A226KQJNFN □	
		10uF	±10%	CL32A106KAJNFN □	
2.80mm	6.3Vdc	100uF	±20%	CL32A107MQVNFN □	Operating
		150uF	±20%	CL32A157MQVNFN □	Operating
	25Vdc	10uF	±10%	CL32A106KAJNFN □	
		22uF	±10%	CL32A226KAJNFN □	

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.35mm	6.3Vdc	4.7uF	±10%	CL21A475KQNFN □	
		10uF	±10%	CL21A106KQNFN □	
	10Vdc	2.2uF	±10%	CL21A225KPFNFN □	
		4.7uF	±10%	CL21A475KPFNFN □	
		10uF	±10%	CL21A106KPFNFN □	
16Vdc	2.2uF	±10%	CL21A225KOFNFN □		
1.40mm	6.3Vdc	22uF	±10%	CL21A226KQQNFN □	
	16Vdc	10uF	±10%	CL21A106KQQNFN □	Operating
	25Vdc	4.7uF	±10%	CL21A475KAQNFN □	
22uF		±20%	CL21A226MAQNFN □	Operating	
1.45mm	25Vdc	10uF	±10%	CL21A106KAYNFN □	Operating

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

## Product Line Up (X6S)

### ■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.55mm	6.3Vdc	1.0uF	±10%	CL05X105KQ5NFN □	Derating
0.57mm	2.5Vdc	2.2uF	±20%	CL05X225MS5NFN □	Derating

### ■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.40mm	4.0Vdc	22uF	±20%	CL21X226MRQNFN □	Derating
1.45mm	25Vdc	10uF	±10%	CL21X106KAYNFN □	Derating

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.80mm	6.3Vdc	47uF	±20%	CL31X476MQHNFN □	Derating

www.richpcba.com

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑



Product Line Up (X7R)

■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.33mm	10Vdc	4.7nF	±10%	CL03B472KP3NFN □	
		6.8nF	±10%	CL03B682KP3NFN □	
		10nF	±10%	CL03B103KP3NFN □	

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark		
0.55mm	10Vdc	100nF	±10%	CL05B104KP5NFN □			
		16Vdc	330pF	±10%	CL05B331K05NFN □		
			8.2nF	±10%	CL05B822K05NFN □		
			10nF	±10%	CL05B103K05NFN □		
			15nF	±10%	CL05B153K05NFN □		
			22nF	±10%	CL05B223K05NFN □		
			27nF	±10%	CL05B273K05NFN □		
			33nF	±10%	CL05B333K05NFN □		
			68nF	±10%	CL05B683K05NFN □		
			100nF	±10%	CL05B104K05NFN □		
			25Vdc	4.7nF	±10%	CL05B472KA5NFN □	
				5.6nF	±10%	CL05B562KA5NFN □	
	10nF	±10%		CL05B103KA5NFN □			
	22nF	±10%		CL05B223KA5NFN □			
	50Vdc	270pF	±10%	CL05B271KB5NFN □			
		330pF	±10%	CL05B331KB5NFN □			
		390pF	±10%	CL05B391KB5NFN □			
		470pF	±10%	CL05B471KB5NFN □			
		560pF	±10%	CL05B561KB5NFN □			
		680pF	±10%	CL05B681KB5NFN □			
		820pF	±10%	CL05B821KB5NFN □			
		1.0nF	±5%	CL05B102JB5NFN □			
		1.0nF	±10%	CL05B102KB5NFN □			
		1.5nF	±10%	CL05B152KB5NFN □			
		2.2nF	±10%	CL05B222KB5NFN □			
		3.3nF	±10%	CL05B332KB5NFN □			
		4.7nF	±10%	CL05B472KB5NFN □			
		5.6nF	±10%	CL05B562KB5NFN □			
		10nF	±10%	CL05B103KB5NFN □			

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.90mm	6.3Vdc	1.0uF	±10%	CL10B105K08NFN □		
		10Vdc	220nF	±10%	CL10B224KP8NFN □	
			330nF	±10%	CL10B334KP8NFN □	
			470nF	±10%	CL10B474KP8NFN □	
			1.0uF	±10%	CL10B105K08NFN □	
			2.2uF	±10%	CL10B225KP8NFN □	Ref
	16Vdc	1.5nF	±10%	CL10B152K08NFN □		
		3.3nF	±10%	CL10B332K08NFN □		
		10nF	±10%	CL10B103K08NFN □		
		15nF	±10%	CL10B153K08NFN □		
		33nF	±10%	CL10B333K08NFN □		

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.90mm	16Vdc	47nF	±10%	CL10B473K08NFN □		
		68nF	±10%	CL10B683K08NFN □		
		100nF	±10%	CL10B104K08NFN □		
		150nF	±10%	CL10B154K08NFN □		
		220nF	±10%	CL10B224K08NFN □		
		330nF	±10%	CL10B334K08NFN □		
		470nF	±10%	CL10B474K08NFN □		
		680nF	±10%	CL10B684K08NFN □		
		1.0uF	±10%	CL10B105K08NFN □		
		25Vdc	1.0nF	±10%	CL10B102KA8NFN □	
			10nF	±10%	CL10B103KA8NFN □	
			12nF	±10%	CL10B123KA8NFN □	
			15nF	±10%	CL10B153KA8NFN □	
			18nF	±10%	CL10B183KA8NFN □	
			22nF	±10%	CL10B223KA8NFN □	
	27nF		±10%	CL10B273KA8NFN □		
	33nF		±10%	CL10B333KA8NFN □		
	47nF		±10%	CL10B473KA8NFN □		
	68nF		±10%	CL10B683KA8NFN □		
	100nF		±10%	CL10B104KA8NFN □		
	150nF		±10%	CL10B154KA8NFN □		
	220nF		±10%	CL10B224KA8NFN □		
	470nF		±10%	CL10B474KA8NFN □		
	1.0uF		±10%	CL10B105KA8NFN □		
	50Vdc	100pF	±10%	CL10B101KB8NFN □		
		150pF	±10%	CL10B151KB8NFN □		
		180pF	±10%	CL10B181KB8NFN □		
		220pF	±10%	CL10B221KB8NFN □		
		270pF	±10%	CL10B271KB8NFN □		
		330pF	±10%	CL10B331KB8NFN □		
		390pF	±10%	CL10B391KB8NFN □		
		470pF	±10%	CL10B471KB8NFN □		
		560pF	±10%	CL10B561KB8NFN □		
		820pF	±10%	CL10B821KB8NFN □		
		1.0nF	±5%	CL10B102JB8NFN □		
		1.0nF	±10%	CL10B102KB8NFN □		
		1.2nF	±10%	CL10B122KB8NFN □		
		1.5nF	±10%	CL10B152KB8NFN □		
		1.8nF	±10%	CL10B182KB8NFN □		
	2.2nF	±10%	CL10B222KB8NFN □			
2.7nF	±10%	CL10B272KB8NFN □				
3.3nF	±10%	CL10B332KB8NFN □				
3.9nF	±10%	CL10B392KB8NFN □				
4.7nF	±10%	CL10B472KB8NFN □				
5.6nF	±10%	CL10B562KB8NFN □				
6.8nF	±10%	CL10B682KB8NFN □				
8.2nF	±10%	CL10B822KB8NFN □				
10nF	±5%	CL10B103JB8NFN □				
10nF	±10%	CL10B103KB8NFN □				
12nF	±10%	CL10B123KB8NFN □				
15nF	±10%	CL10B153KB8NFN □				
18nF	±10%	CL10B183KB8NFN □				
22nF	±10%	CL10B223KB8NFN □				
27nF	±10%	CL10B273KB8NFN □				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

## Product Line Up (X7R)

### ■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	50Vdc	33nF	±10%	CL10B333KB8NFN □	
		39nF	±10%	CL10B393KB8NFN □	
		47nF	±10%	CL10B473KB8NFN □	
		56nF	±10%	CL10B563KB8NFN □	
		68nF	±10%	CL10B683KB8NFN □	
		82nF	±10%	CL10B823KB8NFN □	
		100nF	±10%	CL10B104KB8NFN □	
		100nF	±20%	CL10B104MB8NFN □	

### ■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.75mm	25Vdc	1.0nF	±10%	CL21B102KAANFN □		
		10nF	±10%	CL21B103KAANFN □		
	50Vdc	100pF	±10%	CL21B101KBANFN □		
		180pF	±10%	CL21B181KBANFN □		
		220pF	±10%	CL21B221KBANFN □		
		270pF	±10%	CL21B271KBANFN □		
		330pF	±10%	CL21B331KBANFN □		
		390pF	±10%	CL21B391KBANFN □		
		470pF	±10%	CL21B471KBANFN □		
		560pF	±10%	CL21B561KBANFN □		
		680pF	±10%	CL21B681KBANFN □		
		820pF	±10%	CL21B821KBANFN □		
		1.0nF	±5%	CL21B102JBANFN □		
		1.0nF	±10%	CL21B102KBANFN □		
		1.2nF	±10%	CL21B122KBANFN □		
		1.5nF	±10%	CL21B152KBANFN □		
		1.8nF	±10%	CL21B182KBANFN □		
		2.2nF	±10%	CL21B222KBANFN □		
		3.3nF	±10%	CL21B332KBANFN □		
		3.9nF	±10%	CL21B392KBANFN □		
		4.7nF	±10%	CL21B472KBANFN □		
		5.6nF	±10%	CL21B562KBANFN □		
		6.8nF	±10%	CL21B682KBANFN □		
		8.2nF	±10%	CL21B822KBANFN □		
		10nF	±10%	CL21B103KBANFN □		
		12nF	±10%	CL21B123KBANFN □		
		15nF	±10%	CL21B153KBANFN □		
		18nF	±10%	CL21B183KBANFN □		
		22nF	±10%	CL21B223KBANFN □		
		27nF	±10%	CL21B273KBANFN □		
	33nF	±10%	CL21B333KBANFN □			
	100Vdc	1.0nF	±10%	CL21B102KCANFN □		
		2.2nF	±10%	CL21B222KCANFN □		
		4.7nF	±10%	CL21B472KCANFN □		
		6.8nF	±10%	CL21B682KCANFN □		
		10nF	±10%	CL21B103KCANFN □		
	0.95mm	16Vdc	220nF	±10%	CL21B224KOCNFN □	
			330nF	±10%	CL21B334KOCNFN □	
		25Vdc	100nF	±10%	CL21B104KACNFN □	
			150pF	±10%	CL21B151KBCNFN □	
			180pF	±10%	CL21B181KBCNFN □	

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.95mm	50Vdc	220pF	±10%	CL21B221KBCNFN □		
		270pF	±10%	CL21B271KBCNFN □		
		330pF	±10%	CL21B331KBCNFN □		
		390pF	±10%	CL21B391KBCNFN □		
		470pF	±10%	CL21B471KBCNFN □		
		560pF	±10%	CL21B561KBCNFN □		
		820pF	±10%	CL21B821KBCNFN □		
		1.0nF	±10%	CL21B102KBCNFN □		
		1.5nF	±10%	CL21B152KBCNFN □		
		2.2nF	±10%	CL21B222KBCNFN □		
		2.7nF	±10%	CL21B272KBCNFN □		
		3.3nF	±10%	CL21B332KBCNFN □		
		4.7nF	±10%	CL21B472KBCNFN □		
		6.8nF	±10%	CL21B682KBCNFN □		
		8.2nF	±10%	CL21B822KBCNFN □		
		10nF	±10%	CL21B103KBCNFN □		
		12nF	±10%	CL21B123KBCNFN □		
		15nF	±10%	CL21B153KBCNFN □		
		18nF	±10%	CL21B183KBCNFN □		
		20nF	±10%	CL21B203KBCNFN □		
	200Vdc	22nF	±10%	CL21B223KBCNFN □		
		27nF	±10%	CL21B273KBCNFN □		
		33nF	±10%	CL21B333KBCNFN □		
		47nF	±5%	CL21B473JBCNFN □		
		47nF	±10%	CL21B473KBCNFN □		
		56nF	±10%	CL21B563KBCNFN □		
		68nF	±10%	CL21B683KBCNFN □		
		82nF	±10%	CL21B823KBCNFN □		
		100nF	±10%	CL21B104KBCNFN □		
		220pF	±10%	CL21B221KDCNFN □		
		470pF	±10%	CL21B471KDCNFN □		
		1.0nF	±10%	CL21B102KDCNFN □		
	1.35mm	10Vdc	2.2uF	±10%	CL21B225KPFNFN □	
			4.7uF	±10%	CL21B475KPFNFN □	Ref.
		16Vdc	470nF	±10%	CL21B474KOFNFN □	
			680nF	±10%	CL21B684KOFNFN □	
			1.0uF	±10%	CL21B105KOFNFN □	
			2.2uF	±10%	CL21B225KOFNFN □	
			4.7uF	±10%	CL21B475KOFNFN □	Ref.
		25Vdc	150nF	±10%	CL21B154KAFNFN □	
			220nF	±10%	CL21B224KAFNFN □	
			470nF	±10%	CL21B474KAFNFN □	
1.0uF			±10%	CL21B105KAFNFN □		
1.5uF			±10%	CL21B155KAFNFN □		
50Vdc	2.2uF	±10%	CL21B225KAFNFN □			
	4.7uF	±10%	CL21B475KAFNFN □	Ref.		
	120nF	±10%	CL21B124KBFNFN □			
	150nF	±10%	CL21B154KBFNFN □			
	220nF	±10%	CL21B224KBFNFN □			
50Vdc	330nF	±10%	CL21B334KBFNFN □			
	470nF	±10%	CL21B474KBFNFN □			
	1.0uF	±10%	CL21B105KBFNFN □			
	1.0uF	±10%	CL21B105KBFNFN □			

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (X7R)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.35mm	100Vdc	220nF	±10%	CL21B224KCFNFN □	
1.40mm	6.3Vdc	4.7uF	±10%	CL21B475KQCNFN □	Ref.
		10uF	±10%	CL21B106KQCNFN □	
	10Vdc	10uF	±10%	CL21B106KPQCNFN □	
		16Vdc	10uF	±10%	CL21B106KQCNFN □

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
1.00mm	10Vdc	1.2uF	±10%	CL31B125KPCNFN □		
		16Vdc	330nF	±10%	CL31B334KOCNFN □	
	25Vdc	220nF	±10%	CL31B224KACNFN □		
		50Vdc	220pF	±10%	CL31B221KBCNFN □	
			330pF	±10%	CL31B331KBCNFN □	
		470pF	±10%	CL31B471KBCNFN □		
		560pF	±10%	CL31B561KBCNFN □		
		680pF	±10%	CL31B681KBCNFN □		
		1.5nF	±10%	CL31B152KBCNFN □		
		2.2nF	±10%	CL31B222KBCNFN □		
		2.7nF	±10%	CL31B272KBCNFN □		
		3.3nF	±10%	CL31B332KBCNFN □		
		4.7nF	±10%	CL31B472KBCNFN □		
		8.2nF	±10%	CL31B822KBCNFN □		
	10nF	±10%	CL31B103KBCNFN □			
	15nF	±10%	CL31B153KBCNFN □			
	33nF	±10%	CL31B333KBCNFN □			
	47nF	±10%	CL31B473KBCNFN □			
	68nF	±10%	CL31B683KBCNFN □			
	100nF	±10%	CL31B104KBCNFN □			
	100Vdc	1.0nF	±10%	CL31B102KCCNFN □		
		2.2nF	±10%	CL31B222KCCNFN □		
		3.3nF	±10%	CL31B332KCCNFN □		
		10nF	±10%	CL31B103KCCNFN □		
		22nF	±10%	CL31B223KCCNFN □		
		200Vdc	470pF	±10%	CL31B471KDCNFN □	
	1.40mm	16Vdc	1.0uF	±10%	CL31B105KOFNFN □	
			50Vdc	220nF	±10%	CL31B224KBFNFN □
	1.40mm	50Vdc	330nF	±10%	CL31B334KBFNFN □	
			100Vdc	100nF	±10%	CL31B104KCFNFN □
		500Vdc	220pF	±10%	CL31B221KGFNFN □	
			470pF	±10%	CL31B471KGFNFN □	
			1.0nF	±10%	CL31B102KGFNFN □	
			2.2nF	±10%	CL31B222KGFNFN □	
3.3nF			±10%	CL31B332KGFNFN □		
4.7nF			±10%	CL31B472KGFNFN □		
6.8nF			±10%	CL31B682KGFNFN □		
10nF			±10%	CL31B103KGFNFN □		
630Vdc			330pF	±10%	CL31B331KHFNFN □	
			470pF	±10%	CL31B471KHFNFN □	
		680pF	±10%	CL31B681KHFNFN □		
		1.0nF	±10%	CL31B102KHFNFN □		
1.5nF		±10%	CL31B152KHFNFN □			

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark		
1.40mm	630Vdc	2.2nF	±10%	CL31B222KHFNFN □			
		3.3nF	±10%	CL31B332KHFNFN □			
		4.7nF	±10%	CL31B472KHFNFN □			
		6.8nF	±10%	CL31B682KHFNFN □			
		10nF	±10%	CL31B103KHFNFN □			
	1kVdc	220pF	±10%	CL31B221KJFNFN □	Derating		
		1.0nF	±10%	CL31B102KJFNFN □	Derating		
		1.5nF	±10%	CL31B152KJFNFN □	Derating		
		1.80mm	6.3Vdc	6.8uF	±10%	CL31B685KQHNFN □	
				10uF	±10%	CL31B106KQHNFN □	
1.80mm	10Vdc	4.7uF	±10%	CL31B475KPHNFN □			
		22uF	±10%	CL31B226KPHNFN □			
		16Vdc	2.2uF	±10%	CL31B225KOHNFN □		
	3.3uF		±10%	CL31B335KOHNFN □			
	4.7uF		±10%	CL31B475KOHNFN □			
	25Vdc	10uF	±10%	CL31B106KOHNFN □			
		680nF	±10%	CL31B684KAHNFN □			
		1.0uF	±10%	CL31B105KAHNFN □			
		2.2uF	±10%	CL31B225KAHNFN □			
		4.7uF	±10%	CL31B475KAHNFN □			
		10uF	±10%	CL31B106KAHNFN □			
	35Vdc	10uF	±10%	CL31B106KLHNFN □	Ref.		
		50Vdc	470nF	±10%	CL31B474KBHNFN □		
	680nF		±10%	CL31B684KBHNFN □			
	1.0uF		±10%	CL31B105KBHNFN □			
	2.2uF		±10%	CL31B225KBHNFN □			
	100Vdc	4.7uF	±10%	CL31B475KBHNFN □			
		220nF	±10%	CL31B224KCHNFN □			
200Vdc	1.0uF	±10%	CL31B105KCHNFN □				
	100nF	±10%	CL31B104KDHNFN □				
250Vdc	100nF	±10%	CL31B104KEHNFN □				
	500Vdc	33nF	±10%	CL31B333KGHNFN □			
630Vdc		22nF	±10%	CL31B223KHHNFN □			
	33nF	±10%	CL31B333KHHNFN □				
2kVdc	2.2nF	±10%	CL31B222KJHNFN □	Ref.			

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
2.20mm	10Vdc	10uF	±10%	CL32B106KPINFN □		
2.70mm	6.3Vdc	22uF	±20%	CL32B226MQJNFN □		
		10Vdc	470nF	±10%	CL32B474KPJNFN □	
			22uF	±10%	CL32B226KJNFN □	
	16Vdc	22uF	±20%	CL32B226MPJNFN □		
		10uF	±10%	CL32B106KOJNFN □		
		22uF	±10%	CL32B226KOJNFN □		
	25Vdc	10uF	±10%	CL32B106KAJNFN □		
		22uF	±10%	CL32B226KAJNFN □		
	50Vdc	2.2uF	±10%	CL32B225KBJNFN □		
		4.7uF	±10%	CL32B475KBJNFN □		
		10uF	±10%	CL32B106KBJNFN □		
	100Vdc	1.0uF	±10%	CL32B105KJNFN □		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. †

# Soft – Termination Capacitors for Power Application

ZFN / SFN / YFN – X7R

## Feature




- Soft – Termination relaxes the applied thermal / mechanical stresses by ductile properties of metal-polymer composites.
- Special outgoing inspection for Power application (Bending Test : Sampling Test upto 2mm : X7R)
- Can be applied to power(SMPS, DC – DC Converter) and industrial equipment
- ZFN, SFN, YFN series : Metal Epoxy

## Application

- Power(SMPS, DC – DC converter)
- Ideal for decoupling and filtering applications (Class II : X7R)

## Structure and Dimensions

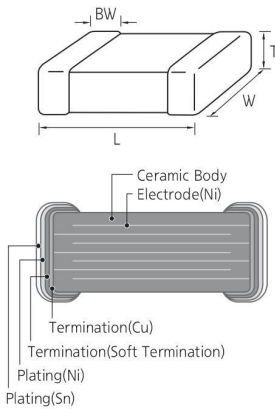

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
10	0603	1.60±0.10	0.80±0.10	0.80±0.10	8	0.30±0.20
		2.00±0.10	1.25±0.10	0.65±0.10	A	0.50+0.20/-0.30
21	0805	2.00±0.10	1.25±0.10	0.85±0.10	C	
		2.00±0.10	1.25±0.10	1.15±0.10	M	
		2.00±0.10	1.25±0.10	1.25±0.10	F	
31	1206	3.20±0.15	1.60±0.15	0.85±0.15	C	0.50±0.30
		3.20±0.15	1.60±0.15	1.25±0.15	F	
		3.20±0.20	1.60±0.20	1.60±0.20	H	

## Industrial Capacitance Table (X7R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance																	
		nF												uF					
		1.0	1.5	2.2	3.3	4.7	10	22	33	47	68	100	220	470	1.0	2.2	4.7	10	22
0402(1005)	50																		
	10																		
0603 (1608)	16																		
	25																		
	50	0.47																	
0805 (2012)	10																		
	16																		
	25																		
1206 (3216)	16																		
	50																		

Product Line Up (ZFN - X7R)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	10Vdc	2.2uF	± 10%	CL10B225KP8ZFN □	Ref.
	16Vdc	1.0uF	± 10%	CL10B105K08ZFN □	

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.35mm	16Vdc	4.7uF	± 10%	CL21B475K0FZFN □	Ref.
	25Vdc	4.7uF	± 10%	CL21B475KAFZFN □	Ref.
	50Vdc	1.0uF	± 10%	CL21B105KBZFZFN □	
	10Vdc	10uF	± 10%	CL21B106KPQZFN □	

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.80mm	16Vdc	10uF	± 10%	CL31B106KOHZFN □	
	50Vdc	4.7uF	± 10%	CL31B475KBHZFN □	

Product Line Up (SFN - X7R)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.55mm	50Vdc	22nF	± 10%	CL05B223KB55FN □	

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	16Vdc	68nF	± 10%	CL10B683K085FN □	
		100nF	± 10%	CL10B104K085FN □	
		220nF	± 10%	CL10B224K085FN □	
		1.0uF	± 10%	CL10B105K085FN □	
		10nF	± 10%	CL10B103K85FN □	
	25Vdc	150nF	± 10%	CL10B154K85FN □	
		220nF	± 10%	CL10B224K85FN □	
		1.0uF	± 10%	CL10B105K85FN □	
		470pF	± 10%	CL10B471K85FN □	
		1.0nF	± 10%	CL10B102K85FN □	
		1.5nF	± 10%	CL10B152K85FN □	
		2.2nF	± 10%	CL10B222K85FN □	
		2.7nF	± 10%	CL10B272K85FN □	
		3.3nF	± 10%	CL10B332K85FN □	
		3.9nF	± 10%	CL10B392K85FN □	
	50Vdc	4.7nF	± 10%	CL10B472K85FN □	
		5.6nF	± 10%	CL10B562K85FN □	
		6.8nF	± 10%	CL10B682K85FN □	
		8.2nF	± 10%	CL10B822K85FN □	
		10nF	± 10%	CL10B103K85FN □	
12nF		± 10%	CL10B123K85FN □		
15nF		± 10%	CL10B153K85FN □		
22nF		± 10%	CL10B223K85FN □		
27nF		± 10%	CL10B273K85FN □		
33nF		± 10%	CL10B333K85FN □		
39nF		± 10%	CL10B393K85FN □		
47nF		± 10%	CL10B473K85FN □		
56nF		± 10%	CL10B563K85FN □		
100nF		± 10%	CL10B104K85FN □		
220nF		± 10%	CL10B224K85FN □		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. †

# Soft – Termination Capacitors for Power Application

ZFN / SFN / YFN – X7R

## Product Line Up (SFN – X7R)

### ■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
0.70mm	50Vdc	330pF	±10%	CL21B331KB6SFN□		
		470pF	±5%	CL21B471JB6SFN□		
		560pF	±10%	CL21B561KB6SFN□		
		680pF	±10%	CL21B681KB6SFN□		
		2.2nF	±10%	CL21B222KB6SFN□		
		3.3nF	±10%	CL21B332KB6SFN□		
		4.7nF	±10%	CL21B472KB6SFN□		
		6.8nF	±10%	CL21B682KB6SFN□		
		8.2nF	±10%	CL21B822KB6SFN□		
		10nF	±10%	CL21B103KB6SFN□		
		15nF	±10%	CL21B153KB6SFN□		
		22nF	±10%	CL21B223KB6SFN□		
		47nF	±10%	CL21B472KB6SFN□		
		0.95mm	50Vdc	4.7nF	±10%	CL21B103KB6SFN□
10nF	±10%			CL21B103KB6SFN□		
22nF	±10%			CL21B223KB6SFN□		
39nF	±10%			CL21B393KB6SFN□		
47nF	±10%			CL21B473KB6SFN□		
100nF	±10%			CL21B104KB6SFN□		
250Vdc	1.0nF	±10%	CL21B102KECSFN□			
	2.2nF	±10%	CL21B222KECSFN□			
1.35mm	16Vdc	1.0uF	±10%	CL21B105KOF5FN□		
		25Vdc	220nF	±10%	CL21B224KAF5FN□	
			470nF	±10%	CL21B474KAF5FN□	
			1.0uF	±10%	CL21B105KAF5FN□	
	50Vdc	2.2uF	±10%	CL21B225KAF5FN□		
		220nF	±10%	CL21B224KBFSFN□		
		470nF	±10%	CL21B474KBFSFN□		
100Vdc	1.0uF	±10%	CL21B105KBFSFN□			
	100nF	±10%	CL21B104KCF5FN□			
220nF	±10%	CL21B224KCF5FN□				
	4.7uF	±10%	CL21B475KOQ5FN□			

### ■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.00mm	50Vdc	100nF	±10%	CL31B104KB6SFN□	
1.25mm	16Vdc	470nF	±10%	CL31B474KOP5FN□	
	50Vdc	1.0uF	±10%	CL31B105KB6SFN□	
1.40mm	630Vdc	220pF	±10%	CL31B221KHFSFN□	
		1.0nF	±10%	CL31B102KHFSFN□	
		1.5nF	±10%	CL31B152KHFSFN□	
		2.2nF	±10%	CL31B222KHFSFN□	
		2.7nF	±10%	CL31B272KHFSFN□	
		3.3nF	±10%	CL31B332KHFSFN□	
		4.7nF	±10%	CL31B472KHFSFN□	
		6.8nF	±10%	CL31B682KHFSFN□	
		10nF	±10%	CL31B103KHFSFN□	
		15nF	±10%	CL31B153KHFSFN□	
		1kVdc	1.0nF	±10%	CL31B102KIF5FN□
1.80mm	25Vdc	10uF	±10%	CL31B106KAH5FN□	
	35Vdc	10uF	±10%	CL31B106KLH5FN□	Ref.

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
1.80mm	100Vdc	220nF	±10%	CL31B224KCH5FN□		
		470nF	±10%	CL31B474KCH5FN□		
		1.0uF	±10%	CL31B105KCH5FN□		
		2.2uF	±10%	CL31B225KCH5FN□		
		47nF	±10%	CL31B473KEH5FN□		
	250Vdc	100nF	±10%	CL31B104KEH5FN□		
		630Vdc	22nF	±10%	CL31B223KH5FN□	
			33nF	±10%	CL31B333KH5FN□	

### ■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.70mm	50Vdc	2.2uF	±10%	CL32B225KBJSFN□	
	100Vdc	1.0uF	±10%	CL32B105KCJSFN□	
		2.2uF	±10%	CL32B225KCJSFN□	

## Product Line Up (YFN – X7R)

### ■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.00mm	25Vdc	4.7uF	±10%	CL32B475KAUYFN□	
	50Vdc	4.7uF	±10%	CL32B475KBUYFN□	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑


# Soft - Termination(3mm) Industrial Capacitors

ZW6 / SW6 - X7R / X7S


## Feature




- Excellent bending strength( $\geq 3\text{mm}$ ) &  $40^\circ\text{C}$  95%RH 500hr with rated voltage
- Soft - Termination is applicable to all class II MLCC series
- W6 = Industrial(3mm bending) code for Network, Power, etc
- Special outgoing inspection for industrial application (HALT, etc)
- Bending strength simulation



Cross-section of MLCC with Cu - Termination




Cross-section of MLCC with Soft - Termination



Soft - Termination relaxes the applied thermal - mechanical stresses by ductile properties of metal - polymer composites.



- Comparison of bending strength

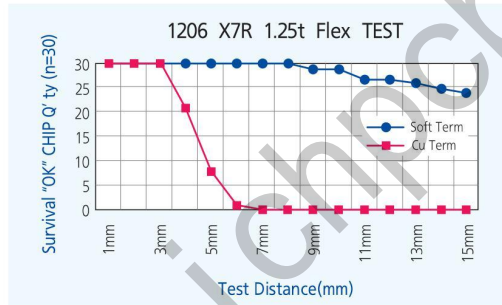

## Application

- Network, Power application and etc.
- Ideal for decoupling and filtering applications (Class II : X7R)

## Structure and Dimensions



Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	$1.00 \pm 0.05$	$0.50 \pm 0.05$	$0.50 \pm 0.05$	5	$0.25 \pm 0.10$
10	0603	$1.60 \pm 0.10$	$0.80 \pm 0.10$	$0.80 \pm 0.10$	8	$0.30 \pm 0.20$
21	0805	$2.00 \pm 0.10$	$1.25 \pm 0.10$	$0.85 \pm 0.10$	C	$0.50+0.20/-0.30$
		$2.00 \pm 0.10$	$1.25 \pm 0.10$	$1.25 \pm 0.10$	F	
		$2.00 \pm 0.15$	$1.25 \pm 0.15$	$1.25 \pm 0.15$	Q	
31	1206	$3.20 \pm 0.20$	$1.60 \pm 0.20$	$1.15 \pm 0.10$	P	$0.50 \pm 0.30$
		$3.20 \pm 0.15$	$1.60 \pm 0.15$	$1.25 \pm 0.15$	F	
		$3.20 \pm 0.20$	$1.60 \pm 0.20$	$1.60 \pm 0.20$	H	
32	1210	$3.20 \pm 0.30$	$2.50 \pm 0.20$	$2.50 \pm 0.20$	J	$0.60 \pm 0.30$
		$3.20 \pm 0.40$	$2.50 \pm 0.30$	$2.50 \pm 0.30$	V	

# Soft – Termination(3mm) Industrial Capacitors

ZW6 / SW6 – X7R /X7S

Industrial Capacitance Table (X7R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance															
		nF							uF								
		1.5	2.2	4.7	10	22	47	100	220	470	1.0	2.2	4.7	10	22	47	100
0402 (1005)	16				10	22	47	100									
	25				10	22	47	100									
	50				10	22	47	100									
0603 (1608)	16				10	22	47	100	220	470							
	25				10	22	47	100	220	470							
	50	1.5	2.2	4.7	10	22	47	100	220	470							
	100				10	22	47	100									
0805 (2012)	10										1.0	2.2	4.7	10			
	16										1.0	2.2	4.7	10			
	25				10	22	47	100	220	470							
	50	1.5	2.2	4.7	10	22	47	100	220	470							
	100				10	22	47	100									
1206 (3216)	10										1.0	2.2	4.7	10			
	16										1.0	2.2	4.7	10			
	25				10	22	47	100	220	470							
	50	1.5	2.2	4.7	10	22	47	100	220	470							
	100				10	22	47	100									
1210 (3225)	10													10	22		
	16													10	22		
	50				10	22	47	100	220	470							
	100				10	22	47	100			1.0	2.2	4.7	10			

www.richocba.com



Product Line Up (X7R)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	16Vdc	1.0uF	±10%	CL10B105K08ZW6□	
	25Vdc	1.0uF	±10%	CL10B105KA8ZW6□	
	50Vdc	100nF	±10%	CL10B104KB8ZW6□	

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.95mm	100Vdc	47nF	±10%	CL21B473KCCZW6□	
		100nF	±10%	CL21B104KCCZW6□	
1.35mm	25Vdc	1.0uF	±10%	CL21B105KAFZW6□	
		2.2uF	±10%	CL21B225KAFZW6□	
		4.7uF	±10%	CL21B475KAFZW6□	Ref.
	50Vdc	1.0uF	±10%	CL21B105KBFZW6□	
1.40mm	16Vdc	4.7uF	±10%	CL21B475KQZW6□	Ref.

■ Size: 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.25mm	100Vdc	100nF	±10%	CL31B104KCPZW6□	
1.40mm	100Vdc	100nF	±10%	CL31B104KCFZW6□	
1.80mm	16Vdc	10uF	±10%	CL31B106KOHZW6□	
		4.7uF	±10%	CL31B475KAHZW6□	
	25Vdc	10uF	±10%	CL31B106KAHZW6□	
		4.7uF	±10%	CL31B475KBHZW6□	
50Vdc	4.7uF	±10%	CL31B475KBHZW6□		

■ Size: 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.70mm	50Vdc	10uF	±10%	CL32B106KBJZW6□	
	100Vdc	2.2uF	±10%	CL32B225KCJZW6□	
2.80mm	100Vdc	4.7uF	±10%	CL32B475KCVZW6□	Derating

Product Line Up (X7S)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.90mm	50Vdc	100uF	±10%	CL10Y104KB8ZW6□	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Reinforced Soft – Termination(3mm) Industrial Capacitors

Z46 – X7R

## Feature





- Excellent bending strength( $\geq 3\text{mm}$ ) &  $85^\circ\text{C}$  85%RH 1000hr with rated voltage
- Soft-Termination is applicable to all class II MLCC series
- Durability against thermal shock /cycles

## Application

- Network, Power application and etc.
- Ideal for decoupling and filtering applications (Class II : X7R)

## Structure and Dimensions

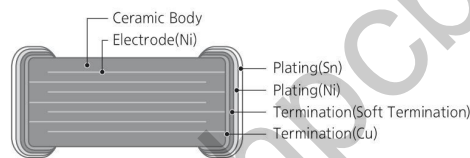

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	$1.00 \pm 0.05$	$0.50 \pm 0.05$	$0.50 \pm 0.05$	5	$0.25 \pm 0.10$
10	0603	$1.60 \pm 0.10$	$0.80 \pm 0.10$	$0.80 \pm 0.10$	8	$0.30 \pm 0.20$
21	0805	$2.00 \pm 0.10$	$1.25 \pm 0.10$	$0.60 \pm 0.10$	6	$0.50 + 0.20 / - 0.30$
		$2.00 \pm 0.10$	$1.25 \pm 0.10$	$0.85 \pm 0.10$	C	
		$2.00 \pm 0.10$	$1.25 \pm 0.10$	$1.25 \pm 0.10$	F	
		$2.00 \pm 0.15$	$1.25 \pm 0.15$	$1.25 \pm 0.15$	Q	
31	1206	$3.20 \pm 0.20$	$1.60 \pm 0.20$	$1.15 \pm 0.10$	P	$0.50 \pm 0.30$
		$3.20 \pm 0.20$	$1.60 \pm 0.20$	$1.60 \pm 0.20$	H	
32	1210	$3.20 \pm 0.30$	$2.50 \pm 0.20$	$2.50 \pm 0.20$	J	$0.60 \pm 0.30$

Industrial Capacitance Table (X7R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance													
		nF						uF							
		10	22	47	100	220	470	1.0	2.2	4.7	10	22	47	100	
0402 (1005)	16														
	25														
	50														
0603 (1608)	16														
	25														
	50														
	100														
0805 (2012)	10														
	16														
	25														
	50														
	100														
1206 (3216)	10														
	16														
	25														
	50														
	100														
1210 (3225)	10														
	16														
	50														

www.richpcba.com

# Reinforced Soft – Termination(3mm) Industrial Capacitors

Z46 – X7R

## Product Line Up (X7R)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	16Vdc	15nF	±10%	CL05B153K05Z46 □
		22nF	±10%	CL05B223K05Z46 □
		33nF	±10%	CL05B333K05Z46 □
		47nF	±10%	CL05B473K05Z46 □
	25Vdc	100nF	±10%	CL05B104K05Z46 □
		1.0nF	±10%	CL05B102KA5Z46 □
		4.7nF	±10%	CL05B472KA5Z46 □
		10nF	±10%	CL05B103KA5Z46 □
	50Vdc	22nF	±10%	CL05B223KA5Z46 □
		330pF	±10%	CL05B331KB5Z46 □
		470pF	±10%	CL05B471KB5Z46 □
		1.0nF	±10%	CL05B102KB5Z46 □
		1.5nF	±10%	CL05B152KB5Z46 □
		2.2nF	±10%	CL05B222KB5Z46 □
		4.7nF	±10%	CL05B472KB5Z46 □
		10nF	±10%	CL05B103KB5Z46 □
		15nF	±10%	CL05B153KB5Z46 □
		22nF	±10%	CL05B223KB5Z46 □

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
0.90mm	10Vdc	1.0uF	±10%	CL10B105KP8Z46 □	
		16Vdc	47nF	±10%	CL10B473K08Z46 □
			68nF	±10%	CL10B683K08Z46 □
	100nF		±10%	CL10B104K08Z46 □	
	25Vdc	220nF	±10%	CL10B224K08Z46 □	
		470nF	±10%	CL10B474K08Z46 □	
		680nF	±10%	CL10B684K08Z46 □	
		1.0uF	±10%	CL10B105K08Z46 □	
		25Vdc	10nF	±10%	CL10B103KA8Z46 □
			68nF	±10%	CL10B683KA8Z46 □
	50Vdc	100nF	±10%	CL10B104KA8Z46 □	
		150nF	±10%	CL10B154KA8Z46 □	
		220nF	±10%	CL10B224KA8Z46 □	
		470nF	±10%	CL10B474KA8Z46 □	
		1.0uF	±10%	CL10B105KA8Z46 □	
		50Vdc	220pF	±10%	CL10B221KB8Z46 □
			470pF	±10%	CL10B471KB8Z46 □
		100Vdc	1.0nF	±10%	CL10B102KB8Z46 □
			1.2nF	±10%	CL10B122KB8Z46 □
			1.5nF	±10%	CL10B152KB8Z46 □
			2.2nF	±10%	CL10B222KB8Z46 □
			3.3nF	±10%	CL10B332KB8Z46 □
			4.7nF	±10%	CL10B472KB8Z46 □
			6.8nF	±10%	CL10B682KB8Z46 □
			10nF	±10%	CL10B103KB8Z46 □
			15nF	±10%	CL10B153KB8Z46 □
			22nF	±10%	CL10B223KB8Z46 □
			33nF	±10%	CL10B333KB8Z46 □
	47nF		±10%	CL10B473KB8Z46 □	
	68nF		±10%	CL10B683KB8Z46 □	
	100nF		±10%	CL10B104KB8Z46 □	
	150nF		±10%	CL10B154KB8Z46 □	
	220nF		±10%	CL10B224KB8Z46 □	
	100Vdc		270pF	±10%	CL10B271KC8Z46 □
			470pF	±10%	CL10B471KC8Z46 □
			1.0nF	±10%	CL10B102KC8Z46 □
			2.2nF	±10%	CL10B222KC8Z46 □
			2.7nF	±10%	CL10B272KC8Z46 □
			4.7nF	±10%	CL10B472KC8Z46 □
			10nF	±10%	CL10B103KC8Z46 □
			68nF	±10%	CL10B683KC8Z46 □

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (X7R)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.70mm	50Vdc	1.0nF	±10%	CL21B102KB6Z46 □	
		1.5nF	±10%	CL21B152KB6Z46 □	
		2.2nF	±10%	CL21B222KB6Z46 □	
		4.7nF	±10%	CL21B472KB6Z46 □	
		10nF	±10%	CL21B103KB6Z46 □	
		22nF	±10%	CL21B223KB6Z46 □	
	100Vdc	1.0nF	±10%	CL21B102KC6Z46 □	
		3.3nF	±10%	CL21B332KC6Z46 □	
		4.7nF	±10%	CL21B472KC6Z46 □	
		10nF	±10%	CL21B103KC6Z46 □	
		15nF	±10%	CL21B153KC6Z46 □	
		22nF	±10%	CL21B223KC6Z46 □	
0.95mm	25Vdc	100nF	±10%	CL21B104KACZ46 □	
	50Vdc	47nF	±10%	CL21B473KBCZ46 □	
		68nF	±10%	CL21B683KBCZ46 □	
		100nF	±10%	CL21B104KBCZ46 □	
	100Vdc	47nF	±10%	CL21B473KCCZ46 □	
		68nF	±10%	CL21B683KCCZ46 □	
100nF		±10%	CL21B104KCCZ46 □		
1.35mm	16Vdc	470nF	±10%	CL21B474KOFZ46 □	
		1.0uF	±10%	CL21B105KOFZ46 □	
		2.2uF	±10%	CL21B225KOFZ46 □	
	25Vdc	220nF	±10%	CL21B224KAFZ46 □	
		1.0uF	±10%	CL21B105KAFZ46 □	
		2.2uF	±10%	CL21B225KAFZ46 □	
	35Vdc	1.0uF	±10%	CL21B105KLFZ46 □	
		50Vdc	100nF	±10%	CL21B104KBFZ46 □
	50Vdc	180nF	±10%	CL21B184KBFZ46 □	
		220nF	±10%	CL21B224KBFZ46 □	
		330nF	±10%	CL21B334KBFZ46 □	
		470nF	±10%	CL21B474KBFZ46 □	
		1.0uF	±10%	CL21B105KBFZ46 □	
		100Vdc	100nF	±10%	CL21B104KCFZ46 □
	1.40mm	10Vdc	4.7uF	±10%	CL21B475KPQZ46 □
16Vdc		4.7uF	±10%	CL21B475KQQZ46 □	Ref.

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark	
1.25mm	25Vdc	1.0uF	±10%	CL31B105KAPZ46 □		
	50Vdc	100nF	±10%	CL31B104KBPZ46 □		
		100Vdc	100nF	±10%	CL31B104KCPZ46 □	
	1.80mm	16Vdc	2.2uF	±10%	CL31B225KOHZ46 □	
			10uF	±10%	CL31B106KOHZ46 □	
		25Vdc	1.5uF	±10%	CL31B155KAHZ46 □	
2.2uF			±10%	CL31B225KAHZ46 □		
3.3uF	±10%		CL31B335KAHZ46 □			
4.7uF	±10%		CL31B475KAHZ46 □			
50Vdc	10uF	±10%	CL31B106KAHZ46 □			
	470nF	±10%	CL31B474KBHZ46 □			
	680nF	±10%	CL31B684KBHZ46 □			
	1.0uF	±10%	CL31B105KBHZ46 □			
	1.5uF	±10%	CL31B155KBHZ46 □			
		2.2uF	±10%	CL31B225KBHZ46 □		
		4.7uF	±10%	CL31B475KBHZ46 □		

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.70mm	16Vdc	22uF	±10%	CL32B226KOJZ46 □	
		22uF	±20%	CL32B226MOJZ46 □	
	50Vdc	4.7uF	±10%	CL32B475KBJZ46 □	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. †

# Reinforced Soft – Termination(5mm) Industrial Capacitors

Z4J – X7R

## Feature





- Excellent bending strength( $\geq 5\text{mm}$ ) &  $85^\circ\text{C}$  85%RH 1000hr with rated voltage
- Soft – Termination is applicable to all class II MLCC series
- Durability against thermal shock / cycles

## Application

- Network, Power application and etc.
- Ideal for decoupling and filtering applications (Class II : X7R)  
(Directly connected to battery)

## Structure and Dimensions

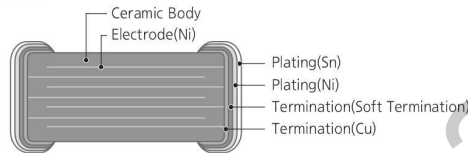

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
10	0603	$1.60 \pm 0.10$	$0.80 \pm 0.10$	$0.80 \pm 0.10$	8	$0.30 \pm 0.20$
21	0805	$2.00 \pm 0.10$	$1.25 \pm 0.10$	$1.25 \pm 0.10$	F	$0.50 + 0.20 / - 0.30$

## Industrial Capacitance Table (X7R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance												
		nF									uF			
		1.5	4.7	10	22	47	100	220	470	1.0	2.2	4.7		
0603 (1608)	25													
	50													
0805 (2012)	25													
	50													

## Product Line Up (X7R)

### ■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.90mm	25Vdc	220nF	$\pm 10\%$	CL10B224KA8Z4J□
		1.0uF	$\pm 10\%$	CL10B105KA8Z4J□
		1.5nF	$\pm 10\%$	CL10B152KB8Z4J□
	50Vdc	4.7nF	$\pm 10\%$	CL10B472KB8Z4J□
		22nF	$\pm 10\%$	CL10B223KB8Z4J□
		47nF	$\pm 10\%$	CL10B473KB8Z4J□
		100nF	$\pm 10\%$	CL10B104KB8Z4J□
		220nF	$\pm 10\%$	CL10B224KB8Z4J□
		470nF	$\pm 10\%$	CL10B474KB8Z4J□

### ■ Size : 2.00 X 1.25mm (inch : 0805)



Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
1.35mm	25Vdc	2.2uF	$\pm 10\%$	CL21B225KAFZ4J□
	50Vdc	1.0uF	$\pm 10\%$	CL21B105KBFZ4J□

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

## Feature





- High Q and low ESR in high frequency range
- Tight tolerance available
- Expanding High-Q (Cu inner-electrode) line – up of 0402, 0603, 0805 case size (0201, 01005 products are already under mass production)
- High efficiency and low power consumption in RF circuit
- Special outgoing inspection for industrial application (HALT, etc)
- Comparison of Q value in high frequency (Normal vs High-Q)

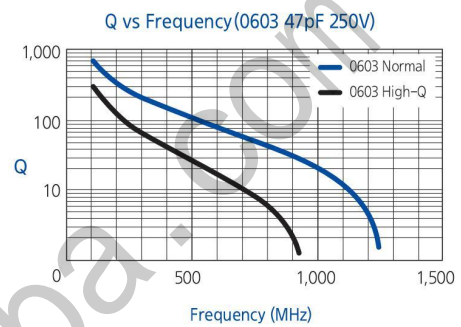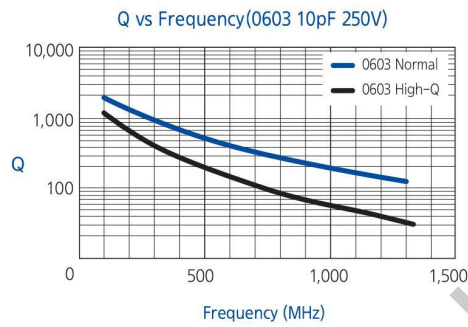

## Application

- Power amplifier module for base-station and GHz range communications
- Smart Factory & Smart Home (IoT)

## Structure and Dimensions

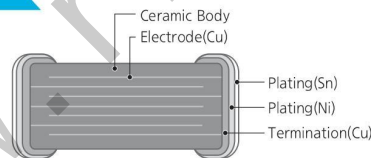

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
03	0201	0.60±0.03	0.30±0.03	0.30±0.03	3	0.15±0.05
05	0402	1.00±0.05	0.50±0.05	0.50±0.05	5	0.25±0.10
10	0603	1.60±0.15	0.80±0.15	0.65±0.15	A	0.30±0.20
21	0805	2.00±0.10	1.25±0.10	0.85±0.10	C	0.50+0.20/-0.30

Industrial Capacitance Table (COG)

Size inch (mm)	T max. (mm)	Rated Voltage (Vdc)	Capacitance(pF)																		
			0.1	0.5	1.0	1.5	2.2	3.3	4.7	6.8	10	15	22	33	47	6.8	100	150	220		
01005 (0402)	0.22	16														27					
		25														27					
0201 (0603)	0.33	25														33					
		50														47					
0402(1005)	0.55	50														68					
0603 (1608)	0.90	50																			
		100																			
0805(2012)	1.00	250														100					
		250														150					

www.richpcba.com



Product Line Up (COG)

■ Size : 0.60 X 0.30mm (inch : 0201)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.33mm	25Vdc	4.7pF	±0.25pF	CL03C4R7CA3GNW □
		10pF	±0.5pF	CL03C100DA3GNW □

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	50Vdc	0.1pF	±0.05pF	CL05C0R1AB5GNW □
		0.1pF	±0.1pF	CL05C0R1BB5GNW □
		0.2pF	±0.05pF	CL05C0R2AB5GNW □
		0.2pF	±0.1pF	CL05C0R2BB5GNW □
		0.3pF	±0.05pF	CL05C0R3AB5GNW □
		0.3pF	±0.1pF	CL05C0R3BB5GNW □
		0.4pF	±0.05pF	CL05C0R4AB5GNW □
		0.4pF	±0.1pF	CL05C0R4BB5GNW □
		0.5pF	±0.05pF	CL05C0R5AB5GNW □
		0.5pF	±0.1pF	CL05C0R5BB5GNW □
		0.6pF	±0.05pF	CL05C0R6AB5GNW □
		0.6pF	±0.1pF	CL05C0R6BB5GNW □
		0.7pF	±0.05pF	CL05C0R7AB5GNW □
		0.7pF	±0.1pF	CL05C0R7BB5GNW □
		0.8pF	±0.05pF	CL05C0R8AB5GNW □
		0.8pF	±0.1pF	CL05C0R8BB5GNW □
		0.9pF	±0.05pF	CL05C0R9AB5GNW □
		0.9pF	±0.1pF	CL05C0R9BB5GNW □
		1.0pF	±0.05pF	CL05C010AB5GNW □
		1.0pF	±0.1pF	CL05C010BB5GNW □
		1.0pF	±0.25pF	CL05C010CB5GNW □
		1.1pF	±0.05pF	CL05C1R1AB5GNW □
		1.1pF	±0.1pF	CL05C1R1BB5GNW □
		1.1pF	±0.25pF	CL05C1R1CB5GNW □
		1.2pF	±0.05pF	CL05C1R2AB5GNW □
		1.2pF	±0.1pF	CL05C1R2BB5GNW □
		1.2pF	±0.25pF	CL05C1R2CB5GNW □
		1.3pF	±0.05pF	CL05C1R3AB5GNW □
		1.3pF	±0.1pF	CL05C1R3BB5GNW □
		1.3pF	±0.25pF	CL05C1R3CB5GNW □
		1.5pF	±0.05pF	CL05C1R5AB5GNW □
		1.5pF	±0.1pF	CL05C1R5BB5GNW □
1.5pF	±0.25pF	CL05C1R5CB5GNW □		
1.6pF	±0.05pF	CL05C1R6AB5GNW □		
1.6pF	±0.1pF	CL05C1R6BB5GNW □		
1.6pF	±0.25pF	CL05C1R6CB5GNW □		
1.8pF	±0.05pF	CL05C1R8AB5GNW □		
1.8pF	±0.1pF	CL05C1R8BB5GNW □		
1.8pF	±0.25pF	CL05C1R8CB5GNW □		
2.0pF	±0.05pF	CL05C020AB5GNW □		
2.0pF	±0.1pF	CL05C020BB5GNW □		
2.0pF	±0.25pF	CL05C020CB5GNW □		
2.2pF	±0.05pF	CL05C2R2AB5GNW □		
2.2pF	±0.1pF	CL05C2R2BB5GNW □		
2.2pF	±0.25pF	CL05C2R2CB5GNW □		
2.4pF	±0.05pF	CL05C2R4AB5GNW □		
2.4pF	±0.1pF	CL05C2R4BB5GNW □		

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	50Vdc	2.4pF	±0.25pF	CL05C2R4CB5GNW □
		2.7pF	±0.05pF	CL05C2R7AB5GNW □
		2.7pF	±0.1pF	CL05C2R7BB5GNW □
		2.7pF	±0.25pF	CL05C2R7CB5GNW □
		3.0pF	±0.05pF	CL05C030AB5GNW □
		3.0pF	±0.1pF	CL05C030BB5GNW □
		3.0pF	±0.25pF	CL05C030CB5GNW □
		3.3pF	±0.05pF	CL05C3R3AB5GNW □
		3.3pF	±0.1pF	CL05C3R3BB5GNW □
		3.3pF	±0.25pF	CL05C3R3CB5GNW □
		3.6pF	±0.05pF	CL05C3R6AB5GNW □
		3.6pF	±0.1pF	CL05C3R6BB5GNW □
		3.6pF	±0.25pF	CL05C3R6CB5GNW □
		3.9pF	±0.05pF	CL05C3R9AB5GNW □
		3.9pF	±0.1pF	CL05C3R9BB5GNW □
		3.9pF	±0.25pF	CL05C3R9CB5GNW □
		4.0pF	±0.05pF	CL05C040AB5GNW □
		4.0pF	±0.1pF	CL05C040BB5GNW □
		4.0pF	±0.25pF	CL05C040CB5GNW □
		4.3pF	±0.05pF	CL05C4R3AB5GNW □
		4.3pF	±0.1pF	CL05C4R3BB5GNW □
		4.3pF	±0.25pF	CL05C4R3CB5GNW □
		4.7pF	±0.05pF	CL05C4R7AB5GNW □
		4.7pF	±0.1pF	CL05C4R7BB5GNW □
		4.7pF	±0.25pF	CL05C4R7CB5GNW □
		5.0pF	±0.05pF	CL05C050AB5GNW □
		5.0pF	±0.1pF	CL05C050BB5GNW □
		5.0pF	±0.25pF	CL05C050CB5GNW □
		5.1pF	±0.05pF	CL05C5R1AB5GNW □
		5.1pF	±0.1pF	CL05C5R1BB5GNW □
		5.1pF	±0.25pF	CL05C5R1CB5GNW □
		5.1pF	±0.5pF	CL05C5R1DB5GNW □
5.6pF	±0.05pF	CL05C5R6AB5GNW □		
5.6pF	±0.1pF	CL05C5R6BB5GNW □		
5.6pF	±0.25pF	CL05C5R6CB5GNW □		
5.6pF	±0.5pF	CL05C5R6DB5GNW □		
6.0pF	±0.05pF	CL05C060AB5GNW □		
6.0pF	±0.1pF	CL05C060BB5GNW □		
6.0pF	±0.25pF	CL05C060CB5GNW □		
6.0pF	±0.5pF	CL05C060DB5GNW □		
6.2pF	±0.05pF	CL05C6R2AB5GNW □		
6.2pF	±0.1pF	CL05C6R2BB5GNW □		
6.2pF	±0.25pF	CL05C6R2CB5GNW □		
6.2pF	±0.5pF	CL05C6R2DB5GNW □		
6.8pF	±0.05pF	CL05C6R8AB5GNW □		
6.8pF	±0.1pF	CL05C6R8BB5GNW □		
6.8pF	±0.25pF	CL05C6R8CB5GNW □		
6.8pF	±0.5pF	CL05C6R8DB5GNW □		
7.0pF	±0.05pF	CL05C070AB5GNW □		
7.0pF	±0.1pF	CL05C070BB5GNW □		
7.0pF	±0.25pF	CL05C070CB5GNW □		
7.0pF	±0.5pF	CL05C070DB5GNW □		
7.5pF	±0.05pF	CL05C7R5AB5GNW □		
7.5pF	±0.1pF	CL05C7R5BB5GNW □		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

## Product Line Up (COG)

■ Size : 1.00 X 0.50mm (inch : 0402)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	50Vdc	7.5pF	±0.25pF	CL05C7R5CB5GNW□	0.80mm	100Vdc	0.5pF	±0.1pF	CL10C0R5BCAGQW□
		7.5pF	±0.5pF	CL05C7R5DB5GNW□			250Vdc	0.1pF	±0.05pF
		8.0pF	±0.05pF	CL05C080AB5GNW□		0.1pF		±0.1pF	CL10C0R1BEAGQW□
		8.0pF	±0.1pF	CL05C080BB5GNW□		0.2pF		±0.05pF	CL10C0R2AEAGQW□
		8.0pF	±0.25pF	CL05C080CB5GNW□		0.2pF		±0.1pF	CL10C0R2BEAGQW□
		8.0pF	±0.5pF	CL05C080DB5GNW□		0.3pF		±0.05pF	CL10C0R3AEAGQW□
		8.2pF	±0.05pF	CL05C8R2AB5GNW□		0.3pF		±0.1pF	CL10C0R3BEAGQW□
		8.2pF	±0.1pF	CL05C8R2BB5GNW□		0.3pF		±0.25pF	CL10C0R3CEAGQW□
		8.2pF	±0.25pF	CL05C8R2CB5GNW□		0.4pF		±0.05pF	CL10C0R4AEAGQW□
		8.2pF	±0.5pF	CL05C8R2DB5GNW□		0.4pF		±0.1pF	CL10C0R4BEAGQW□
		9.0pF	±0.05pF	CL05C090AB5GNW□		0.4pF		±0.25pF	CL10C0R4CEAGQW□
		9.0pF	±0.1pF	CL05C090BB5GNW□		0.5pF		±0.05pF	CL10C0R5AEAGQW□
		9.0pF	±0.25pF	CL05C090CB5GNW□		0.5pF		±0.1pF	CL10C0R5BEAGQW□
		9.0pF	±0.5pF	CL05C090DB5GNW□		0.5pF		±0.25pF	CL10C0R5CEAGQW□
		9.1pF	±0.05pF	CL05C9R1AB5GNW□		0.6pF		±0.05pF	CL10C0R6AEAGQW□
		9.1pF	±0.1pF	CL05C9R1BB5GNW□		0.6pF		±0.1pF	CL10C0R6BEAGQW□
		9.1pF	±0.25pF	CL05C9R1CB5GNW□		0.6pF		±0.25pF	CL10C0R6CEAGQW□
		9.1pF	±0.5pF	CL05C9R1DB5GNW□		0.7pF		±0.05pF	CL10C0R7AEAGQW□
		10pF	±1%	CL05C100FB5GNW□		0.7pF		±0.1pF	CL10C0R7BEAGQW□
		10pF	±2%	CL05C100GB5GNW□		0.7pF		±0.25pF	CL10C0R7CEAGQW□
		10pF	±5%	CL05C100JB5GNW□		0.8pF		±0.05pF	CL10C0R8AEAGQW□
		11pF	±1%	CL05C110FB5GNW□		0.8pF		±0.1pF	CL10C0R8BEAGQW□
		11pF	±2%	CL05C110GB5GNW□		0.8pF		±0.25pF	CL10C0R8CEAGQW□
		11pF	±5%	CL05C110JB5GNW□		0.9pF		±0.05pF	CL10C0R9AEAGQW□
		12pF	±1%	CL05C120FB5GNW□		0.9pF		±0.1pF	CL10C0R9BEAGQW□
		12pF	±2%	CL05C120GB5GNW□		0.9pF		±0.25pF	CL10C0R9CEAGQW□
		12pF	±5%	CL05C120JB5GNW□		1.0pF		±0.05pF	CL10C010AEAGQW□
		15pF	±1%	CL05C150FB5GNW□		1.0pF		±0.1pF	CL10C010BEAGQW□
		15pF	±2%	CL05C150GB5GNW□		1.0pF		±0.25pF	CL10C010CEAGQW□
		15pF	±5%	CL05C150JB5GNW□		1.1pF	±0.05pF	CL10C1R1AEAGQW□	
		18pF	±1%	CL05C180FB5GNW□		1.1pF	±0.1pF	CL10C1R1BEAGQW□	
		18pF	±2%	CL05C180GB5GNW□		1.1pF	±0.25pF	CL10C1R1CEAGQW□	
		18pF	±5%	CL05C180JB5GNW□		1.2pF	±0.05pF	CL10C1R2AEAGQW□	
		20pF	±1%	CL05C200FB5GNW□		1.2pF	±0.1pF	CL10C1R2BEAGQW□	
		20pF	±2%	CL05C200GB5GNW□		1.2pF	±0.25pF	CL10C1R2CEAGQW□	
		20pF	±5%	CL05C200JB5GNW□		1.3pF	±0.05pF	CL10C1R3AEAGQW□	
		22pF	±1%	CL05C220FB5GNW□		1.3pF	±0.1pF	CL10C1R3BEAGQW□	
		22pF	±2%	CL05C220GB5GNW□		1.3pF	±0.25pF	CL10C1R3CEAGQW□	
		22pF	±5%	CL05C220JB5GNW□		1.5pF	±0.05pF	CL10C1R5AEAGQW□	
		24pF	±1%	CL05C240FB5GNW□		1.5pF	±0.1pF	CL10C1R5BEAGQW□	
		24pF	±2%	CL05C240GB5GNW□		1.5pF	±0.25pF	CL10C1R5CEAGQW□	
		24pF	±5%	CL05C240JB5GNW□		1.6pF	±0.05pF	CL10C1R6AEAGQW□	
		27pF	±1%	CL05C270FB5GNW□		1.6pF	±0.1pF	CL10C1R6BEAGQW□	
		27pF	±2%	CL05C270GB5GNW□		1.6pF	±0.25pF	CL10C1R6CEAGQW□	
		27pF	±5%	CL05C270JB5GNW□		1.8pF	±0.05pF	CL10C1R8AEAGQW□	
		33pF	±1%	CL05C330FB5GNW□		1.8pF	±0.1pF	CL10C1R8BEAGQW□	
		33pF	±2%	CL05C330GB5GNW□		1.8pF	±0.25pF	CL10C1R8CEAGQW□	
33pF	±5%	CL05C330JB5GNW□	2.0pF	±0.05pF	CL10C020AEAGQW□				
39pF	±1%	CL05C390FB5GNW□	2.0pF	±0.1pF	CL10C020BEAGQW□				
39pF	±2%	CL05C390GB5GNW□	2.0pF	±0.25pF	CL10C020CEAGQW□				
39pF	±5%	CL05C390JB5GNW□	2.2pF	±0.05pF	CL10C2R2AEAGQW□				
47pF	±1%	CL05C470FB5GNW□	2.2pF	±0.1pF	CL10C2R2BEAGQW□				
47pF	±2%	CL05C470GB5GNW□	2.2pF	±0.25pF	CL10C2R2CEAGQW□				
47pF	±5%	CL05C470JB5GNW□	2.4pF	±0.05pF	CL10C2R4AEAGQW□				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up ( COG )

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.80mm	250Vdc	2.4pF	±0.1pF	CL10C2R4BEAGQW □	0.80mm	250Vdc	7.5pF	±0.1pF	CL10C7R5BEAGQW □
		2.4pF	±0.25pF	CL10C2R4CEAGQW □			7.5pF	±0.25pF	CL10C7R5CEAGQW □
		2.7pF	±0.05pF	CL10C2R7AEAGQW □			7.5pF	±0.5pF	CL10C7R5DEAGQW □
		2.7pF	±0.1pF	CL10C2R7BEAGQW □			8.0pF	±0.05pF	CL10C080AEAGQW □
		2.7pF	±0.25pF	CL10C2R7CEAGQW □			8.0pF	±0.1pF	CL10C080BEAGQW □
		3.0pF	±0.05pF	CL10C030AEAGQW □			8.0pF	±0.25pF	CL10C080CEAGQW □
		3.0pF	±0.1pF	CL10C030BEAGQW □			8.0pF	±0.5pF	CL10C080DEAGQW □
		3.0pF	±0.25pF	CL10C030CEAGQW □			8.2pF	±0.05pF	CL10C8R2AEAGQW □
		3.3pF	±0.05pF	CL10C3R3AEAGQW □			8.2pF	±0.1pF	CL10C8R2BEAGQW □
		3.3pF	±0.1pF	CL10C3R3BEAGQW □			8.2pF	±0.25pF	CL10C8R2CEAGQW □
		3.3pF	±0.25pF	CL10C3R3CEAGQW □			8.2pF	±0.5pF	CL10C8R2DEAGQW □
		3.6pF	±0.05pF	CL10C3R6AEAGQW □			9.0pF	±0.05pF	CL10C090AEAGQW □
		3.6pF	±0.1pF	CL10C3R6BEAGQW □			9.0pF	±0.1pF	CL10C090BEAGQW □
		3.6pF	±0.25pF	CL10C3R6CEAGQW □			9.0pF	±0.25pF	CL10C090CEAGQW □
		3.9pF	±0.05pF	CL10C3R9AEAGQW □			9.0pF	±0.5pF	CL10C090DEAGQW □
		3.9pF	±0.1pF	CL10C3R9BEAGQW □			9.1pF	±0.05pF	CL10C9R1AEAGQW □
		3.9pF	±0.25pF	CL10C3R9CEAGQW □			9.1pF	±0.1pF	CL10C9R1BEAGQW □
		4.0pF	±0.05pF	CL10C040AEAGQW □			9.1pF	±0.25pF	CL10C9R1CEAGQW □
		4.0pF	±0.1pF	CL10C040BEAGQW □			9.1pF	±0.5pF	CL10C9R1DEAGQW □
		4.0pF	±0.25pF	CL10C040CEAGQW □			10pF	±1%	CL10C100FEAGQW □
		4.3pF	±0.05pF	CL10C4R3AEAGQW □			10pF	±2%	CL10C100GEAGQW □
		4.3pF	±0.1pF	CL10C4R3BEAGQW □			10pF	±5%	CL10C100JEAGQW □
		4.3pF	±0.25pF	CL10C4R3CEAGQW □			11pF	±1%	CL10C110FEAGQW □
		4.7pF	±0.05pF	CL10C4R7AEAGQW □			11pF	±2%	CL10C110GEAGQW □
		4.7pF	±0.1pF	CL10C4R7BEAGQW □			11pF	±5%	CL10C110JEAGQW □
		4.7pF	±0.25pF	CL10C4R7CEAGQW □			12pF	±1%	CL10C120FEAGQW □
		5.0pF	±0.05pF	CL10C050AEAGQW □			12pF	±2%	CL10C120GEAGQW □
		5.0pF	±0.1pF	CL10C050BEAGQW □			12pF	±5%	CL10C120JEAGQW □
		5.0pF	±0.25pF	CL10C050CEAGQW □			15pF	±1%	CL10C150FEAGQW □
		5.1pF	±0.05pF	CL10C5R1AEAGQW □			15pF	±2%	CL10C150GEAGQW □
		5.1pF	±0.1pF	CL10C5R1BEAGQW □			15pF	±5%	CL10C150JEAGQW □
		5.1pF	±0.25pF	CL10C5R1CEAGQW □			18pF	±1%	CL10C180FEAGQW □
		5.1pF	±0.5pF	CL10C5R1DEAGQW □			18pF	±2%	CL10C180GEAGQW □
		5.6pF	±0.05pF	CL10C5R6AEAGQW □			18pF	±5%	CL10C180JEAGQW □
		5.6pF	±0.1pF	CL10C5R6BEAGQW □			20pF	±1%	CL10C200FEAGQW □
		5.6pF	±0.25pF	CL10C5R6CEAGQW □			20pF	±2%	CL10C200GEAGQW □
		5.6pF	±0.5pF	CL10C5R6DEAGQW □			20pF	±5%	CL10C200JEAGQW □
		6.0pF	±0.05pF	CL10C060AEAGQW □			22pF	±1%	CL10C220FEAGQW □
		6.0pF	±0.1pF	CL10C060BEAGQW □			22pF	±2%	CL10C220GEAGQW □
		6.0pF	±0.25pF	CL10C060CEAGQW □			22pF	±5%	CL10C220JEAGQW □
		6.0pF	±0.5pF	CL10C060DEAGQW □			24pF	±2%	CL10C240GEAGQW □
		6.2pF	±0.05pF	CL10C6R2AEAGQW □			24pF	±5%	CL10C240JEAGQW □
6.2pF	±0.1pF	CL10C6R2BEAGQW □	27pF	±1%	CL10C270FEAGQW □				
6.2pF	±0.25pF	CL10C6R2CEAGQW □	27pF	±2%	CL10C270GEAGQW □				
6.2pF	±0.5pF	CL10C6R2DEAGQW □	27pF	±5%	CL10C270JEAGQW □				
6.8pF	±0.05pF	CL10C6R8AEAGQW □	33pF	±1%	CL10C330FEAGQW □				
6.8pF	±0.1pF	CL10C6R8BEAGQW □	33pF	±2%	CL10C330GEAGQW □				
6.8pF	±0.25pF	CL10C6R8CEAGQW □	33pF	±5%	CL10C330JEAGQW □				
6.8pF	±0.5pF	CL10C6R8DEAGQW □	39pF	±1%	CL10C390FEAGQW □				
7.0pF	±0.05pF	CL10C070AEAGQW □	39pF	±2%	CL10C390GEAGQW □				
7.0pF	±0.1pF	CL10C070BEAGQW □	39pF	±5%	CL10C390JEAGQW □				
7.0pF	±0.25pF	CL10C070CEAGQW □	47pF	±1%	CL10C470FEAGQW □				
7.0pF	±0.5pF	CL10C070DEAGQW □	47pF	±2%	CL10C470GEAGQW □				
7.5pF	±0.05pF	CL10C7R5AEAGQW □	47pF	±5%	CL10C470JEAGQW □				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

## Product Line Up (COG)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.95mm	250Vdc	0.5pF	±0.05pF	CL21C0R5AECGNW□	0.95mm	250Vdc	3.6pF	±0.05pF	CL21C3R6AECGNW□
		0.5pF	±0.1pF	CL21C0R5BECGNW□			3.6pF	±0.1pF	CL21C3R6BECGNW□
		0.5pF	±0.25pF	CL21C0R5CECGNW□			3.6pF	±0.25pF	CL21C3R6CECGNW□
		0.6pF	±0.05pF	CL21C0R6AECGNW□			3.9pF	±0.05pF	CL21C3R9AECGNW□
		0.6pF	±0.1pF	CL21C0R6BECGNW□			3.9pF	±0.1pF	CL21C3R9BECGNW□
		0.6pF	±0.25pF	CL21C0R6CECGNW□			3.9pF	±0.25pF	CL21C3R9CECGNW□
		0.7pF	±0.05pF	CL21C0R7AECGNW□			4.0pF	±0.05pF	CL21C040AECGNW□
		0.7pF	±0.1pF	CL21C0R7BECGNW□			4.0pF	±0.1pF	CL21C040BECGNW□
		0.7pF	±0.25pF	CL21C0R7CECGNW□			4.0pF	±0.25pF	CL21C040CECGNW□
		0.8pF	±0.05pF	CL21C0R8AECGNW□			4.3pF	±0.05pF	CL21C4R3AECGNW□
		0.8pF	±0.1pF	CL21C0R8BECGNW□			4.3pF	±0.1pF	CL21C4R3BECGNW□
		0.8pF	±0.25pF	CL21C0R8CECGNW□			4.3pF	±0.25pF	CL21C4R3CECGNW□
		0.9pF	±0.05pF	CL21C0R9AECGNW□			4.7pF	±0.05pF	CL21C4R7AECGNW□
		0.9pF	±0.1pF	CL21C0R9BECGNW□			4.7pF	±0.1pF	CL21C4R7BECGNW□
		0.9pF	±0.25pF	CL21C0R9CECGNW□			4.7pF	±0.25pF	CL21C4R7CECGNW□
		1.0pF	±0.05pF	CL21C010AECGNW□			5.0pF	±0.05pF	CL21C050AECGNW□
		1.0pF	±0.1pF	CL21C010BECGNW□			5.0pF	±0.1pF	CL21C050BECGNW□
		1.0pF	±0.25pF	CL21C010CECGNW□			5.0pF	±0.25pF	CL21C050CECGNW□
		1.1pF	±0.05pF	CL21C1R1AECGNW□			5.1pF	±0.05pF	CL21C5R1AECGNW□
		1.1pF	±0.1pF	CL21C1R1BECGNW□			5.1pF	±0.1pF	CL21C5R1BECGNW□
		1.1pF	±0.25pF	CL21C1R1CECGNW□			5.1pF	±0.25pF	CL21C5R1CECGNW□
		1.2pF	±0.05pF	CL21C1R2AECGNW□			5.1pF	±0.5pF	CL21C5R1DECGNW□
		1.2pF	±0.1pF	CL21C1R2BECGNW□			5.6pF	±0.05pF	CL21C5R6AECGNW□
		1.2pF	±0.25pF	CL21C1R2CECGNW□			5.6pF	±0.1pF	CL21C5R6BECGNW□
		1.3pF	±0.05pF	CL21C1R3AECGNW□			5.6pF	±0.25pF	CL21C5R6CECGNW□
		1.3pF	±0.1pF	CL21C1R3BECGNW□			5.6pF	±0.5pF	CL21C5R6DECGNW□
		1.3pF	±0.25pF	CL21C1R3CECGNW□			6.0pF	±0.05pF	CL21C060AECGNW□
		1.5pF	±0.05pF	CL21C1R5AECGNW□			6.0pF	±0.1pF	CL21C060BECGNW□
		1.5pF	±0.1pF	CL21C1R5BECGNW□			6.0pF	±0.25pF	CL21C060CECGNW□
		1.5pF	±0.25pF	CL21C1R5CECGNW□			6.0pF	±0.5pF	CL21C060DECGNW□
		1.6pF	±0.05pF	CL21C1R6AECGNW□			6.2pF	±0.05pF	CL21C6R2AECGNW□
		1.6pF	±0.1pF	CL21C1R6BECGNW□			6.2pF	±0.1pF	CL21C6R2BECGNW□
		1.6pF	±0.25pF	CL21C1R6CECGNW□			6.2pF	±0.25pF	CL21C6R2CECGNW□
		1.8pF	±0.05pF	CL21C1R8AECGNW□			6.2pF	±0.5pF	CL21C6R2DECGNW□
		1.8pF	±0.1pF	CL21C1R8BECGNW□			6.8pF	±0.05pF	CL21C6R8AECGNW□
		1.8pF	±0.25pF	CL21C1R8CECGNW□			6.8pF	±0.1pF	CL21C6R8BECGNW□
		2.0pF	±0.05pF	CL21C020AECGNW□			6.8pF	±0.25pF	CL21C6R8CECGNW□
		2.0pF	±0.1pF	CL21C020BECGNW□			6.8pF	±0.5pF	CL21C6R8DECGNW□
		2.0pF	±0.25pF	CL21C020CECGNW□			7.0pF	±0.05pF	CL21C070AECGNW□
		2.2pF	±0.05pF	CL21C2R2AECGNW□			7.0pF	±0.1pF	CL21C070BECGNW□
2.2pF	±0.1pF	CL21C2R2BECGNW□	7.0pF	±0.25pF	CL21C070CECGNW□				
2.2pF	±0.25pF	CL21C2R2CECGNW□	7.0pF	±0.5pF	CL21C070DECGNW□				
2.4pF	±0.05pF	CL21C2R4AECGNW□	7.5pF	±0.05pF	CL21C7R5AECGNW□				
2.4pF	±0.1pF	CL21C2R4BECGNW□	7.5pF	±0.1pF	CL21C7R5BECGNW□				
2.4pF	±0.25pF	CL21C2R4CECGNW□	7.5pF	±0.25pF	CL21C7R5CECGNW□				
2.7pF	±0.05pF	CL21C2R7AECGNW□	7.5pF	±0.5pF	CL21C7R5DECGNW□				
2.7pF	±0.1pF	CL21C2R7BECGNW□	8.0pF	±0.05pF	CL21C080AECGNW□				
2.7pF	±0.25pF	CL21C2R7CECGNW□	8.0pF	±0.1pF	CL21C080BECGNW□				
3.0pF	±0.05pF	CL21C030AECGNW□	8.0pF	±0.25pF	CL21C080CECGNW□				
3.0pF	±0.1pF	CL21C030BECGNW□	8.0pF	±0.5pF	CL21C080DECGNW□				
3.0pF	±0.25pF	CL21C030CECGNW□	8.2pF	±0.05pF	CL21C8R2AECGNW□				
3.3pF	±0.05pF	CL21C3R3AECGNW□	8.2pF	±0.1pF	CL21C8R2BECGNW□				
3.3pF	±0.1pF	CL21C3R3BECGNW□	8.2pF	±0.25pF	CL21C8R2CECGNW□				
3.3pF	±0.25pF	CL21C3R3CECGNW□	8.2pF	±0.5pF	CL21C8R2DECGNW□				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

Product Line Up (COG)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.95mm	250Vdc	9.0pF	±0.05pF	CL21C090AECGNW □	0.95mm	250Vdc	100pF	±2%	CL21C101GECGNW □
		9.0pF	±0.1pF	CL21C090BECGNW □			100pF	±5%	CL21C101JECGNW □
		9.0pF	±0.25pF	CL21C090CECGNW □					
		9.0pF	±0.5pF	CL21C090DECGNW □					
		9.1pF	±0.05pF	CL21C9R1AECGNW □					
		9.1pF	±0.1pF	CL21C9R1BECGNW □					
		9.1pF	±0.25pF	CL21C9R1CECGNW □					
		9.1pF	±0.5pF	CL21C9R1DECGNW □					
		10pF	±1%	CL21C100FECGNW □					
		10pF	±2%	CL21C100GECGNW □					
		10pF	±5%	CL21C100JECGNW □					
		11pF	±1%	CL21C110FECGNW □					
		11pF	±2%	CL21C110GECGNW □					
		11pF	±5%	CL21C110JECGNW □					
		12pF	±1%	CL21C120FECGNW □					
		12pF	±2%	CL21C120GECGNW □					
		12pF	±5%	CL21C120JECGNW □					
		15pF	±1%	CL21C150FECGNW □					
		15pF	±2%	CL21C150GECGNW □					
		15pF	±5%	CL21C150JECGNW □					
		18pF	±1%	CL21C180FECGNW □					
		18pF	±2%	CL21C180GECGNW □					
		18pF	±5%	CL21C180JECGNW □					
		20pF	±1%	CL21C200FECGNW □					
		20pF	±2%	CL21C200GECGNW □					
		20pF	±5%	CL21C200JECGNW □					
		22pF	±1%	CL21C220FECGNW □					
		22pF	±2%	CL21C220GECGNW □					
		22pF	±5%	CL21C220JECGNW □					
		24pF	±1%	CL21C240FECGNW □					
		24pF	±2%	CL21C240GECGNW □					
		24pF	±5%	CL21C240JECGNW □					
		27pF	±1%	CL21C270FECGNW □					
		27pF	±2%	CL21C270GECGNW □					
		27pF	±5%	CL21C270JECGNW □					
		33pF	±1%	CL21C330FECGNW □					
		33pF	±2%	CL21C330GECGNW □					
		33pF	±5%	CL21C330JECGNW □					
		39pF	±1%	CL21C390FECGNW □					
		39pF	±2%	CL21C390GECGNW □					
39pF	±5%	CL21C390JECGNW □							
47pF	±1%	CL21C470FECGNW □							
47pF	±2%	CL21C470GECGNW □							
47pF	±5%	CL21C470JECGNW □							
62pF	±1%	CL21C620FECGNW □							
62pF	±2%	CL21C620GECGNW □							
62pF	±5%	CL21C620JECGNW □							
68pF	±1%	CL21C680FECGNW □							
68pF	±2%	CL21C680GECGNW □							
68pF	±5%	CL21C680JECGNW □							
82pF	±1%	CL21C820FECGNW □							
82pF	±2%	CL21C820GECGNW □							
82pF	±5%	CL21C820JECGNW □							
100pF	±1%	CL21C101FECGNW □							

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑


# High Effective Capacitance Industrial Capacitors

N3W – X5R / X7R

## Feature



- Excellent DC – bias characteristics with fine powder
- Enhance high temperature reliability
- Special outgoing inspection for industrial application (HALT, etc)
- Advantage of fine powder technology

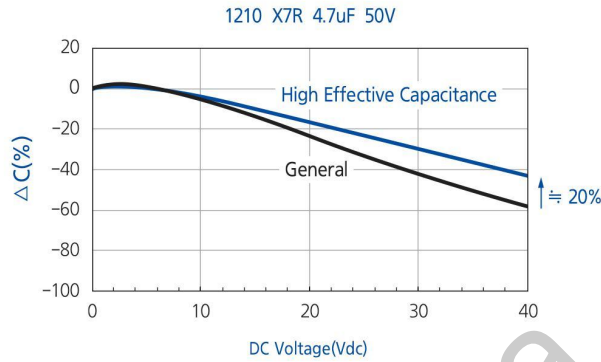


By using finer powder : Reduced capacitance degradation by bias and aging

## Application

- 24 / 48V input line filter for power supply
- Network, Power application and etc.
- Ideal for decoupling and filtering applications (Class II : X7R)

## Structure and Dimensions

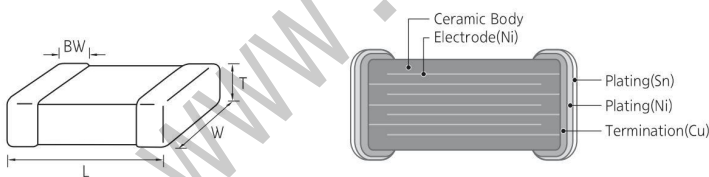

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00±0.05	0.50±0.05	0.50±0.05	5	0.25±0.10
21	0805	2.00±0.10	1.25±0.10	1.25±0.10	F	0.50+0.20/-0.30
32	1210	3.20±0.20	1.60±0.20	1.60±0.20	H	0.50±0.30
		3.20±0.30	2.50±0.20	2.50±0.20	J	0.60±0.30
		3.20±0.40	2.50±0.30	2.50±0.30	V	

### Industrial Capacitance Table (X5R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance												
		nF						uF						
		10	22	47	100	220	470	1.0	2.2	4.7	6.8	10		
0805(2012)	6.3													

### Industrial Capacitance Table (X7R)

Size inch (mm)	Rated Voltage (Vdc)	Capacitance												
		nF						uF						
		10	22	47	100	220	470	1.0	2.2	4.7	6.8	10		
0402(1005)	16													
1206 (3216)	50													
	100													
1210 (3225)	50													
	100													

### Product Line Up (X5R)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.35mm	6.3Vdc	10uF	±10%	CL21A106KQFN3W□	

### Product Line Up (X7R)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
0.55mm	16Vdc	100nF	±10%	CL05B104K05N3W□	

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
1.80mm	50Vdc	4.7uF	±10%	CL31B475KBHN3W□	

■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Remark
2.70mm	50Vdc	10uF	±10%	CL32B106KBJN3W□	
		4.7uF	±10%	CL32B475KBHN3W□	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# Reliability Test Condition

No.	Item	Performance	Test condition																											
1	Appearance	No abnormal exterior appearance	Visual Inspection through Microscope (X10)																											
2	Insulation resistance	10,000MΩ min. or 500MΩ · μF min. (or *100MΩ · μF) product whichever is smaller. (Rated voltage ≤ 16V: 10,000MΩ min. or 100MΩ · μF min. product whichever is smaller)	Apply the rated voltage for 60 ~ 120sec. Rated voltage > 500V : Insulation resistance shall be measured with 500±50Vdc																											
3	Withstanding voltage	No dielectric breakdown or mechanical breakdown	Apply the specified voltage* for 1 ~ 5 sec. Charge / Discharge current limit : 50mA max *CLASS I (Rated Voltage < 100V) : 300% of the rated Voltage CLASS II (Rated Voltage < 100V) : 250% of the rated Voltage In the case of rated Voltage ≥ 100V products, following condition should be applied. 100V ≤ Rated Voltage < 500V : 200% of the rated Voltage 500V ≤ Rated Voltage < 1000V : 150% of the rated Voltage Rated Voltage ≥ 1000V : 120% of the rated Voltage																											
4	Capacitance	Class I	Within the specified tolerance																											
		Class II	Within the specified tolerance																											
5	Q	Class I	Capacitance ≥ 30pF : Q ≥ 1,000 < 30pF : Q ≥ 400+20×C (C : Capacitance)																											
	Tanδ	Class II	<p>1.Characteristic : A(X5R)</p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>50V / 35V</td> <td>0.025 max / 0.05 max*</td> </tr> <tr> <td>25V</td> <td>0.025 max / 0.05 max* / 0.10 max*</td> </tr> <tr> <td>16V</td> <td>0.035 max / 0.05 max* / 0.10 max*</td> </tr> <tr> <td>≤ 10V</td> <td>0.05 max / 0.10 max*</td> </tr> </tbody> </table> <p>2.Characteristic : B(X7R), X(X6S), Y(X7S)</p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>50V ≥ / 35V / 25V</td> <td>0.025 max / 0.05 max* / 0.10 max*</td> </tr> <tr> <td>16V</td> <td>0.035 max / 0.10 max*</td> </tr> <tr> <td>≤ 10V</td> <td>0.05 max / 0.10 max*</td> </tr> </tbody> </table> <p>3.Characteristic : F(Y5V)</p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>50V / 35V / 25V</td> <td>0.05 max / 0.07 max* / 0.09 max*</td> </tr> <tr> <td>16V</td> <td>0.07 max / 0.09 max* / 0.125 max*</td> </tr> <tr> <td>10V</td> <td>0.125 max / 0.16 max*</td> </tr> <tr> <td>≤ 6.3V</td> <td>0.16 max</td> </tr> </tbody> </table>	Rated Voltage	Spec	50V / 35V	0.025 max / 0.05 max*	25V	0.025 max / 0.05 max* / 0.10 max*	16V	0.035 max / 0.05 max* / 0.10 max*	≤ 10V	0.05 max / 0.10 max*	Rated Voltage	Spec	50V ≥ / 35V / 25V	0.025 max / 0.05 max* / 0.10 max*	16V	0.035 max / 0.10 max*	≤ 10V	0.05 max / 0.10 max*	Rated Voltage	Spec	50V / 35V / 25V	0.05 max / 0.07 max* / 0.09 max*	16V	0.07 max / 0.09 max* / 0.125 max*	10V	0.125 max / 0.16 max*	≤ 6.3V
Rated Voltage	Spec																													
50V / 35V	0.025 max / 0.05 max*																													
25V	0.025 max / 0.05 max* / 0.10 max*																													
16V	0.035 max / 0.05 max* / 0.10 max*																													
≤ 10V	0.05 max / 0.10 max*																													
Rated Voltage	Spec																													
50V ≥ / 35V / 25V	0.025 max / 0.05 max* / 0.10 max*																													
16V	0.035 max / 0.10 max*																													
≤ 10V	0.05 max / 0.10 max*																													
Rated Voltage	Spec																													
50V / 35V / 25V	0.05 max / 0.07 max* / 0.09 max*																													
16V	0.07 max / 0.09 max* / 0.125 max*																													
10V	0.125 max / 0.16 max*																													
≤ 6.3V	0.16 max																													
6	Temperature characteristics of capacitance	Class I	<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Temp. coefficient (PPM/°C)</th> </tr> </thead> <tbody> <tr> <td>C(C0G)</td> <td>0 ± 30</td> </tr> </tbody> </table>	Characteristic	Temp. coefficient (PPM/°C)	C(C0G)	0 ± 30																							
		Characteristic	Temp. coefficient (PPM/°C)																											
C(C0G)	0 ± 30																													
Class II	<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Capacitance change(%) with No bias</th> </tr> </thead> <tbody> <tr> <td>A(X5R) / B(X7R)</td> <td>± 15%</td> </tr> <tr> <td>X(X6S) / Y(X7S)</td> <td>± 22%</td> </tr> <tr> <td>Z(X7T)</td> <td>+22% ~ -33%</td> </tr> <tr> <td>F(Y5V)</td> <td>+22% ~ -82%</td> </tr> </tbody> </table>	Characteristic	Capacitance change(%) with No bias	A(X5R) / B(X7R)	± 15%	X(X6S) / Y(X7S)	± 22%	Z(X7T)	+22% ~ -33%	F(Y5V)	+22% ~ -82%																			
Characteristic	Capacitance change(%) with No bias																													
A(X5R) / B(X7R)	± 15%																													
X(X6S) / Y(X7S)	± 22%																													
Z(X7T)	+22% ~ -33%																													
F(Y5V)	+22% ~ -82%																													

■ Class I

Capacitance	Frequency	Voltage
≤ 1,000pF	1kHz ± 10%	0.5 ~ 5Vrms
> 1,000pF	1kHz ± 10%	

■ Class II

Capacitance	Frequency	Voltage
≤ 10μF	1kHz ± 10%	1.0 ± 0.2Vrms
> 10μF	120Hz ± 20%	0.5 ± 0.1Vrms
Exception*	1kHz ± 10%	0.5 ± 0.1Vrms

Capacitance shall be measured after the heat treatment of 150+0/-10°C for 1hr and leaving for 24±2hr at room temperature. (Class II)

\* The conditions of measurement may be altered upon request. You can check the specification at the web site or contact sales people for each product with mark\*




Capacitance shall be measured by the steps shown in the following table.

Step	Temperature(°C)
1	25±2
2	Min. operating temp. ± 2
3	25±2
4	Max. operating temp. ± 2
5	25±2

■ Class I  
Temperature Coefficient shall be calculated from the formula as below  
Temp. Coefficient =  $\frac{C2 - C1}{C1 \times \Delta T} \times 10^6$  [ppm/°C]  
C1 : Capacitance at step 3  
C2 : Capacitance at 125°C  
ΔT : 125°C - 25°C = 100°C

■ Class II  
Capacitance change shall be calculated from the formula as below  
ΔC =  $\frac{C2 - C1}{C1} \times 100$  (%)  
C1 : Capacitance at step 3  
C2 : Capacitance at step 2 or step 4



No.	Item	Performance	Test condition											
7	Adhesive strength of termination	No indication of peeling shall occur on the terminal electrode.	Apply 500g.f pressure for 10±1 sec. ※ 200g.f for size 0201 / 100g.f for size 01005 											
8	Bending strength	Appearance	No mechanical damage shall occur.											
		Capacitance	<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td>Class I</td> <td>Within±5% or ±0.5pF whichever is larger</td> </tr> <tr> <td rowspan="3">Class II</td> <td>A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)</td> <td>Within±12.5%</td> </tr> <tr> <td>F(Y5V)</td> <td>Within±30%</td> </tr> </tbody> </table>	Characteristic	Capacitance change	Class I	Within±5% or ±0.5pF whichever is larger	Class II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	Within±12.5%	F(Y5V)	Within±30%		
Characteristic	Capacitance change													
Class I	Within±5% or ±0.5pF whichever is larger													
Class II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	Within±12.5%												
	F(Y5V)	Within±30%												
			• Bending Limit : 1mm • Test Speed : 1.0mm / sec. Keep the test board at the limit point in 5sec. then Measure Capacitance. ※ Industrial Capacitor - SW6 / ZW6 / Z46 Code, Bending Limit : 3mm - Z4J Code, Bending Limit : 5mm 											
9	Solderability	More than 75% of the terminal surface is to be soldered newly, so metal part does not come out or dissolve ※ Industrial Capacitor : Z46 / Z4J Code, More than 95% 	<table border="1"> <thead> <tr> <th>Solder</th> <th>Sn_Ag3_0.5Cu</th> </tr> </thead> <tbody> <tr> <td>Solder temp.</td> <td>245±5℃</td> </tr> <tr> <td>Flux</td> <td>RMA Type</td> </tr> <tr> <td>Dip time</td> <td>3±0.3sec.</td> </tr> <tr> <td>Pre-heating</td> <td>at 80 ~ 120℃ for 10 ~ 30sec.</td> </tr> </tbody> </table>	Solder	Sn_Ag3_0.5Cu	Solder temp.	245±5℃	Flux	RMA Type	Dip time	3±0.3sec.	Pre-heating	at 80 ~ 120℃ for 10 ~ 30sec.	
Solder	Sn_Ag3_0.5Cu													
Solder temp.	245±5℃													
Flux	RMA Type													
Dip time	3±0.3sec.													
Pre-heating	at 80 ~ 120℃ for 10 ~ 30sec.													
10	Resistance to soldering heat	Appearance	No mechanical damage shall occur.											
		Capacitance	<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td>Class I</td> <td>±2.5% or ±0.25pF whichever is larger</td> </tr> <tr> <td rowspan="3">Class II</td> <td>A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)</td> <td>Within±7.5%</td> </tr> <tr> <td>F(Y5V)</td> <td>Within±20%</td> </tr> </tbody> </table>	Characteristic	Capacitance change	Class I	±2.5% or ±0.25pF whichever is larger	Class II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	Within±7.5%	F(Y5V)	Within±20%		
		Characteristic	Capacitance change											
		Class I	±2.5% or ±0.25pF whichever is larger											
		Class II	A(X5R), B(X7R), X(X6S), Y(X7S) Z(X7T)	Within±7.5%										
			F(Y5V)	Within±20%										
Q (Class I)	Within the specified initial value													
Tanδ (Class II)	Within the specified initial value													
Insulation resistance	Within the specified initial value													
Withstanding voltage	No breakdown of dielectric													
		Solder temperature: 270±5℃ DIP TIME : 10±1 sec. Each termination shall be fully immersed and preheated as below : <table border="1"> <thead> <tr> <th>Step</th> <th>Temp.(℃)</th> <th>Time(sec.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>80 ~ 100</td> <td>60</td> </tr> <tr> <td>2</td> <td>150 ~ 180</td> <td>60</td> </tr> </tbody> </table>	Step	Temp.(℃)	Time(sec.)	1	80 ~ 100	60	2	150 ~ 180	60			
Step	Temp.(℃)	Time(sec.)												
1	80 ~ 100	60												
2	150 ~ 180	60												
11	Vibration test	Appearance	No mechanical damage shall occur.											
		Capacitance	<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td>Class I</td> <td>±2.5% or ±0.25pF whichever is larger</td> </tr> <tr> <td rowspan="3">Class II</td> <td>A(X5R), B(X7R)</td> <td>Within±5%</td> </tr> <tr> <td>X(X6S), Y(X7S) Z(X7T)</td> <td>Within±5%</td> </tr> <tr> <td>F(Y5V)</td> <td>Within±10%</td> </tr> </tbody> </table>	Characteristic	Capacitance change	Class I	±2.5% or ±0.25pF whichever is larger	Class II	A(X5R), B(X7R)	Within±5%	X(X6S), Y(X7S) Z(X7T)	Within±5%	F(Y5V)	Within±10%
		Characteristic	Capacitance change											
		Class I	±2.5% or ±0.25pF whichever is larger											
		Class II	A(X5R), B(X7R)	Within±5%										
			X(X6S), Y(X7S) Z(X7T)	Within±5%										
F(Y5V)	Within±10%													
Q (Class I)	Within the specified initial value													
Tanδ (Class II)	Within the specified initial value													
Insulation resistance	Within the specified initial value													
		The capacitor shall be subjected to a harmonic motion having a total amplitude of 1.5mm changing frequency from 10Hz to 55Hz and back to 10Hz in about 1 min. Repeat this for 2hours each in 3mutually perpendicular directions ※ Industrial Capacitor : Z46 / Z4J Code With frequency from 10 ~ 2000Hz during 20min. 3 directions X 12 times (total 36 times, 12hr) Perform the initial measurement according to Note1. Please refer to p.131 Final measurement Leave the capacitor in ambient condition for 24±2 hours before measurement. Then perform the measurement.												

# Reliability Test Condition

No.	Item	Performance	Test condition						
12	Appearance	No mechanical damage shall occur.	Applied voltage : Rated Voltage						
	Capacitance	<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td>Class I</td> <td><math>\pm 7.5\%</math> or <math>\pm 0.75\text{pF}</math> whichever is larger</td> </tr> <tr> <td>Class II</td> <td>Within <math>\pm 12.5\%</math></td> </tr> </tbody> </table>	Characteristic	Capacitance change	Class I	$\pm 7.5\%$ or $\pm 0.75\text{pF}$ whichever is larger	Class II	Within $\pm 12.5\%$	Temperature : $40 \pm 2^\circ\text{C}$ Humidity : 90~95%RH Duration time : 500+12/-0hr. Charge / Discharge current : 50mA max.  ※ Industrial Capacitor : Z46 / Z4J Code 85 $\pm 2^\circ\text{C}$ , 80~85%RH, 1000+48 / -0hr.
		Characteristic	Capacitance change						
		Class I	$\pm 7.5\%$ or $\pm 0.75\text{pF}$ whichever is larger						
	Class II	Within $\pm 12.5\%$							
Q (Class I)	Capacitance $\geq 30\text{pF}$ : Q $\geq 200$ $< 30\text{pF}$ : Q $\geq 100 + 10 / 3 \times C$ (C : Capacitance)								
Tan $\delta$ (Class II)	1. Capacitance : A(X5R) 0.05 max / 0.075 max* (35V / 50V) 0.05 max / 0.075 max* / 0.125 max* (16V / 25V) 0.075 max / 0.125 max* ( $\leq 10\text{V}$ ) 2. Capacitance : B(X7R), X(X6S) 0.05 max / 0.125 max* (16V / 25V / 35V / 50V $\geq$ ) 0.075 max / 0.125 max* ( $\leq 10\text{V}$ ) 3. Capacitance : F(Y5V) 0.09 max (50V) 0.09 max / 0.125 max* (25V / 35V) 0.09 max / 0.125 max* / 0.16 max* (16V) 0.16 max / 0.195 max* (10V) 0.195 max (4V / 6.3V) 4. Industrial Capacitor : Z46 / Z4J Code 0.035 max* ( $\geq 25\text{V}$ ) 0.050 max* (16V) 0.075 max* (10V)								
Insulation resistance	500M $\Omega$ min. or 25M $\Omega$ $\cdot \mu\text{F}$ min. product whichever is smaller / 12.5M $\Omega$ $\cdot \mu\text{F}$ or over*								
13	Appearance	No mechanical damage shall occur.	Temperature : Max. operating temperature						
	Capacitance	<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td>Class I</td> <td><math>\pm 3\%</math> or <math>\pm 0.30\text{pF}</math> whichever is larger</td> </tr> <tr> <td>Class II</td> <td>Within <math>\pm 12.5\%</math></td> </tr> </tbody> </table>	Characteristic	Capacitance change	Class I	$\pm 3\%$ or $\pm 0.30\text{pF}$ whichever is larger	Class II	Within $\pm 12.5\%$	Duration Time: 1000+48 / -0hr. Charge / Discharge Current : 50mAmax. Apply Voltage : 100% of Rated Voltage* It depends on each item (120% / 150% / 200% Rated Voltage)
		Characteristic	Capacitance change						
		Class I	$\pm 3\%$ or $\pm 0.30\text{pF}$ whichever is larger						
	Class II	Within $\pm 12.5\%$							
Q (Class I)	Capacitance $\geq 30\text{pF}$ : Q $\geq 350$ $10\text{pF} \leq \text{Capacitance} < 30\text{pF}$ : Q $\geq 275 + 2.5 \times C$ Capacitance $< 10\text{pF}$ : Q $\geq 200 + 10 \times C$ (C : Capacitance)								
Tan $\delta$ (Class II)	1. Capacitance : A(X5R) 0.05 max / 0.075 max* (35V / 50V) 0.05 max / 0.075 max* / 0.125 max* (16V / 25V) 0.075 max / 0.125 max* ( $\leq 10\text{V}$ ) 2. Capacitance : B(X7R), X(X6S) 0.05 max / 0.125 max* (16V / 25V / 35V / 50V $\geq$ ) 0.075 max / 0.125 max* ( $\leq 10\text{V}$ ) 3. Capacitance : F(Y5V) 0.09 max (50V) 0.09 max / 0.125 max* (25V / 35V) 0.09 max / 0.125 max* / 0.16 max* (16V) 0.16 max / 0.195 max* (10V) 0.195 max (4V / 6.3V) 4. Industrial Capacitor : Z46 / Z4J Code 0.035 max* ( $\geq 25\text{V}$ ) 0.050 max* (16V) 0.075 max* (10V)								
Insulation resistance	1,000M $\Omega$ min. or 50M $\Omega$ $\cdot \mu\text{F}$ min. product whichever is smaller / 25M $\Omega$ $\cdot \mu\text{F}$ or over*								
High temperature resistance		Perform the initial measurement according to Note1. Perform the final measurement according to Note2. Please refer to p.131  This test is only applied to Rated Voltage $\leq 500\text{V}$ products. You can check the specification at the web site or contact sales people for each product with mark*							

No.	Item	Performance	Test condition																													
14	Temperature cycle	Appearance	No mechanical damage shall occur.																													
		Capacitance	<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td>Class I</td> <td><math>\pm 2.5\%</math> or <math>\pm 0.25\text{pF}</math> whichever is larger</td> </tr> <tr> <td rowspan="4">Class II</td> <td>A(X5R)</td> <td>Within <math>\pm 7.5\%</math> / <math>\pm 10\%</math> / <math>\pm 15\%</math>*</td> </tr> <tr> <td>B(X7R)</td> <td>Within <math>\pm 7.5\%</math></td> </tr> <tr> <td>X(X6S), Y(X7S) Z(X7T)</td> <td>Within <math>\pm 15\%</math></td> </tr> <tr> <td>F(Y5V)</td> <td>Within <math>\pm 20\%</math></td> </tr> </tbody> </table>	Characteristic	Capacitance change	Class I	$\pm 2.5\%$ or $\pm 0.25\text{pF}$ whichever is larger	Class II	A(X5R)	Within $\pm 7.5\%$ / $\pm 10\%$ / $\pm 15\%$ *	B(X7R)	Within $\pm 7.5\%$	X(X6S), Y(X7S) Z(X7T)	Within $\pm 15\%$	F(Y5V)	Within $\pm 20\%$	Capacitor shall be subjected to 5 cycles. ※ Industrial Capacitor : Z46 / Z4J Code, 1000 cycles. Condition for 1 cycle : <table border="1"> <thead> <tr> <th>Step</th> <th>Temp.(°C)</th> <th>Time(min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. operating temperature +0/-3</td> <td>30</td> </tr> <tr> <td>2</td> <td>25</td> <td>2 ~ 3</td> </tr> <tr> <td>3</td> <td>Max. operating temperature +3/-0</td> <td>30</td> </tr> <tr> <td>4</td> <td>25</td> <td>2 ~ 3</td> </tr> </tbody> </table>	Step	Temp.(°C)	Time(min.)	1	Min. operating temperature +0/-3	30	2	25	2 ~ 3	3	Max. operating temperature +3/-0	30	4	25	2 ~ 3
			Characteristic	Capacitance change																												
			Class I	$\pm 2.5\%$ or $\pm 0.25\text{pF}$ whichever is larger																												
			Class II	A(X5R)	Within $\pm 7.5\%$ / $\pm 10\%$ / $\pm 15\%$ *																											
				B(X7R)	Within $\pm 7.5\%$																											
X(X6S), Y(X7S) Z(X7T)	Within $\pm 15\%$																															
F(Y5V)	Within $\pm 20\%$																															
Step	Temp.(°C)	Time(min.)																														
1	Min. operating temperature +0/-3	30																														
2	25	2 ~ 3																														
3	Max. operating temperature +3/-0	30																														
4	25	2 ~ 3																														
Q (Class I)	Within the specified initial value	Perform the initial measurement according to Note1. Please refer to p.131																														
Tanδ (Class II)	Within the specified initial value																															
Insulation resistance	Within the specified initial value																															
			Final measurement Leave the capacitor in ambient condition for 24±2 hours before measurement. Then perform the measurement.																													
15	Mechanical Shock (Only for Z46 / Z4J Code)	Appearance	No abnormal exterior appearance.																													
		Capacitance	<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td>Class II</td> <td>Within <math>\pm 10\%</math></td> </tr> </tbody> </table>	Characteristic	Capacitance change	Class II	Within $\pm 10\%$	Three shocks in each direction should be applied along 3 mutually perpendicular axes of the test specimen (18 shocks) <table border="1"> <thead> <tr> <th>Peak value</th> <th>Duration</th> <th>Wave</th> <th>Velocity</th> </tr> </thead> <tbody> <tr> <td>1,500G</td> <td>0.5ms</td> <td>Half sine</td> <td>4.7m / sec</td> </tr> </tbody> </table>	Peak value	Duration	Wave	Velocity	1,500G	0.5ms	Half sine	4.7m / sec																
			Characteristic	Capacitance change																												
		Class II	Within $\pm 10\%$																													
Peak value	Duration	Wave	Velocity																													
1,500G	0.5ms	Half sine	4.7m / sec																													
Tanδ (Class II)	1. Capacitance : B(X7R) 0.025 max* (25V) 0.035 max* (16V) 0.050 max* (6.3V/10V)	Perform the initial measurement according to Note1. Perform the final measurement according to Note2. Please refer to p.131																														
IR	1,000MΩ min. or 50MΩ · μF min. product whichever is smaller / 12.5MΩ · μF or over*																															

Recommended Soldering Method				
Size inch(mm)	Temperature Characteristic	Capacitance	Condition	
			Flow	Reflow
01005(0402)	-	-	-	○
0201(0603)				
0402(1005)				
0603(1608)	Class I	-	○	○
	Class II	C < 1uF	○	○
		C ≥ 1uF	-	○
0805(2012)	Class I	-	○	○
	Class II	C < 4.7uF	○	○
		C ≥ 4.7uF	-	○
1206(3216)	Array	-	-	○
	Class I	-	○	○
		Class II	C < 10uF	○
Array	C ≥ 10uF		-	○
	1210(3225)	-	-	-
1808(4520)	○			
1812(4532)	○			
2220(5750)	○			
	○			

**Note 1. Initial Measurement For Class II**

Perform the heat treatment at 150°C +0/-10°C for 1 hour and leave the capacitor in ambient condition for 24±2 hours before measurement. Then perform the measurement.

**Note 2. Latter Measurement**

1. CLASS I

Leave the capacitor in ambient condition for 24±2 hours before measurement. Then perform the measurement.

2. CLASS II

Perform the heat treatment at 150°C +0/-10°C for 1 hour and leave the capacitor in ambient condition for 24±2 hours before measurement. Then perform the measurement.

**Note 3. All Size in Reliability Test Condition Section is "inch"**

# Premium Capacitors for Automotive Applications

<b>CL</b>	<b>10</b>	<b>B</b>	<b>104</b>	<b>K</b>	<b>B</b>	<b>8</b>	<b>W</b>	<b>P</b>	<b>N</b>	<b>C</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>

## 1 SERIES CODE

CL = Multilayer Ceramic Capacitors

## 2 SIZE CODE

Code	inch(mm)	Code	inch(mm)	Code	inch(mm)
05	0402(1005)	21	0805(2012)	32	1210(3225)
10	0603(1608)	31	1206(3216)		

## 3 DIELECTRIC CODE

Class I

Symbol	EIA Code	Operation Temperature Range(°C)	Temperature Coefficient(ppm / °C)
C	COG	-55 ~ +125	0±30

Class II

Symbol	EIA Code	Operation Temperature Range(°C)	Capacitance Change(%)
B	X7R	-55 ~ +125	±15
Y	X7S	-55 ~ +125	±22

## 4 CAPACITANCE CODE

Capacitance expressed in pF. 2 significant digits plus number of zeros.

example) 106=10 × 10<sup>6</sup>=10,000,000pF

For Values <10pF, Letter R denotes decimal point

example) 1R5 =1.5pF

## 5 TOLERANCE CODE

Capacitance Tolerance

Code	Capacitance Tolerance	TC	Capacitance series	Remark
C	±0.25pF	COG	E-12 series*	under 5pF
D	±0.5pF	COG	E-12 series*	5pF < Cp < 10pF
J	±5%	COG	E-12 series	≥ 10pF
K	±10%	X7R/X7S	E-6 series	
M	±20%	X7R/X7S	E-6 series	

\* E-24 series is also available

※This code has only typical specifications. Please refer to individual specifications.

Series	Capacitance Step											
	1.0			2.2				4.7				
E-3	1.0			2.2				4.7				
E-6	1.0	1.5		2.2	3.3		4.7	6.8				
E-12	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2
E-24	1.0	1.1	1.2	1.3	2.2	2.4	2.7	3.0	4.7	5.1	5.6	6.2
	1.5	1.6	1.8	2.0	3.3	3.6	3.9	4.3	6.8	7.5	8.2	9.1

## 6 RATED VOLTAGE CODE

Q = 6.3V P = 10V O = 16V A = 25V B = 50V C = 100V

## 7 THICKNESS CODE

(Unit:mm)

Size mm(inch)	Code	Thickness*	Tolerance
1005(0402)	5	0.50	±0.05
1608(0603)	8	0.80	±0.10
2012(0805)	6	0.60	±0.10
	C	0.85	±0.10
	F	1.25	±0.10
	Q	1.25	±0.15
3216(1206)	C	0.85	±0.15
	P	1.15	±0.10
	H	1.60	±0.20
3225(1210)	I	2.00	±0.20
	J	2.50	±0.20

\* In case of Higher Bending Strength, ESD protection capacitors, Please refer to individual specifications.  
 ※ This code has only typical specifications. Please refer to individual specifications.

## 8 DESIGN CODE

Code	Inner electrode	Termination	Plating material	Design
1	Ni	Cu	Ni_Sn 100%	Standard
V	Ni	Cu/Metal Epoxy	Ni_Sn 100%	Standard
W	Ni	Cu/Metal Epoxy	Ni_Sn 100%	Open Mode
X	Ni	Cu/Metal Epoxy	Ni_Sn 100%	Float Mode

※ This code has only typical specifications. Please refer to individual specifications.

## 9 PRODUCT CODE OR SIZE CONTROL CODE

P = Automotive product meet AEC-Q200.

## 10 CONTROL CODE

N = Standard J = Higher Bending Strength E = ESD Protection

## 11 PACKAGING CODE

Code	Type	Code	Type
C	Cardbord Tape, 7" reel	E	Embossed Tape, 7" reel
D/L	Cardbord Tape, 13" reel (Quantity option)	F	Embossed Tape, 13" reel

※ If you want to learn to the code or quantity in detail, please see page 148.  
 In order to move to the page directly, please click the here. ↑

# General Automotive Capacitors

## Feature




- Automotive products are manufactured in state of the art facilities recommend for registration to ISO / TS 16949 : 2002.
- Automotive products meet AEC – Q200 requirements.
- Automotive products are RoHS compliant.
- Automotive products meet JEDEC – 020 – D requirements.
- X7R dielectric components have BME and metal – epoxy terminations with a Ni / Sn plated overcoat.
- COG dielectric components contain BME and copper terminations with a Ni / Sn plated overcoat.
- Size 0603 / 0805 / 1206 is suitable for flow and reflow soldering.
- Size 0402 and smaller ( $\leq 0402$ ) and 1210 and bigger ( $\geq 1210$ ) is suitable for reflow soldering.

## Application

- Automotive Electronic Equipment (Powertrain, Safety, Body & Chassis, Convenience, Infotainment)

## Structure and Dimensions

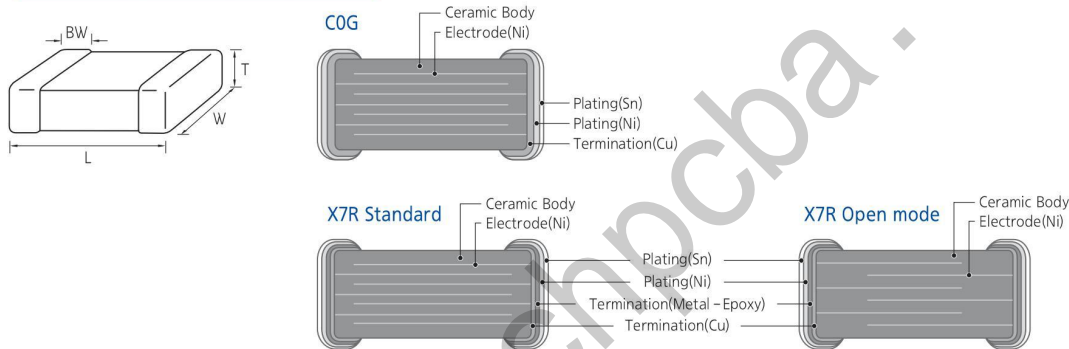

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00±0.05	0.50±0.05	0.50±0.05	5	0.25±0.10
10	0603	1.60±0.10	0.80±0.10	0.80±0.10	8	0.30±0.20
21	0805	2.00±0.10	1.25±0.10	0.60±0.10	6	0.50+0.20/-0.30
				0.85±0.10	C	
				1.25±0.10	F	
31	1206	3.20±0.15	1.60±0.15	1.25±0.15	Q	0.50±0.30
				0.85±0.15	C	
				1.15±0.10	P	
32	1210	3.20±0.20	1.60±0.20	1.60±0.20	H	0.60±0.30
				2.00±0.20	I	
32	1210	3.20±0.30	2.50±0.20	2.00±0.20	I	0.60±0.30
				2.50±0.20	J	

## Automotive Capacitance Table (COG)

Size inch (mm)	Thickness (mm)	Rated Voltage (Vdc)	Capacitance										
			pF					nF					
			10	22	47	100	220	470	1.0	2.2	4.7	10	22
0402 (1005)	0.50	50											
		100											
0603 (1608)	0.80	50											
		100					270						
0805 (2012)	0.60	50											
		100											
	0.85	50											
	1.25	100											

Automotive Capacitance Table (X7R)

Size inch (mm)	Thickness (mm)	Rated Voltage (Vdc)	Capacitance											
			nF					uF						
			10	22	47	100	220	470	1.0	2.2	4.7	10	22	
0402 (1005)	0.50	10												
		16												
		25												
		50												
0603 (1608)	0.80	10												
		16												
		25												
		50												
		100												
0805 (2012)	1.25	10												
	0.85	16												
	1.25													
	0.60	25												
	0.85													
	1.25	50												
	0.60													
	0.85	100												
	1.25													
	1.25	100												
	0.60													
	0.85	100												
1.25														
1206 (3216)	1.60	10												
	1.15	16												
	1.60													
	0.85	25												
	1.15													
	1.60	50												
	0.85													
	1.15	100												
	1.60													
	0.85	100												
	1.15													
1210 (3225)	2.50	10												
	2.50	16												
	2.50	25												
	2.50	50												

# General Automotive Capacitors

## Product Line Up (Automotive Capacitors – COG)

### ■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number		
0.55mm	50Vdc	4.7pF	±0.25pF	CL05C4R7CB51PN□		
		6.8pF	±0.5pF	CL05C6R8DB51PN□		
		10pF	±5%	CL05C100JB51PN□		
		12pF	±5%	CL05C120JB51PN□		
		15pF	±5%	CL05C150JB51PN□		
		18pF	±5%	CL05C180JB51PN□		
		22pF	±5%	CL05C220JB51PN□		
		33pF	±5%	CL05C330JB51PN□		
		39pF	±5%	CL05C390JB51PN□		
		47pF	±5%	CL05C470JB51PN□		
		56pF	±5%	CL05C560JB51PN□		
		68pF	±5%	CL05C680JB51PN□		
		82pF	±5%	CL05C820JB51PN□		
		100pF	±5%	CL05C101JB51PN□		
		120pF	±5%	CL05C121JB51PN□		
		150pF	±5%	CL05C151JB51PN□		
		180pF	±5%	CL05C181JB51PN□		
		220pF	±5%	CL05C221JB51PN□		
		100Vdc	100Vdc	4.7pF	±0.25pF	CL05C4R7CC51PN□
				6.8pF	±0.5pF	CL05C6R8DC51PN□
				10pF	±5%	CL05C100JC51PN□
				12pF	±5%	CL05C120JC51PN□
15pF	±5%			CL05C150JC51PN□		
18pF	±5%			CL05C180JC51PN□		
22pF	±5%			CL05C220JC51PN□		
27pF	±5%			CL05C270JC51PN□		
33pF	±5%			CL05C330JC51PN□		
39pF	±5%			CL05C390JC51PN□		
47pF	±5%			CL05C470JC51PN□		
56pF	±5%			CL05C560JC51PN□		
68pF	±5%			CL05C680JC51PN□		
82pF	±5%			CL05C820JC51PN□		
100pF	±5%	CL05C101JC51PN□				

### ■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number			
0.90mm	50Vdc	4.7pF	±0.25pF	CL10C4R7CB81PN□			
		6.8pF	±0.5pF	CL10C6R8DB81PN□			
		10pF	±5%	CL10C100JB81PN□			
		12pF	±5%	CL10C120JB81PN□			
		15pF	±5%	CL10C150JB81PN□			
		18pF	±5%	CL10C180JB81PN□			
		22pF	±5%	CL10C220JB81PN□			
		27pF	±5%	CL10C270JB81PN□			
		33pF	±5%	CL10C330JB81PN□			
		39pF	±5%	CL10C390JB81PN□			
		47pF	±5%	CL10C470JB81PN□			
		56pF	±5%	CL10C560JB81PN□			
		68pF	±5%	CL10C680JB81PN□			
		82pF	±5%	CL10C820JB81PN□			
		100pF	±5%	CL10C101JB81PN□			
		120pF	±5%	CL10C121JB81PN□			
		150pF	±5%	CL10C151JB81PN□			
		180pF	±5%	CL10C181JB81PN□			
		220pF	±5%	CL10C221JB81PN□			
		100Vdc	100Vdc	220pF	±5%	CL10C220JC81PN□	
				270pF	±5%	CL10C271JB81PN□	
				330pF	±5%	CL10C331JB81PN□	
	390pF			±5%	CL10C391JB81PN□		
	470pF			±5%	CL10C471JB81PN□		
	560pF			±5%	CL10C561JB81PN□		
	680pF			±5%	CL10C681JB81PN□		
	820pF			±5%	CL10C821JB81PN□		
	1.0nF			±5%	CL10C102JB81PN□		
	100Vdc			100Vdc	4.7pF	±0.25pF	CL10C4R7CC81PN□
					6.8pF	±0.5pF	CL10C6R8DC81PN□
					10pF	±5%	CL10C100JC81PN□
					12pF	±5%	CL10C120JC81PN□
					15pF	±5%	CL10C150JC81PN□
					18pF	±5%	CL10C180JC81PN□
					22pF	±5%	CL10C220JC81PN□
					27pF	±5%	CL10C270JC81PN□
					33pF	±5%	CL10C330JC81PN□
					39pF	±5%	CL10C390JC81PN□
					47pF	±5%	CL10C470JC81PN□
		56pF	±5%		CL10C560JC81PN□		
		68pF	±5%		CL10C680JC81PN□		
		82pF	±5%		CL10C820JC81PN□		
100pF		±5%	CL10C101JC81PN□				
120pF		±5%	CL10C121JC81PN□				
150pF		±5%	CL10C151JC81PN□				
180pF		±5%	CL10C181JC81PN□				
220pF		±5%	CL10C221JC81PN□				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑



Product Line Up (Automotive Capacitors – COG)

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.70mm	50Vdc	10pF	±5%	CL21C100JB61PN □	0.95mm	100Vdc	470pF	±5%	CL21C471JCC1PN □
		12pF	±5%	CL21C120JB61PN □			560pF	±5%	CL21C561JCC1PN □
		15pF	±5%	CL21C150JB61PN □			680pF	±5%	CL21C681JCC1PN □
		18pF	±5%	CL21C180JB61PN □			820pF	±5%	CL21C821JCC1PN □
		22pF	±5%	CL21C220JB61PN □			1.0nF	±5%	CL21C102JCC1PN □
		27pF	±5%	CL21C270JB61PN □			1.35mm	50Vdc	1.0nF
		33pF	±5%	CL21C330JB61PN □	1.2nF	±5%			CL21C122JBF1PN □
		39pF	±5%	CL21C390JB61PN □	1.5nF	±5%			CL21C152JBF1PN □
		47pF	±5%	CL21C470JB61PN □	1.8nF	±5%			CL21C182JBF1PN □
		56pF	±5%	CL21C560JB61PN □	2.2nF	±5%			CL21C222JBF1PN □
		68pF	±5%	CL21C680JB61PN □	2.7nF	±5%			CL21C272JBF1PN □
		82pF	±5%	CL21C820JB61PN □	3.3nF	±5%			CL21C332JBF1PN □
		100pF	±5%	CL21C101JB61PN □	3.9nF	±5%			CL21C392JBF1PN □
		120pF	±5%	CL21C121JB61PN □	4.7nF	±5%			CL21C472JBF1PN □
		150pF	±5%	CL21C151JB61PN □	5.6nF	±5%			CL21C562JBF1PN □
		180pF	±5%	CL21C181JB61PN □	6.8nF	±5%			CL21C682JBF1PN □
		220pF	±5%	CL21C221JB61PN □	8.2nF	±5%			CL21C822JBF1PN □
		270pF	±5%	CL21C271JB61PN □	10nF	±5%			CL21C103JBF1PN □
		330pF	±5%	CL21C331JB61PN □	100Vdc	1.0nF			±5%
		390pF	±5%	CL21C391JB61PN □	100Vdc	10pF	±5%	CL21C100JC61PN □	
		12pF	±5%	CL21C120JC61PN □		12pF	±5%	CL21C120JC61PN □	
	15pF	±5%	CL21C150JC61PN □	15pF		±5%	CL21C150JC61PN □		
	18pF	±5%	CL21C180JC61PN □	18pF		±5%	CL21C180JC61PN □		
	22pF	±5%	CL21C220JC61PN □	22pF		±5%	CL21C220JC61PN □		
	27pF	±5%	CL21C270JC61PN □	27pF		±5%	CL21C270JC61PN □		
	33pF	±5%	CL21C330JC61PN □	33pF		±5%	CL21C330JC61PN □		
	39pF	±5%	CL21C390JC61PN □	39pF		±5%	CL21C390JC61PN □		
	47pF	±5%	CL21C470JC61PN □	47pF		±5%	CL21C470JC61PN □		
	56pF	±5%	CL21C560JC61PN □	56pF		±5%	CL21C560JC61PN □		
	68pF	±5%	CL21C680JC61PN □	68pF		±5%	CL21C680JC61PN □		
	82pF	±5%	CL21C820JC61PN □	82pF		±5%	CL21C820JC61PN □		
	100pF	±5%	CL21C101JC61PN □	100pF		±5%	CL21C101JC61PN □		
	120pF	±5%	CL21C121JC61PN □	120pF		±5%	CL21C121JC61PN □		
	150pF	±5%	CL21C151JC61PN □	150pF		±5%	CL21C151JC61PN □		
	180pF	±5%	CL21C181JC61PN □	180pF		±5%	CL21C181JC61PN □		
	220pF	±5%	CL21C221JC61PN □	220pF		±5%	CL21C221JC61PN □		
	270pF	±5%	CL21C271JC61PN □	270pF		±5%	CL21C271JC61PN □		
	330pF	±5%	CL21C331JC61PN □	330pF	±5%	CL21C331JC61PN □			
	390pF	±5%	CL21C391JC61PN □	390pF	±5%	CL21C391JC61PN □			
0.95mm	50Vdc	470pF	±5%	CL21C471JBC1PN □	470pF	±5%	CL21C471JBC1PN □		
		560pF	±5%	CL21C561JBC1PN □	560pF	±5%	CL21C561JBC1PN □		
		680pF	±5%	CL21C681JBC1PN □	680pF	±5%	CL21C681JBC1PN □		
		820pF	±5%	CL21C821JBC1PN □	820pF	±5%	CL21C821JBC1PN □		
		1.0nF	±5%	CL21C102JBC1PN □	1.0nF	±5%	CL21C102JBC1PN □		
		1.2nF	±5%	CL21C122JBC1PN □	1.2nF	±5%	CL21C122JBC1PN □		
		1.5nF	±5%	CL21C152JBC1PN □	1.5nF	±5%	CL21C152JBC1PN □		
		1.8nF	±5%	CL21C182JBC1PN □	1.8nF	±5%	CL21C182JBC1PN □		
		2.2nF	±5%	CL21C222JBC1PN □	2.2nF	±5%	CL21C222JBC1PN □		
		2.7nF	±5%	CL21C272JBC1PN □	2.7nF	±5%	CL21C272JBC1PN □		
		3.3nF	±5%	CL21C332JBC1PN □	3.3nF	±5%	CL21C332JBC1PN □		
3.9nF	±5%	CL21C392JBC1PN □	3.9nF	±5%	CL21C392JBC1PN □				
4.7nF	±5%	CL21C472JBC1PN □	4.7nF	±5%	CL21C472JBC1PN □				
5.6nF	±5%	CL21C562JBC1PN □	5.6nF	±5%	CL21C562JBC1PN □				

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

# General Automotive Capacitors

## Product Line Up (Automotive Capacitors – X7R)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
0.55mm	10Vdc	100nF	±10%	CL05B104KP5VPN □	
		16Vdc	1.0nF	±10%	CL05B102K05VPN □
			1.5nF	±10%	CL05B152K05VPN □
			2.2nF	±10%	CL05B222K05VPN □
			3.3nF	±10%	CL05B332K05VPN □
			4.7nF	±10%	CL05B472K05VPN □
			6.8nF	±10%	CL05B682K05VPN □
			10nF	±10%	CL05B103K05VPN □
			15nF	±10%	CL05B153K05VPN □
			22nF	±10%	CL05B223K05VPN □
			33nF	±10%	CL05B333K05VPN □
			47nF	±10%	CL05B473K05VPN □
			68nF	±10%	CL05B683K05VPN □
			100nF	±10%	CL05B104K05VPN □
	25Vdc	1.0nF	±10%	CL05B102KA5VPN □	
		1.5nF	±10%	CL05B152KA5VPN □	
		2.2nF	±10%	CL05B222KA5VPN □	
		3.3nF	±10%	CL05B332KA5VPN □	
		4.7nF	±10%	CL05B472KA5VPN □	
		6.8nF	±10%	CL05B682KA5VPN □	
		10nF	±10%	CL05B103KA5VPN □	
		15nF	±10%	CL05B153KA5VPN □	
		22nF	±10%	CL05B223KA5VPN □	
		33nF	±10%	CL05B333KA5VPN □	
		47nF	±10%	CL05B473KA5VPN □	
		50Vdc	330pF	±10%	CL05B331KB5VPN □
			470pF	±10%	CL05B471KB5VPN □
			560pF	±10%	CL05B561KB5VPN □
	680pF		±10%	CL05B681KB5VPN □	
	1.0nF		±10%	CL05B102KB5VPN □	
	1.5nF		±10%	CL05B152KB5VPN □	
	2.2nF		±10%	CL05B222KB5VPN □	
	3.3nF		±10%	CL05B332KB5VPN □	
	4.7nF		±10%	CL05B472KB5VPN □	
	6.8nF		±10%	CL05B682KB5VPN □	
	10nF		±10%	CL05B103KB5VPN □	
	15nF		±10%	CL05B153KB5VPN □	
	22nF		±10%	CL05B223KB5VPN □	
	33nF		±10%	CL05B333KB5VPN □	
	47nF	±10%	CL05B473KB5VPN □		

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number		
0.90mm	10Vdc	1.0uF	±10%	CL10B105KP8VPN □		
		16Vdc	47nF	±10%	CL10B473K08WPN □	
			68nF	±10%	CL10B683K08WPN □	
			100nF	±10%	CL10B104K08WPN □	
			150nF	±10%	CL10B154K08VPN □	
			220nF	±10%	CL10B224K08VPN □	
			330nF	±10%	CL10B334K08VPN □	
			470nF	±10%	CL10B474K08VPN □	
			680nF	±10%	CL10B684K08VPN □	
			1.0uF	±10%	CL10B105K08VPN □	
			25Vdc	1.0nF	±10%	CL10B102KA8WPN □
				1.5nF	±10%	CL10B152KA8WPN □
				2.2nF	±10%	CL10B222KA8WPN □
				3.3nF	±10%	CL10B332KA8WPN □
	4.7nF	±10%		CL10B472KA8WPN □		
	6.8nF	±10%		CL10B682KA8WPN □		
	10nF	±10%		CL10B103KA8WPN □		
	15nF	±10%		CL10B153KA8WPN □		
	22nF	±10%		CL10B223KA8WPN □		
	33nF	±10%		CL10B333KA8WPN □		
	47nF	±10%		CL10B473KA8WPN □		
	68nF	±10%		CL10B683KA8WPN □		
	100nF	±10%		CL10B104KA8WPN □		
	150nF	±10%		CL10B154KA8VPN □		
	50Vdc	470pF	±10%	CL10B471KB8WPN □		
		1.0nF	±10%	CL10B102KB8WPN □		
		1.5nF	±10%	CL10B152KB8WPN □		
		2.2nF	±10%	CL10B222KB8WPN □		
		3.3nF	±10%	CL10B332KB8WPN □		
		4.7nF	±10%	CL10B472KB8WPN □		
		6.8nF	±10%	CL10B682KB8WPN □		
		10nF	±10%	CL10B103KB8WPN □		
		15nF	±10%	CL10B153KB8WPN □		
		22nF	±10%	CL10B223KB8WPN □		
		33nF	±10%	CL10B333KB8WPN □		
		47nF	±10%	CL10B473KB8WPN □		
		68nF	±10%	CL10B683KB8WPN □		
		100nF	±10%	CL10B104KB8WPN □		
	100Vdc	220pF	±10%	CL10B221KC8WPN □		
		330pF	±10%	CL10B331KC8WPN □		
		470pF	±10%	CL10B471KC8WPN □		
		680pF	±10%	CL10B681KC8WPN □		
		1.0nF	±10%	CL10B102KC8WPN □		
		1.5nF	±10%	CL10B152KC8WPN □		

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
 In order to move to the page directly, please click the here. ↑

Product Line Up (Automotive Capacitors – X7R)

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.90mm	100Vdc	2.2nF	±10%	CL10B222KC8WPN□
		3.3nF	±10%	CL10B332KC8WPN□
		4.7nF	±10%	CL10B472KC8WPN□
		6.8nF	±10%	CL10B682KC8WPN□
		10nF	±10%	CL10B103KC8WPN□
		15nF	±10%	CL10B153KC8WPN□
		22nF	±10%	CL10B223KC8WPN□
		33nF	±10%	CL10B333KC8WPN□
		47nF	±10%	CL10B473KC8WPN□

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number		
0.90mm	50Vdc	100nF	±10%	CL21B104KBFVPN□		
		150nF	±10%	CL21B154KBFVPN□		
		220nF	±10%	CL21B224KBFVPN□		
		330nF	±10%	CL21B334KBFVPN□		
		470nF	±10%	CL21B474KBFVPN□		
		680nF	±10%	CL21B684KBFVPN□		
		1.0uF	±10%	CL21B105KBFVPN□		
		100Vdc	100nF	±10%	CL21B104KCFVPN□	
		1.40mm	10Vdc	4.7uF	±10%	CL21B475KQVVP□
			16Vdc	4.7uF	±10%	CL21B475KQVVP□

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
0.70mm	50Vdc	1.0nF	±10%	CL21B102KB6WPN□	
		2.2nF	±10%	CL21B222KB6WPN□	
		4.7nF	±10%	CL21B472KB6WPN□	
		10nF	±10%	CL21B103KB6WPN□	
		15nF	±10%	CL21B153KB6WPN□	
		22nF	±10%	CL21B223KB6WPN□	
		100Vdc	1.0nF	±10%	CL21B102KC6WPN□
			2.2nF	±10%	CL21B222KC6WPN□
			4.7nF	±10%	CL21B472KC6WPN□
			10nF	±10%	CL21B103KC6WPN□
15nF	±10%		CL21B153KC6WPN□		
22nF	±10%		CL21B223KC6WPN□		
0.95mm	16Vdc	100nF	±10%	CL21B104KOCWPN□	
		25Vdc	47nF	±10%	CL21B473KACWPN□
		68nF	±10%	CL21B683KACWPN□	
		100nF	±10%	CL21B104KACWPN□	
	50Vdc	33nF	±10%	CL21B333KBCWPN□	
		47nF	±10%	CL21B473KBCWPN□	
		68nF	±10%	CL21B683KBCWPN□	
		100nF	±10%	CL21B104KBCWPN□	
		100Vdc	33nF	±10%	CL21B333KCCWPN□
			47nF	±10%	CL21B473KCCWPN□
68nF	±10%		CL21B683KCCWPN□		
100nF	±10%		CL21B104KCCWPN□		
1.35mm	10Vdc	1.0uF	±10%	CL21B105KPFVPN□	
		2.2uF	±10%	CL21B225KPFVPN□	
		16Vdc	150nF	±10%	CL21B154KOFVPN□
	16Vdc	220nF	±10%	CL21B224KOFVPN□	
		330nF	±10%	CL21B334KOFVPN□	
		470nF	±10%	CL21B474KOFVPN□	
		680nF	±10%	CL21B684KOFVPN□	
		1.0uF	±10%	CL21B105KOFVPN□	
		2.2uF	±10%	CL21B225KOFVPN□	
		25Vdc	150nF	±10%	CL21B154KAFVPN□
			220nF	±10%	CL21B224KAFVPN□
			330nF	±10%	CL21B334KAFVPN□
			470nF	±10%	CL21B474KAFVPN□
			680nF	±10%	CL21B684KAFVPN□
			1.0uF	±10%	CL21B105KAFVPN□
			2.2uF	±10%	CL21B225KAFVPN□

■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number	
1.00mm	25Vdc	220nF	±10%	CL31B224KACWPN□	
		330nF	±10%	CL31B334KACWPN□	
		470nF	±10%	CL31B474KACWPN□	
	50Vdc	100nF	±10%	CL31B104KBCWPN□	
		100Vdc	100nF	±10%	CL31B104KCCWPN□
		1.25mm	16Vdc	1.0uF	±10%
25Vdc	680nF		±10%	CL31B684KAPWPN□	
	1.0uF		±10%	CL31B105KAPWPN□	
	50Vdc		100nF	±10%	CL31B104KBPWPN□
150nF			±10%	CL31B154KBPWPN□	
220nF			±10%	CL31B224KBPWPN□	
100Vdc	100nF	±10%	CL31B104KCPWPN□		
	150nF	±10%	CL31B154KCPWPN□		
	220nF	±10%	CL31B224KCPWPN□		
	1.80mm	10Vdc	4.7uF	±10%	CL31B475KPHVPN□
			10uF	±10%	CL31B106KPHVPN□
		16Vdc	2.2uF	±10%	CL31B225KOHVPN□
4.7uF			±10%	CL31B475KOHVPN□	
10uF			±10%	CL31B106KOHVPN□	
25Vdc		2.2uF	±10%	CL31B225KAHVPN□	
	4.7uF	±10%	CL31B475KAHVPN□		
	10uF	±10%	CL31B106KAHVPN□		
	50Vdc	330nF	±10%	CL31B334KBHWP□	
		470nF	±10%	CL31B474KBHWP□	
		680nF	±10%	CL31B684KBHWP□	
1.0uF		±10%	CL31B105KBHWP□		
2.2uF		±10%	CL31B225KBHWP□		
4.7uF		±10%	CL31B475KBHWP□		


■ Size : 3.20 X 2.50mm (inch : 1210)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
2.70mm	10Vdc	22uF	±10%	CL32B226KJVP□
	16Vdc	22uF	±10%	CL32B226KJVP□
	25Vdc	4.7uF	±10%	CL32B475KAJVP□
	50Vdc	4.7uF	±10%	CL32B475KBJVP□

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

### Feature



- AEC – Q200 qualified, 5mm bending strength guarantee.
- Strong thermal – mechanical properties.



### Application

- Critical circuits and Battery line circuits.  
(Prevent a module / sub – system failure in the event of a cracked /shorted capacitor)

### Structure and Dimensions

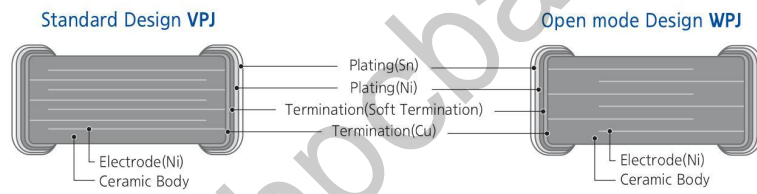

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00±0.10	0.50±0.05	0.50±0.05	5	0.25±0.10
10	0603	1.60±0.20	0.80±0.10	0.80±0.10	8	0.30±0.20
21	0805	2.00±0.30	1.25±0.20	0.85±0.10	C	0.50+0.20/-0.30
				1.25±0.20	F	
31	1206	3.20±0.30	1.60±0.30	1.60±0.30	H	0.50±0.30
32	1210	3.20±0.40	2.50±0.30	2.50±0.30	J	0.60±0.30

### Higher Bending Strength Capacitance Table (X7R)

Size inch (mm)	Thickness (mm)	Rated Voltage (Vdc)	Capacitance											
			nF					uF						
			10	22	47	100	220	470	1.0	2.2	4.7	10	22	
0402 (1005)	0.50	16												
		50												
0603(1608)	0.80	25												
0805(2012)	1.25	25												
1206(3216)	1.60	16												

### Product Line Up (Higher Bending Strength Capacitors – X7R)

■ Size : 1.00 X 0.50mm (inch : 0402)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.55mm	16Vdc	10nF	±10%	CL05B103K05VPJ □
		22nF	±10%	CL05B223K05VPJ □
		47nF	±10%	CL05B473K05VPJ □
		100nF	±10%	CL05B104K05VPJ □
	25Vdc	10nF	±10%	CL05B103KA5VPJ □
		22nF	±10%	CL05B223KA5VPJ □
	50Vdc	10nF	±10%	CL05B103KB5VPJ □
		22nF	±10%	CL05B223KB5VPJ □

■ Size : 1.60 X 0.80mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
0.90mm	10Vdc	1.0uF	±10%	CL10B105KP8VPJ □
	16Vdc	1.0uF	±10%	CL10B105K08VPJ □
	25Vdc	1.0uF	±10%	CL10B105KA8VPJ □

■ Size : 2.00 X 1.25mm (inch : 0805)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
1.45mm	10Vdc	1.0uF	±10%	CL21B105KPFVPJ □
	16Vdc	1.0uF	±10%	CL21B105KOFVPJ □
	25Vdc	1.0uF	±10%	CL21B105KAFVPJ □


■ Size : 3.20 X 1.60mm (inch : 1206)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
1.90mm	10Vdc	4.7uF	±10%	CL31B475KPHVPJ □
	16Vdc	4.7uF	±10%	CL31B475KOHVPJ □

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148  
In order to move to the page directly, please click the here. ↑

### Feature



- Compliance with the IEC 61000 – 4 – 2 standard for ESD immunity.
- Enhanced DC – Bias & Breakdown voltage.



### Application

- Input and output sections in a wide range of automotive electronics.

### Structure and Dimensions

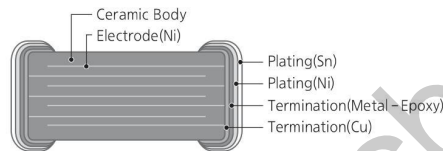

Size Code	EIA Code	Dimension(mm)			
		L	W	T	BW
10	0603	1.70±0.10	0.90±0.10	0.90±0.10	0.30±0.20

### ESD Protection Capacitance Table (X7R)

Size inch (mm)	Thickness (mm)	Rated Voltage (Vdc)	Capacitance(nF)													
			1.0	1.5	2.2	3.3	4.7	6.8	10	15	22	33	47			
0603(1608)	0.80	100														

### Product Lineup (ESD Protection Capacitors – X7R)

■ Size : 1.70 X 0.90mm (inch : 0603)

Thickness Max.	Rated Voltage	Capacitance	Capacitance Tolerance	Part Number
1.00mm	100Vdc	1.0nF	±10%	CL10B102KC84PE □
		1.5nF	±10%	CL10B152KC84PE □
		2.2nF	±10%	CL10B222KC84PE □
		3.3nF	±10%	CL10B332KC84PE □
		4.7nF	±10%	CL10B472KC84PE □
		6.8nF	±10%	CL10B682KC84PE □
		10nF	±10%	CL10B103KC84PE □

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p.148

In order to move to the page directly, please click the here. ↑

# Reliability Test Conditions

No.	Item	Performance	Test condition															
1	Pre-and Post-Stress Electrical Test	-																
2	High Temperature Exposure	Appearance	No abnormal exterior appearance															
		Capacitance Change	Class I	Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ , (Whichever is larger)														
			Class II	Within $\pm 10\%$														
		Q	Class I	Capacitance $\geq 30\text{pF}$ : $Q \geq 1,000$ $< 30\text{pF}$ : $Q \geq 400 + 20 \times C$ (C : Capacitance)														
		Tan $\delta$	Class II	Rated Voltage $\geq 25\text{V}$ : 0.030 max $\geq 16\text{V}$ : 0.050 max $\geq 10\text{V}$ : 0.075 max *1)														
IR		More than 10,000 $\Omega$ or 500 $\Omega$ X $\mu\text{F}$ (Whichever is smaller) *1)																
3	Temperature Cycling	Appearance	No abnormal exterior appearance															
		Capacitance Change	Class I	Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ , (Whichever is larger)														
			Class II	Within $\pm 10\%$														
		Q	Class I	Capacitance $\geq 30\text{pF}$ : $Q \geq 1,000$ $< 30\text{pF}$ : $Q \geq 400 + 20 \times C$ (C : Capacitance)														
		Tan $\delta$	Class II	Rated Voltage $\geq 25\text{V}$ : 0.030 max $\geq 16\text{V}$ : 0.050 max $\geq 10\text{V}$ : 0.075 max *1)														
IR		More than 10,000 $\Omega$ or 500 $\Omega$ X $\mu\text{F}$ (Whichever is smaller) *1)																
			<table border="1"> <thead> <tr> <th>Step</th> <th>Temperature(°C)</th> <th>Time(min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. operating Temp.+0/-3</td> <td>30<math>\pm</math>3</td> </tr> <tr> <td>2</td> <td>25<math>\pm</math>2</td> <td>1</td> </tr> <tr> <td>3</td> <td>Max. operating Temp.+3/-0</td> <td>30<math>\pm</math>3</td> </tr> <tr> <td>4</td> <td>25<math>\pm</math>2</td> <td>1</td> </tr> </tbody> </table>	Step	Temperature(°C)	Time(min.)	1	Min. operating Temp.+0/-3	30 $\pm$ 3	2	25 $\pm$ 2	1	3	Max. operating Temp.+3/-0	30 $\pm$ 3	4	25 $\pm$ 2	1
Step	Temperature(°C)	Time(min.)																
1	Min. operating Temp.+0/-3	30 $\pm$ 3																
2	25 $\pm$ 2	1																
3	Max. operating Temp.+3/-0	30 $\pm$ 3																
4	25 $\pm$ 2	1																
4	Destructive Physical Analysis	No defects or abnormalities	Per EIA 469															
5	Biased Humidity	Appearance	No abnormal exterior appearance															
		Capacitance Change	Class I	Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ , (Whichever is larger)														
			Class II	Within $\pm 12.5\%$														
		Q	Class I	Capacitance $\geq 30\text{pF}$ : $Q \geq 200$ $< 30\text{pF}$ : $Q \geq 100 + (10/3) \times C$ (C : Capacitance)														
		Tan $\delta$	Class II	Rated Voltage $\geq 25\text{V}$ : 0.035 max $\geq 16\text{V}$ : 0.050 max $\geq 10\text{V}$ : 0.075 max *1)														
IR		More than 500 $\Omega$ or 25 $\Omega$ X $\mu\text{F}$ (Whichever is smaller) *1)																
6	High Temperature Operating Life	Appearance	No abnormal exterior appearance															
		Capacitance Change	Class I	Within $\pm 3.0\%$ or $\pm 0.3\text{pF}$ , (Whichever is larger)														
			Class II	Within $\pm 12.5\%$														
		Q	Class I	Capacitance $\geq 30\text{pF}$ : $Q \geq 350$ $\geq 10\text{pF}$ : $Q \geq 275 + (5/2) \times C$ $< 10\text{pF}$ : $Q \geq 200 + 10 \times C$ (C : Capacitance)														
		Tan $\delta$	Class II	Rated Voltage $\geq 25\text{V}$ : 0.035 max $\geq 16\text{V}$ : 0.050 max $\geq 10\text{V}$ : 0.075 max *1)														
IR		More than 1,000 $\Omega$ or 50 $\Omega$ X $\mu\text{F}$ (Whichever is smaller) *1)																

※ \*1) : Indicates typical specification. Please refer to individual specifications.  
 \*2) : Some of the parts are applicable in rated voltage X 150% or X 120%, Please refer to individual specifications.

# Reliability Test Conditions

No.	Item	Performance	Test condition								
7	External Visual	No abnormal exterior appearance	Microscope (x10)								
8	Physical Dimensions	Within the specified dimensions	Using the calipers								
9	Mechanical Shock	Appearance	No abnormal exterior appearance								
		Capacitance Change	Class I	Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ , (Whichever is larger)							
			Class II	Within $\pm 10\%$							
		Q	Class I	Capacitance $\geq 30\text{pF}$ : $Q \geq 1,000$ $< 30\text{pF}$ : $Q \geq 400 + 20 \times C$ (C : Capacitance)							
		Tan $\delta$	Class II	Rated Voltage $\geq 25\text{V}$ : 0.025 max $\geq 16\text{V}$ : 0.035 max $\geq 10\text{V}$ : 0.050 max *1)							
IR		More than 10,000M $\Omega$ or 500M $\Omega \times \mu\text{F}$ (Whichever is smaller) *1)									
			Three shocks in each direction should be applied along 3 mutually perpendicular axes of the test specimen (18 shocks) <table border="1"> <thead> <tr> <th>Peak value</th> <th>Duration</th> <th>Wave</th> <th>Velocity</th> </tr> </thead> <tbody> <tr> <td>1,500G</td> <td>0.5ms</td> <td>Half sine</td> <td>4.7m / sec</td> </tr> </tbody> </table> Initial Measurement Perform the heat treatment at 150°C +0/-10°C for 1 hour and leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.  Final Measurement Leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.	Peak value	Duration	Wave	Velocity	1,500G	0.5ms	Half sine	4.7m / sec
Peak value	Duration	Wave	Velocity								
1,500G	0.5ms	Half sine	4.7m / sec								
10	Vibration	Appearance	No abnormal exterior appearance								
		Capacitance Change	Class I	Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ , (Whichever is larger)							
			Class II	Within $\pm 10\%$							
		Q	Class I	Capacitance $\geq 30\text{pF}$ : $Q \geq 1,000$ $< 30\text{pF}$ : $Q \geq 400 + 20 \times C$ (C : Capacitance)							
		Tan $\delta$	Class II	Rated Voltage $\geq 25\text{V}$ : 0.025 max $\geq 16\text{V}$ : 0.035 max $\geq 10\text{V}$ : 0.050 max *1)							
IR		More than 10,000M $\Omega$ or 500M $\Omega \times \mu\text{F}$ (Whichever is smaller) *1)									
			5g's for 20min., 12cycles each of 3 orientations, Use 8" x 5" PCB 0.031" Thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10~2000Hz.  Initial Measurement Perform the heat treatment at 150°C +0/-10°C for 1 hour and leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.  Final Measurement Leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.								
11	Resistance to Solder Heat	Appearance	No abnormal exterior appearance								
		Capacitance Change	Class I	Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ , (Whichever is larger)							
			Class II	Within $\pm 10\%$							
		Q	Class I	Capacitance $\geq 30\text{pF}$ : $Q \geq 1,000$ $< 30\text{pF}$ : $Q \geq 400 + 20 \times C$ (C : Capacitance)							
		Tan $\delta$	Class II	Rated Voltage $\geq 25\text{V}$ : 0.025 max $\geq 16\text{V}$ : 0.035 max $\geq 10\text{V}$ : 0.050 max *1)							
IR		More than 10,000M $\Omega$ or 500M $\Omega \times \mu\text{F}$ (Whichever is smaller) *1)									
			Solder pot : 260 $\pm$ 5°C, 10 $\pm$ 1sec.  Initial Measurement Perform the heat treatment at 150°C +0/-10°C for 1 hour and leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.  Final Measurement Leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.								
12	ESD	Appearance	No abnormal exterior appearance								
		Capacitance Change	Class I	Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ , (Whichever is larger)							
			Class II	Within $\pm 10\%$							
		Q	Class I	Capacitance $\geq 30\text{pF}$ : $Q \geq 1,000$ $< 30\text{pF}$ : $Q \geq 400 + 20 \times C$ (C : Capacitance)							
		Tan $\delta$	Class II	Rated Voltage $\geq 25\text{V}$ : 0.025 max $\geq 16\text{V}$ : 0.035 max $\geq 10\text{V}$ : 0.050 max *1)							
IR		More than 10,000M $\Omega$ or 500M $\Omega \times \mu\text{F}$ (Whichever is smaller) *1)									
			AEC - Q200 - 002  Initial Measurement Perform the heat treatment at 150°C +0/-10°C for 1 hour and leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.  Final Measurement Perform the heat treatment at 150°C +0 / -10°C for 1 hour and leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.								
13	Solderability	95% of the terminations is to be soldered evenly and continuously	a) Preheat at 155°C for 4 hrs, Immerse in solder for 5s at 235 $\pm$ 5°C b) Steam aging for 8 hrs, Immerse in solder for 5s at 235 $\pm$ 5°C c) Steam aging for 8 hrs, Immerse in solder for 120s at 260 $\pm$ 5°C solder : a solution ethanol and rosin								

※ \*1) : Indicates typical specification. Please refer to individual specifications.



No.	Item		Performance	Test condition																	
14	Electrical Characterization	Capacitance	Within specified tolerance	The Capacitance / D.F. should be measured at 25°C, * Capacitance shall be measured after the heat treatment of 150+0/-10°C for 1hr and leaving for 24±2hr at room temperature. (Class II) <table border="1"> <thead> <tr> <th>Class</th> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td rowspan="2">I</td> <td>1000pF ↓</td> <td>1MHz ± 10%</td> <td rowspan="2">0.5 - 5.0Vrms</td> </tr> <tr> <td>1000pF ↑</td> <td>1kHz ± 10%</td> </tr> <tr> <td rowspan="2">II</td> <td>10μF ↓</td> <td>1kHz ± 10%</td> <td>1.0±0.2Vrms</td> </tr> <tr> <td>10μF ↑</td> <td>120Hz ± 20%</td> <td>0.5±0.1Vrms</td> </tr> </tbody> </table>	Class	Capacitance	Frequency	Voltage	I	1000pF ↓	1MHz ± 10%	0.5 - 5.0Vrms	1000pF ↑	1kHz ± 10%	II	10μF ↓	1kHz ± 10%	1.0±0.2Vrms	10μF ↑	120Hz ± 20%	0.5±0.1Vrms
		Class	Capacitance		Frequency	Voltage															
		I	1000pF ↓		1MHz ± 10%	0.5 - 5.0Vrms															
			1000pF ↑		1kHz ± 10%																
		II	10μF ↓		1kHz ± 10%	1.0±0.2Vrms															
			10μF ↑		120Hz ± 20%	0.5±0.1Vrms															
		Q	Class I		Capacitance ≥ 30pF : Q ≥ 1,000 < 30pF : Q ≥ 400 + 20 X C (C : Capacitance)																
Tanδ	Class II	Rated Voltage ≥ 25V : 0.025 max ≥ 16V : 0.035 max ≥ 10V : 0.050 max *1)																			
IR@25°C	Class I	More than 100,000MΩ or 1,000MΩ X μF (Whichever is smaller)																			
	Class II	More than 10,000MΩ or 500MΩ X μF (Whichever is smaller)																			
IR@125°C	Class I	More than 10,000MΩ or 100MΩ X μF (Whichever is smaller)																			
	Class II	More than 1,000MΩ or 10MΩ X μF (Whichever is smaller)																			
Dielectric Strength		No dielectric breakdown or mechanical breakdown	I.R. should be measured with a DC voltage not exceeding Rated Voltage @25°C, @125°C for 60 ~ 120 sec. Dielectric Strength : 250% of the rated voltage for 1 ~ 5 seconds The charge / discharge current is less than 50mA.																		
15	Board Flex	Appearance	No abnormal exterior appearance	Bending to the limit for 60 seconds. Limit : Class I - 3mm Class II - 2mm *1) Initial Measurement Perform the heat treatment at 150°C +0/-10°C for 1 hour and leave the capacitor in ambient condition for 24±2 hours before measurement. Then perform the measurement. Final Measurement Leave the capacitor in ambient condition for 24±2 hours before measurement. Then perform the measurement.																	
		Capacitance Change	Class I		Within ±5.0% or ±0.5pF, (Whichever is larger)																
			Class II		Within ±10%																
16	Terminal Strength (SMD)	Appearance	No abnormal exterior appearance	18N, for 60±1 sec. * 0603(1608) -10N, 0402(1005) -2N Initial Measurement Perform the heat treatment at 150°C +0/-10°C for 1 hour and leave the capacitor in ambient condition for 24±2 hours before measurement. Then perform the measurement. Final Measurement Leave the capacitor in ambient condition for 24±2 hours before measurement. Then perform the measurement.																	
		Capacitance Change	Class I		Within ±2.5% or ±0.25pF, (Whichever is larger)																
			Class II		Within ±10%																
17	Beam Load	Destruction value should be exceed Chip Length ≤ 2.5mm a) Chip Thickness > 0.5mm : 20N b) Chip Thickness ≤ 0.5mm : 8N Chip Length ≥ 3.2mm a) Chip Thickness ≥ 1.25mm : 54.5N b) Chip Thickness < 1.25mm : 15N	Beam speed Chip Length ≤ 2.5mm, 0.50±0.05mm / sec. Chip Length ≥ 3.5mm, 2.50±0.25mm / sec.																		
18	Capacitance Temperature Characteristics	Capacitance Change	Class I	0±30ppm / °C	Capacitance shall be measured by the steps shown in the following table. <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature(°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2</td> </tr> <tr> <td>2</td> <td>Min. operating temp. ±2</td> </tr> <tr> <td>3</td> <td>25±2</td> </tr> <tr> <td>4</td> <td>Max. operating temp. ±2</td> </tr> <tr> <td>5</td> <td>25±2</td> </tr> </tbody> </table> ■ Class I Temperature Coefficient shall be calculated from the formula as below Temp. Coefficient = $\frac{C2 - C1}{C1 \times \Delta T} \times 10^6$ [ppm / °C] C1 : Capacitance at step 3    C2 : Capacitance at 125°C ΔT : 125°C - 25°C = 100°C ■ Class II Capacitance change shall be calculated from the formula as below ΔC = $\frac{C2 - C1}{C1} \times 100$ (%) C1 : Capacitance at step 3    C2 : Capacitance at step 2 or step 4	Step	Temperature(°C)	1	25±2	2	Min. operating temp. ±2	3	25±2	4	Max. operating temp. ±2	5	25±2				
			Step	Temperature(°C)																	
1	25±2																				
2	Min. operating temp. ±2																				
3	25±2																				
4	Max. operating temp. ±2																				
5	25±2																				
Class II	Within ±15%																				


※ \*1) : Indicates typical specification. Please refer to individual specifications.

If you want more detailed information, Please Visit Samsung Electro - mechanics website ( www.semcr.com )

# Packaging Specifications

- Taping Packaging design : Packaging design follows IEC 60286 – 3 standard (IEC 60286 – 3 Packaging of components for automatic handling – parts 3)

## Cardboard(Paper) tape : 4mm pitch

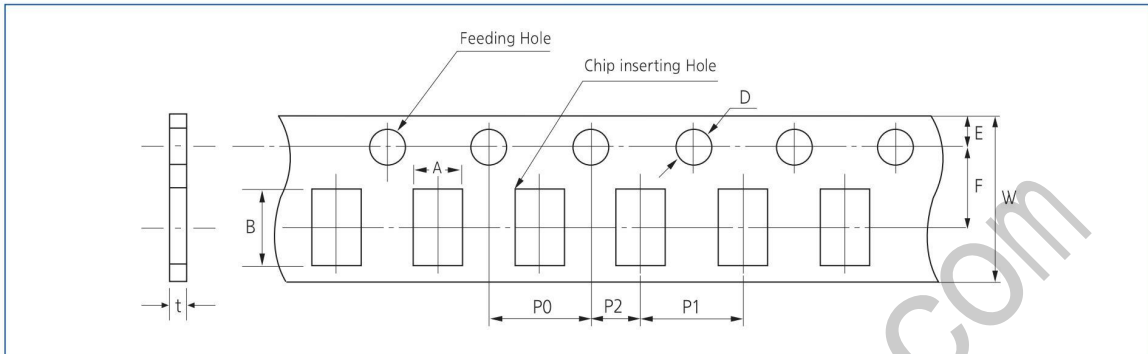


Unit : mm

Symbol	A	B	W	F	E	P1	P2	P0	D	t	
Size inch(mm)	0504 (1410)	1.30 ±0.20	1.70 ±0.20	8.00 ±0.30	3.50 ±0.05	1.75 ±0.10	4.00 ±0.10	2.00 ±0.05	4.00 ±0.10	Ø1.50 +0.10/-0	1.10 Below
	0603 0306 (1608) (0816)	1.10 ±0.20	1.90 ±0.20								
	0805 0508 (2012) (1220)	1.60 ±0.20	2.40 ±0.20								
	1206 0612 (3216) (1632)	2.00 ±0.20	3.60 ±0.20								

※ According to normal size, we fill out A, B in the table above. The data may be changed as special size tolerance.

## Cardboard(Paper) tape : 2mm pitch

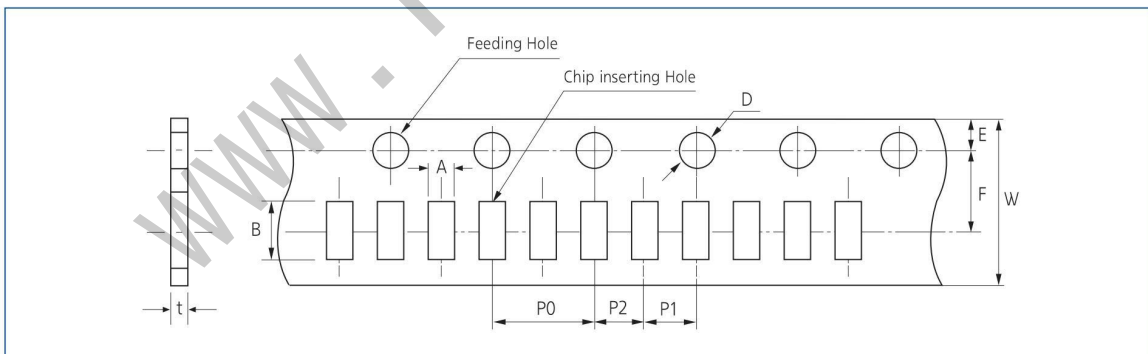


Unit : mm

Symbol	A	B	W	F	E	P1	P2	P0	D	t	
Size inch(mm)	01005 (0402)	0.25 ±0.02	0.45 ±0.02	8.00 ±0.30	3.50 ±0.05	1.75 ±0.10	2.00 ±0.10	2.00 ±0.05	4.00 ±0.10	Ø1.50 +0.10 /-0.03	0.25 ±0.02
	0201 (0603)	0.38 ±0.03	0.68 ±0.03								0.37 ±0.03
	0402 (1005)	0.62 ±0.05	1.12 ±0.05								0.37 ±0.05
											0.60 ±0.05
	0204 (0510)	0.62+0.05 /-0.10	1.12+0.05 /-0.10								0.37 ±0.03

※ According to normal size, we fill out A, B in the table above. The data may be changed as special size tolerance.

Embossed(Plastic) tape

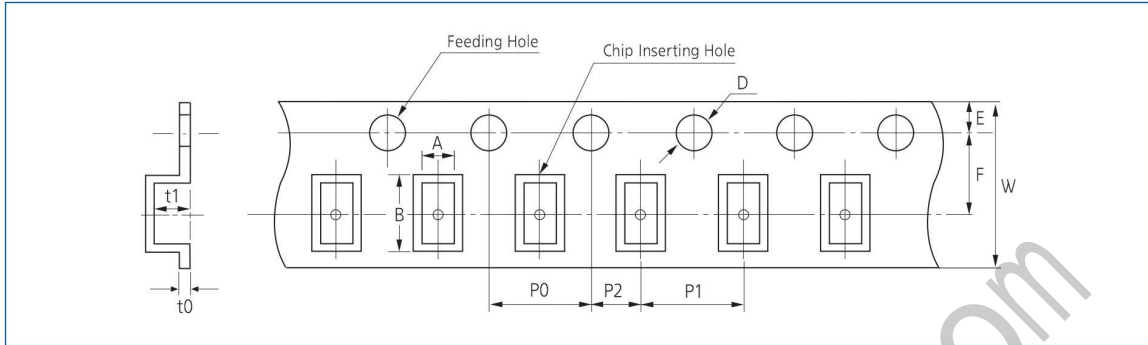


Unit : mm

Symbol	A	B	W	F	E	P1	P2	P0	D	t1	t0
Type											
01005 (0402)	0.25 ±0.02	0.45 ±0.02	4.00 ±0.05	1.80 ±0.02	0.90 ±0.05	1.00 ±0.02	1.00 ±0.02	2.00 ±0.04	∅0.80 ±0.04	0.25 ±0.02	0.50 Max
0603 (1608)	1.05 ±0.15	1.90 ±0.15	8.00 ±0.30	3.50 ±0.05	0.90 ±0.05	1.00 ±0.02	1.00 ±0.02	2.00 ±0.04	∅0.80 ±0.04	0.25 ±0.02	0.50 Max
0805 (2012)	1.45 ±0.20	2.30 ±0.20									
1206 (3216)	1.90 ±0.20	3.50 ±0.20									
1210 (3225)	2.80 ±0.20	3.60 ±0.20									
1808 (4520)	2.30 ±0.20	4.90 ±0.20	12.00 ±0.30	5.60 ±0.05	1.75 ±0.10	8.00 ±0.10	2.00 ±0.05	4.00 ±0.10	∅1.50 +0.10 /-0.03	3.80 Max	0.60 Below
1812 (4532)	3.60 ±0.20	4.90 ±0.20									
2220 (5750)	5.50 ±0.20	6.20 ±0.20									
0204 (5010)	0.62 +0.05 /-0.10	1.12 +0.05 /-0.10	0.80 ±0.30	3.50 ±0.05	0.90 ±0.05	1.00 ±0.02	1.00 ±0.02	2.00 ±0.04	∅0.80 ±0.04	0.25 ±0.02	0.50 Max
0306 (0816)	1.10 ±0.20	1.90 ±0.20									
0508 (1220)	1.45 ±0.20	2.30 ±0.20									
0612 (1632)	2.00 ±0.20	3.60 ±0.20									

※ According to normal size, we fill out A, B in the table above. The data may be changed as special size tolerance.


Peeling off of Tape

- 10g.f ≤ Peel off force ≤ 70g.f

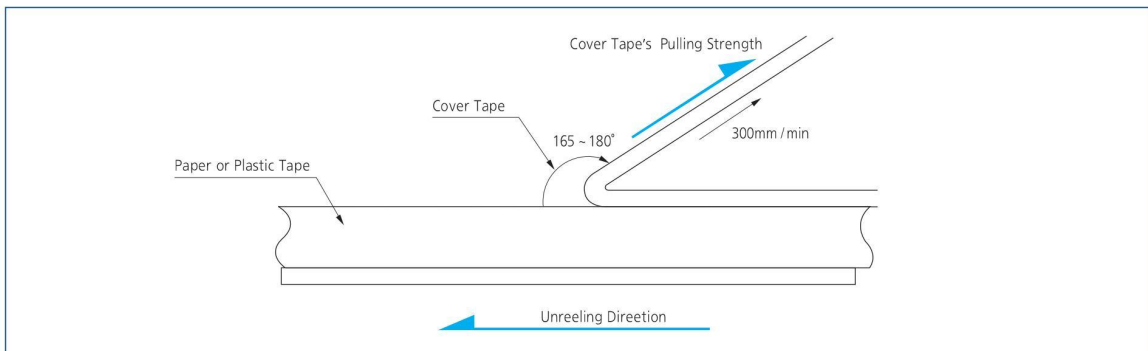

# Packaging Specifications

## Taping figure

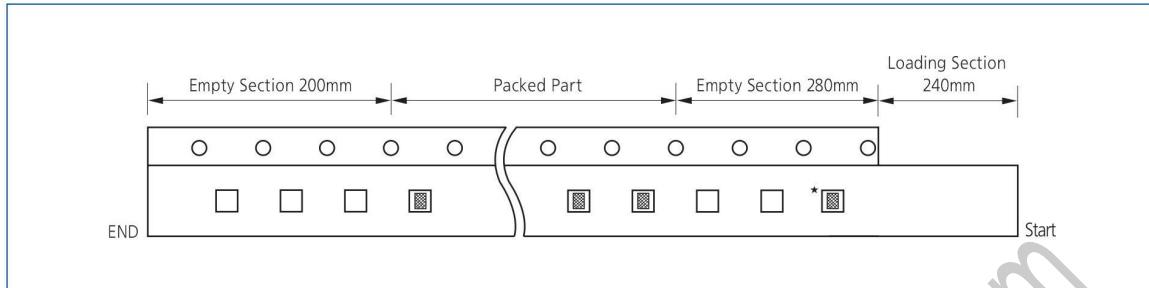

★ The chip is only use for identifying the label and packaged products. Please don't use the chip.

## Packaging Code & Quantity

Unit : kpcs

Size inch(mm)	Thickness code	Cardboard(Paper) Type										
		7" Reel					10" Reel	13" Reel				
		C	8	H	Z*	Y*	O	D	L	2*	7*	3
01005(0402)	2	20	-	-	-	-	-	100	-	-	-	-
0201(0603)	3	10	-	15	10	10	30	50	-	150	50	-
0402(1005)	3	10	-	15	-	-	30	50	-	-	-	-
	5	10	8	-	10	10	30	50	40	100	50	-
	7,8(THMC)	-	8	-	-	-	-	-	-	-	-	30
0504(1410)	8	4	-	-	-	-	10	10	15	-	-	-
0603(1608)	5	4	-	-	-	-	30	50	-	-	-	-
	8	4	-	-	4	4	10	10	15	-	-	-
	9,N	4	-	-	-	-	-	-	-	-	-	-
0805(2012)	A,C	4	-	-	-	-	10	10	15	-	-	-
1206(3216)	C	4	-	-	-	-	10	10	15	-	-	-

\* 2 = 1mm Pitch / Z = Chip aligned for horizontal / Y, 7 = Chip aligned for vertical


Unit : kpcs

Size inch(mm)	Thickness code	Embossed(Plastic) Type						Bulk case Type	Bulk Type
		7" Reel				10" Reel	13" Reel		
		E	G	W*	R*	S	F		
01005(0402)	2	50	-	-	-	-	-	-	-
0201(0603)	1	10	-	-	-	-	-	-	-
0402(1005)	1,2,L	15	-	-	-	-	-	-	-
	3,5	-	-	-	-	-	-	50	-
0603(1608)	8	3	-	-	3	-	10	15	-
	E,M	3	-	-	-	-	-	-	-
0604(1610)	D	3	-	3	-	6	10	-	-
0805(2012)	A,C	-	-	-	-	-	-	10	-
	E	2	3	2	-	6	10	5	-
	F	2	3	2	-	6	10	5	-
	Q	2	3	2	-	6	10	5	-
1206(3216)	E,P,F	2	3	-	-	6	10	-	-
	H	2	-	2	-	4	8	-	-
1210(3225)	9,D,C,O	2	-	-	-	-	10	-	-
	E,F,M	2	-	-	-	-	10	-	-
	H,T	2	-	-	-	4	8	-	-
	I,U	2	-	-	-	-	4	-	-
	J,V	1	-	1	-	-	4	-	-
	S	2	-	-	-	-	8	-	-
1808(4520)	F	2	-	-	-	-	-	-	-
1812(4532)	F	1	-	-	-	-	4	-	-
	H,I	1	-	-	-	-	4	-	-
	J,L	-	-	-	-	-	2	-	-
2220(5750)	H,I,J	-	-	-	-	-	2	-	-

\* R = Chip aligned for horizontal / W = Chip aligned for vertical

### Reel Dimensions

Unit : mm

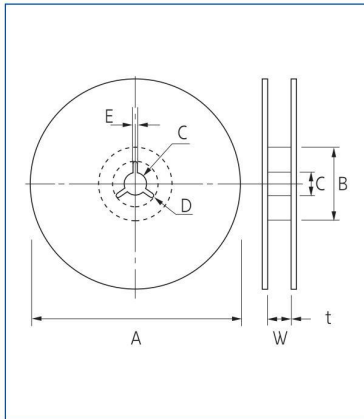


Symbol	Tape Width	A	B	C	D
7" Reel	4mm	$\varnothing 178 \pm 2.0$	MIN $\varnothing 50$	$\varnothing 13 \pm 0.5$	$21 \pm 0.8$
	8mm	$\varnothing 178 \pm 2.0$	MIN $\varnothing 50$	$\varnothing 13 \pm 0.5$	$21 \pm 0.8$
	12mm	$\varnothing 178 \pm 2.0$	MIN $\varnothing 50$	$\varnothing 13 \pm 0.5$	$21 \pm 0.8$
10" Reel	8mm	$\varnothing 258 \pm 2.0$	MIN $\varnothing 70$	$\varnothing 13 \pm 0.5$	$21 \pm 0.8$
13" Reel	8mm	$\varnothing 330 \pm 2.0$	MIN $\varnothing 70$	$\varnothing 13 \pm 0.5$	$21 \pm 0.8$
	12mm	$\varnothing 330 \pm 2.0$	MIN $\varnothing 70$	$\varnothing 13 \pm 0.5$	$21 \pm 0.8$

Symbol	Tape Width	E	W	t
7" Reel	4mm	$2.0 \pm 0.5$	$5.0 \pm 0.5$	$1.2 \pm 0.2$
	8mm	$2.0 \pm 0.5$	$10 \pm 1.5$	$0.9 \pm 0.2$
	12mm	$2.0 \pm 0.5$	$13 \pm 0.5$	$1.2 \pm 0.2$
10" Reel	8mm	$2.0 \pm 0.5$	$10 \pm 1.5$	$1.8 \pm 0.2$
13" Reel	8mm	$2.0 \pm 0.5$	$10 \pm 1.5$	$1.8 \pm 0.2$
	12mm	$2.0 \pm 0.5$	$13 \pm 0.5$	$2.2 \pm 0.2$

### Bulk Case Packaging

- Bulk case packaging can reduce the stock space and transportation costs.
- The bulk feeding system can increase the productivity.
- It can eliminate the components loss.

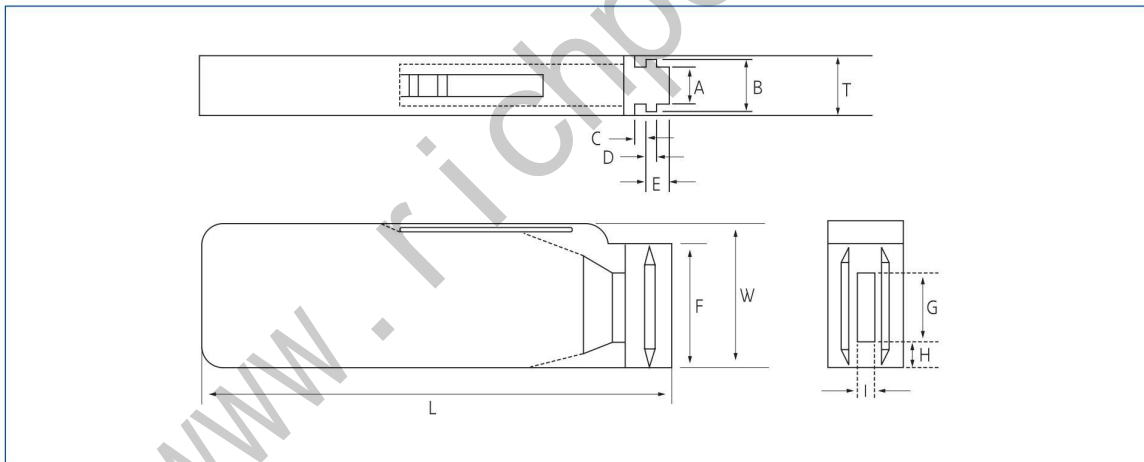

Unit : mm

Symbol	A	B	T	C	D	E
Dimension	$6.80 \pm 0.10$	$8.80 \pm 0.10$	$12 \pm 0.10$	$1.50 \pm 0.10 / -0$	$2.00 +0 / -0.10$	$3.00 +0.20 / -0$

Symbol	F	W	G	H	L	I
Dimension	$31.5 +0.20 / -0$	$36 +0 / -0.20$	$19 \pm 0.35$	$7.00 \pm 0.35$	$110 \pm 0.70$	$5.00 \pm 0.35$

### ■ QUANTITY

Unit : pcs

Size Inch(mm)	0402(1005)	0603(1608)	0805(2012)	
			T ≤ 0.85mm	T ≥ 1.0mm
Quantity	50,000	10,000 or 15,000	10,000	5,000

# Application Manual for Surface Mounting

## 1. Storage of products

### 1-1. Storage Environment

Tape packing materials are designed to withstand long-term storage, but they will degrade more rapidly in the presence of high temperature or high humidity. Therefore, the products must be stored in an ambient 0 ~ 40°C with a relative humidity of 0 ~ 70%. Allowable storage period is within 6 months from the outgoing date of delivery.

### 1-2. Corrosive Gases

Since sulfur and chlorine may degrade the solderability of the end termination, it is important to store the capacitors in an environment free of these gases.


### 1-3. Temperature Fluctuations

Since dew condensation may occur by the differences in temperature when the products are taken out of storage, it is important to maintain a temperature-controlled environment.

## 2. Design of Solder Land Pattern

When designing printed circuit boards, the shape and size of the solder lands must allow for the proper amount of solder on the capacitor. The amount of solder at the end terminations has a direct effect on the probability that the chip will crack. The greater amount of solder, the larger amount of stress on the chip, and the more likely that it will break. Use the following illustrations as guidelines for proper Solder land design.

Recommendation of solder Land Shape and Size

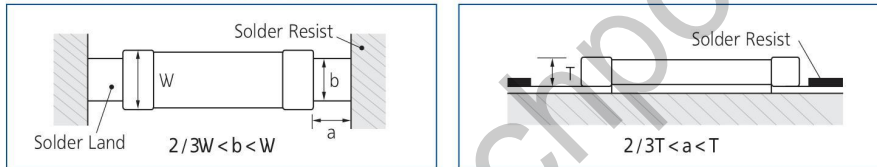

## 3. Adhesives

MLCCs generally require the use of an adhesive to position the chips to the circuit board prior to soldering.

### 3-1. Requirements for Adhesives

They must have enough adhesion so that the chips will not fall off or move during the handling of the circuit board.

They must maintain their adhesive strength when exposed to soldering temperatures.

They should not spread or run when applied to the circuit board.


They should have a long pot life.

They should harden quickly.

They should not corrode the circuit board or chip material.

They should be a good insulator.

They should be non-toxic, and not produce harmful gases, nor be harmful when touched.

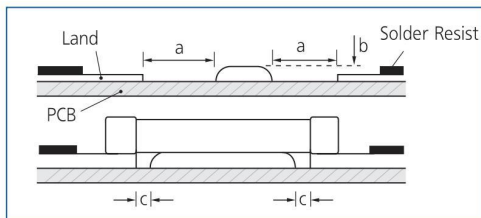

Type	21	31
a	Min. 0.2	Min. 0.2
b	70 ~ 100 μm	70 ~ 100 μm
c	> 0	> 0

### 3-2. Application Method

It is important to use the proper amount of adhesive. Too little will cause poor adhesion to the circuit board, and too much may strain the conductor pattern, thereby causing defective soldering. The following illustrations show the proper quantity of adhesive.

### 3-3. Adhesive hardening Characteristics

To prevent oxidation of the terminations, the adhesive must harden at 160°C or less, within 2 minutes or less.


## 4. Mounting

### 4-1. Mounting Head Pressure

Excessive pressure will cause chip capacitors to crack.  
The pressure between nozzle and chip capacitor will be 300g maximum during mounting.

### 4-2. Bending Stress

Bending of printed circuit board by mounting head when double-sided circuit boards are used, chip capacitors first are mounted and soldered onto one side of the board.  
When the capacitors are mounted onto the other side, it is important to support the board as shown in the illustration. If the circuit board is not supported, it may bend, causing the already - installed capacitors to crack.

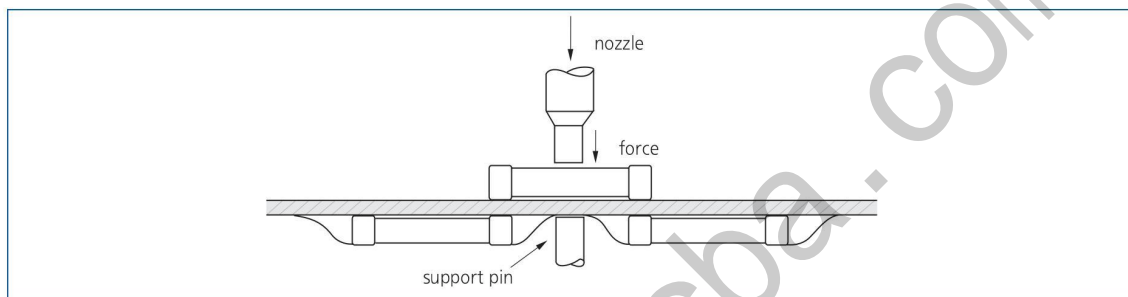

## 5. Flux

Although highly - activated flux gives better solderability, substances which increase activity may also degrade the insulation of the chip capacitors, To avoid such degradation, it is recommended that a mildly activated rosin flux ( less than 0.2% chlo.rine ) be used

## 6. Soldering

Since a multilayer ceramic chip capacitor comes into direct contact with melted solder during soldering, it is exposed to potentially mechanical stress caused by the sudden temperature change. The capacitor may also be subject to silver migration, and to contamination by the flux. Because of these factors, soldering technique is critical.

### 6-1. Soldering Methods

Method	Classification	
Reflow soldering	- Overall heating	- Infrared rays - Hot plate - VPS (Vapor phase)
	- Local heating	- Air heater - Laser - Light beam
Flow soldering	- Single wave - Double wave	


### 6-2. Soldering Profile

To avoid the crack problem by sudden temperature change, follow the temperature profile in the adjacent graph.

# Application Manual for Surface Mounting


## 6-3. Pb-Free (Sn 100%) Plating

### • REFLOW SOLDERING

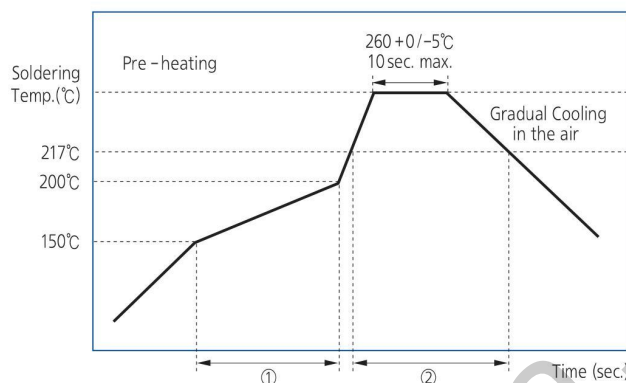

Soldering Temp.(°C)	Pre-heating Time (①, sec.)	Soldering Time(②, sec.)
260 + 0 / -5	60 ~ 120	60 ~ 150

### • FLOW SOLDERING

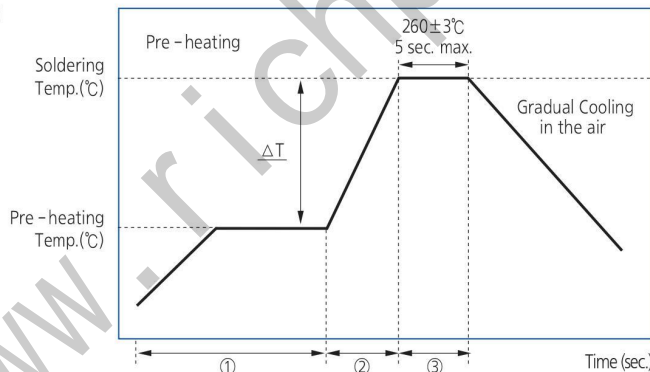

$\Delta T$ (°C)	Soldering Temp. (°C)	Pre-heating Time (① + ②, sec.)	Soldering Time (③, sec.)
$\leq 150$ (1206 and below size)	$260 \pm 3$	$\geq 120$	$\leq 5$

### • SOLDER IRON(Hand Soldering)

Variation of Temp.(°C)	Soldering Temp.(°C)	Pre-heating Time(sec.)	Soldering Time(sec.)	Cooling Time(sec.)	Condition of Iron Facilities		
					Wattage	Tip Diameter	Soldering Time
$\Delta T \leq 130$	$300 \pm 10^\circ\text{C}$ max.	$\geq 60$ sec.	$\leq 4$ sec.	-	20W max.	3mm max.	4sec max.



\* Caution - Iron tip should not contact with ceramic body directly



#### 6-4. Manual Soldering

Manual soldering can pose a great risk of creating thermal cracks in chip capacitors. The hot soldering iron tip comes into direct contact with the end terminations, and operator's carelessness may cause the tip of the soldering iron to come into direct contact with the ceramic body of the capacitor. Therefore the soldering iron must be handled carefully, and close attention must be paid to the selection of the soldering iron tip and to temperature control of the tip.

#### 6-5. Amount of Solder

Too much Solder		Cracks tend to occur due to large stress.
Not enough solder		Weak holding force may cause bad connections or detaching of the capacitor

#### 6-6. Cooling

Natural cooling using air is recommended. If the chips are dipped into solvent for cleaning, the temperature difference ( $\Delta T$ ) must be less than 100°C


#### 6-7. Cleaning

If rosin flux is used, cleaning usually is unnecessary. When strongly activated flux is used, chlorine in the flux may dissolve into some types of cleaning fluids, thereby affecting the chip capacitors. This means that the cleaning fluid must be carefully selected, and should always be new.

### 7. Notes for Separating Multiple, Shared PC Boards

A multi-PC board is separated into many individual circuit boards after soldering has been completed. If the board is bent or distorted at the time of separation, cracks may occur in the chip capacitors. Carefully choose a separation method that minimizes the bending of the circuit board.

# Certifications

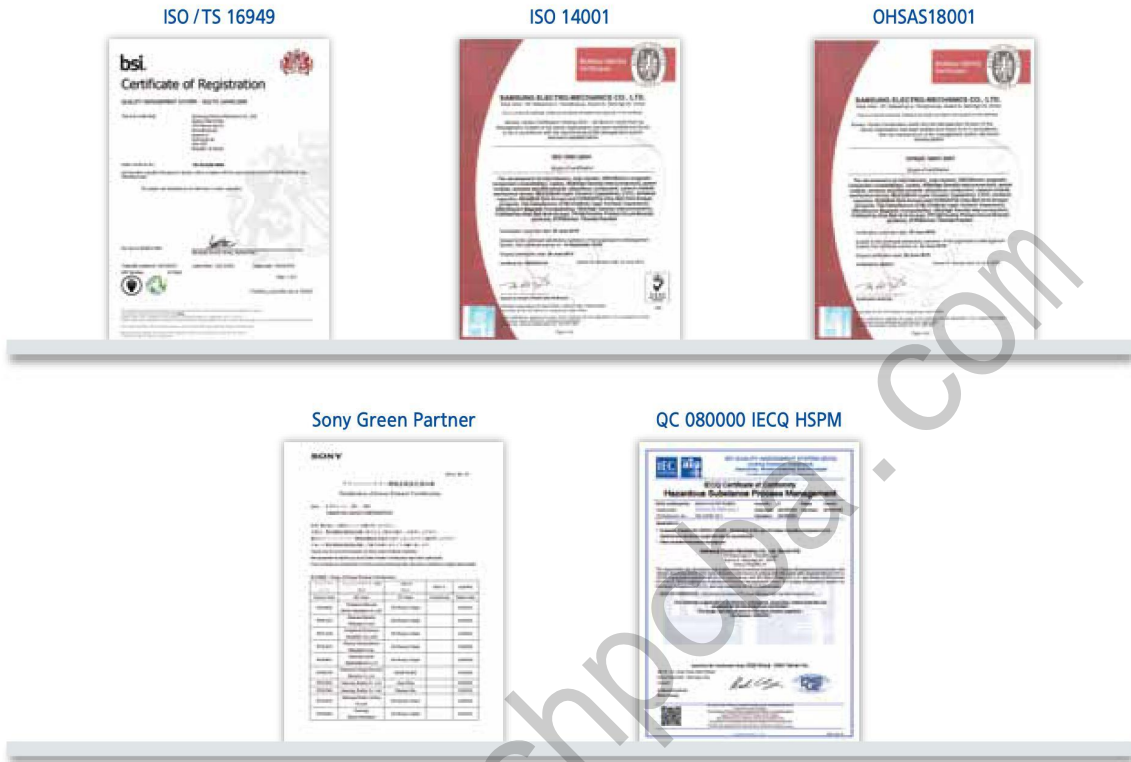

Quality System Certification status for each factory site

Certification	Suwon (Korea)	Busan (Korea)	Calamba (Philippines)	Tianjin (China)	Binhai (China)
ISO / TS 16949	BSI TS 91430-000	BSI TS 91430-001	BSI TS 91430-005	BSI TS 91430-007	BSI TS 91430-007
Date Validity	2013-10-25 ~ 2016-10-24	2016-07-31 ~ 2018-09-14	2015-07-20 ~ 2018-07-19	2014-11-18 ~ 2017-11-17	2014-11-18 ~ 2017-11-17
ISO 14001	20BK00223-UK	20BK00223-UK	EMS_77354	CNBJ320761-UK	CNBJ320761-UK
Date Validity	2016-06-25 ~ 2018-09-14	2016-06-25 ~ 2018-09-14	2015-07-13 ~ 2018-07-12	2015-04-15 ~ 2018-04-14	2015-04-15 ~ 2018-04-14
OHSAS 18001	BK50217	BK50217	OHS_568723	CN100043A	CN100043A
Date Validity	2013-06-25 ~ 2019-06-24	2013-06-25 ~ 2019-06-24	2010-12-21 ~ 2016-10-13	2015-04-15 ~ 2018-04-14	2015-04-15 ~ 2018-04-14
QC 080000	KR-HSPM-1011	KR-HSPM-1012	PI-HSPM-1001	PRC-HSPM-1767	PRC-HSPM-1767-2
Date Validity	2016-07-02 ~ 2019-07-01	2016-07-14 ~ 2019-07-19	2016-07-11 ~ 2019-07-04	2016-07-11 ~ 2019-07-26	2016-07-11 ~ 2019-07-26
Sony Green Partner Date Validity	2016-02-22 ~ 2018-05-31	2016-02-22 ~ 2018-05-31	2016-02-22 ~ 2018-05-31	2016-02-22 ~ 2018-05-31	2016-02-22 ~ 2018-05-31

# Homepage

<http://www.Samsungsem.com>

## SEMCO LCR web-site

SEMCO web -site supports all technical data & information for our partner.



Certifications

## LCR Web Library

The software of "LCR Web Library" provides the characteristics of SEMCO's products on the website. (<http://weblib.samsungsem.com/>)

- S-parameter and Spice Model of MLCC, Inductor and Bead.
- The acoustic noise data of MLCC
- Capacitance of MLCC according to Temperature and DC bias

Part Number	Capacitance	Size (EIAthickness)	Rated Voltage	TC	Thickness Max	Tolerance
CL31104R05LN	100nF	03050402	4Vdc	X7S	0.25 mm	±20%
CL31105R05LN	1uF	03050815	4Vdc	X7S	0.55 mm	±20%
CL31147R05LN	470nF	03050815	4Vdc	X7S	0.55 mm	±20%
CL324102P2N1N	1nF	010550402	10Vdc	X5R	0.22 mm	±10%
CL324102G2N1N	1nF	010550402	5.3Vdc	X5R	0.22 mm	±10%
CL324102K2N1N	10nF	010550402	10Vdc	X5R	0.22 mm	±10%
CL324102L2N1N	10nF	010550402	5.3Vdc	X5R	0.22 mm	±10%
CL324104G2N1N	100nF	010550402	5.3Vdc	X5R	0.22 mm	±10%
CL324104R2N1N	100nF	010550402	4Vdc	X5R	0.22 mm	±20%
CL324105R04K00	1uF	010550403	5.3Vdc	X5R	0.55 mm	±20%
CL324182K2N1N	1.8nF	010550402	10Vdc	X5R	0.22 mm	±10%
CL324222P2N1N	2.2nF	010550402	10Vdc	X5R	0.22 mm	±10%
CL324252K2N1N	220nF	010550402	5.3Vdc	X5R	0.22 mm	±20%
CL32482G2N1N	5.6nF	010550402	5.3Vdc	X5R	0.22 mm	±10%
CL325224K2N1N	220nF	010550402	10Vdc	X7R	0.22 mm	±10%
CL325334K2N1N	330nF	010550402	10Vdc	X7R	0.22 mm	±10%

## Disclaimer & Limitation of Use and Application

1. This catalogue is valid only to the products purchased either from us or through our official distributors. Should you have any question regarding our product specifications, please contact our sales personnel or application engineers.
2. Product specifications included in this catalogue are effective as of [September. 30, 2016]. Please be advised that they are standard product specifications for reference only. We may change, modify or discontinue the product specifications without notice at any time. Before placing an order, you need to check with our personnel about the validity of the product specifications that you are referring to.
3. We may modify or cease to produce the products listed in this catalogue without notice.
4. Without obtaining our permission, you should not be allowed to reproduce, copy, use or transfer any content or information contained this catalogue in any manner whatsoever for any purpose.
5. WE WILL NOT ASSUME ANY RESPONSIBILITIES WHATSOEVER FOR ANY CLAIM, DISPUTE, DAMAGE OR LIABILITY WITH REGARDS TO THE INTELLECTUAL PROPERTY RIGHTS OR OTHER RELATED RIGHTS OF OURS OR ANY THIRD PARTY ASSOCIATED WITH YOUR USE OF OUR PRODUCTS AND/OR INFORMATION CONTAINED IN THIS CATALOGUE. WE EXPRESSLY DISCLAIM THAT NO LICENSE IS GRANTED REGARDING THE AFOREMENTIONED RIGHTS.
6. THE PRODUCTS LISTED IN THIS CATALOGUE ARE NOT DESIGNED AND MANUFACTURED FOR ANY USE AND APPLICATIONS SET FORTH BELOW. PLEASE NOTE THAT ANY MISUSE OF THE PRODUCTS DEVIATING FROM PRODUCTS SPECIFICATIONS OR INFORMATION PROVIDED IN THIS CATALOGUE MAY CAUSE SERIOUS PROPERTY DAMAGES OR PERSONAL INJURY. WE WILL NOT BE LIABLE FOR ANY DAMAGES RESULTING FROM ANY MISUSE OF THE PRODUCTS, SPECIFICALLY INCLUDING USING THE PRODUCTS FOR HIGH RELIABILITY APPLICATIONS AS LISTED BELOW.

IF YOU HAVE ANY QUESTIONS REGARDING THIS 'LIMITATION OF USE AND APPLICATION', YOU SHOULD FIRST CONTACT OUR SALES PERSONNEL OR APPLICATION ENGINEERS.

- ① Aerospace/Aviation equipment
- ② Medical equipment
- ③ Military equipment
- ④ Disaster prevention/crime prevention equipment
- ⑤ Any other applications with the same as or similar complexity or reliability to the applications set forth above.

[www.richpcba.com](http://www.richpcba.com)

www.richpcba.com

[www.richpcba.com](http://www.richpcba.com)



## Passive components sales offices

### Head office

Maeyoung-ro 150 (Maetan-dong) Yeongtong-gu, Suwon-city, Gyeonggi Province, Korea 16674  
Tel : +82-31-210-5114

### America Sales Office

#### San Jose Office

Samsung Electromechanics America Inc  
3655 North First Street  
San Jose, CA, 95134  
TEL : +1-503-869-8083  
E-mail : philip.elliott@samsung.com

### Europe Sales Office

#### Frankfurt office

Samsung Electro-Mechanics GmbH, Kölnerstr. 12  
65760 Eschborn Germany  
TEL : + 49-6196-66-7259  
E-mail : benjamin.blume@samsung.com

### Domestic Distributors

#### Korchip Corporation

359, Manan-ro, Manan-gu, Anyang-si, Gyeonggi-do, Korea  
Tel :+82-31-361-8100  
E-mail : parts@korchip.com

#### SAMT

315, Yeongdong-daero, Gangnam-gu, Seoul, Korea  
Tel : +82-2-3458-9000  
E-mail : info@isamt.com

#### CHUNGMAC

13, Heungdeok 1-ro, Giheung-gu, Yongin-si,  
Gyeonggi-do, Korea  
Tel : +82-31-234-2367  
E-mail : webmaster@chungmac.co.kr

#### YOUNGDUK

632, Seobusaet-gil, Geumcheon-gu, Seoul, Korea  
Tel : +82-2-2107-7860  
E-mail : dryblood@hanmail.net

### Asia Sales Offices

#### Shenzhen Office

Shenzhen Office-14F, Tower A, SCC Building, Junction of Houhai Blvd.  
and Haide 1st Rd., Nanshan Dist., Shenzhen City, China  
TEL : +86-755-8608-5562  
E-mail : alex77.zhang@samsung.com

#### Shanghai Office

9F Room CD, Shanghai HNA Building, No.898 Pu Ming Rd.,  
Pudong New Area Dist., Shanghai City, China, 200122  
TEL : +86-21-2231-4353  
E-mail : jerry.qu@samsung.com

#### Beijing Office

14F Room C1C2, China Merchants Tower, No.118 Jianguo Rd.,  
Chaoyang Dist., Beijing City, China, 100022  
TEL : +86-10-6566-8100-6606  
E-mail : kiko.wang@samsung.com

#### Taipei Office

9F-1, No.399 Rueykuang Rd., Neihu Dist., Taipei City, Taiwan  
TEL : +886-2-2656-8350  
E-mail : kevin0130.wang@samsung.com

#### Japan(Tokyo) Office

Samsung Electro-Mechanics Japan Co.,Ltd  
-ShinagawaGrand Central Tower 9F,  
2-16-4, Kounan, Minato-ku, Tokyo, Japan  
TEL : +81-3-6369-6452  
E-mail : hikota.suga@samsung.com

#### Singapore Office

Samsung Electro-Mechanics Private Limited - 3 Church Street  
Samsung Hub #23-01 Singapore  
TEL : +65-6933-2636  
E-mail : jessica.benegildo@samsung.com

#### India Office

Vipul Tech Square, Tower C, Golf Course Road, Sector - 43,  
Gurgaon - 122001, Haryana, India  
TEL : +91-124-4841800  
E-mail : munish.kumar@samsung.com

## Passive components manufacturing sites

#### Suwon Plant(Korea)

Meayoungro 150 (Maetan-dong) Yeongtong-gu,  
Suwon Gyeonggi-do 16674  
Tel : +82-31-210-5114

#### Busan Plant (Korea)

Noksan Saneopjungro 333 (Songjeong-dong),  
Gangseo-gu, Busan 46754  
Tel : +82-51-970-7114, 8114

#### Tianjin Plant (China)

27, Heiniucheng-Road,Tianjin, China 300210  
Tel : +86-22-2830-3333

#### Binhai Plant(China)

80, Xiqing road, TEDA west district, Tianjin, China  
TEL : +86-22-2830-3333(3500)

#### Philippines Plant (Philippines)

BLK 5&6 Calamba Premiere International Park Brgy.  
Batino Calamba, Laguna Philippines  
TEL : +63-49-508-8300

All information indicated in this catalog is as of September. 2016

\* The specifications and designs contained herein may be subject to change without notice.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Samsung Electro-Mechanics:

[CL05A106MP5NUNC](#) [CL10B475KQ8NQNC](#) [CL21A475KBQNNNE](#) [CL31B225KCHSNNE](#) [CL21B105KBFNNNE](#)  
[CL31A107MQHNNWE](#) [CL32A106KOTLNWE](#) [CL32B106KBJN3WE](#) [CL02C2R5BO2GNNC](#) [CL03A104KQ3NNWC](#)  
[CL32B102KJFNNWE](#) [CL32B226KOJNNWE](#) [CL21B104KCFNNWE](#) [CL32B226MOJNNWE](#) [CL31B104KCFNNWE](#)  
[CL31B106KAHNNWE](#) [CL32B475KBJN3WE](#) [CL32B475KCVZNWE](#) [CL05A475KP5NRND](#) [CL05B682KB5NNWC](#)  
[CL21A106KQFN3WE](#) [CL21B224KCFSNWE](#) [CL31B475KOHNNWE](#) [CL32A106MOJNNWE](#) [CL32A107MPVNNWE](#)  
[CL32B106KMVNNWE](#) [CL05A475MQ5NRNL](#) [CL21A106KOCL3RC](#) [CL32B476KPJNNWE](#) [CL03C470JA3NNWH](#)  
[CL10A226MQ8ZUNE](#) [CL21A226MAQNNNF](#) [CL21B225KOFNHNG](#) [CL31B333KCCNNWC](#) [CL10B221KB8NNWC](#)  
[CL32B475KBJN3WF](#) [CL05A226MQ7ZUN8](#) [CL10B103KC8NHNC](#) [CL31B475KBHN3WE](#) [CL05B104KP5NNWC](#)  
[CL05A475KP5NRNC](#) [CL21A476MR7NVNC](#) [CL21A476MR9NVNC](#) [CL31C104JAHNNWE](#) [CL10B105MO8NNWC](#)  
[CL31B105KCHNNWE](#) [CL05B105KQ5NQWC](#) [CL32B475KBJNNWE](#) [CL10B224MQ6NXNC](#) [CL05B222JB5NNWC](#)  
[CL31B225KCHS3WE](#) [CL05A475MQ5NRNC](#) [CL10A106KP8NQSC](#) [CL21B105KOFNNWE](#) [CL31B475KAHNNWE](#)  
[CL10B102KB8NNWC](#) [CL31A106KOHNNWE](#) [CL32B106KAJNNWE](#) [CL31A106KPHNNWE](#) [CL21B104KBCNNWC](#)  
[CL32B106KBJNNWE](#) [CL32B475KBUYNWE](#) [CL10B474KA8NNWC](#) [CL31A106KQHNNWE](#) [CL31B225KOHNNWE](#)  
[CL32A476MQJNNWE](#) [CL31B106KPHNNWE](#) [CL32A226MOJNNWE](#) [CL32B225KCJSNWE](#) [CL32B105KCJNNWE](#)  
[CL32B104KCFNNWE](#) [CL21A226MAQNNNE](#) [CL32B226KAJNNWE](#) [CL05A475MP5NRNC](#) [CL05A105KP5NNND](#)  
[CL31A106MOHNNWE](#) [CL31B106KOHNNWE](#) [CL10B225KP8NNWC](#) [CL32A106KPINNWE](#) [CL05A105KP5NNNC](#)  
[CL10A105MQ8NNNC](#) [CL10A225KA5LNNC](#) [CL10F225ZP8NNNC](#) [CL10B103KA8NNNC](#) [CL10B102KA8NNNC](#)  
[CL10B101KB8NNNC](#) [CL10A474KB8NNNC](#) [CL31C470JIFNNNE](#) [CL10C130JB8NNNC](#) [CL10C131JB8NNNC](#)  
[CL10C140JB8NNNC](#) [CL10C150JC8NNNC](#) [CL10C182JB8NNNC](#) [CL10C360JB8NNNC](#) [CL10C3R6CB8NNNC](#)  
[CL10C470JC8NNNC](#) [CL10C4R3CB8NNNC](#) [CL10C620JB8NNNC](#) [CL10C6R8DB8NNNC](#) [CL10C910JB8NNNC](#)