



品质至上、安全第一
Safety First Quality First



产品目录

PRODUCT CATALOG

www.zqsling.com

天津中企成长科技有限公司
Tianjin Zhong Qi Growth Technology Co., Ltd.

产品 目录

PRODUCT CATALOG

公司介绍 (Company profile)	01
吊装带 (Lifting Slings)	02/10
扁平吊装带: Webbing Sling	03
环状扁平吊装带: Endless Webbing Sling	04
双眼扁平吊装带: Eye-Eye Webbing Sling	05
环状圆形吊带: Endless Round Sling	06
双眼圆形吊带: Eye-Eye Round Sling	07
圆状组合吊索: Multi-Round Sling	08
一次性使用吊装带: Used One Only Way Sling	09
捆绑带 (Cargo Straps)	11/23
捆绑带: Ratchet Strap	12
栓紧器: Ratchet Buckle	14
钩子: Hook	19
拖带: Tow Strap	23
安全带 (Safety Harness)	24/25
生产与认证 (Production And Certification)	26
场景示例 (Scenario Example)	27
为什么选择我们 (Why Choose us)	28

公司简介

COMPANY PROFILE

天津中企成长科技有限公司坐落在风景秀丽的海滨城市——天津，地理位置得天独厚，毗邻繁忙的天津港口，这个地理位置为我们提供了便捷的物流和全球贸易的机会。我们专注于吊装带、安全带、捆绑带等产品的经营和供应。

作为一家优秀的吊装带供应商，中企坚守着“安全至上，品质第一”的企业文化。这一核心文化使我们始终将客户的安全放在首位，对安全和吊装产品质量要求严格，确保每一件产品都符合高标准。

我们的服务理念是“诚信经营、创造价值”。这意味着我们始终以诚实、透明和利他的方式开展业务，努力为客户创造实际价值。我们不仅仅是您的安全和吊装产品供应商，更是您可以信赖的合作伙伴。

除了为客户提供高质量的产品和卓越的服务，中企还积极关注员工的幸福和成长。如果您正在寻找高品质、可靠、安全的吊装解决方案，欢迎随时与我们联系，我们将全力以赴为您提供最优质的服务。

Tianjin Zhong Qi Growth Technology Co., Ltd. is located in Tianjin—the beautiful coastal city. It has a unique geographical location and is adjacent to the busy Tianjin Port. This geographical location provides us with convenient logistics and global trade opportunities. We focus on the operation and supply of webbing slings, safety harness, cargo straps and other products.

As an excellent supplier of lifting slings, Zhong Qi adheres to the corporate culture of “safety first, quality first”. This core culture enables us to always put the safety of our customers first and have strict requirements on quality of safety and lifting products to ensure that every product meets high standards.

Our service philosophy is “operate with integrity and create value”. This means we always conduct business in an honest, transparent and altruistic way, striving to create real value for our customers. We are not just your supplier of safety and lifting products, we are your trustworthy partner.

In addition to providing customers with high-quality products and excellent services, Zhong Qi also actively cares about the happiness and growth of our employees. If you are looking for high-quality, reliable and safe lifting solutions, please feel free to contact us and we will do our best to provide you with the best service.



吊装带
LIFTING SLINGS



扁平吊装带

WEBBING SLING

扁平吊装带采用世界一流质量的合成纤维作为原料，并采用国际领先的织造技术和设备制造而成。可根据客户需求制作各种安全系数，包括4倍、5倍、6倍、7倍和8倍的吊装带，生产范围0.2t-100t。这些吊装带按照国际标准颜色来区分不同的承载能力，也可根据带宽来进行分类。在进行吊装操作时，不会对被吊物的表面造成任何损害。

扁平吊装带符合欧洲标准EN1492-1+A1:2008和中国行业标准JB/T8521-2007。


Webbing slings are made of world-class quality synthetic fibers as raw materials and are manufactured using internationally leading weaving technology and equipment. These slings can be produced various safety factors according to customer needs, including webbing slings with 4 times, 5 times, 6 times, 7 times and 8 times, with a production range of 0.2t-100t. These webbing slings are distinguished by international standard colors with different carrying capacities and can also be classified according to bandwidth. During the lifting operation, no damage will be caused to the surface of the lifted object.

Webbing slings comply with EN1492-1+A1:2008 and JB/T8521-2007.



环状扁平吊装带

ENDLESS WEBBING SLING

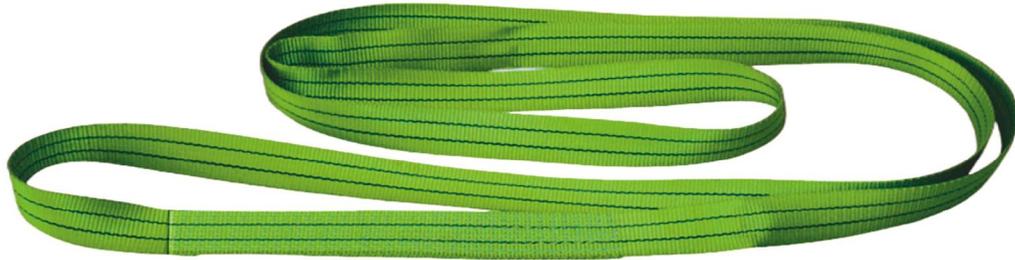

这种吊装带很轻便，使用方便，不会对被吊物的表面造成损害，可以确保起重过程平稳和安全。它具备高强度，吨位可以通过不同的颜色进行识别，提高了劳动效率，降低了成本。此外，它具有耐腐蚀和出色的耐磨性能，适用范围广泛，可以在港口、钢铁、机械等各种吊装场所使用。

环状扁平吊装带符合欧盟标准EN1492-1、澳大利亚标准AS1353以及我国行业标准JB/T8521.1和CE、GS安全要求。


Endless webbing slings are very light, easy to use, will not cause damage to the surface of the lifted object, and can ensure a smooth and safe lifting process. The sling has high strength and the tonnage can be identified by different colors, which improve labor efficiency and reduce costs. In addition, these slings have corrosion resistance and excellent wear resistance, and have a wide range of applications. Endless webbing slings can be used in various lifting places such as ports, steel, and machinery.

Endless webbing slings comply with EN1492-1, AS1353, JB/T8521.1 and CE GS.

吊带 型号 Code	颜色 Color	1 根吊装带正常载荷 Single Max,Working Load Limit						2 根吊装带正常载荷 2-Legs Max,Working Load Limit				近似宽度 Approx Width (mm)			最小 长度 Min Length (m)	最大 长度 Max Length (m)
		直吊 拉力 Upright	结套 拉力 Choked	β				直吊 拉力 Upright 45°	结套 拉力 Choked 45°	直吊 拉力 Upright 45°-60°	结套 拉力 Choked 45°-60°					
				0°-7°	7°-45°	45°-60°	45°									
												5:1	6:1	7:1		
		1.0	0.8	2.0	1.4	1.0	0.7	1.4	1.12	1.0	0.8					
EW-A-10	紫色	1000	800	2000	1400	1000	700	1400	1120	1000	800	25	25	30	1	100
EW-A-20	绿色	2000	1600	4000	2800	2000	1400	2800	2240	2000	1600	50	50	60	1	100
EW-A-30	黄色	3000	2400	6000	4200	3000	2100	4200	3360	3000	2400	75	75	90	1	100
EW-A-40	灰色	4000	3200	8000	5600	4000	2800	5600	4480	4000	3200	100	100	120	1	100
EW-A-50	红色	5000	4000	10000	7000	5000	3500	7000	5600	5000	4000	125	125	150	1	100
EW-A-60	棕色	6000	4800	12000	8400	6000	4200	8400	6720	6000	4800	150	150	180	1	100
EW-A-80	蓝色	8000	6400	16000	11200	8000	5600	11200	8960	8000	6400	200	200	240	1	100
EW-A-100	桔红	10000	8000	20000	14000	10000	7000	14000	11200	10000	8000	250	250	300	1	100
EW-A-120	桔红	12000	9600	24000	16800	12000	8400	16800	13440	12000	9600	300	300	300	3	100
EW-A-150	蓝色	15000	12000	40000	28000	15000	14000	28000	22400	15000	12000	200	200	240	3	100
EW-A-200	桔红	20000	16000	60000	42000	20000	21000	42000	33600	20000	16000	250	250	300	3	100
EW-A-250	桔红	25000	20000	50000	35000	25000	17500	35000	28000	25000	20000	300	300	300	3	100
EW-A-300	桔红	30000	24000	60000	42000	30000	21000	42000	33600	30000	24000	300	300	300	3	100
EW-A-400	桔红	40000	32000	80000	56000	40000	28000	56000	44800	40000	32000				3	100
EW-A-500	桔红	50000	40000	100000	70000	50000	35000	70000	56000	50000	40000				3	100

双眼扁平吊装带

EYE-EYE WEBBING SLING

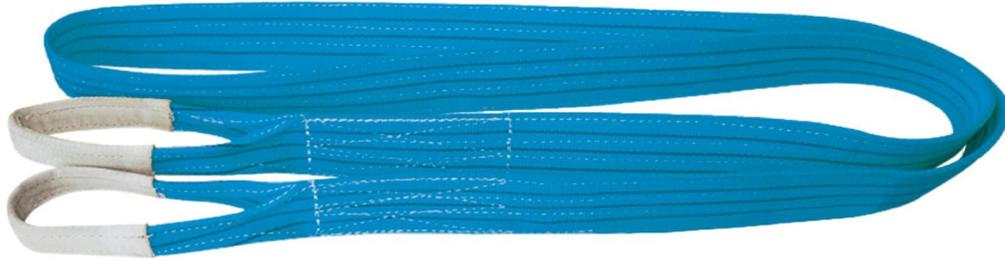

双眼扁平吊装带具有两个吊环，由高强度聚酯布带和扁平织带构成，具备出色的耐久性和承载能力。它可以与吊钩、吊环等吊索装置协同使用，适用于吊装各种形状的货物。此吊装带具有柔软性和高强度等特点。通过选择不同尺寸和容量的双眼扁平吊装带，可以适应不同重量和尺寸的货物。

双眼扁平吊装带符合欧盟标准EN1492-1、澳大利亚标准AS1353以及我国行业标准JB/T8521.1和CE GS安全要求。

The eye-eye webbing sling has two rings and is made of high-strength polyester cloth straps and flat webbing for excellent durability and load-bearing capacity. It can be used in conjunction with sling devices such as hooks and rings, and is suitable for lifting goods of various shapes. This sling has the characteristics of softness and high strength. By choosing different sizes and capacities, eye-eye webbing slings can accommodate cargo of different weights and sizes. Eye-eye webbing slings comply with EN1492-1, AS1353, JB/T8521.1 and CE GS.

最大安全工作载荷 = 方式系数 P × 额定载荷 Max.SWL=Mode Coefficient P × Working Load Limit 吊装方式最大安全工作载荷 Max.SWL of lifting method

吊带 型号 Code	颜色 Color	1 根吊装带正常载荷 Single Max,Working Load Limit						2 根吊装带正常载荷 2-Legs Max,Working Load Limit				近似宽度 Approx Width (mm)			最小 长度 Min Length (m)	最大 长度 Max Length (m)
		直吊 拉力 Upright	结套 拉力 Choked	β				直吊 拉力 Upright 45°	结套 拉力 Choked 45°	直吊 拉力 Upright 45°-60°	结套 拉力 Choked 45°-60°					
				0°-7°	7°-45°	45-60°	45°					5:1	6:1	7:1		
		1.0	0.8	2.0	1.4	1.0	0.7	1.4	1.12	1.0	0.8	5:1	6:1	7:1		
EW-B-10	紫色	1000	800	2000	1400	1000	700	1400	1120	1000	800	25	25	30	1	100
EW-B-20	绿色	2000	1600	4000	2800	2000	1400	2800	2240	2000	1600	50	50	60	1	100
EW-B-30	黄色	3000	2400	6000	4200	3000	2100	4200	3360	3000	2400	75	75	90	1	100
EW-B-40	灰色	4000	3200	8000	5600	4000	2800	5600	4480	4000	3200	100	100	120	1	100
EW-B-50	红色	5000	4000	10000	7000	5000	3500	7000	5600	5000	4000	125	125	150	1	100
EW-B-60	棕色	6000	4800	12000	8400	6000	4200	8400	6720	6000	4800	150	150	180	1	100
EW-B-80	蓝色	8000	6400	16000	11200	8000	5600	11200	8960	8000	6400	200	200	240	1	100
EW-B-100	桔红	10000	8000	20000	14000	10000	7000	14000	11200	10000	8000	250	250	300	1	100
EW-B-120	桔红	12000	9600	24000	16800	12000	8400	16800	13440	12000	9600	300	300	300	3	100
EW-B-150	蓝色	15000	12000	40000	28000	15000	14000	28000	22400	15000	12000	200	200	240	3	100
EW-B-200	桔红	20000	16000	60000	42000	20000	21000	42000	33600	20000	16000	250	250	300	3	100
EW-B-250	桔红	25000	20000	50000	35000	25000	17500	35000	28000	25000	20000	300	300	300	3	100
EW-B-300	桔红	30000	24000	60000	42000	30000	21000	42000	33600	30000	24000	300	300	300	3	100
EW-B-400	桔红	40000	32000	80000	56000	40000	28000	56000	44800	40000	32000				3	100
EW-B-500	桔红	50000	40000	100000	70000	50000	35000	70000	56000	50000	40000				3	100

环状圆形吊带

ENDLESS ROUND SLING

环状圆形吊带全方位用于物体的起重吊装，甚至适用于容易受损坏的物品。它具有高强度，同时能有效保护物体表面，既轻便又柔软，并且有多种组合使用方式。

环状圆形吊带按照欧洲EN 1492-2标准、澳大利亚AS4497.1标准以及中国行业标准JB/T8521.2制作，符合CE GS安全要求。

Endless round sling is used for all-round lifting of objects, even for items that are easily damaged. This sling has high strength, can effectively protect the surface of objects, is both light and soft, and can be used in various combinations.

Endless webbing slings comply with EN1492-1, AS1353, JB/T8521.1 and CE GS.

Endless round sling is made in accordance with EN 1492-2, JB/T8521.2, AS4497.1, conforming to the CE GS.



最大安全工作载荷 = 方式系数 P × 额定载荷 Max.SWL=Mode Coefficient P × Working Load Limit 吊装方式最大安全工作载荷 Max.SWL of lifting method

吊带 型号 Code	颜色 Color	1 根吊装带正常载荷 Single Max,Working Load Limit						2 根吊装带正常载荷 2-Legs Max,Working Load Limit				近似宽度 Approx Width (mm)	最小长度 Min Length (m)	最大长度 Max Length (m)
		直吊 拉力 Upright	结套 拉力 Choked	β				直吊 拉力 Upright 45°	结套 拉力 Choked 45°	直吊 拉力 Upright 45°-60°	结套 拉力 Choked 45°-60°			
				0°-7°	7°-45°	45-60°	45°							
		1.0	0.8	2.0	1.4	1.0	0.7	1.4	1.12	1.0	0.8			
ER-A-10	紫色	1000	800	2000	1400	1000	700	1400	1120	1000	800	40	1	100
ER-A-20	绿色	2000	1600	4000	2800	2000	1400	2800	2240	2000	1600	50	1	100
ER-A-30	黄色	3000	2400	6000	4200	3000	2100	4200	3360	3000	2400	60	1	100
ER-A-40	灰色	4000	3200	8000	5600	4000	2800	5600	4480	4000	3200	70	1	100
ER-A-50	红色	5000	4000	10000	7000	5000	3500	7000	5600	5000	4000	75	1	100
ER-A-60	棕色	6000	4800	12000	8400	6000	4200	8400	6720	6000	4800	80	1	100
ER-A-80	桔红	8000	6400	16000	11200	8000	5600	11200	8960	8000	6400	90	1	100
ER-A-100	桔红	10000	8000	20000	14000	10000	7000	14000	11200	10000	8000	100	1	100
ER-A-120	桔红	12000	9600	24000	16800	12000	8400	16800	13440	12000	9600	110	1	100
ER-A-150	桔红	15000	12000	40000	28000	15000	14000	28000	22400	15000	12000	150	1	100
ER-A-200	桔红	20000	16000	60000	42000	20000	21000	42000	33600	20000	16000	180	1	100
ER-A-250	桔红	25000	20000	50000	35000	25000	17500	35000	28000	25000	20000	200	1	100
ER-A-300	桔红	30000	24000	60000	42000	30000	21000	42000	33600	30000	24000	200	1	100
ER-A-400	桔红	40000	32000	80000	56000	40000	28000	56000	44800	40000	32000	200	1	100
ER-A-500	桔红	50000	40000	100000	70000	50000	35000	70000	56000	50000	40000	220	1	100
ER-A-600	桔红	60000	48000	120000	84000	60000	42000	84000	67200	60000	48000	220	1	100
ER-A-800	桔红	80000	64000	160000	112000	80000	56000	112000	89600	80000	64000	260	1	100
ER-A-1000	桔红	100000	80000	200000	140000	100000	70000	140000	112000	100000	80000	290	1	100

双眼圆形吊带

EYE-EYE ROUND SLING

双眼圆形吊装带特别适用于圆环形物体的吊装，外表面精细，对易损物体不会造成损伤。轻便柔软，在狭小的空间也易使用。

双眼圆形吊装带符合欧洲标准EN 1492-2+A1:2008和中国行业标准JB/T8521-2007。

Eye-Eye round sling is especially suitable for hoisting ring-shaped objects. The outer surface is fine and will not cause damage to fragile objects. Lightweight and soft, it is easy to use in small spaces.

Eye-Eye round slings comply with EN 1492-2+A1:2008 and JB/T8521-2007.



最大安全工作载荷 = 方式系数 P × 额定载荷 Max.SWL-Mode Coefficient P × Working Load Limit 吊装方式最大安全工作载荷 Max.SWL of lifting method

吊带 型号 Code	颜色 Color	1 根吊带正常载荷 Single Max,Working Load Limit						2 根吊带正常载荷 2-Legs Max,Working Load Limit				近似宽度 Approx Width (mm)	最小长度 Min Length (m)	最大长度 Max Length (m)
		直吊 拉力 Upright	结套 拉力 Choked	β				直吊 拉力 Upright 45°	结套 拉力 Choked 45°	直吊 拉力 Upright 45°-60°	结套 拉力 Choked 45°-60°			
				0°-7°	7°-45°	45-60°	45°							
		1.0	0.8	2.0	1.4	1.0	0.7	1.4	1.12	1.0	0.8			
ER-B-10	紫色	1000	800	2000	1400	1000	700	1400	1120	1000	800	50	1	100
ER-B-20	绿色	2000	1600	4000	2800	2000	1400	2800	2240	2000	1600	60	1	100
ER-B-30	黄色	3000	2400	6000	4200	3000	2100	4200	3360	3000	2400	70	1	100
ER-B-40	灰色	4000	3200	8000	5600	4000	2800	5600	4480	4000	3200	75	1	100
ER-B-50	红色	5000	4000	10000	7000	5000	3500	7000	5600	5000	4000	80	1	100
ER-B-60	棕色	6000	4800	12000	8400	6000	4200	8400	6720	6000	4800	90	1	100
ER-B-80	桔红	8000	6400	16000	11200	8000	5600	11200	8960	8000	6400	100	1	100
ER-B-100	桔红	10000	8000	20000	14000	10000	7000	14000	11200	10000	8000	110	1	100
ER-B-120	桔红	12000	9600	24000	16800	12000	8400	16800	13440	12000	9600	125	1	100
ER-B-150	桔红	15000	12000	40000	28000	15000	14000	28000	22400	15000	12000	150	1	100
ER-B-200	桔红	20000	16000	60000	42000	20000	21000	42000	33600	20000	16000	180	1	100
ER-B-250	桔红	25000	20000	50000	35000	25000	17500	35000	28000	25000	20000	200	1	100
ER-B-300	桔红	30000	24000	60000	42000	30000	21000	42000	33600	30000	24000	220	1	100
ER-B-400	桔红	40000	32000	80000	56000	40000	28000	56000	44800	40000	32000	250	1	100
ER-B-500	桔红	50000	40000	100000	70000	50000	35000	70000	56000	50000	40000	270	1	100
ER-B-600	桔红	60000	48000	120000	84000	60000	42000	84000	67200	60000	48000	280	1	100
ER-B-800	桔红	80000	64000	160000	112000	80000	56000	112000	89600	80000	64000	300	1	100
ER-B-1000	桔红	100000	80000	200000	140000	100000	70000	140000	112000	100000	80000	320	1	100

圆状组合吊索

MULTI-ROUND SLING

圆状组合吊索包括主吊环、连接卸扣、吊装带以及金属末端件。根据各种吊装需求，成套索具可以分为：单腿吊带索具、双腿吊带索具、三腿吊带索具和四腿吊带索具。

圆状组合吊索符合欧洲标准EN 1491和中国标准JB/ T8521。

Multi-round sling includes main lifting rings, connecting shackles, textile sling and metal end pieces. According to various lifting needs, it can be divided into: 1-leg, 2-legs, 3-



型号 Code	颜色 Color	$\beta=0$ to 45°	$\beta=0$ to 60°
	紫色	1000kg	
	绿色	2000kg	
	黄色	3000kg	
	灰色	4000kg	
	红色	5000kg	
	紫色	1400kg	1000kg
	绿色	2800kg	2000kg
	黄色	4200kg	3000kg
	灰色	5600kg	4000kg
	红色	7000kg	5000kg
	紫色	2100kg	1500kg
	绿色	4200kg	3000kg
	黄色	6300kg	4500kg
	灰色	8400kg	6000kg
	红色	10500kg	7500kg
	紫色	2100kg	1500kg
	绿色	4200kg	3000kg
	黄色	6300kg	4500kg
	灰色	8400kg	6000kg
	红色	10500kg	7500kg

一次性使用吊装带

USED ONE ONLY WAY SLING

一次性吊装带可根据现场需求制作不同吨位和宽度的吊装带。它们是经济型吊装带，专门设计用于一次性吊装操作（即，装货吊装→卸货吊装），而不适用于反复多次吊装的情况。由于其特性，可以免于专业人员周期性的对吊装带的检查，非常方便使用。

一次性使用吊装带符合德国标准DIN 60005-2006和欧洲标准EN1492-1。

Used one only way sling can be produced in different tonnages and widths according to site requirements. These slings are economical slings specifically designed for one-time lifting operations (i.e. loading hoisting → unloading hoisting) and are not suitable for repeated hoisting operations. Due to characteristics, these slings eliminate the need for professionals to periodically inspect the sling, making them very convenient to use.

Used one only way slings comply with DIN 60005-2006 and EN1492-1.



编号 Code No	安全系数 S.F.	额定载荷 WLL(kg)	宽度 Width (mm)	编号 Code No	安全系数 S.F.	额定载荷 WLL(kg)	宽度 Width (mm)
OS4030	4:1	300	25	OS7060	7:1	600	30
OS4050	4:1	500	25	OS7060	7:1	600	35
OS4150	4:1	1500	35	OS7060	7:1	600	50
OS5035	5:1	350	25	OS7065	7:1	650	35
OS5038	5:1	380	25	OS7070	7:1	700	35
OS5050	5:1	500	25	OS7075-1	7:1	750	25
OS5060	5:1	600	25	OS7075-2	7:1	750	35
OS5065	5:1	650	25	OS7050-3	7:1	750	50
OS5075	5:1	750	25	OS7090	7:1	900	30
OS7030	7:1	300	25	OS7090	7:1	900	40
OS7035	7:1	350	25	OS7095	7:1	950	40
OS7040	7:1	400	25	OS7100	7:1	1000	30
OS7050-1	7:1	500	25	OS7100	7:1	1000	45
OS7050-2	7:1	500	35	OS7100	7:1	1000	50
OS7050-3	7:1	500	50	OS7200	7:1	2000	60

吊装带使用注意事项

INSTRUCTIONS FOR WEBBING SLINGS AND ROUND SLINGS





捆绑带
CARGO STRAPS

捆绑带

RATCHET STRAP

捆绑带主要用于货物的运输、搬运、装载和仓储过程中的牢固固定。它们提供可靠的锁紧功能，不容易松脱，确保了安全性，而且操作方便，不会损坏物品表面。根据不同类型的钩具，适用于各种环境和场合。

捆绑带严格按照EN12195-2标准生产。

Ratchet Straps are mainly used for firm fixation during transportation, handling, loading and warehousing of goods. These strap provide a reliable locking function that is not easy to loosen, ensuring safety, and are easy to operate without damaging the surface of the item. According to different types of hooks, they are suitable for various environments and occasions.

Ratchet Straps are manufactured in strict accordance with the EN12195-2.



ZQ2501



ZQ2502




ZQ2503



ZQ3801



ZQ3802-1

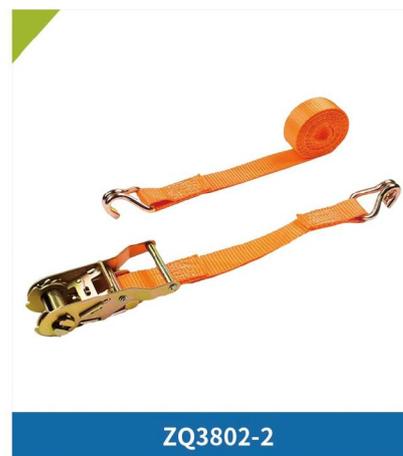

ZQ3802-2



ZQ3803



ZQ5001



ZQ5002



ZQ5003



ZQ5004



ZQ5005



ZQ5006



ZQ7501



ZQ10001

捆绑带


RATCHET STRAP



精包装 1



精包装 2

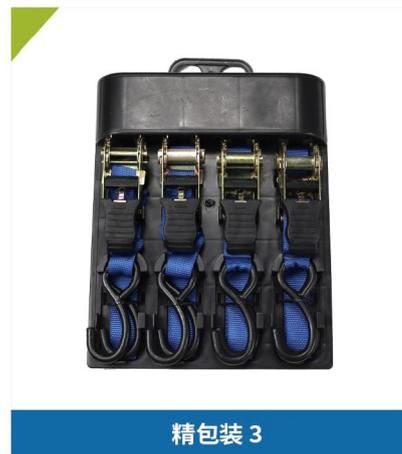

精包装 3

栓紧器

RATCHET BUCKLE


栓紧器是用于货物运输、搬运、装载或仓储时的固定工具，它们在锁紧后不会脱落，提供了安全可靠的固定，而且使用起来轻便、操作简单，可以有效保护物品免受损害。

栓紧器严格按照EN12195-2标准生产。


Ratchet buckles are fastening tools used for cargo transportation, handling, loading or storage. Ratchet buckles will not fall off after being locked, providing safe and reliable fixation. Ratchet buckles are also light to use and simple to operate, and can effectively protect goods from damage.

Ratchet buckles are manufactured in strict accordance with the EN12195-2.







1001




2501




2502




2503




2504




2505




2506




2507




2508




2701




2702




2703




2704




2705




2706




3201




3202




3801




3802




3803




3804




3805




3806



3807




3808




3809




3810











5001



5002



5003

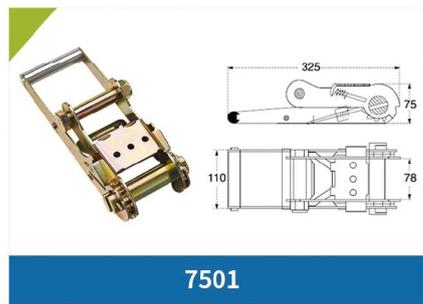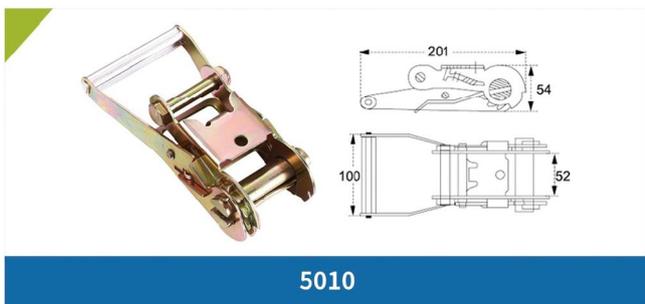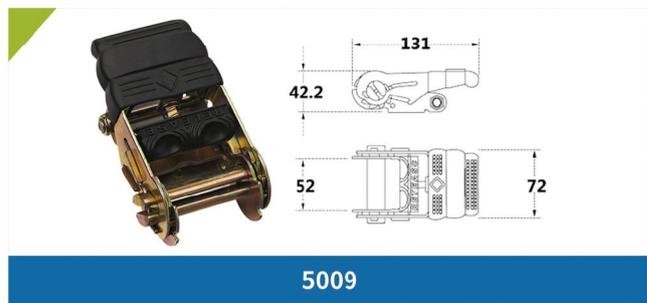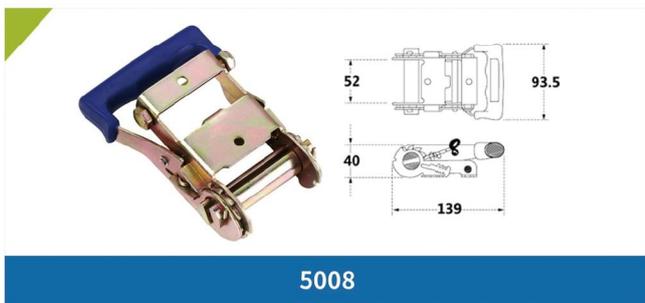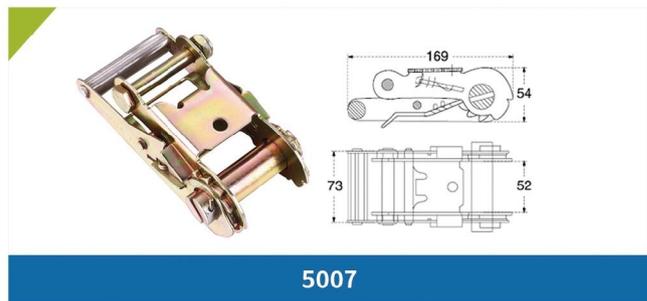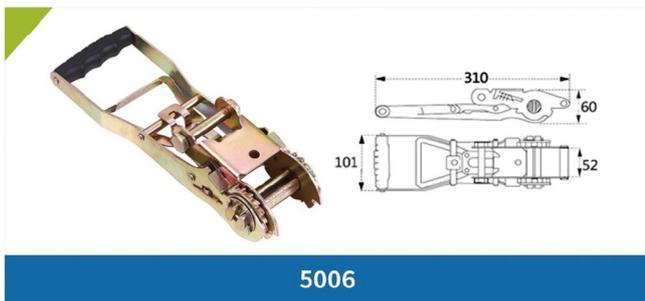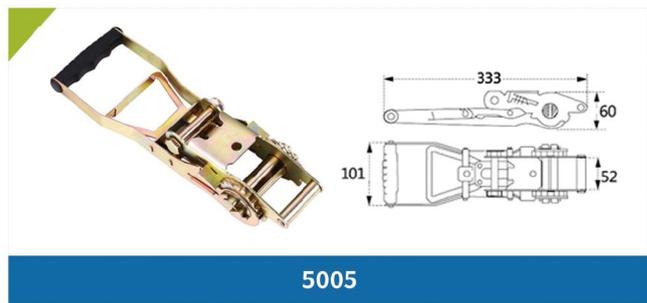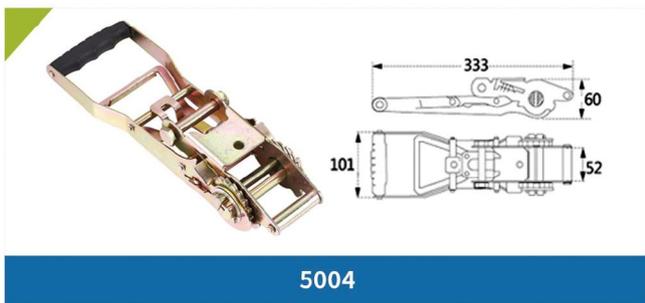

钩子


HOOK



钩子可在吊装、捆绑、拖拽和固定等各种作业中用作连接工具。它们种类繁多，额定承载能力范围大，适用于不同的吊装任务场合。

Hooks can be used as connecting tools in various operations such as lifting, bundling, dragging and fixing. Hooks have various types and a wide range of rated load capacities, making them suitable for different hoisting tasks.




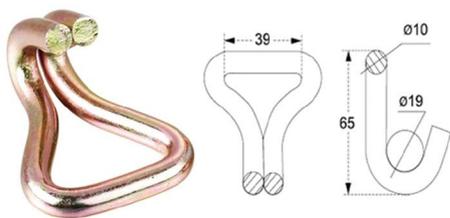

DH3801




DH3802

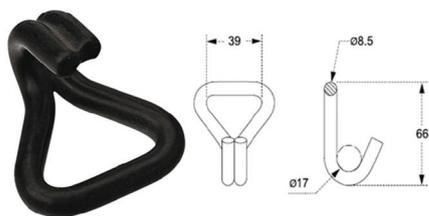


DH3803



DH3804

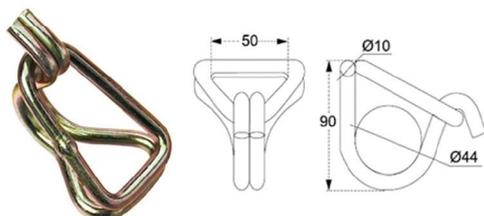


DH3805

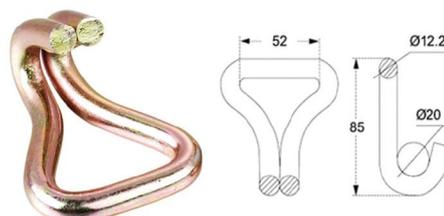


DH5001




DH5002

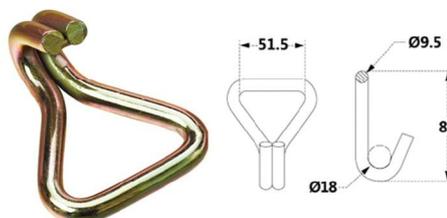

DH5003

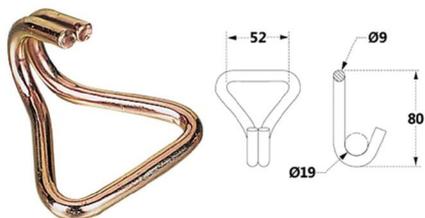


DH5004

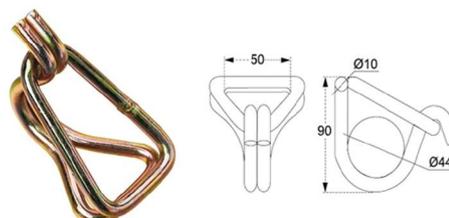


DH5005



DH5006

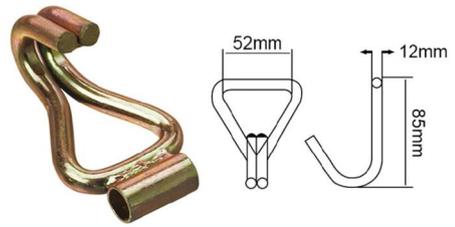


DH5007

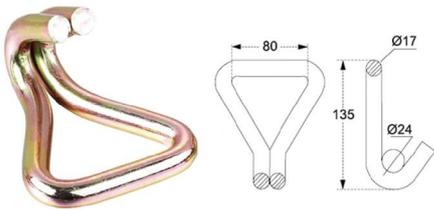


DH7501




JH3801

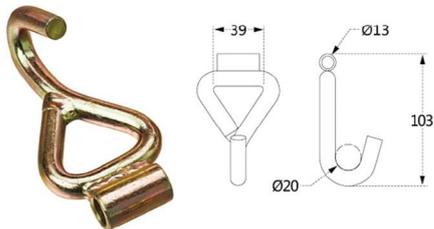

JH3802

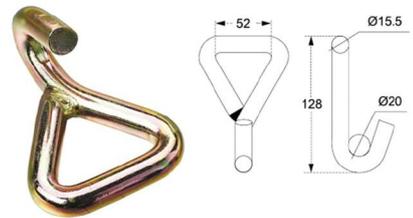

JH5001

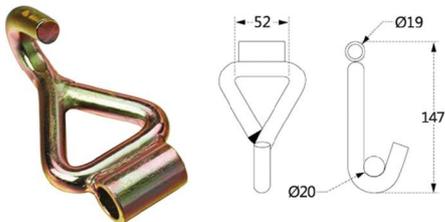


JH5002




OH001




OH002

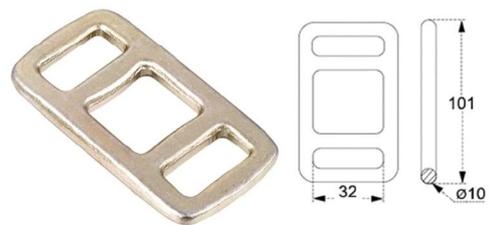


OH003




OH004




OH005




OH006




OH007




OH008




OH009



SH2501



SH2502



SH2503



SH2504



SH2505



SH2506



SH2507



SH2508



SH2509



SH2510



SH2511



SH2512



SJH3801



SJH3802



SJH5001



SJH5002



UH5001



UH5002

拖带

TOW STRAP

能够用最便捷的方式解决故障、残损或陷落的小汽车或吉普车的问题，特殊的设计——镀锌扁钩非常容易与交通工具匹配。相比于钢丝绳和链条，它更轻便，不易生锈、腐烂或霉变，特别适合储存在小汽车的行李箱中。

Tow straps can solve the problem of a broken down, damaged or sunken car or jeep in the simplest way. The special design—galvanized flat hook is very easy to match the vehicle. Compared with steel wire ropes and chains, it is lighter and not prone to rust, rot or mildew, making it especially suitable for storage in the trunk of a car.


TB01 型 TYPE TB01

产品编码 Art.No	破断载荷 (kg) Breaking Load	近似厚度 (mm) Approx Thickness	近似宽度 (mm) Approx Width	总体长度 (m) Total Length
TS01-01	1000	2	25	4
TS01-015	1500	2	35	4
TS01-02	2000	2	50	4
TS01-03	3000	3	50	4



TB02 型 TYPE TB02

产品编码 Art.No	破断载荷 (kg) Breaking Load	近似厚度 (mm) Approx Thickness	近似宽度 (mm) Approx Width	总体长度 (m) Total Length
TS02-01	1000	2	25	4
TS02-015	1500	2	35	4
TS02-02	2000	2	50	4
TS02-03	3000	3	50	4

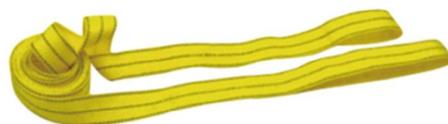

TB03 型 TYPE TB03

产品编码 Art.No	破断载荷 (kg) Breaking Load	近似厚度 (mm) Approx Thickness	近似宽度 (mm) Approx Width	总体长度 (m) Total Length
TS03-01	1000	2	25	4
TS03-015	1500	2	35	4
TS03-02	2000	2	50	4
TS03-03	3000	3	50	4



安全带
SAFETY HARNESS



安全带


SAFETY HARNESS

针对不同具体的使用环境，高空作业安全带有不同的型号，在结构上可以看出。根据实际用途，有很多种不同的类型，但是大部分使用方法基本一致。


安全带符合国家标准GB6095-2009，欧洲标准EN361。

Safety harnesses have different models according to different specific use environments, which can be seen in the structure. There are many different types depending on the actual use, but most of them are basically used in the same way. Safety harnesses comply with GB6095-2009 and EN361.

CONSTRUCTION

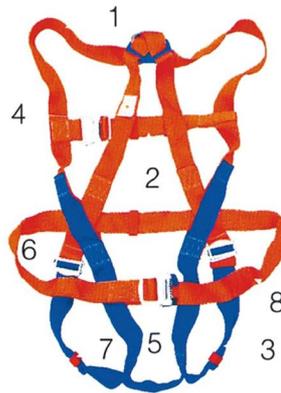

ROPE

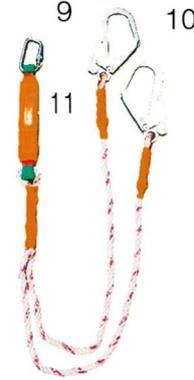

- (1) brace strap
- (2) chest strap
- (3) hip strap
- (4) chest buckle
- (5) belt buckle
- (6) hip buckle
- (7) plastic cover
- (8) waist strap
- (9) rope
- (10) safety hook
- (11) energy absorber



NO.1



NO.2



NO.3



NO.4



NO.5

为了确保安全和舒适性，应注意：


- 1.安全带的松紧度应适中，不宜过紧或过松。
- 2.在每次使用前，务必检查安全带的各个部件，确保其处于最佳工作状态。
- 3.建议安全带不换人穿，以避免每次重新调整以配合个人使用。
- 4.如果安全带出现磨损、割裂或任何可能危及安全的情况，应立即停止使用。
- 5.安全带每年都要进行安全检查。
- 6.清洁安全带时，可以使用合适的清洁剂，湿的安全带需自然晾干，避免直接曝晒在火源或阳光下。
- 7.每次使用后，务必清洁干净后存放在阴凉干燥的地方。

To ensure safety and comfort, attention should be paid to:

1. The tightness of the safety harness should be moderate and should not be too tight or too loose.
2. Before each use, be sure to check each component of the safety harness to ensure it is in optimal working condition.
3. It is recommended that the safety harness should not be worn by different people to avoid readjusting it to suit individual use every time.
4. If the safety harness shows signs of wear, tearing, or any condition that could jeopardize safety, stop using it immediately.
5. Safety harnesses must be inspected every year.
6. When cleaning the safety harness, you can use a suitable detergent. The wet safety harness needs to be dried naturally and avoid direct exposure to fire or sunlight.
7. After each use, be sure to clean it and store it in a cool and dry place.


生产与认证

PRODUCTION AND CERTIFICATION

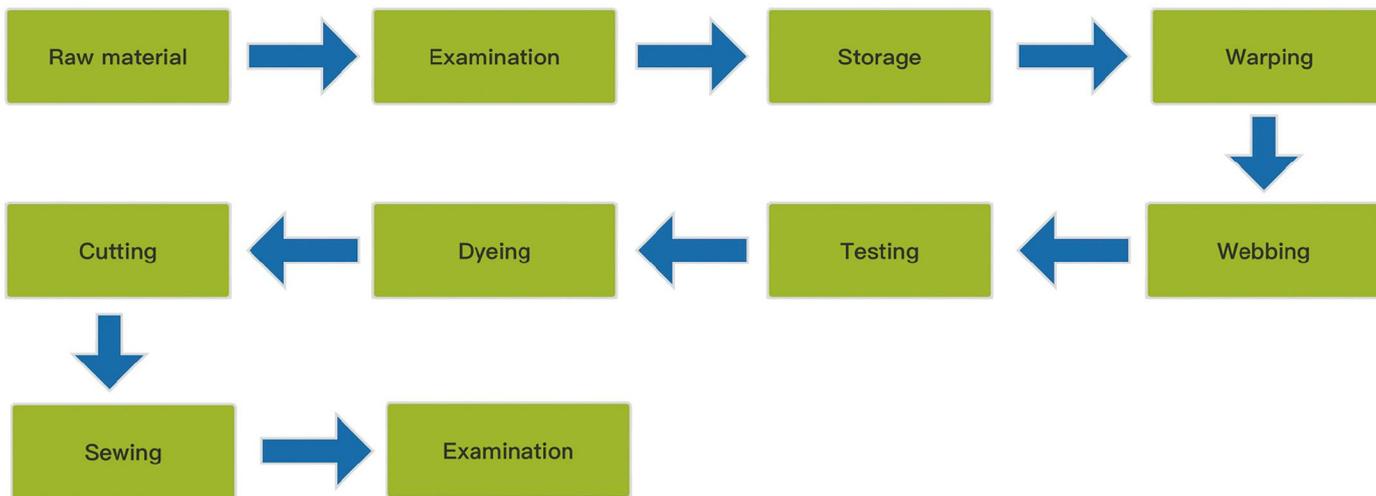

场景示例

SCENARIO EXAMPLE

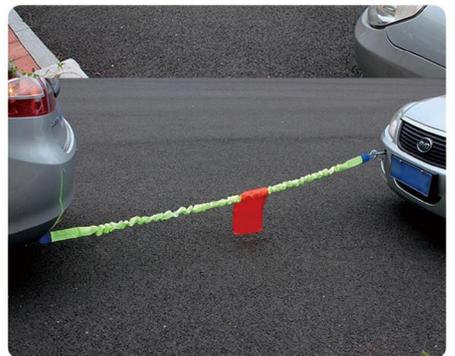

为什么选择我们

WHY CHOOSE US

我们能为您提供什么？

- 丰富多样的产品类型。
- 非常有竞争力的价格。
- 零距离的售后服务。
- 专业的吊装产品解决方案

我们的优势

- 拥有丰富的国际服务经验。
- 毗邻港口的绝佳地理位置。
- 支持产品定制的特殊需求。
- 严谨而全面的交易流程。
- 零缺陷的产品质量管理

为什么选择我们？

- 我们对产品质量有严格要求。
- 我们不为获得利润而降低成本
- 我们致力实现1次做对事情
- 我们具有最先进的制造设备
- 我们拥有多项产品的国际认证

What We Can Offer You?

- Rich and diverse product types.
- Very competitive price.
- Immediate after-sales service.
- Professional lifting product solutions.

Our Advantages

- Rich international service experience.
- An excellent geographical location adjacent to the port.
- Support special needs for product customization.
- A rigorous and comprehensive transaction process.
- Product quality management without defects.

Why Choose Us?

- We have strict requirements for product quality.
- We do not reduce costs to gain profits.
- We are committed to doing things right the first time.
- We have state-of-the-art manufacturing equipment.
- We have many international certifications for our products.





ZHONG QI GROWTH

品质至上、安全第一

Safety First Quality First

诚信经营、创造价值

Operate With Integrate And Create Value



全球销售中心：天津中企成长科技有限公司

联系电话：+86 16622223090

邮箱：info@zqsling.com

网站：www.zqsling.com

全球销售中心地址：天津市北辰区双街可信产业园

Global Sales Center: Tianjin Zhong Qi Growth Technology Co., Ltd.

Tel: +86 16622223090

Email: info@zqsling.com

Website: www.zqsling.com

Global Sales Center Address: Shuangjie Trusted Industrial Park, Beichen District, Tianjin, China