

# TEST REPORT

**Application No.:** SHCR2311002378EV  
**Applicant:** CSE Energy&Technology Co.,Ltd  
**Address of Applicant:** Building S4, No.777, Sizhuan Road, Shanghai, China  
**Manufacturer:** CSE Energy&Technology Co.,Ltd  
**Address of Manufacturer:** Building S4, No.777, Sizhuan Road, Shanghai, China  
**Equipment Under Test (EUT):**  
**EUT Name:** AC charging pile of electric vehicle  
**Model No.:** CSE-BCG-AT32-K01-1-CE, CSG-BCG-AT32/K03-3-CE, CSE-BCG-AT32-K01-3-CE, CSE-BCG-AT16-K01-3-CE, CSG-BCG-AT16/K03-3-CE, CSG-BCG-AT16/K04-3-CE, CSE-BCG-AT16-K01-1-CE  
**Remark:** Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.  
**Trade Mark:** CSE, power4 Homeby cse  
**Standard(s) :** EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1  
**Date of Receipt:** 2023-10-09  
**Date of Test:** 2023-10-17 to 2023-11-01  
**Date of Issue:** 2023-11-21

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.





**SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.**

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR231100237801

Page: 2 of 53

Revision Record			
Version	Description	Date	Remark
00	Co-license	2023-11-21	Base on SHCR231000209301

Authorized for issue by:			
Tested By			
	Bill Wu/Project Engineer		
Approved By			
	Parlam Zhan / Reviewer		

## 2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Mains Power Port (150kHz-30MHz)	EN 301 489-1 V2.2.3 EN 301 489-3 V2.3.2 EN 301 489-17 V3.2.4 EN 301 489-52 V1.2.1	EN 55032: 2015+A11:2020+A1:2020	Class B	Pass
Radiated Emissions (30MHz-1GHz)		EN 55032: 2015+A11:2020+A1:2020	Class B	Pass
Radiated Emissions (Above 1GHz)		EN 55032: 2015+A11:2020+A1:2020	Class B	Pass
Harmonic Current Emission		EN IEC 61000-3-2:2019+A1:2021	Class A	Pass
Voltage Fluctuations and Flicker		EN 61000-3-3:2013+A1:2019+A2:2021	Clause 5	Pass

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN 301 489-1 V2.2.3 EN 301 489-3 V2.3.2 EN 301 489-17 V3.2.4 EN 301 489-52 V1.2.1	EN 61000-4-2:2009	4kV Contact Discharge 8kV Air Discharge	Pass
Radiated Immunity (80MHz-6GHz)		EN IEC 61000-4-3:2020	3V/m, 80%, 1kHz Amp. Mod.	Pass
Electrical Fast Transients Burst at AC Mains Power Port		EN 61000-4-4:2012	1kV; 5/50ns Tr/Td; 5kHz Repetition Frequency	Pass
Surge at AC Mains Power Port		EN 61000-4-5:2014 +A1:2017	1.2/50µs Tr/Td; 1kV Line to Line	Pass
Conducted Immunity at AC Mains Power Port (150kHz-80MHz)		EN 61000-4-6:2014	3Vrms (emf), 80%, 1kHz Amp. Mod.	Pass
Voltage Dips and Interruptions		EN IEC 61000-4-11:2020	0 % UT for 0.5per; 0 % UT for 1per; 0 % UT for 250per; 70 % UT for 25per; UT is Supply Voltage	Pass

Note1: There are series models mentioned in this report, and they are the similar in electrical and electronic characters. Only the model CSE-BCG-AT32-K01-3-CE was tested since their differences were the model number and appearance.

Note2: This report was an additional report copied from the report SHCR231000209301, just changing the model name, company information and trade mark. Since the electrical circuit design, layout, components used and internal wiring for the model CSE-BCG-AT32-K01-3-CE in this report was exactly the same as the model CSG-BCG-AT32-K01-3-CE in the report SHCR231000209301.

### 3 Contents

	Page
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 TEST SUMMARY</b> .....	<b>3</b>
<b>3 CONTENTS</b> .....	<b>4</b>
<b>4 GENERAL INFORMATION</b> .....	<b>6</b>
4.1 DETAILS OF E.U.T. ....	6
4.2 DESCRIPTION OF SUPPORT UNITS .....	7
4.3 MEASUREMENT UNCERTAINTY & DECISION RULE .....	7
4.4 TEST LOCATION .....	8
4.5 TEST FACILITY .....	8
4.6 DEVIATION FROM STANDARDS .....	8
4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	8
4.8 EMS MONITOR .....	8
<b>5 EQUIPMENT LIST</b> .....	<b>9</b>
<b>6 EMISSION TEST RESULTS</b> .....	<b>13</b>
6.1 CONDUCTED EMISSIONS AT AC MAINS POWER PORT (150kHz-30MHz) .....	13
6.1.1 <i>E.U.T. Operation</i> .....	13
6.1.2 <i>Test Mode Description</i> .....	13
6.1.3 <i>Test Setup Diagram</i> .....	13
6.1.4 <i>Measurement Procedure and Data</i> .....	14
6.2 RADIATED EMISSIONS (30MHz-1GHz) .....	18
6.2.1 <i>E.U.T. Operation</i> .....	18
6.2.2 <i>Test Mode Description</i> .....	18
6.2.3 <i>Test Setup Diagram</i> .....	18
6.2.4 <i>Measurement Procedure and Data</i> .....	19
6.3 RADIATED EMISSIONS (ABOVE 1GHz) .....	21
6.3.1 <i>E.U.T. Operation</i> .....	21
6.3.2 <i>Test Mode Description</i> .....	21
6.3.3 <i>Test Setup Diagram</i> .....	21
6.3.4 <i>Measurement Procedure and Data</i> .....	22
6.4 HARMONIC CURRENT EMISSION .....	24
6.4.1 <i>E.U.T. Operation</i> .....	24
6.4.2 <i>Test Mode Description</i> .....	24
6.4.3 <i>Test Setup Diagram</i> .....	24
6.4.4 <i>Measurement Procedure and Data</i> .....	24
6.5 VOLTAGE FLUCTUATIONS AND FLICKER .....	32
6.5.1 <i>E.U.T. Operation</i> .....	32
6.5.2 <i>Test Mode Description</i> .....	32
6.5.3 <i>Test Setup Diagram</i> .....	32
6.5.4 <i>Measurement Procedure and Data</i> .....	33
<b>7 IMMUNITY TEST RESULTS</b> .....	<b>34</b>
7.1 ELECTROSTATIC DISCHARGE .....	37
7.1.1 <i>Test Setup Diagram</i> .....	37
7.1.2 <i>E.U.T. Operation</i> .....	37
7.1.3 <i>Test Mode Description</i> .....	37
7.1.4 <i>Test Condition and Results:</i> .....	37
7.2 RADIATED IMMUNITY (80MHz-6GHz) .....	39
7.2.1 <i>Test Setup Diagram</i> .....	39
7.2.2 <i>E.U.T. Operation</i> .....	39

7.2.3	Test Mode Description .....	39
7.2.4	Test Condition and Results: .....	39
7.3	ELECTRICAL FAST TRANSIENTS BURST AT AC MAINS POWER PORT .....	41
7.3.1	Test Setup Diagram .....	41
7.3.2	E.U.T. Operation .....	41
7.3.3	Test Mode Description .....	41
7.3.4	Test Condition and Results: .....	41
7.4	SURGE AT AC MAINS POWER PORT .....	42
7.4.1	Test Setup Diagram .....	42
7.4.2	E.U.T. Operation .....	42
7.4.3	Test Mode Description .....	42
7.4.4	Test Condition and Results: .....	42
7.5	CONDUCTED IMMUNITY AT AC MAINS POWER PORT (150KHZ-80MHZ) .....	44
7.5.1	Test Setup Diagram .....	44
7.5.2	E.U.T. Operation .....	44
7.5.3	Test Mode Description .....	44
7.5.4	Test Condition and Results: .....	44
7.6	VOLTAGE DIPS AND INTERRUPTIONS .....	45
7.6.1	Test Setup Diagram .....	45
7.6.2	E.U.T. Operation .....	45
7.6.3	Test Mode Description .....	45
7.6.4	Test Condition and Results: .....	45
<b>8</b>	<b>TEST SETUP PHOTO .....</b>	<b>47</b>
<b>9</b>	<b>EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS) .....</b>	<b>53</b>

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	AC 380V/50Hz
Test voltage:	AC 380V/50Hz

#### BLE

Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Receiver Category:	2
Antenna Gain:	2 dBi (Provided by manufacturer)
Antenna Type:	PCB Antenna

#### 2.4GHz WiFi

Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2472MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK), 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	5MHz
Number of Channels:	802.11b/g/n(HT20): 13
Receiver Category:	1
Antenna Gain:	2 dBi (Provided by manufacturer)
Antenna Type:	PCB Antenna

#### NFC

Operation Frequency:	13.56MHz
Modulation Type:	ASK
Antenna Type:	Loop Antenna

#### GSM

Frequency Band:	Band	Tx (MHz)	Rx (MHz)
	E-GSM900	880-915	925-960
	DCS1800	1710-1785	1805-1880
Type of Modulation:	GMSK(GSM/GPRS/EGPRS), 8PSK (EGPRS)		
Sample Type:	Module equipment		
Antenna Type:	External Antenna		
Antenna Gain:	3dBi (Provided by manufacturer)		

LTE

Frequency Band:	LTE BAND	Duplex Mode	Uplink (MHz)	Downlink (MHz)	Supported Channel Bandwidth					
					1.4	3	5	10	15	20
	1	FDD	1920-1980	2110-2170	---	---	☒	☒	☒	☒
	3	FDD	1710-1785	1805-1880	☒	☒	☒	☒	☒	☒
	7	FDD	2500-2570	2620-2690	---	---	☒	☒	☒	☒
	8	FDD	880-915	925-960	☒	☒	☒	☒	---	---
	20	FDD	791-821	832-862	---	---	☒	☒	☒	☒
	28	FDD	703-748	758-803	---	☒	☒	☒	☒	☒
Type of Modulation:	UL: QPSK,16QAM DL: QPSK,16QAM,64QAM									
Sample Type:	Module equipment									
Antenna Type:	External Antenna									
Antenna Gain:	3dBi (Provided by manufacturer)									

#### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
iPad	Apple	A1490	-
Resistance load	-	-	-
Router	NETGEAR	RAX50	-

#### 4.3 Measurement Uncertainty & Decision Rule

**Measurement Uncertainty:**

No.	Item	Measurement Uncertainty ( $U_{Lab}$ )	$U_{CISPR}$
1	Conducted Emission at mains port using AMN	3.4dB (9kHz to 150kHz)	3.8dB (9kHz to 150kHz)
		2.9dB (150kHz to 30MHz)	3.4dB (150kHz to 30MHz)
2	Conducted Emission at mains port using VP	2.2dB (9kHz to 30MHz)	2.9dB (9kHz to 30MHz)
3	Conducted Emission at telecommunication port using AAN	4.6dB (150kHz to 30MHz)	5.0dB (150kHz to 30MHz)
4	Radiated Power	3.4dB (30MHz to 300MHz)	4.5dB (30MHz to 300MHz)
5	Radiated emission	5.7dB (30MHz-1GHz)	6.3dB (30MHz-1GHz)
		4.8dB (1GHz-6GHz)	5.2dB (1GHz-6GHz)
		5.0dB (6GHz-18GHz)	5.5dB (6GHz-18GHz)
6	Radiated disturbance (disturbance current in a LLAS)	2.6dB (9kHz to 30MHz)	3.3dB (9kHz to 30MHz)

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

**Decision Rule:**

- CISPR 16-4-2 for emission measurements is as below described.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

$U_{LAB}$  less than  $U_{CISPR}$ , therefore:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

#### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab  
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China  
Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

• **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

• **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.  
Company Number: 8617A

• **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None

#### 4.8 EMS Monitor

Visual: Working status of EUT.

Other: A support spectrum analyser and pick up antenna was used to monitor for any unintentional transmission from the EUT.



## 5 Equipment List

<b>Conducted Emissions at AC Mains Power Port (150kHz-30MHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2022/12/20	2023/12/19
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2022/12/20	2023/12/19
Line impedance stabilization network	EMCO	3816_2	SHEM019-1	2022/12/20	2023/12/19
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2022/12/20	2023/12/19
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2020/12/20	2023/12/19
CE test Cable	/	/	SHEM172-1	2022/12/20	2023/12/19
Test Software	ESE	e3	Version: 6.111221a	N/A	N/A

<b>Radiated Emissions (30MHz-1GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2022/12/20	2023/12/19
EMI test receiver	Rohde & Schwarz	ESR7	SHEM201-1	2023/8/01	2024/7/31
CONTROLLER	INNCO	CO2000	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM048-1	2023/9/3	2025/9/2
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM202-1	2023/4/17	2025/4/16
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/5/6	2026/5/5
Pre-amplifier	HP	8447D	SHEM236-1	2022/12/22	2023/12/21
Pre-amplifier	HP	8447D	SHEM143-1	2022/12/20	2023/12/19
RE test Cable	/	/	SHEM217-2	2023/5/9	2024/5/8
Test Software	ESE	e3	Version: 6.191211	N/A	N/A
Semi/Fully Anechoic	TIANDE	9*6*6M	SHEM198-1	2021/05/27	2024/05/26

<b>Radiated Emissions (Above 1GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2022/12/20	2023/12/19
EMI test receiver	Rohde & Schwarz	ESR7	SHEM201-1	2023/8/01	2024/7/31
CONTROLLER	INNCO	CO2000	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2023/9/3	2025/9/2
Pre-amplifier (1-18GHz)	Schwarzbeck	SCU-F0118-G40-BZ4-CSS(F)	SHEM050-2	2022/12/20	2023/12/19
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2022/8/11	2024/8/10

Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/5/6	2026/5/5
RE test Cable	/	/	SHEM217-2	2023/5/9	2024/5/8
Test Software	ESE	e3	Version: 6.191211	N/A	N/A
Semi/Fully Anechoic	TIANDE	9*6*6M	SHEM198-1	2021/05/27	2024/05/26

<b>Harmonic Current Emission</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Harmonic&Flicker analyzer	AMETEK	PACS-1	SHEM024-2	2023/8/01	2024/7/31
AC Power Source 5KVA	AMETEK	5001iX	SHEM025-2	2023/8/01	2024/7/31
Test Software	AMETEK	CTS4	Version: 4.24.0	N/A	N/A
Harmonic&Flicker analyzer	EM TEST	DPA500	SHEM024-1	2023/8/01	2024/7/31
AC Power Source 6KVA	EM TEST	ACS500	SHEM025-1	2023/8/01	2024/7/31
Test Software	EM TEST	DPA	Version: 5.4.8.0	N/A	N/A

<b>Voltage Fluctuations and Flicker</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Harmonic&Flicker analyzer	AMETEK	PACS-1	SHEM024-2	2023/8/01	2024/7/31
AC Power Source 5KVA	AMETEK	5001iX	SHEM025-2	2023/8/01	2024/7/31
Test Software	AMETEK	CTS4	Version: 4.24.0	N/A	N/A
Harmonic&Flicker analyzer	EM TEST	DPA500	SHEM024-1	2023/8/01	2024/7/31
AC Power Source 6KVA	EM TEST	ACS500	SHEM025-1	2023/8/01	2024/7/31
Test Software	EM TEST	DPA	Version: 5.4.8.0	N/A	N/A

<b>Electrostatic Discharge</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Electrostatic Discharge Simulator	TESEQ	NSG 437	SHEM041-2	2023/8/01	2024/7/31
Electrostatic Discharge Simulator	3CTEST	EDS20H	SHEM199-1	2022/12/20	2023/12/19

<b>Radiated Immunity (80MHz-6GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Signal generator	Rohde & Schwarz	SMB100A	SHEM194-1	2022/12/20	2023/12/19
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2023/8/01	2024/7/31
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-3	2023/8/01	2024/7/31
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Antenna	SCHWARZBECK	STLP9149	SHEM131-1	N/A	N/A
Amplifier	MILMEGA	AS0840-55-55	SHEM133-1	2022/12/20	2023/12/19
Amplifier	MILMEGA	80RF1000-250	SHEM132-1	2022/12/20	2023/12/19
Amplifier	Rohde & Schwarz	BBA150-E60	SHEM171-1	2022/12/20	2023/12/19
Power meter sensor	Rohde & Schwarz	NRP-Z22	SHEM136-1	2023/8/01	2024/7/31

ElectroMagnetic Field Probe	ETS-Lindgren	HI-6105	SHEM134-1	2023/8/24	2024/8/23
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/5/6	2026/5/5
Test Software	Rohde & Schwarz	EMC32	Version: 10.20.01	N/A	N/A

<b>Electrical Fast Transients Burst at AC Mains Power Port</b>					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2022/12/20	2023/12/19
Test Software	EMC-PARTNER	GENECS	Version: 3.29	N/A	N/A
Immunity Test System	TESEQ	NSG 3060	SHEM224-1	2023/8/01	2024/7/31
Coupling / Decoupling Network (CDN)	TESEQ	CDN 3061	SHEM224-3	2023/8/01	2024/7/31
EFT & Surge Generator	PRIMA	PRM61045TB	SHEM200-1	2023/9/28	2024/9/27
CDN for EFT & Surge	PRIMA	PRM-CDN	SHEM200-2	2023/9/28	2024/9/27

<b>Surge at AC Mains Power Port</b>					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2022/12/20	2023/12/19
Test Software	EMC-PARTNER	GENECS	Version: 3.29	N/A	N/A
Immunity Test System	TESEQ	NSG 3060	SHEM224-1	2023/8/01	2024/7/31
Coupling / Decoupling Network (CDN)	TESEQ	CDN 3061	SHEM224-3	2023/8/01	2024/7/31
EFT & Surge Generator	PRIMA	PRM61045TB	SHEM200-1	2023/9/28	2024/9/27
CDN for EFT & Surge	PRIMA	PRM-CDN	SHEM200-2	2023/9/28	2024/9/27
CDN for unsymmetrical interconnection lines (1.2/50us)	SCHAFFNER	CDN 117	SHEM224-5	2023/8/01	2024/7/31
CDN for symmetric datalines & Resistor network (Surge 1.2/50 or 10/700 us)	SCHAFFNER	CDN 118 & INA172	SHEM224-6 & SHEM224-7	2023/8/01	2024/7/31

<b>Conducted Immunity at AC Mains Power Port (150kHz-80MHz)</b>					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMB100A	SHEM194-1	2022/12/20	2023/12/19
Power Amplifier	HAEFFLY	PAMP250	SHEM023-1	2022/12/20	2023/12/19
6dB Attenuator	HUAXIANG	DTS50-6dB-1G-A	SHEM123-2	2022/12/20	2023/12/19
Coupling clamp	LUTHI	EM 101	SHEM027-1	2023/06/05	2024/06/04
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2023/8/01	2024/7/31
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-3	2023/8/01	2024/7/31
Coupling and Decoupling Network (CDN)	LUTHI	L-801 M1	SHEM023-5	2022/12/20	2023/12/19
Coupling and Decoupling Network	LUTHI	L-801 M2/M3	SHEM023-6	2022/12/20	2023/12/19

(CDN)					
Shielding Room	ZHONGYU	5*3*3M	SHEM079-6	2022/12/20	2025/12/19
Coupling and Decoupling Network	Teseq	CDN M016	SHEM168-1	2023/8/01	2024/7/31
RF Generator	SCHAFFNER	NSG 2070	SHEM221-1	2022/8/02	2024/8/01
Test Software	Rohde & Schwarz	EMC32	Version: 10.20.01	N/A	N/A

<b>Voltage Dips and Interruptions</b>					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2022/12/20	2023/12/19
Test Software	EMC-PARTNER	GENECS	Version: 3.29	N/A	N/A
Immunity Test System	TESEQ	NSG 3060	SHEM224-1	2023/8/01	2024/7/31
Coupling / Decoupling Network (CDN)	TESEQ	CDN 3061	SHEM224-3	2023/8/01	2024/7/31
Manual step transformer	TESEQ	INA 6501	SHEM224-4	2023/8/01	2024/7/31

<b>General used equipment</b>					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Digital pressure meter	YONGZHI	DYM3-01	SHEM082-1	2021-01-22	2024-01-21
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-9~10	2022-12-31	2023-12-30
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-5	2023-07-23	2024-07-22
Digital Temperature& humidity recorder	Jianda Renke	RS-WS-N01-6J	SHEM247-1~8	2023-01-13	2024-01-12
Digital Multimeter	FLUKE	17B+	SHEM271-1	2023-07-19	2024-07-18
Autoformer regulator	Guangzhou bao de	TDGC2-5KVA	SHEM150-1	N/A	N/A
Multi-purpose tong tester	FLUKE	317	SHEM001-2	2022-11-14	2023-11-13

## 6 Emission Test Results

### 6.1 Conducted Emissions at AC Mains Power Port (150kHz-30MHz)

Test Requirement: EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1

Test Method: EN 55032: 2015+A11:2020+A1:2020

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz


#### 6.1.1 E.U.T. Operation

Operating Environment:  
 Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1010 mbar

#### 6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	WiFi mode_Establish the communication between EUT and Ipad mini via wifi function, and use the "APP" in Ipad mini to control EUT working continuously.
Pre-scan	01	Data Communication Mode:The EUT is connected with CMW500 (wireless communication tester). The Absolute Radio Frequency Channel Number is allocated to the middle channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A data communication link has been established.

#### 6.1.3 Test Setup Diagram

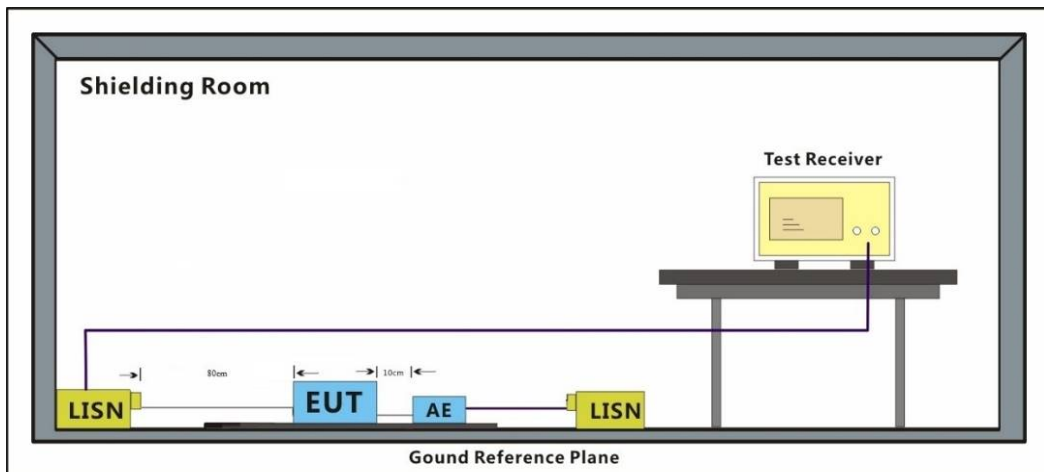

### 6.1.4 Measurement Procedure and Data


Frequency range: 150kHz-30MHz

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

The red line show in graphic is the limit in standard used in this section.

Remark: Measured Level= Read Level+ Cable Loss+ LISN Factor

Test Mode: 00; Line: Live line

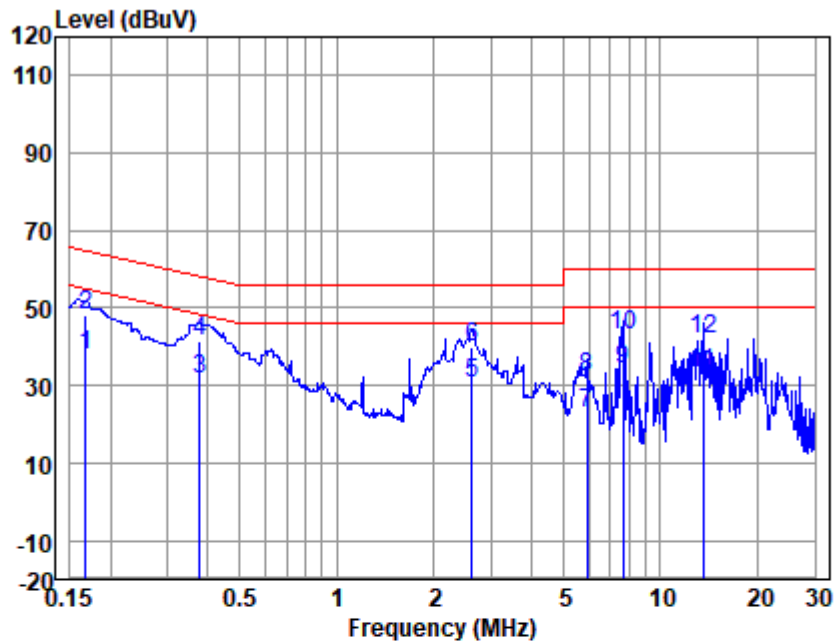


LISN : LINE  
 EUT/Project No : 02093EV  
 Test Mode : L1

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.17	27.42	0.40	9.87	37.69	55.08	-17.39	Average
2	0.17	37.76	0.40	9.87	48.03	65.08	-17.05	QP
3	0.38	21.66	0.26	9.87	31.79	48.34	-16.55	Average
4	0.38	31.16	0.26	9.87	41.29	58.34	-17.05	QP
5	2.62	20.58	0.23	9.87	30.68	46.00	-15.32	Average
6	2.62	30.01	0.23	9.87	40.11	56.00	-15.89	QP
7	5.93	12.41	0.35	9.97	22.73	50.00	-27.27	Average
8	5.93	21.73	0.35	9.97	32.05	60.00	-27.95	QP
9	7.65	23.73	0.40	9.98	34.11	50.00	-15.89	Average
10	7.65	32.47	0.40	9.98	42.85	60.00	-17.15	QP
11	13.55	22.49	0.47	10.02	32.98	50.00	-17.02	Average
12	13.55	31.47	0.47	10.02	41.96	60.00	-18.04	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Test Mode: 00; Line: Live line

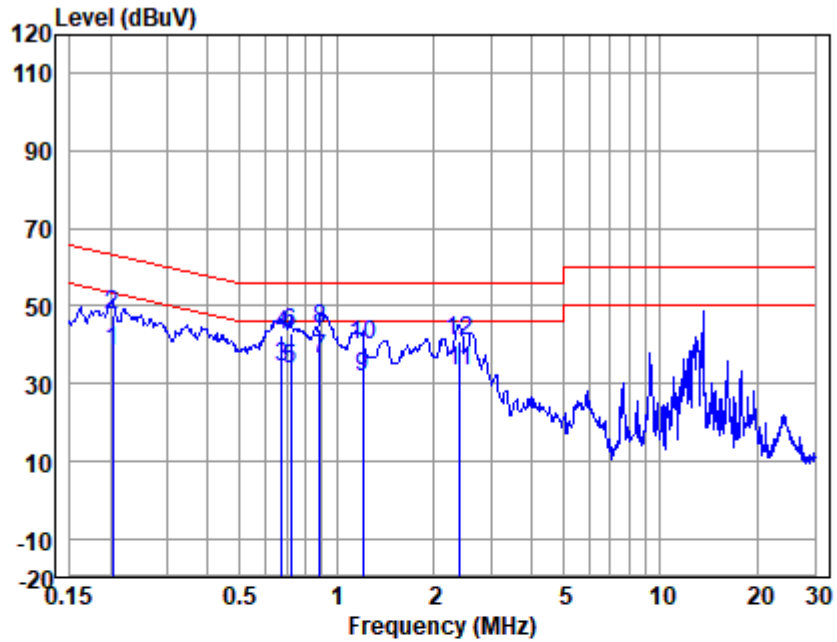


LISN : LINE  
 EUT/Project No : 02093EV  
 Test Mode : L2

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.20	27.87	0.40	9.87	38.14	53.49	-15.35	Average
2	0.20	37.35	0.40	9.87	47.62	63.49	-15.87	QP
3	0.68	24.40	0.20	9.86	34.46	46.00	-11.54	Average
4	0.68	32.52	0.20	9.86	42.58	56.00	-13.42	QP
5	0.72	23.56	0.20	9.86	33.62	46.00	-12.38	Average
6	0.72	33.20	0.20	9.86	43.26	56.00	-12.74	QP
7	0.89	26.38	0.20	9.86	36.44	46.00	-9.56	Average
8	0.89	34.02	0.20	9.86	44.08	56.00	-11.92	QP
9	1.20	21.74	0.20	9.86	31.80	46.00	-14.20	Average
10	1.20	29.69	0.20	9.86	39.75	56.00	-16.25	QP
11	2.40	23.07	0.22	9.86	33.15	46.00	-12.85	Average
12	2.40	31.07	0.22	9.86	41.15	56.00	-14.85	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss



Test Mode: 00; Line: Live line

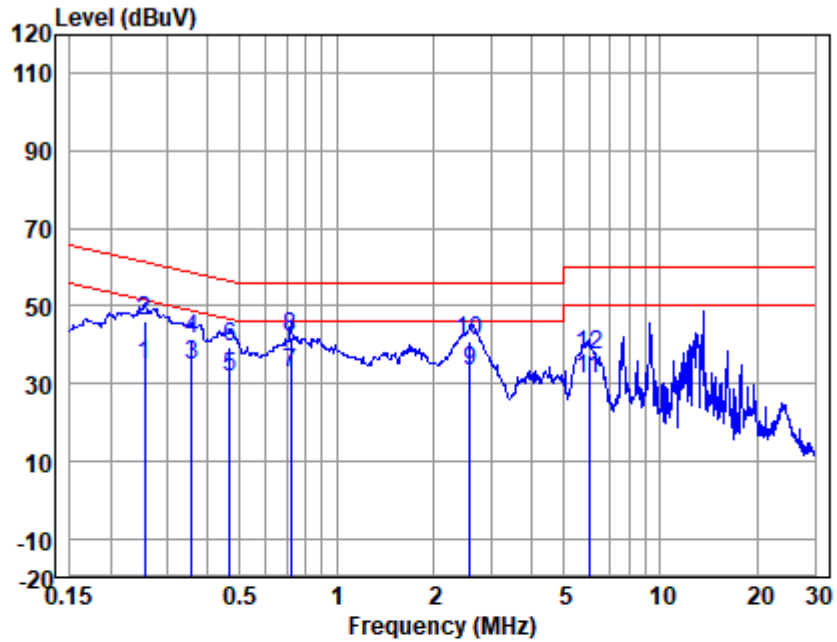


LISN : LINE  
 EUT/Project No : 02093EV  
 Test Mode : L3

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.25	24.69	0.35	9.87	34.91	51.60	-16.69	Average
2	0.25	35.73	0.35	9.87	45.95	61.60	-15.65	QP
3	0.36	24.86	0.27	9.87	35.00	48.78	-13.78	Average
4	0.36	31.40	0.27	9.87	41.54	58.78	-17.24	QP
5	0.47	21.56	0.21	9.86	31.63	46.58	-14.95	Average
6	0.47	29.40	0.21	9.86	39.47	56.58	-17.11	QP
7	0.72	22.62	0.20	9.86	32.68	46.00	-13.32	Average
8	0.72	31.82	0.20	9.86	41.88	56.00	-14.12	QP
9	2.58	22.93	0.23	9.87	33.03	46.00	-12.97	Average
10	2.58	31.09	0.23	9.87	41.19	56.00	-14.81	QP
11	6.02	21.03	0.35	9.97	31.35	50.00	-18.65	Average
12	6.02	27.20	0.35	9.97	37.52	60.00	-22.48	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss



Test Mode: 00; Line: Neutral Line

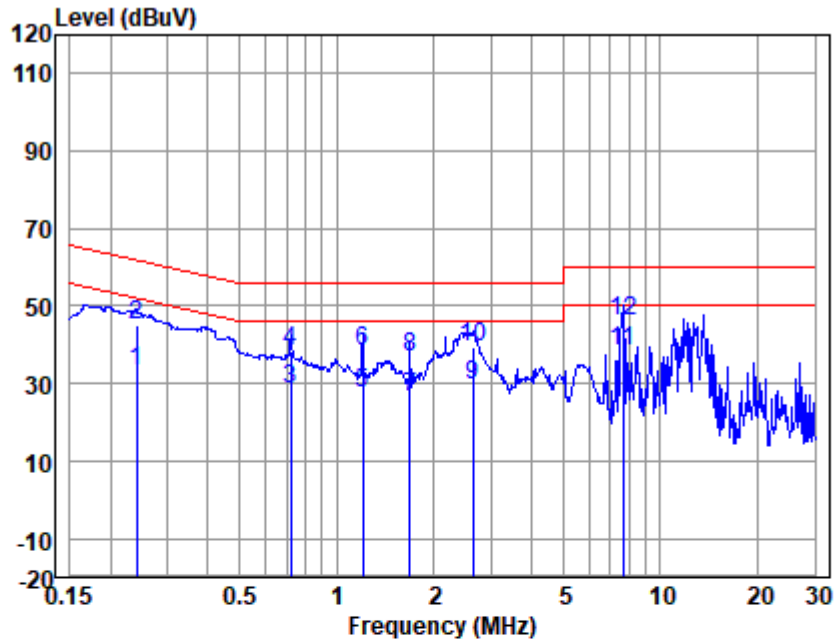

LISN : NEUTRAL  
 EUT/Project No : 02093EV  
 Test Mode : N

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.24	23.24	0.30	9.87	33.41	52.08	-18.67	Average
2	0.24	35.07	0.30	9.87	45.24	62.08	-16.84	QP
3	0.72	18.55	0.30	9.86	28.71	46.00	-17.29	Average
4	0.72	28.27	0.30	9.86	38.43	56.00	-17.57	QP
5	1.20	17.30	0.30	9.86	27.46	46.00	-18.54	Average
6	1.20	28.27	0.30	9.86	38.43	56.00	-17.57	QP
7	1.68	16.27	0.30	9.86	26.43	46.00	-19.57	Average
8	1.68	26.56	0.30	9.86	36.72	56.00	-19.28	QP
9	2.64	19.36	0.36	9.87	29.59	46.00	-16.41	Average
10	2.64	29.27	0.36	9.87	39.50	56.00	-16.50	QP
11	7.65	27.96	0.37	9.98	38.31	50.00	-11.69	Average
12	7.65	35.73	0.37	9.98	46.08	60.00	-13.92	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

## 6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement: EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1

Test Method: EN 55032: 2015+A11:2020+A1:2020

### Limit:

Test Distance: 3m  
 30MHz-230MHz 40 dB(μV/m) quasi-peak  
 230MHz-1GHz 47 dB(μV/m) quasi-peak  
 Detector: Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz

Test Distance: 10m  
 30MHz-230MHz 30 dB(μV/m) quasi-peak  
 230MHz-1GHz 37 dB(μV/m) quasi-peak  
 Detector: Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz

### 6.2.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

### 6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	WiFi mode_Establish the communication between EUT and Ipad mini via wifi function, and use the "APP" in Ipad mini to control EUT working continuously.
Pre-scan	01	Data Communication Mode:The EUT is connected with CMW500 (wireless communication tester). The Absolute Radio Frequency Channel Number is allocated to the middle channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A data communication link has been established.

### 6.2.3 Test Setup Diagram

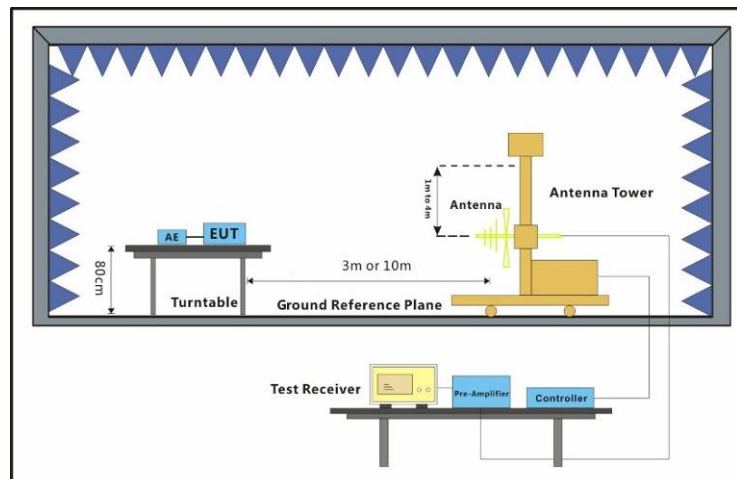

### 6.2.4 Measurement Procedure and Data


Frequency range: 30MHz-1GHz

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

The red line show in graphic is the limit in standard used in this section.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Test Mode: 00; Polarity: Horizontal

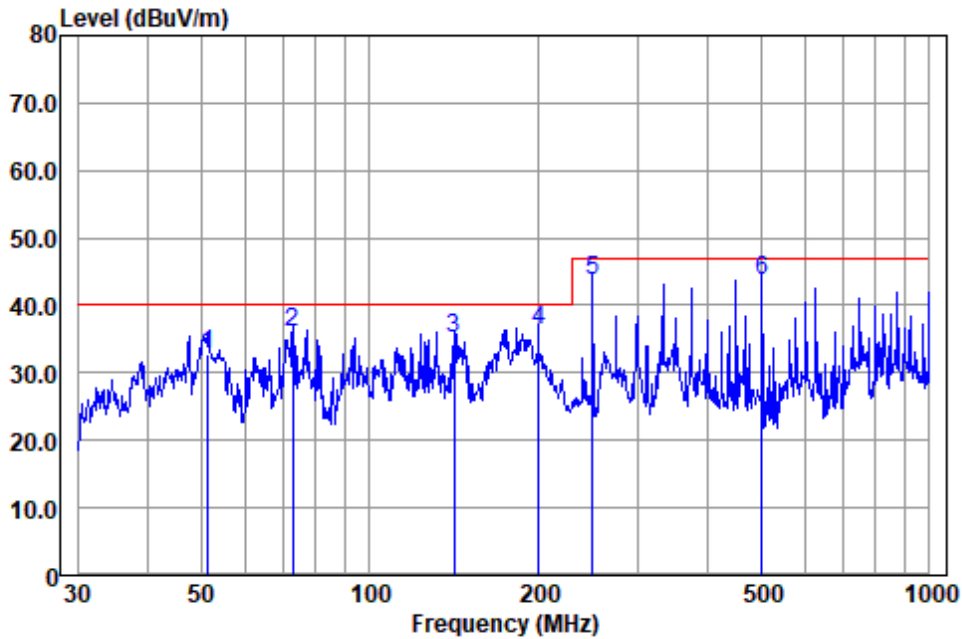


Antenna Polarity :HORIZONTAL  
 EUT/Project :2093EV  
 Test mode :00

	Read	Antenna	Cable	Preamp	Emission	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	51.301	43.79	13.81	1.25	26.20	32.65	40.00	-7.35 QP
2	72.847	49.35	11.19	1.47	26.10	35.91	40.00	-4.09 QP
3	141.330	47.35	12.84	2.05	27.10	35.14	40.00	-4.86 QP
4	199.986	50.36	10.11	2.53	26.70	36.30	40.00	-3.70 QP
5	250.301	55.95	11.89	2.71	26.90	43.65	47.00	-3.35 QP
6	501.179	49.73	17.94	3.95	27.80	43.82	47.00	-3.18 QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical

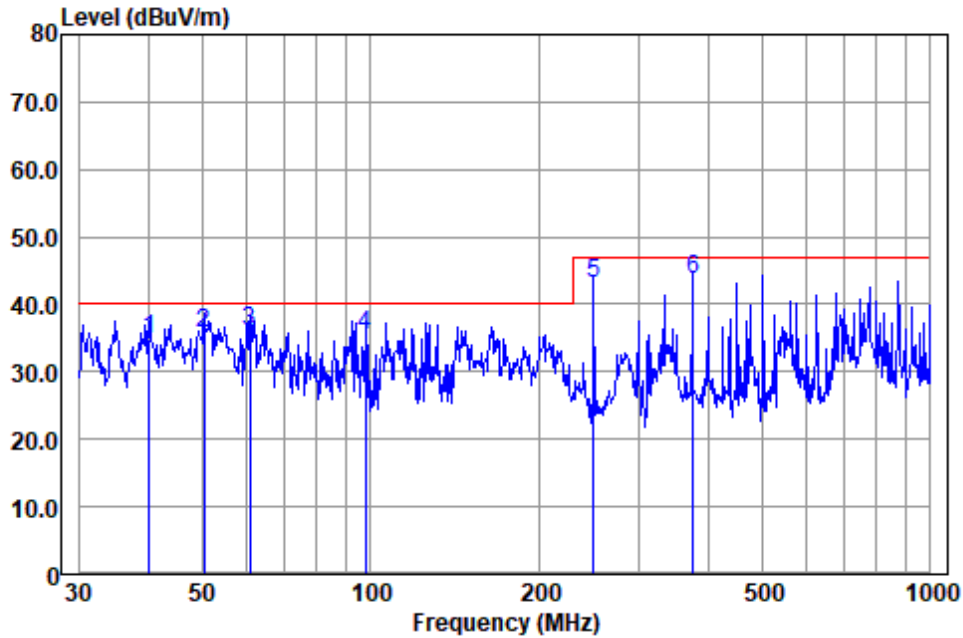

Antenna Polarity :VERTICAL  
 EUT/Project :2093EV  
 Test mode :00

	Read	Antenna	Cable	Preamp	Emission	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	40.276	46.40	13.39	1.13	26.20	34.72	40.00	-5.28 QP
2	50.409	46.72	13.83	1.23	26.20	35.58	40.00	-4.42 QP
3	60.704	47.86	13.14	1.28	26.20	36.08	40.00	-3.92 QP
4	97.798	52.19	8.60	1.72	26.95	35.56	40.00	-4.44 QP
5	250.301	55.31	11.89	2.71	26.90	43.01	47.00	-3.99 QP
6	375.939	52.07	15.24	3.30	26.98	43.63	47.00	-3.37 QP

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

### 6.3 Radiated Emissions (Above 1GHz)

Test Requirement: EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1

Test Method: EN 55032: 2015+A11:2020+A1:2020

Limit:

Frequency range(GHz)	Radiated emissions limit(dBμV/m)	
	Peak	Average
1GHz-3GHz	70	50
3GHz-6GHz	74	54

Detector: Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 6000MHz

#### 6.3.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1010 mbar

#### 6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	WiFi mode_Establish the communication between EUT and Ipad mini via wifi function, and use the "APP" in Ipad mini to control EUT working continuously.
Pre-scan	01	Data Communication Mode:The EUT is connected with CMW500 (wireless communication tester). The Absolute Radio Frequency Channel Number is allocated to the middle channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A data communication link has been established.

#### 6.3.3 Test Setup Diagram

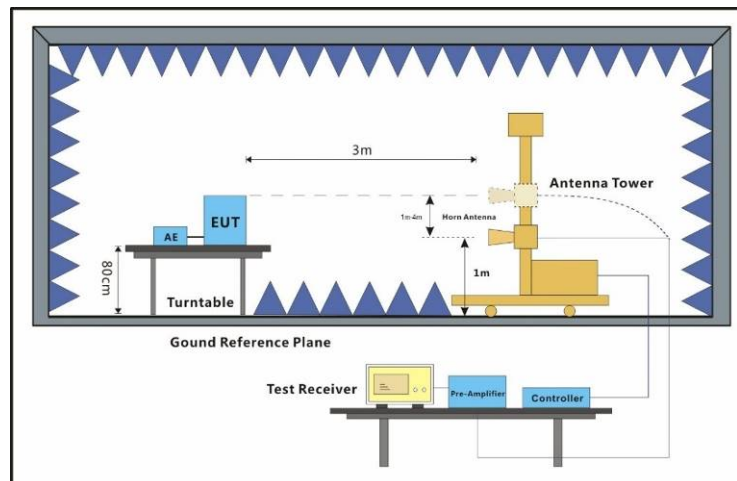


### 6.3.4 Measurement Procedure and Data

Frequency range: Above 1GHz

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Test Mode: 00; Polarity: Horizontal

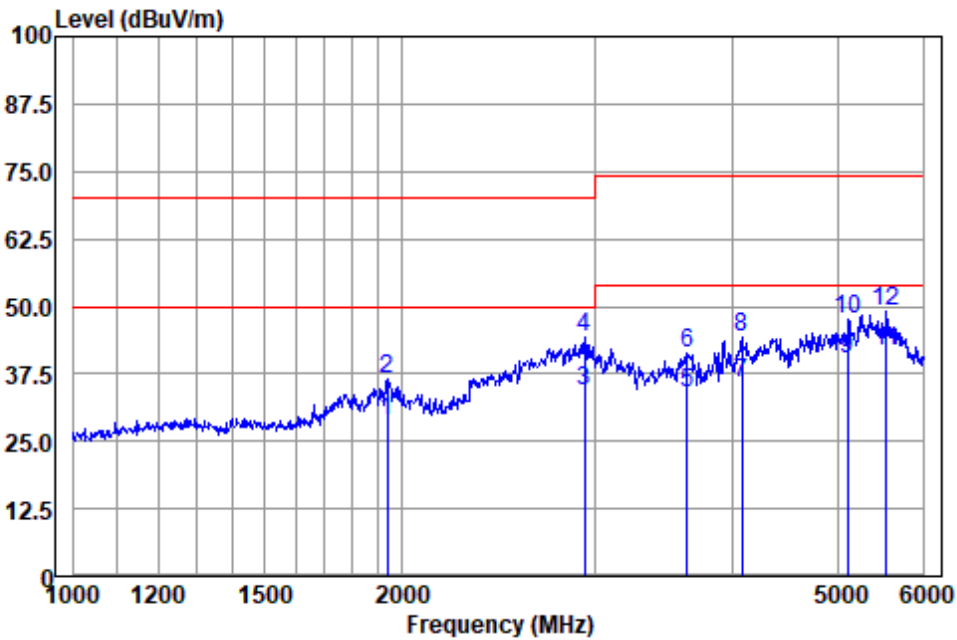


Antenna Polarity :HORIZONTAL  
 EUT/Project :2093EV  
 Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1940.510	40.77	24.10	4.98	41.12	28.73	50.00	-21.27	Average
2	1940.510	48.45	24.10	4.98	41.12	36.41	70.00	-33.59	Peak
3	2935.411	43.23	27.40	6.09	42.30	34.42	50.00	-15.58	Average
4	2935.411	52.92	27.40	6.09	42.30	44.11	70.00	-25.89	Peak
5	3646.072	40.87	28.60	6.90	42.33	34.04	54.00	-19.96	Average
6	3646.072	48.29	28.60	6.90	42.33	41.46	74.00	-32.54	Peak
7	4089.092	41.60	29.20	7.23	42.39	35.64	54.00	-18.36	Average
8	4089.092	50.26	29.20	7.23	42.39	44.30	74.00	-29.70	Peak
9	5106.433	42.69	31.43	8.22	42.28	40.06	54.00	-13.94	Average
10	5106.433	50.12	31.43	8.22	42.28	47.49	74.00	-26.51	Peak
11	5535.214	43.85	31.63	8.52	42.21	41.79	54.00	-12.21	Average
12	5535.214	51.28	31.63	8.52	42.21	49.22	74.00	-24.78	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical

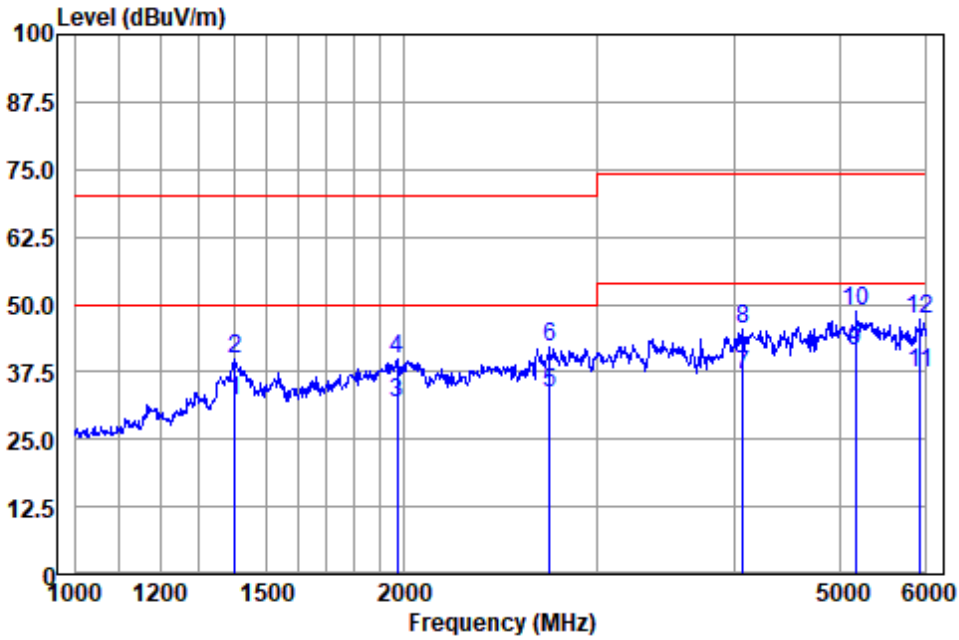

Antenna Polarity :VERTICAL  
 EUT/Project :2093EV  
 Test mode :00

	Read	Antenna	Cable	Preamp	Emission	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 1403.042	45.71	23.40	4.13	41.20	32.04	50.00	-17.96	Average
2 1403.042	53.47	23.40	4.13	41.20	39.80	70.00	-30.20	Peak
3 1972.056	43.36	24.37	5.00	41.11	31.62	50.00	-18.38	Average
4 1972.056	51.64	24.37	5.00	41.11	39.90	70.00	-30.10	Peak
5 2717.743	43.25	26.90	5.87	42.30	33.72	50.00	-16.28	Average
6 2717.743	51.45	26.90	5.87	42.30	41.92	70.00	-28.08	Peak
7 4081.772	42.70	29.23	7.23	42.39	36.77	54.00	-17.23	Average
8 4081.772	51.23	29.23	7.23	42.39	45.30	74.00	-28.70	Peak
9 5170.883	43.75	31.50	8.24	42.27	41.22	54.00	-12.78	Average
10 5170.883	51.13	31.50	8.24	42.27	48.60	74.00	-25.40	Peak
11 5925.216	38.36	32.47	8.66	42.38	37.11	54.00	-16.89	Average
12 5925.216	48.63	32.47	8.66	42.38	47.38	74.00	-26.62	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

### 6.4 Harmonic Current Emission

Test Requirement: EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1

Test Method: EN IEC 61000-3-2:2019+A1:2021


#### 6.4.1 E.U.T. Operation

Operating Environment:  
 Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1010 mbar

#### 6.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	WiFi mode_Establish the communication between EUT and Ipad mini via wifi function, and use the "APP" in Ipad mini to control EUT working continuously.
Pre-scan	01	Data Communication Mode:The EUT is connected with CMW500 (wireless communication tester). The Absolute Radio Frequency Channel Number is allocated to the middle channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A data communication link has been established.

#### 6.4.3 Test Setup Diagram

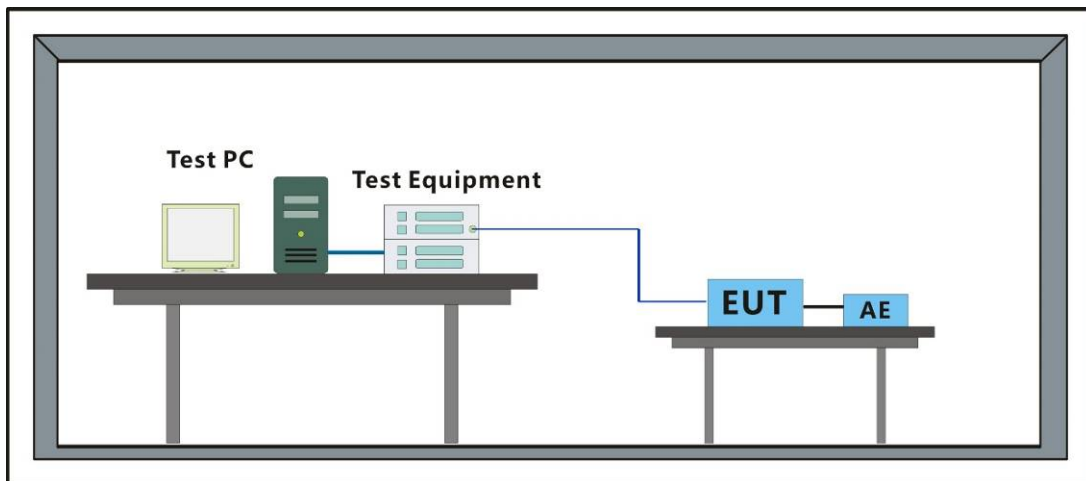

#### 6.4.4 Measurement Procedure and Data

Frequency range: 100Hz-2KHz



Highest parameter values during test:

**POWER/0**

	<u>相1</u>		<u>相2</u>		<u>相3</u>		<u>三相总和</u>	
U_tRMS	<b>227.51</b>	V	<b>227.62</b>	V	<b>231.29</b>	V	<b>228.81</b>	V
I_tRMS	<b>3.8079</b>	A	<b>2.8287</b>	A	<b>2.7931</b>	A	<b>3.1432</b>	A
P_t	<b>713.82</b>	W	<b>533.61</b>	W	<b>525.72</b>	W	<b>1.7732</b>	kW
Q_t	<b>490.91</b>	var	<b>360.26</b>	var	<b>375.41</b>	var	<b>1.2268</b>	kvar
S_t	<b>866.34</b>	VA	<b>643.85</b>	VA	<b>646.01</b>	VA	<b>2.1562</b>	kVA
PF_t	<b>0.8239</b>		<b>0.8288</b>		<b>0.8138</b>		<b>0.8224</b>	
F_fund							<b>50.009</b>	Hz
U_fundRMS	<b>225.88</b>	V	<b>225.93</b>	V	<b>229.73</b>	V	<b>227.18</b>	V
I_fundRMS	<b>3.3814</b>	A	<b>2.4982</b>	A	<b>2.4301</b>	A	<b>2.7699</b>	A
P_fund	<b>728.16</b>	W	<b>543.78</b>	W	<b>536.67</b>	W	<b>1.8086</b>	kW
Q_fund	<b>-230.50</b>	var	<b>-151.15</b>	var	<b>-153.74</b>	var	<b>-535.39</b>	var
S_fund	<b>763.79</b>	VA	<b>564.41</b>	VA	<b>558.26</b>	VA	<b>1.8865</b>	kVA

Phase 1

Harm#	Harms(avg)(A)	100%Limit	%of Limit	Status	Harms(max)(A)	150%Limit	%of Limit	Status
2	1.242E-02	1.08	0.01	PASS	1.950E-02	1.62	0.01	PASS
3	9.416E-01	2.30	0.41	PASS	1.478E+00	3.45	0.43	PASS
4	1.126E-02	0.43	0.03	PASS	1.768E-02	0.65	0.03	PASS
5	7.245E-01	1.14	0.64	PASS	1.137E+00	1.71	0.67	PASS
6	1.147E-02	0.30	0.04	PASS	1.801E-02	0.45	0.04	PASS
7	7.174E-01	0.77	0.93	PASS	1.126E+00	1.16	0.98	PASS
8	8.940E-03	0.23	0.04	PASS	1.403E-02	0.35	0.04	PASS
9	1.490E-01	0.40	0.37	PASS	2.340E-01	0.60	0.39	PASS
10	8.650E-03	0.18	0.05	PASS	1.358E-02	0.28	0.05	PASS
11	3.026E-01	0.33	0.92	PASS	4.751E-01	0.50	0.96	PASS
12	7.450E-03	0.15	0.05	PASS	1.170E-02	0.23	0.05	PASS
13	1.925E-01	0.21	0.92	PASS	3.022E-01	0.32	0.96	PASS
14	1.028E-02	0.13	0.08	PASS	1.614E-02	0.20	0.08	PASS
15	1.026E-01	0.15	0.68	PASS	1.611E-01	0.23	0.72	PASS
16	7.580E-03	0.12	0.07	PASS	1.190E-02	0.17	0.07	PASS
17	1.028E-01	0.13	0.78	PASS	1.613E-01	0.20	0.81	PASS
18	7.560E-03	0.10	0.07	PASS	1.187E-02	0.15	0.08	PASS
19	1.024E-01	0.12	0.87	PASS	1.607E-01	0.18	0.90	PASS
20	7.170E-03	0.09	0.08	PASS	1.126E-02	0.14	0.08	PASS
21	9.068E-02	0.11	0.85	PASS	1.424E-01	0.16	0.88	PASS
22	7.350E-03	0.08	0.09	PASS	1.154E-02	0.13	0.09	PASS
23	7.123E-02	0.10	0.73	PASS	1.118E-01	0.15	0.76	PASS
24	9.310E-03	0.08	0.12	PASS	1.462E-02	0.12	0.13	PASS
25	6.369E-02	0.09	0.71	PASS	9.998E-02	0.14	0.74	PASS
26	8.990E-03	0.07	0.13	PASS	1.411E-02	0.11	0.13	PASS
27	5.531E-02	0.08	0.67	PASS	8.683E-02	0.13	0.69	PASS
28	6.030E-03	0.07	0.09	PASS	9.466E-03	0.10	0.10	PASS
29	4.783E-02	0.08	0.61	PASS	7.509E-02	0.12	0.65	PASS
30	6.780E-03	0.06	0.11	PASS	1.064E-02	0.09	0.12	PASS
31	6.561E-02	0.07	0.90	PASS	1.030E-01	0.11	0.94	PASS
32	6.100E-03	0.06	0.11	PASS	9.576E-03	0.09	0.11	PASS
33	4.201E-02	0.07	0.62	PASS	6.595E-02	0.10	0.65	PASS
34	6.340E-03	0.05	0.12	PASS	9.953E-03	0.08	0.12	PASS
35	4.113E-02	0.06	0.64	PASS	6.457E-02	0.10	0.67	PASS
36	6.530E-03	0.05	0.13	PASS	1.025E-02	0.08	0.13	PASS
37	3.632E-02	0.06	0.60	PASS	5.702E-02	0.09	0.63	PASS
38	7.640E-03	0.05	0.16	PASS	1.199E-02	0.07	0.16	PASS
39	4.628E-02	0.06	0.80	PASS	7.265E-02	0.09	0.84	PASS
40	5.640E-03	0.05	0.12	PASS	8.854E-03	0.07	0.13	PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

Phase 2

Harm#	Harms(avg)(A)	100%Limit	%of Limit	Status	Harms(max)(A)	150%Limit	%of Limit	Status
2	1.455E-02	1.08	0.01	PASS	2.284E-02	1.62	0.01	PASS
3	3.612E-02	2.30	0.02	PASS	5.670E-02	3.45	0.02	PASS
4	4.450E-03	0.43	0.01	PASS	6.986E-03	0.65	0.01	PASS
5	6.772E-01	1.14	0.59	PASS	1.063E+00	1.71	0.62	PASS
6	4.200E-03	0.30	0.01	PASS	6.593E-03	0.45	0.01	PASS
7	4.324E-01	0.77	0.56	PASS	6.787E-01	1.16	0.59	PASS
8	4.800E-03	0.23	0.02	PASS	7.535E-03	0.35	0.02	PASS
9	8.422E-02	0.40	0.21	PASS	1.322E-01	0.60	0.22	PASS
10	5.370E-03	0.18	0.03	PASS	8.430E-03	0.28	0.03	PASS
11	2.255E-01	0.33	0.68	PASS	3.540E-01	0.50	0.72	PASS
12	5.410E-03	0.15	0.04	PASS	8.493E-03	0.23	0.04	PASS
13	1.938E-01	0.21	0.92	PASS	3.042E-01	0.32	0.97	PASS
14	6.120E-03	0.13	0.05	PASS	9.608E-03	0.20	0.05	PASS
15	1.329E-01	0.15	0.89	PASS	2.087E-01	0.23	0.93	PASS
16	6.290E-03	0.12	0.05	PASS	9.874E-03	0.17	0.06	PASS
17	1.138E-01	0.13	0.86	PASS	1.787E-01	0.20	0.90	PASS
18	5.430E-03	0.10	0.05	PASS	8.524E-03	0.15	0.06	PASS
19	1.053E-01	0.12	0.89	PASS	1.653E-01	0.18	0.93	PASS
20	5.350E-03	0.09	0.06	PASS	8.399E-03	0.14	0.06	PASS
21	6.534E-02	0.11	0.61	PASS	1.026E-01	0.16	0.64	PASS
22	8.370E-03	0.08	0.10	PASS	1.314E-02	0.13	0.11	PASS
23	7.549E-02	0.10	0.77	PASS	1.185E-01	0.15	0.81	PASS
24	8.510E-03	0.08	0.11	PASS	1.336E-02	0.12	0.12	PASS
25	6.704E-02	0.09	0.74	PASS	1.052E-01	0.14	0.78	PASS
26	6.210E-03	0.07	0.09	PASS	9.749E-03	0.11	0.09	PASS
27	6.749E-02	0.08	0.81	PASS	1.059E-01	0.13	0.85	PASS
28	6.630E-03	0.07	0.10	PASS	1.041E-02	0.10	0.11	PASS
29	6.885E-02	0.08	0.88	PASS	1.081E-01	0.12	0.93	PASS
30	5.970E-03	0.06	0.10	PASS	9.372E-03	0.09	0.10	PASS
31	2.803E-02	0.07	0.38	PASS	4.400E-02	0.11	0.40	PASS
32	5.430E-03	0.06	0.09	PASS	8.524E-03	0.09	0.10	PASS
33	5.517E-02	0.07	0.81	PASS	8.661E-02	0.10	0.85	PASS
34	5.120E-03	0.05	0.09	PASS	8.038E-03	0.08	0.10	PASS
35	4.668E-02	0.06	0.73	PASS	7.328E-02	0.10	0.76	PASS
36	6.330E-03	0.05	0.12	PASS	9.937E-03	0.08	0.13	PASS
37	4.558E-02	0.06	0.75	PASS	7.155E-02	0.09	0.79	PASS
38	6.380E-03	0.05	0.13	PASS	1.002E-02	0.07	0.14	PASS
39	4.714E-02	0.06	0.81	PASS	7.400E-02	0.09	0.85	PASS
40	5.640E-03	0.05	0.12	PASS	8.854E-03	0.07	0.13	PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

Phase 3

Harm#	Harms(avg)(A)	100%Limit	%of Limit	Status	Harms(max)(A)	150%Limit	%of Limit	Status
2	6.260E-03	1.08	0.01	PASS	9.827E-03	1.62	0.01	PASS
3	9.870E-02	2.30	0.04	PASS	1.549E-01	3.45	0.04	PASS
4	4.100E-03	0.43	0.01	PASS	6.436E-03	0.65	0.01	PASS
5	7.628E-01	1.14	0.67	PASS	1.197E+00	1.71	0.70	PASS
6	3.540E-03	0.30	0.01	PASS	5.557E-03	0.45	0.01	PASS
7	4.208E-01	0.77	0.55	PASS	6.605E-01	1.16	0.57	PASS
8	5.310E-03	0.23	0.02	PASS	8.336E-03	0.35	0.02	PASS
9	5.962E-02	0.40	0.15	PASS	9.359E-02	0.60	0.16	PASS
10	5.630E-02	0.18	0.31	PASS	8.838E-02	0.28	0.32	PASS
11	3.021E-01	0.33	0.92	PASS	4.742E-01	0.50	0.96	PASS
12	4.540E-03	0.15	0.03	PASS	7.127E-03	0.23	0.03	PASS
13	1.925E-01	0.21	0.92	PASS	3.022E-01	0.32	0.96	PASS
14	7.180E-03	0.13	0.05	PASS	1.127E-02	0.20	0.06	PASS
15	4.085E-02	0.15	0.27	PASS	6.413E-02	0.23	0.29	PASS
16	5.390E-03	0.12	0.05	PASS	8.462E-03	0.17	0.05	PASS
17	1.030E-01	0.13	0.78	PASS	1.616E-01	0.20	0.82	PASS
18	5.770E-03	0.10	0.06	PASS	9.058E-03	0.15	0.06	PASS
19	1.036E-01	0.12	0.88	PASS	1.627E-01	0.18	0.91	PASS
20	8.360E-03	0.09	0.09	PASS	1.312E-02	0.14	0.10	PASS
21	5.165E-02	0.11	0.48	PASS	8.108E-02	0.16	0.50	PASS
22	6.230E-03	0.08	0.07	PASS	9.780E-03	0.13	0.08	PASS
23	9.259E-02	0.10	0.94	PASS	1.454E-01	0.15	0.99	PASS
24	5.600E-03	0.08	0.07	PASS	8.791E-03	0.12	0.08	PASS
25	8.137E-02	0.09	0.90	PASS	1.277E-01	0.14	0.95	PASS
26	9.010E-03	0.07	0.13	PASS	1.414E-02	0.11	0.13	PASS
27	6.223E-02	0.08	0.75	PASS	9.769E-02	0.13	0.78	PASS
28	6.400E-03	0.07	0.10	PASS	1.005E-02	0.10	0.10	PASS
29	7.127E-02	0.08	0.91	PASS	1.119E-01	0.12	0.96	PASS
30	6.320E-03	0.06	0.10	PASS	9.922E-03	0.09	0.11	PASS
31	6.627E-02	0.07	0.91	PASS	1.040E-01	0.11	0.95	PASS
32	8.900E-03	0.06	0.15	PASS	1.397E-02	0.09	0.16	PASS
33	3.513E-02	0.07	0.52	PASS	5.515E-02	0.10	0.54	PASS
34	5.980E-03	0.05	0.11	PASS	9.388E-03	0.08	0.12	PASS
35	4.143E-02	0.06	0.65	PASS	6.504E-02	0.10	0.68	PASS
36	6.290E-03	0.05	0.12	PASS	9.874E-03	0.08	0.13	PASS
37	4.159E-02	0.06	0.68	PASS	6.529E-02	0.09	0.72	PASS
38	6.810E-03	0.05	0.14	PASS	1.069E-02	0.07	0.15	PASS
39	3.018E-02	0.06	0.52	PASS	4.738E-02	0.09	0.54	PASS
40	5.070E-03	0.05	0.11	PASS	7.959E-03	0.07	0.12	PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.



# SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR231100237801

Page: 29 of 53

## Phase 1

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	7.00E-02	0.46	15.18	OK
3	4.29E-01	2.07	20.68	OK
4	5.20E-02	0.46	11.21	OK
5	5.60E-02	0.92	6.03	OK
6	1.80E-02	0.46	3.81	OK
7	3.90E-02	0.69	5.63	OK
8	1.40E-02	0.46	2.94	OK
9	3.90E-02	0.46	8.50	OK
10	1.50E-02	0.46	3.28	OK
11	1.50E-02	0.23	6.49	OK
12	1.30E-02	0.23	5.64	OK
13	9.00E-03	0.23	3.91	OK
14	7.00E-03	0.23	2.87	OK
15	1.10E-02	0.23	4.72	OK
16	6.00E-03	0.23	2.72	OK
17	5.00E-03	0.23	2.36	OK
18	7.00E-03	0.23	2.93	OK
19	8.00E-03	0.23	3.36	OK
20	1.10E-02	0.23	4.79	OK
21	6.00E-03	0.23	2.66	OK
22	5.00E-03	0.23	2.01	OK
23	6.00E-03	0.23	2.50	OK
24	3.00E-03	0.23	1.34	OK
25	8.00E-03	0.23	3.52	OK
26	3.00E-03	0.23	1.39	OK
27	8.00E-03	0.23	3.56	OK
28	2.00E-03	0.23	1.03	OK
29	6.00E-03	0.23	2.59	OK
30	3.00E-03	0.23	1.48	OK
31	4.00E-03	0.23	1.85	OK
32	3.00E-03	0.23	1.11	OK
33	5.00E-03	0.23	2.11	OK
34	2.00E-03	0.23	0.92	OK
35	3.00E-03	0.23	1.25	OK
36	2.00E-03	0.23	0.80	OK
37	3.00E-03	0.23	1.44	OK
38	2.00E-03	0.23	0.84	OK
39	3.00E-03	0.23	1.39	OK
40	6.00E-03	0.23	2.49	OK



# SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR231100237801

Page: 30 of 53

## Phase 2

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	3.60E-02	0.46	7.87	OK
3	5.24E-01	2.07	25.29	OK
4	1.90E-02	0.46	4.12	OK
5	7.50E-02	0.92	8.20	OK
6	8.00E-03	0.46	1.63	OK
7	6.40E-02	0.69	9.33	OK
8	8.00E-03	0.46	1.83	OK
9	5.10E-02	0.46	11.14	OK
10	1.70E-02	0.46	3.76	OK
11	3.00E-02	0.23	12.88	OK
12	1.00E-02	0.23	4.43	OK
13	2.40E-02	0.23	10.42	OK
14	7.00E-03	0.23	2.82	OK
15	2.50E-02	0.23	11.00	OK
16	5.00E-03	0.23	2.28	OK
17	1.70E-02	0.23	7.58	OK
18	6.00E-03	0.23	2.47	OK
19	1.50E-02	0.23	6.43	OK
20	7.00E-03	0.23	2.89	OK
21	1.40E-02	0.23	5.96	OK
22	4.00E-03	0.23	1.93	OK
23	1.30E-02	0.23	5.58	OK
24	3.00E-03	0.23	1.33	OK
25	1.20E-02	0.23	5.17	OK
26	4.00E-03	0.23	1.64	OK
27	9.00E-03	0.23	4.01	OK
28	7.00E-03	0.23	3.25	OK
29	1.30E-02	0.23	5.50	OK
30	9.00E-03	0.23	3.71	OK
31	9.00E-03	0.23	3.98	OK
32	4.00E-03	0.23	1.67	OK
33	1.00E-02	0.23	4.23	OK
34	3.00E-03	0.23	1.46	OK
35	1.00E-02	0.23	4.45	OK
36	3.00E-03	0.23	1.39	OK
37	9.00E-03	0.23	3.90	OK
38	4.00E-03	0.23	1.68	OK
39	9.00E-03	0.23	3.81	OK
40	4.00E-03	0.23	1.91	OK

Phase 3

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	8.10E-02	0.46	17.53	OK
3	4.87E-01	2.07	23.52	OK
4	7.70E-02	0.46	16.61	OK
5	3.70E-02	0.92	4.03	OK
6	2.40E-02	0.46	5.27	OK
7	6.40E-02	0.69	9.31	OK
8	2.30E-02	0.46	5.01	OK
9	3.50E-02	0.46	7.58	OK
10	1.80E-02	0.46	3.89	OK
11	1.90E-02	0.23	8.21	OK
12	1.50E-02	0.23	6.68	OK
13	1.40E-02	0.23	5.88	OK
14	8.00E-03	0.23	3.65	OK
15	1.20E-02	0.23	5.24	OK
16	9.00E-03	0.23	3.95	OK
17	1.10E-02	0.23	4.58	OK
18	9.00E-03	0.23	3.81	OK
19	8.00E-03	0.23	3.67	OK
20	1.30E-02	0.23	5.85	OK
21	9.00E-03	0.23	3.75	OK
22	4.00E-03	0.23	1.90	OK
23	8.00E-03	0.23	3.61	OK
24	4.00E-03	0.23	1.90	OK
25	8.00E-03	0.23	3.27	OK
26	3.00E-03	0.23	1.19	OK
27	8.00E-03	0.23	3.55	OK
28	3.00E-03	0.23	1.31	OK
29	8.00E-03	0.23	3.52	OK
30	3.00E-03	0.23	1.21	OK
31	6.00E-03	0.23	2.51	OK
32	3.00E-03	0.23	1.15	OK
33	6.00E-03	0.23	2.81	OK
34	2.00E-03	0.23	1.02	OK
35	6.00E-03	0.23	2.75	OK
36	3.00E-03	0.23	1.30	OK
37	5.00E-03	0.23	2.38	OK
38	3.00E-03	0.23	1.27	OK
39	5.00E-03	0.23	2.02	OK
40	8.00E-03	0.23	3.39	OK

### 6.5 Voltage Fluctuations and Flicker

Test Requirement: EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1

Test Method: EN 61000-3-3:2013+A1:2019+A2:2021


#### 6.5.1 E.U.T. Operation

Operating Environment:  
 Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

#### 6.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	WiFi mode_Establish the communication between EUT and Ipad mini via wifi function, and use the "APP" in Ipad mini to control EUT working continuously.
Pre-scan	01	Data Communication Mode:The EUT is connected with CMW500 (wireless communication tester). The Absolute Radio Frequency Channel Number is allocated to the middle channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A data communication link has been established.

#### 6.5.3 Test Setup Diagram

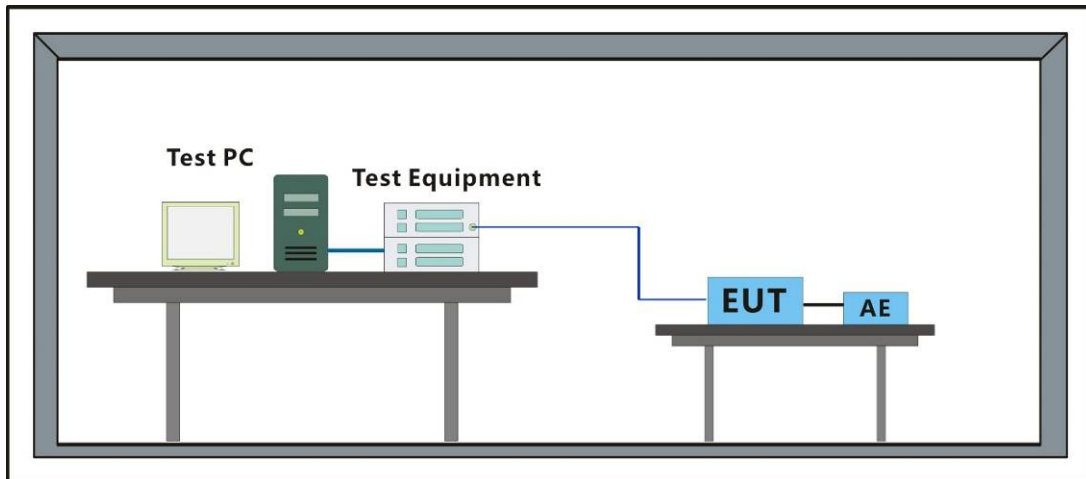



**6.5.4 Measurement Procedure and Data**

**Maximum Flicker results**

	<b>L1</b>	<b>L2</b>	<b>L3</b>	<b>Limit</b>	<b>Result</b>
Pst	0.180	0.164	0.188	1.00	PASS
Plt	0.151	0.147	0.182	0.65	PASS
dc [%]	0.006	0.009	0.010	3.30	PASS
dmax [%]	0.863	0.886	0.822	6.00	PASS
dt [s]	0.000	0.000	0.000	0.50	PASS

## 7 Immunity Test Results

### Performance Criteria Description in EN 301 489-1

<b>Performance criteria for continuous phenomena</b>	During the test, the equipment shall: <ul style="list-style-type: none"> <li>• continue to operate as intended;</li> <li>• not unintentionally transmit;</li> <li>• not unintentionally change its operating state;</li> <li>• not unintentionally change critical stored data.</li> </ul>
<b>Performance criteria for transient phenomena</b>	For all ports and transient phenomena with the exception described below, the following applies: <ul style="list-style-type: none"> <li>• The application of the transient phenomena shall not result in a change of the mode of operation (e.g. unintended transmission) or the loss of critical stored data.</li> <li>• After application of the transient phenomena, the equipment shall operate as intended.</li> </ul> For surges applied to symmetrically operated wired network ports intended to be connected directly to outdoor lines the following criteria applies: <ul style="list-style-type: none"> <li>• For products with only one symmetrical port intended for connection to outdoor lines, loss of function is allowed, provided the function is self-recoverable, or can be otherwise restored. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</li> <li>• For products with more than one symmetrical port intended for connection to outdoor lines, loss of function on the port under test is allowed, provided the function is self-recoverable. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</li> </ul>

### Performance Criteria Description in EN 301 489-17

Criteria	During Test	After Test (i.e. as a result of the application of the test)
<b>A</b>	Shall operate as intended. (see note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
<b>B</b>	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
<b>C</b>	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.

NOTE: Operate as intended during the test allows a level of degradation in accordance with Minimum performance level.

#### Minimum performance level

For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER, the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.

#### Performance criteria for Continuous phenomena

The performance criteria A shall apply.

Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur during the test.

Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur during the test.

**Performance criteria for Transient phenomena**

The performance criteria B shall apply, except for voltage dips greater than or equal to 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply.

Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur as a result of the application of the test.

Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur as a result of the application of the test.

**Performance Criteria Description in EN 301 489-3 V2.3.2**

**Performance Criteria**

Introduction	<p>The performance criteria are used to make an assessment whether a radio equipment passes or fails immunity tests.</p> <p>Only the performance criteria specified in the present document or in ETSI EN 301 489-1 [1] where referenced shall apply.</p> <p>The provisions of ETSI EN 301 489-1 [1], clause 6, shall apply together with the following.</p>
Continuous and non-continuous operation	<p>Latency is the time delay between the initiation and the completion of operation of the EUT. Correct functioning requires completing the relevant operation within the maximum latency time.</p> <p>Where the maximum latency is specified in the applicable harmonised radio standard (in the wanted performance criterion, or an acknowledge requirement), that value shall be used.</p> <p>Where this is not the case, then the maximum latency is that required by the intended use of the EUT.</p>
Operating modes	<p>Where the EUT has more than one mode of operation (see clause 4.4.1), an unplanned transition from one mode to another is considered as an unintentional response. The EUT shall be tested in all modes to confirm there are no such unintentional responses.</p>

**Special conditions for EMC immunity tests**

<b>Reference to clauses in ETSI EN 301 489-1</b>	<b>Special product-related conditions, additional to or modifying the test conditions in ETSI EN 301 489-1, clause 9</b>
Test method; Radio frequency electromagnetic field	<p>Where the EUT is subject to EMC Immunity testing under a Harmonised Standard of a Directive other than the Directive 2014/53/EU [i.2] then the modulating signal frequency specified in that Harmonised Standard may be used. If this alternative modulating frequency is used, then the applicable Directive, Harmonised Standard &amp; modulating frequency shall be noted in the test report.</p>
Fast transients common mode	<p>The requirements of ETSI EN 301 489-1 [1], clauses 9.4.1 and 9.4.2 shall be applied with the exception of clause 7.4 of EN 61000-4-4 [4].</p>
Test method; Radio frequency, common mode	<p>Where the EUT is subject to EMC Immunity testing under a Harmonised Standard of a Directive other than the Directive 2014/53/EU [i.2] then the modulating signal frequency specified in that Harmonised Standard may be used. If this alternative modulating frequency is used, then the applicable Directive, Harmonised Standard &amp; modulating frequency shall be noted in the test report.</p>

**Performance Criteria Description in EN 301 489-52 V1.2.0**

**Performance criteria for Continuous phenomena**

**GSM and voice call**

Performance criteria for Continuous phenomena applied to Transmitters (CT)

With a link established, during the test, the uplink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check).

NOTE: When there is a high-level background noise present, the filter bandwidth may be reduced down to a minimum of 40 Hz.

In idle mode, the transmitter shall not operate unintentionally.

At the conclusion of the test, the EUT shall operate as intended with no loss of user control functions or critical stored data, and the communication link shall have been maintained.

Performance criteria for Continuous phenomena applied to Receivers (CR)

During the test, the RXQUAL of the downlink shall not exceed the value of three, measured during each individual exposure in the test sequence.

In the case of narrow band responses, the procedure in clause 4.4.1 shall be followed.

During the test, the downlink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check).

NOTE: When there is a high-level background noise present, the filter bandwidth may be reduced down to a minimum of 40 Hz.

At the conclusion of the test, the EUT shall operate as intended with no loss of user control functions or critical stored data, and the communication link shall have been maintained.

**UTRA**

In the data transfer mode, the performance criteria can be one of the following:

- if the BER is used, it shall not exceed 0,001 during the test sequence;
- if the BLER is used, it shall not exceed 0,01 during the test sequence.

The BLER calculation shall be based on evaluating the CRC on each transport block.

In the case of narrow band responses, the procedure in clause 4.4.2.1 shall be followed.

When testing a voice call, the performance criteria in clause 6.1.1 shall apply.

**E-UTRA, E-UTRA with LAA, inband or guard band NB-IoT, Standalone NB-IoT**

In data transfer mode, the data throughput of the EUT shall not fall below 95 % of the maximum data throughput.

In the case of narrow band responses, the procedure in clause 4.4.2.2 shall be followed.

When testing a voice call, the performance criteria in clause 6.1.1 shall apply.

**NR**

In data transfer mode, the data throughput of the EUT shall not fall below 95 % of the maximum data throughput.

In the case of narrow band responses, the procedure in clause 4.4.3 shall be followed.

When testing a voice call, the performance criteria in clause 6.1.1 shall apply.

Performance criteria for Transient phenomena

At the conclusion of each exposure of the transient phenomena, the EUT shall operate without loss of the communication link.


At the conclusion of the total test comprising the series of individual exposures, the EUT shall operate as intended without loss of user control functions or critical stored data.

In addition, where the EUT supports idle mode it should be verified that the transmitter shall not unintentionally operate when transient phenomena are applied.

### 7.1 Electrostatic Discharge

Test Requirement: EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1  
 Test Method: EN 61000-4-2:2009

#### 7.1.1 Test Setup Diagram

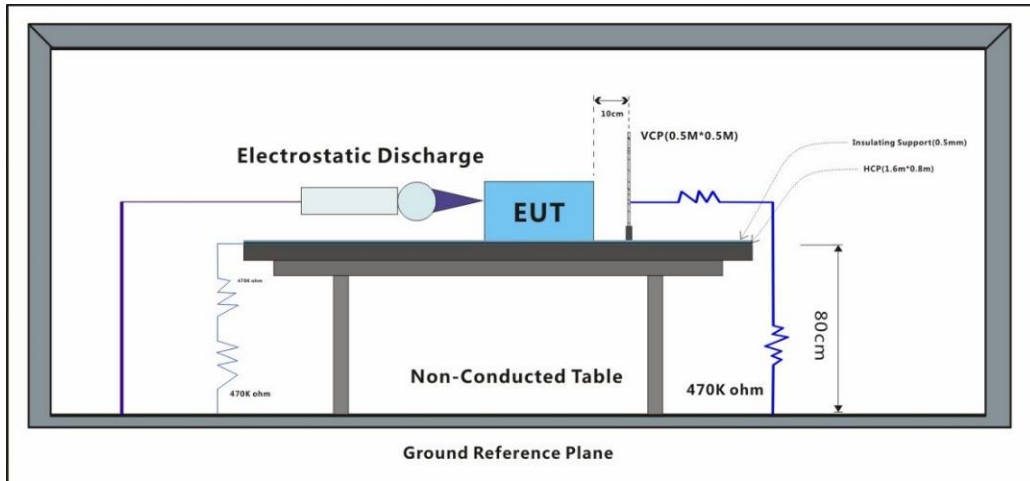

#### 7.1.2 E.U.T. Operation

Operating Environment:  
 Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1020 mbar

#### 7.1.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	WiFi mode_Establish the communication between EUT and Ipad mini via wifi function, and use the "APP" in Ipad mini to control EUT working continuously.
Final test	01	Data Communication Mode:The EUT is connected with CMW500 (wireless communication tester). The Absolute Radio Frequency Channel Number is allocated to the middle channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A data communication link has been established.

#### 7.1.4 Test Condition and Results:

- Performance Criterion: B
- Discharge Impedance: 330Ω/150pF
- Number of Discharge: Minimum 10 times at each test point
- Discharge Mode: Single Discharge
- Discharge Period: 1 second minimum
- Test Point: 1. All insulated enclosure and seams.  
 2. All accessible metal parts of the enclosure.  
 3. All side


Discharge type	Level (kV)	Polarity	Test Point	EUT Performance	Criterion	Result
Air Discharge	2,4,8	+	1	CT/CR	A	Pass
Air Discharge	2,4,8	-	1	CT/CR	A	Pass
Contact Discharge	4	+	2	CT/CR	A	Pass
Contact Discharge	4	-	2	CT/CR	A	Pass
Horizontal Coupling	4	+	3	CT/CR	A	Pass
Horizontal Coupling	4	-	3	CT/CR	A	Pass
Vertical Coupling	4	+	3	CT/CR	A	Pass
Vertical Coupling	4	-	3	CT/CR	A	Pass
A: No degradation in the performance of the EUT was observed						

### 7.2 Radiated Immunity (80MHz-6GHz)

Test Requirement: EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1

Test Method: EN IEC 61000-4-3: 2020

#### 7.2.1 Test Setup Diagram

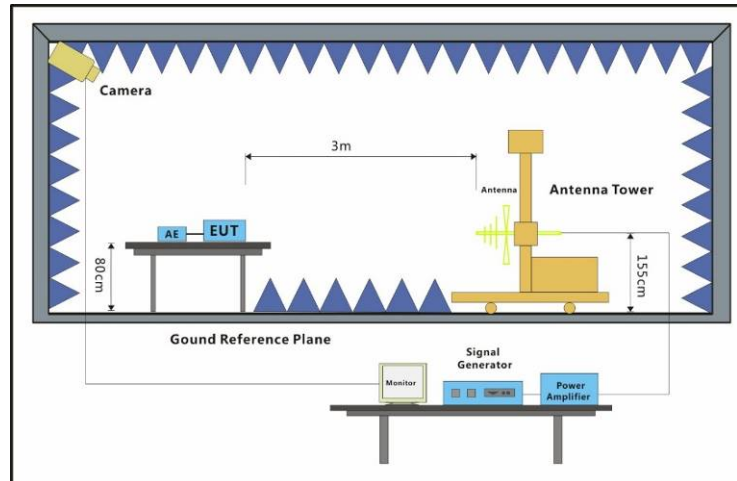

#### 7.2.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1010 mbar

#### 7.2.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	WiFi mode_Establish the communication between EUT and Ipad mini via wifi function, and use the "APP" in Ipad mini to control EUT working continuously.
Final test	01	Data Communication Mode:The EUT is connected with CMW500 (wireless communication tester). The Absolute Radio Frequency Channel Number is allocated to the middle channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A data communication link has been established.

#### 7.2.4 Test Condition and Results:

Performance Criterion: A  
 Frequency Range: 80MHz to 6GHz  
 Antenna Polarisation: Vertical and Horizontal  
 Modulation: 1kHz,80% Amp. Mod,1% increment



**SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.**

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR231100237801

Page: 40 of 53

Frequency	Level (V/m)	EUT Face	Dwell time	EUT Performance	Criterion	Result
80MHz-6GHz	3	Front	2s	CT/CR	A	Pass
80MHz-6GHz	3	Back	2s	CT/CR	A	Pass
80MHz-6GHz	3	Left	2s	CT/CR	A	Pass
80MHz-6GHz	3	Right	2s	CT/CR	A	Pass
80MHz-6GHz	3	Top	2s	CT/CR	A	Pass
80MHz-6GHz	3	Underside	2s	CT/CR	A	Pass

A: No degradation in the performance of the EUT was observed




### 7.3 Electrical Fast Transients Burst at AC Mains Power Port

Test Requirement: EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1

Test Method: EN 61000-4-4:2012

#### 7.3.1 Test Setup Diagram

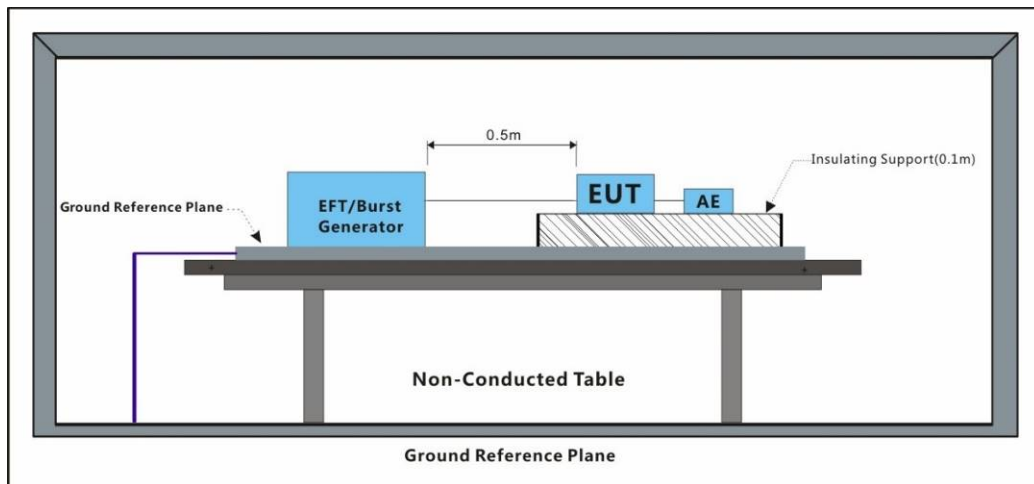

#### 7.3.2 E.U.T. Operation

Operating Environment:  
 Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

#### 7.3.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	WiFi mode_Establish the communication between EUT and Ipad mini via wifi function, and use the "APP" in Ipad mini to control EUT working continuously.
Final test	01	Data Communication Mode:The EUT is connected with CMW500 (wireless communication tester). The Absolute Radio Frequency Channel Number is allocated to the middle channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A data communication link has been established.

#### 7.3.4 Test Condition and Results:

Performance Criterion: B  
 Repetition Frequency: 5kHz  
 Burst Period: 300ms

Test Line	Level (kV)	Polarity	CDN/Clamp	EUT Performance	Criterion	Result
AC mains power port	1	+	CDN	CT/CR	A	Pass
AC mains power port	1	-	CDN	CT/CR	A	Pass


A: No degradation in the performance of the EUT was observed

### 7.4 Surge at AC Mains Power Port

Test Requirement: EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1

Test Method: EN 61000-4-5:2014 +A1:2017

#### 7.4.1 Test Setup Diagram

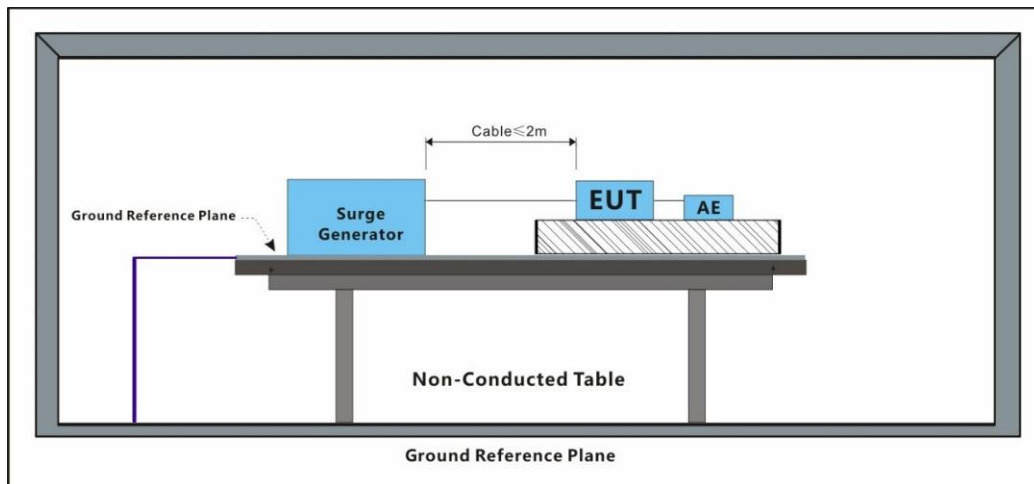

#### 7.4.2 E.U.T. Operation

Operating Environment:  
 Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1020 mbar

#### 7.4.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	WiFi mode_Establish the communication between EUT and Ipad mini via wifi function, and use the "APP" in Ipad mini to control EUT working continuously.
Final test	01	Data Communication Mode:The EUT is connected with CMW500 (wireless communication tester). The Absolute Radio Frequency Channel Number is allocated to the middle channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A data communication link has been established.

#### 7.4.4 Test Condition and Results:

Performance Criterion: B  
 Interval: 60s between each surge  
 No. of surges: 5 positive, 5 negative at 0°, 90°, 180°, 270°

Test Line	Level (kV)	Polarity	Phase (deg)	EUT Performance	Criterion	Result
L-N	1	+	0°	CT/CR	A	Pass
L-N	1	-	0°	CT/CR	A	Pass
L-N	1	+	90°	CT/CR	A	Pass
L-N	1	-	90°	CT/CR	A	Pass
L-N	1	+	180°	CT/CR	A	Pass
L-N	1	-	180°	CT/CR	A	Pass
L-N	1	+	270°	CT/CR	A	Pass
L-N	1	-	270°	CT/CR	A	Pass


A: No degradation in the performance of the EUT was observed

### 7.5 Conducted Immunity at AC Mains Power Port (150kHz-80MHz)

Test Requirement: EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1

Test Method: EN 61000-4-6:2014

#### 7.5.1 Test Setup Diagram

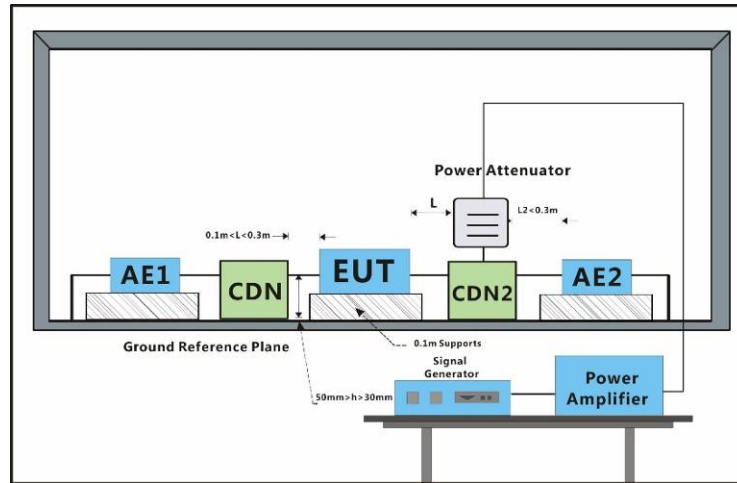

#### 7.5.2 E.U.T. Operation

Operating Environment:  
 Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1020 mbar

#### 7.5.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	WiFi mode_Establish the communication between EUT and Ipad mini via wifi function, and use the "APP" in Ipad mini to control EUT working continuously.
Final test	01	Data Communication Mode:The EUT is connected with CMW500 (wireless communication tester). The Absolute Radio Frequency Channel Number is allocated to the middle channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A data communication link has been established.

#### 7.5.4 Test Condition and Results:

Performance Criterion: A  
 Frequency Range: 0.15MHz to 80MHz  
 Modulation: 80%, 1kHz Amplitude Modulation  
 Step Size: 1%

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	EUT Performance	Criterion	Result
AC power port	3	CDN	2s	CT/CR	A	Pass


A: No degradation in the performance of the EUT was observed

### 7.6 Voltage Dips and Interruptions

Test Requirement: EN 301 489-1 V2.2.3  
 EN 301 489-3 V2.3.2  
 EN 301 489-17 V3.2.4  
 EN 301 489-52 V1.2.1

Test Method: EN IEC 61000-4-11:2020

#### 7.6.1 Test Setup Diagram

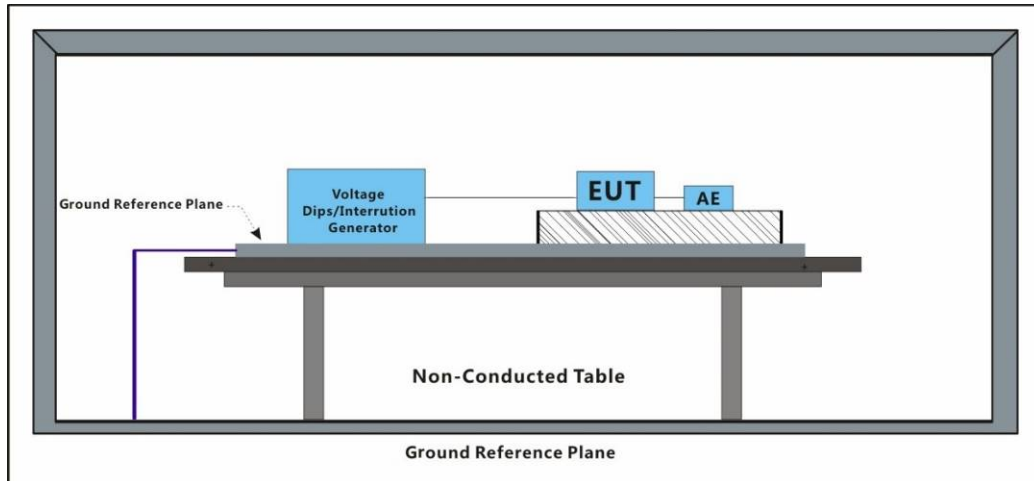

#### 7.6.2 E.U.T. Operation

Operating Environment:  
 Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1020 mbar

#### 7.6.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	WiFi mode_Establish the communication between EUT and Ipad mini via wifi function, and use the "APP" in Ipad mini to control EUT working continuously.
Final test	01	Data Communication Mode:The EUT is connected with CMW500 (wireless communication tester). The Absolute Radio Frequency Channel Number is allocated to the middle channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A data communication link has been established.

#### 7.6.4 Test Condition and Results:

Performance Criterion: 0% of UT (Supply Voltage) for 0.5 Cycle:B;  
 0% of UT for 1 Cycle:B;  
 0% of UT for 250 Cycles:C;  
 70 % of UT for 25 Cycles:C  
 No. of Dips / Interruptions: 3 per Level  
 Time between dropout: 10s

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	EUT Performance	Criterion	Result
0	0°	0.5 Cycle	3	CT/CR	A	Pass
0	180°	0.5 Cycle	3	CT/CR	A	Pass
0	0°	1 Cycle	3	CT/CR	A	Pass
0	180°	1 Cycle	3	CT/CR	A	Pass
0	0°	250 Cycles	3	CT/CR	C	Pass
0	180°	250 Cycles	3	CT/CR	C	Pass
70	0°	25 Cycles	3	CT/CR	A	Pass
70	180°	25 Cycles	3	CT/CR	A	Pass

A: No degradation in the performance of the EUT was observed

C: During test,EUT stop work.After test,EUT restart by operator.

## 8 Test Setup Photo

### Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup



### Radiated Emissions (30MHz-1GHz)






**Radiated Emissions (Above 1GHz)**




**Harmonic Current Emission**

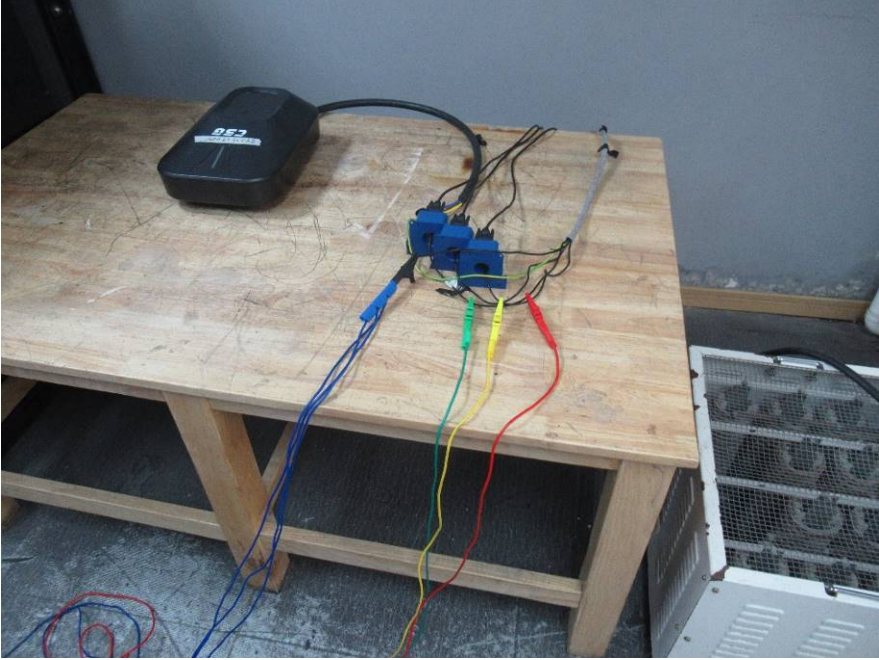



### Voltage Fluctuations and Flicker

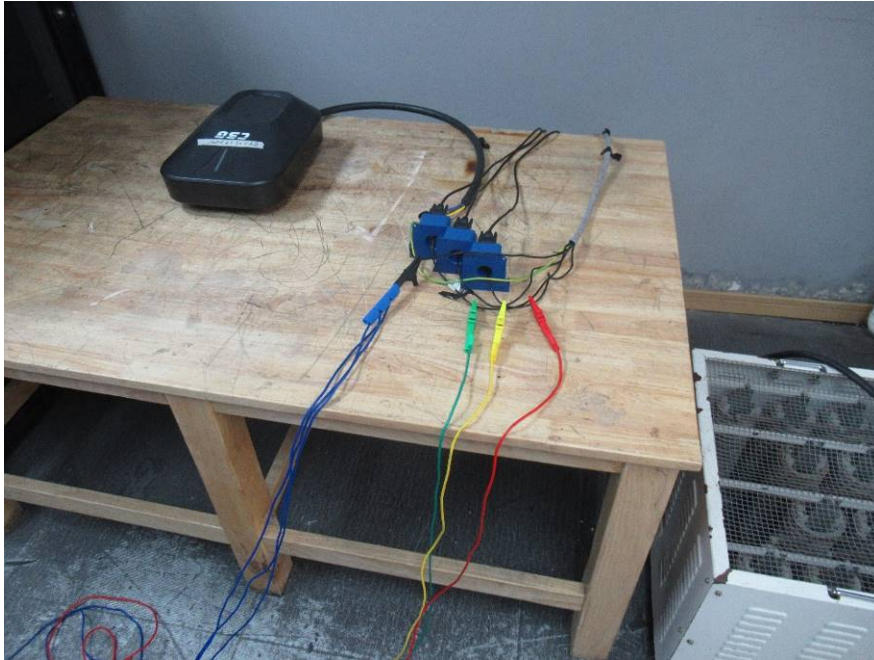

### Electrostatic Discharge



**Radiated Immunity (80MHz-6GHz)**



**Electrical Fast Transients Burst at AC Mains Power Port**



**Surge at AC Mains Power Port**





### Conducted Immunity at AC Mains Power Port (150kHz-80MHz)



### Voltage Dips and Interruptions





**SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.**

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR231100237801

Page: 53 of 53

## **9 EUT Constructional Details (EUT Photos)**

Refer to Appendix - Photographs of EUT Constructional Details for SHCR2311002378EV

- End of the Report -