User Manual

Exterior Underground Lighting

Please read user manual before commencing installation and keep it for future reference.


■WARNING.



Attention! Dangerous electrical voltage.

Possible consequences: Death or severe injury.

- 1. The safety of this lighting fixture is guaranteed only if you comply with these instructions.
- 2 Please use the specific input voltage.
- 3. Please disconnect the power before repair, installation or replacement.
- 4. Please use the lights in the proper application places as to avoid the lights be broken.
- 5. Do not locate fixtures in low areas where water will collect.
- 6.Please provide proper drainage (sand,gravel) for sleeve so that fixtures will not be immersed in water.
- 7. If any questions on this instruction, please consult a professional qualified technicians.

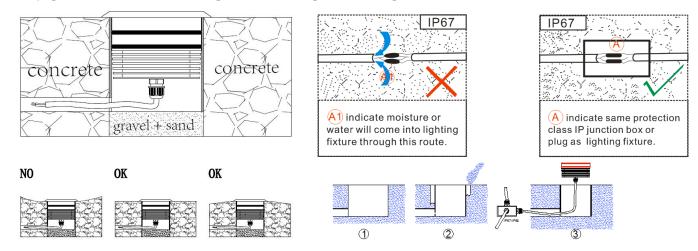

■Instructions of installation.

1. Ensure mains supply is switched off during the whole installation period.

Dug a hole according to the dimension of the mounting sleeve.

2.Place the mounting sleeve in the desired position with underneath a layer of gravel and sand. This to obtain a good drainage of the underground light, then fix it with the concrete.

Please also make the tube for the lighting fixtures' wires to be connected with the power cable.

- 3. Connect the electric supply wires of "L", "N", "Ground" to the corresponding "L", "N", "Ground" of the fixture's wires with the waterproof connector IP67 or IP68.
- 4. Push the fixture into the mounting sleeve.

Ensure everything is installed very well, and then turn on the power for the illumination application.


■Specifications.

Item No.: UL-1006-0300-CH(1)

Input: AC100~245V

Power: 3W IP rating: IP67 Class: I

Cut Out: 40mm





Warning.

The non-professionals can not disassemble or repair the fixture. We keep the right to refuse the replacement or repairing of the fixtures that have been disassembled or repaired personally.