

User Manual

Adjustable on ground light-- Trans 15W





Please read user manual before commencing installation and keep it for future reference.

■WARNING.



Attention! Dangerous electrical voltage.
Possible consequences: Death or severe injury.

- 1.The safety of this lighting fixture is guaranteed only if you comply with these instructions.
2. Please use the specific input voltage..
3. Please disconnect the power before repair,installation or replacement.
4. Please use the lights in the proper application places as to avoid the lights be broken.
5. Do not locate fixtures in low areas where water will collect.
- 6.If any questions on this instruction,please consult a professional qualified technicians.

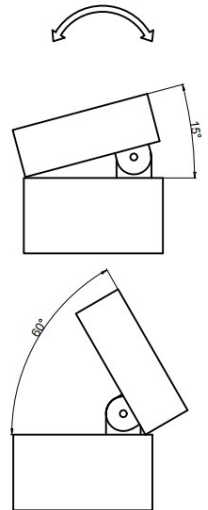




■Instructions of installation.

1. Ensure mains supply is switched off.
2. Unpack each packaging carefully, and select the suitable locations for the fixtures.


--- With the round base part for ground mounting

3. Drill four screw holes for the screw expansion pipe M6x28mm according to the round base holes distance in the the drawing “3” . Then fix the round base on the ground with the provided four screws.
4. Connect the cable to the mains supply with the IP67/IP68 high quality waterproof connectors, then place the fixture on the round base as drawing “4”.
5. Fix the fixture on the round base by fixing the screws at the side of bottom with the Allen key as drawing “5”.

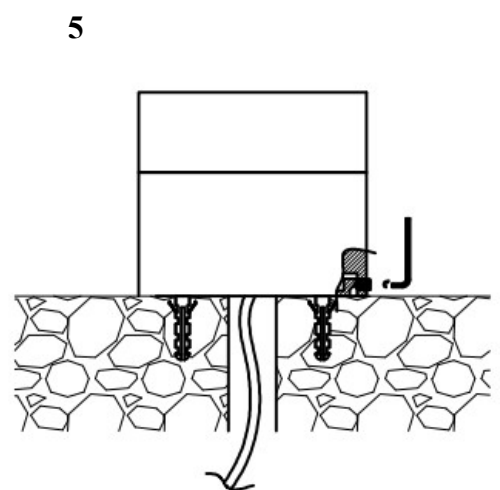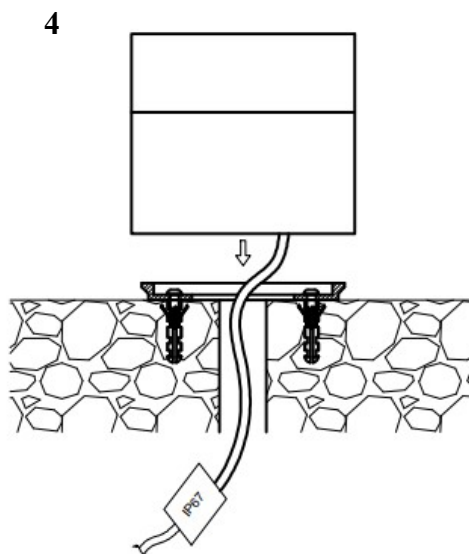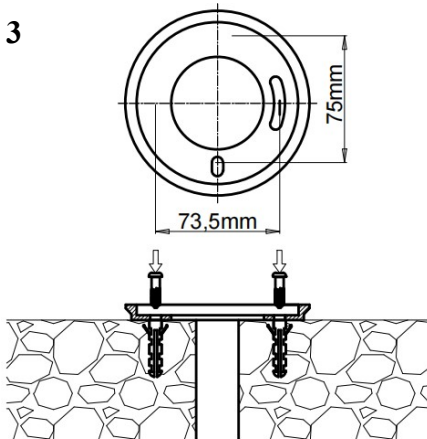

- 6.Loosen the fixed screw at the middle side of housing,pull up the top part of fixture,then fix the side screw with the Allen key as to fix the top part as drawing “6”.
- 7.Loosen the bracket screw by the Allen key as to adjust the beam direction for your application as drawing “7”.

8. Fix the bracket screw by the Allen key after you have adjusted a suitable beam direction as drawing “8”.

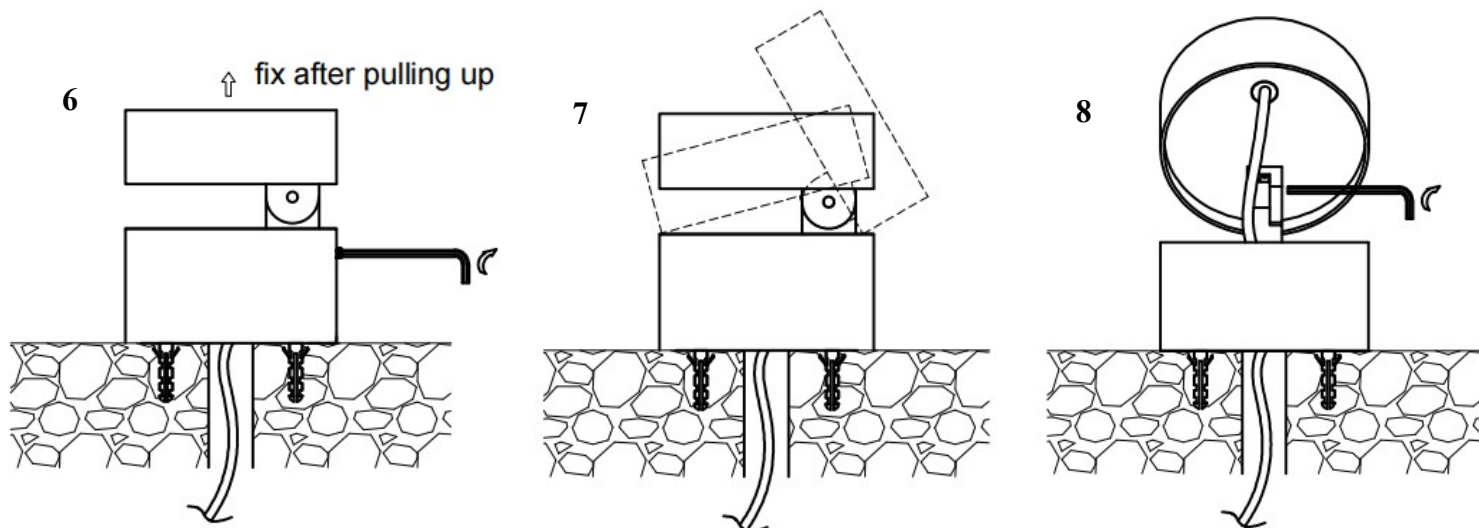

9. Ensure everything is installed very well, and then turn on the power for the illumination application.

---Spike installation

3. Fix the spike part with the round base by screws as drawing “I”

4. Place the fixture on the round base.


Fix the fixture on the round base by fixing the screws at the side of bottom with the Allen key as drawing “II”.

5. Insert the spike into the soil as drawing “III”, then connect the cable to the mains supply with the IP67/IP68 high quality waterproof connectors.

Note: If the ground is hard or installation is difficult, thoroughly wet the ground where you wish to install the spike using a garden hose or watering can.

6. Proceed the steps from 6 to 8 in above round base mounting instructions.

9. Ensure everything is installed very well, and then turn on the power for the illumination application.

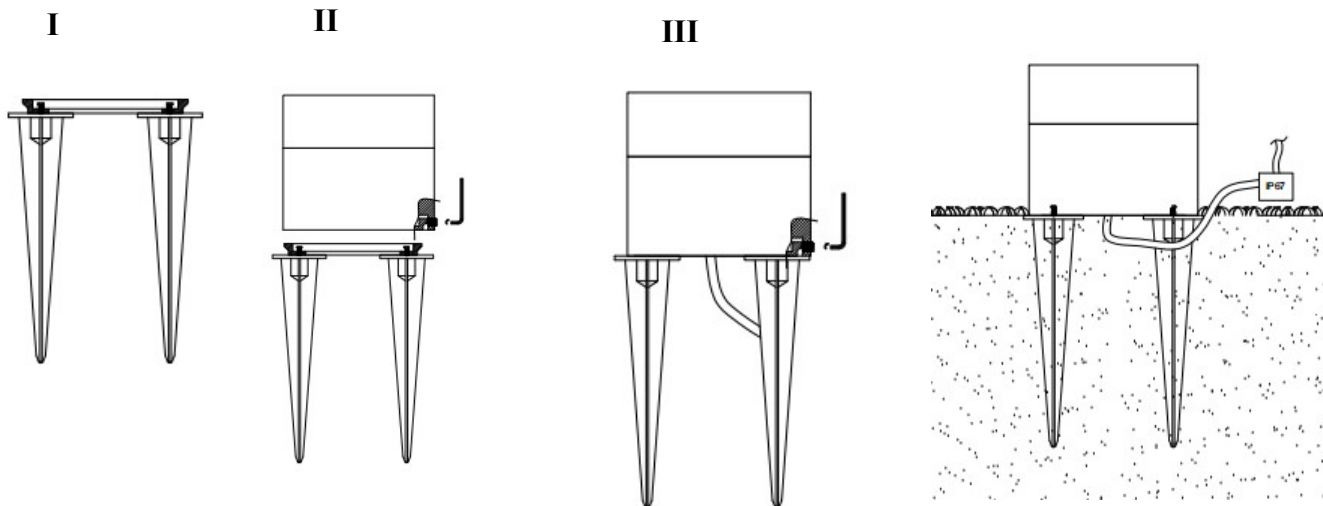

■Specifications.

Item No.:UL-1205-1500-AH

Input:AC100-265V

Power: 15W

IP rating: IP67

Class: I



Warning.

The non-professionals can not disassemble or repair the fixture. We keep the right to refuse the replacement or repairing of the fixtures that have been disassembled or repaired personally.