


Firmware update

1. First install the driver DriverAssitant_v5.1.zip on the window computer, as shown in the figure below, after prompting that the installation is successful, you need to restart the window computer once.

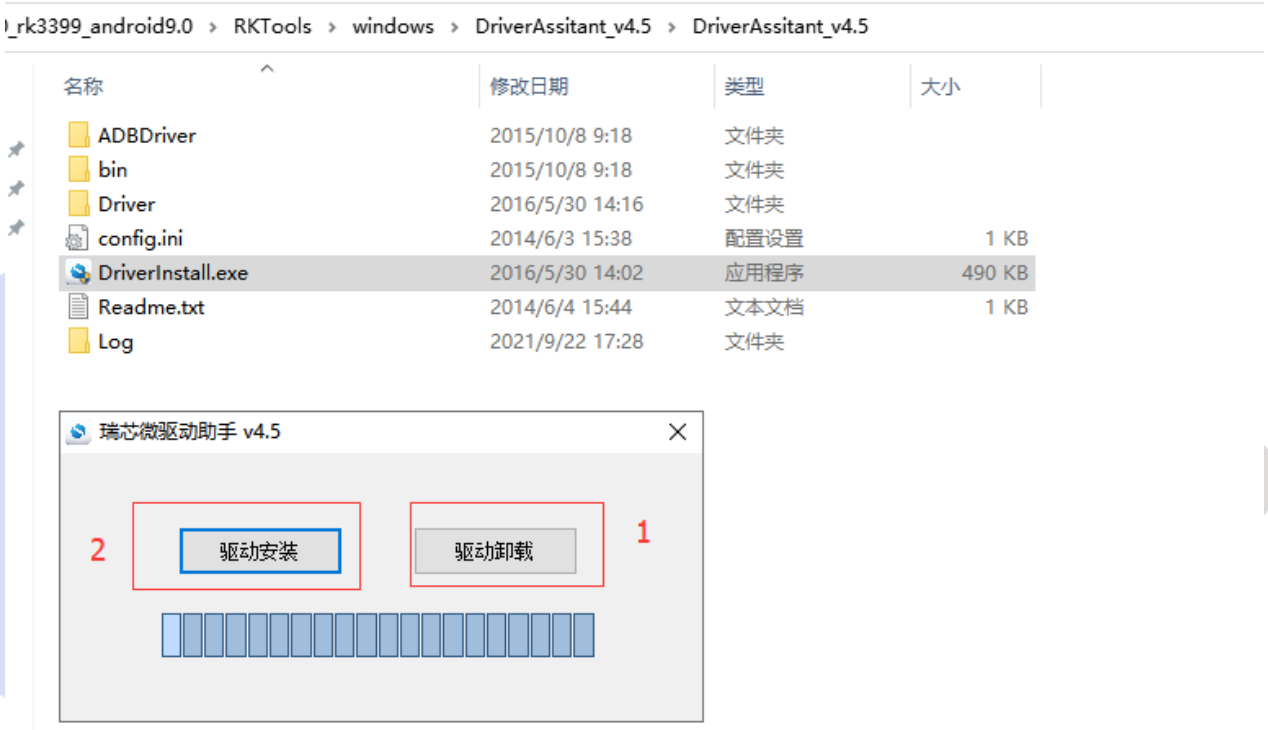

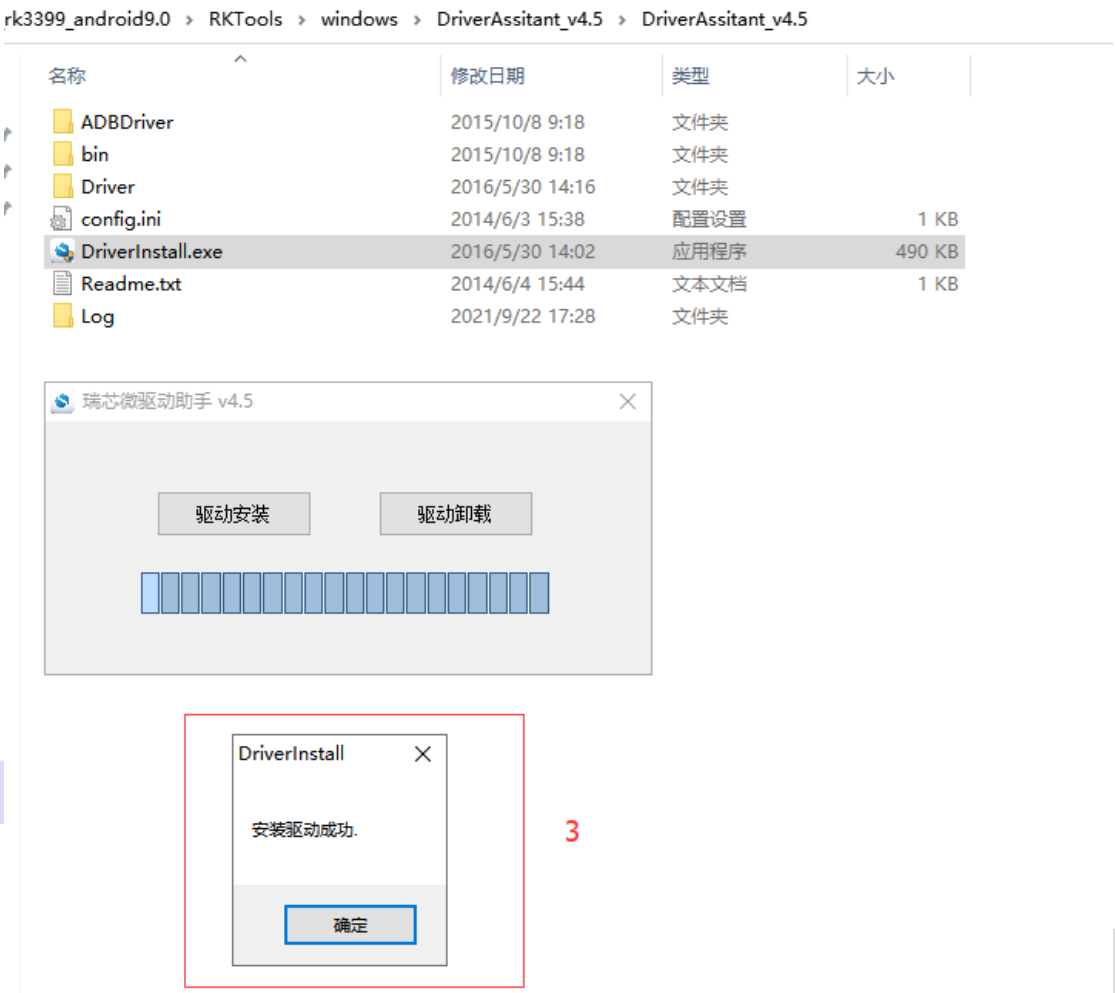


2. Open the upgrade tool, this tool does not need to be installed, you can use it by opening AndroidTool.exe, as shown below

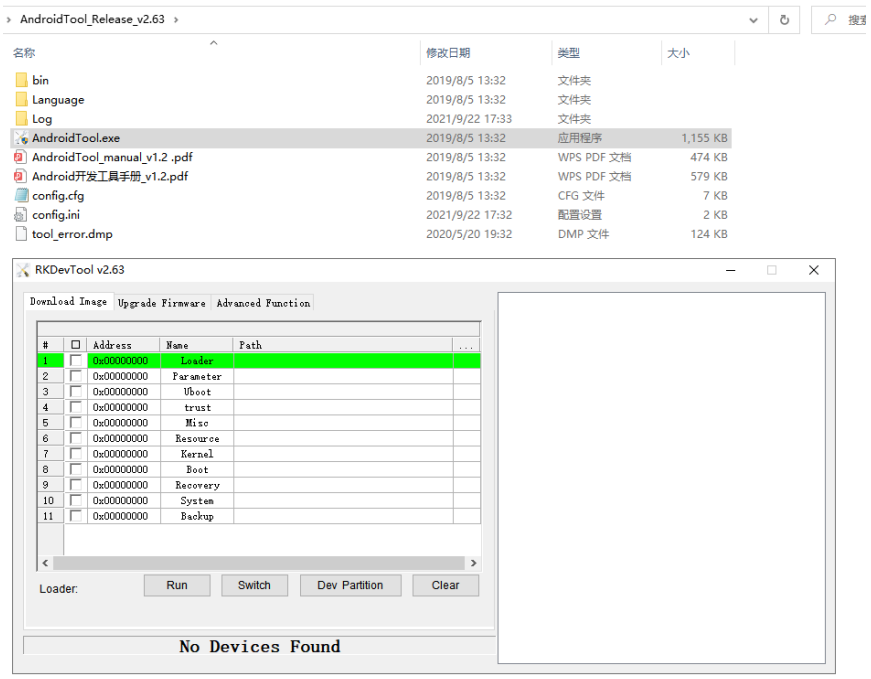

3.Select the firmware to upgrade, as shown in the figure below

(1) Choose firmware upgrade

(2) Select the firmware that needs to be upgraded.

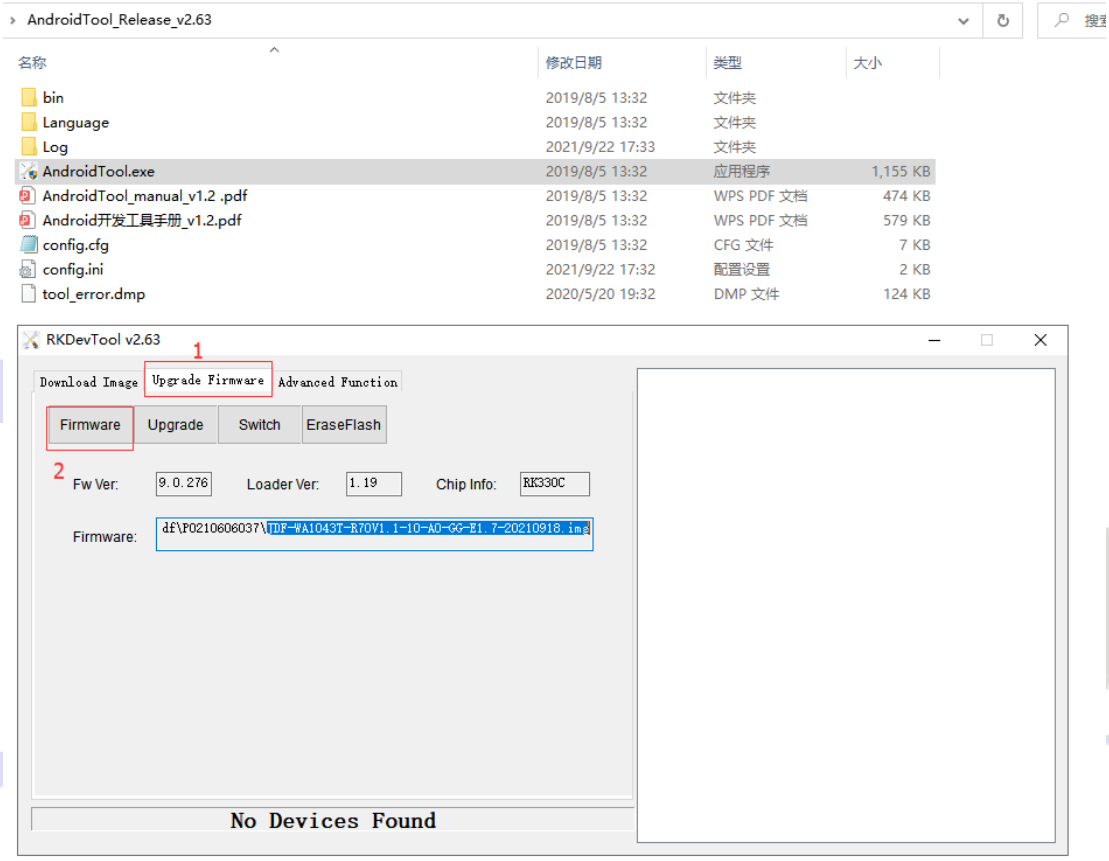



4) 1.Using a dual USB 2.0 cable, connect the computer to the USB 2.0 port on the motherboard.

2.Press and hold the reset button on the motherboard without releasing it.

3.then plug in the power supply for about three seconds.


4. In the AndroidTool tool, you will see a loader device displayed. Release the reset button again, as shown below.

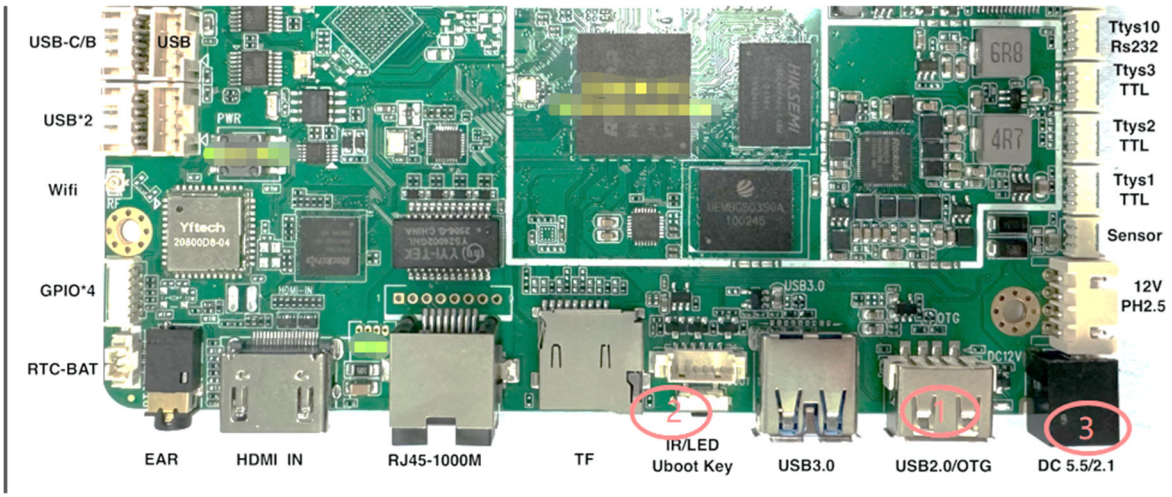

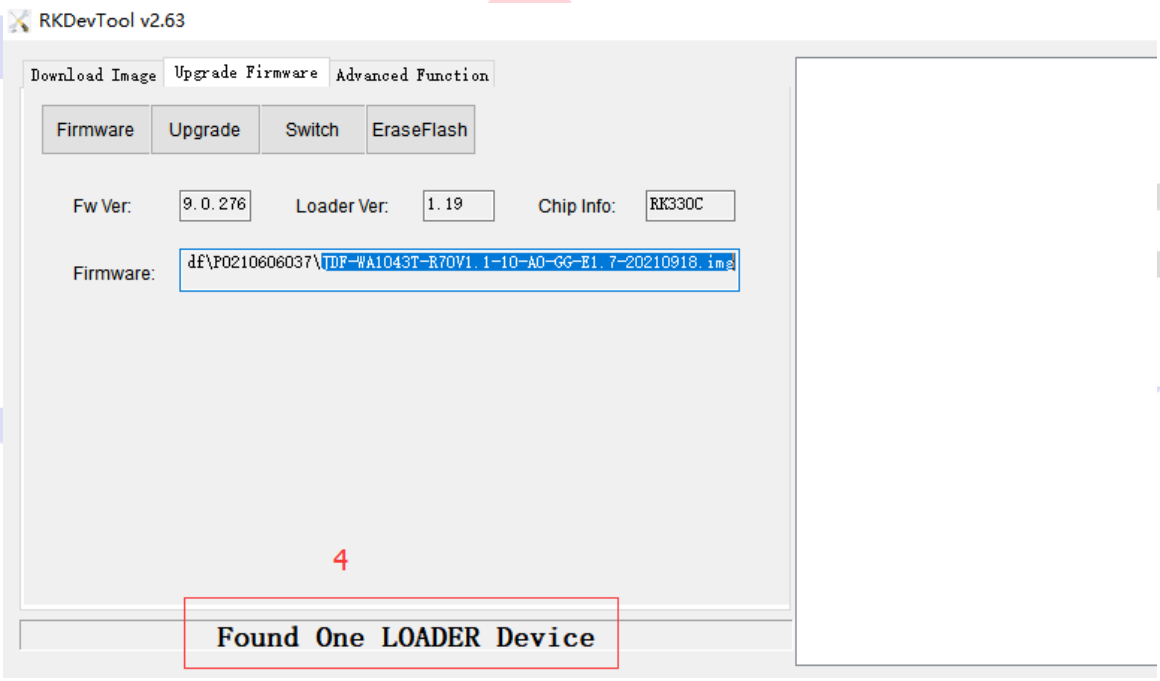

5. After completing the above steps, click "EraseFlash" first. After erasing is complete, click "upgrade" to update the firmware. Wait for the download to complete, as shown i

n the following figure.

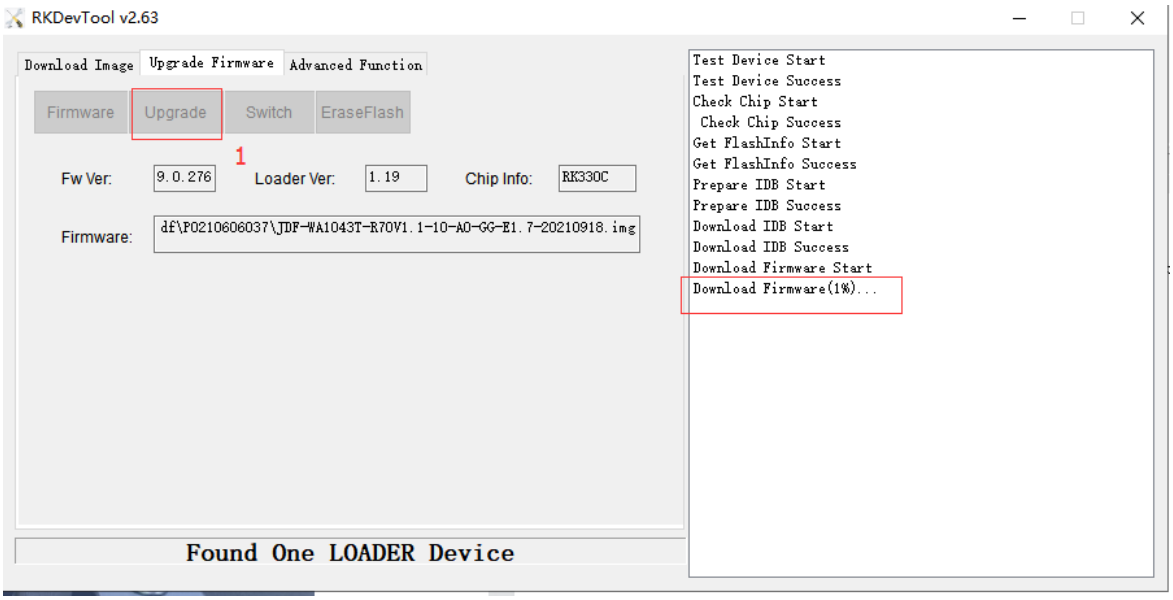

6. If step 4 confirms that the operation is normal, but no device is found in the AndroidTool tool, we recommend changing to a usb cable.