











北京包美机械有限公司 Beijing Poemy Machinery Co.,Ltd.

地址:北京市昌平区科技园超前路甲1号13楼302

302, 13th Floor, No. A1 Chaoqian Road, Science and Technology Park,

Changping District, Beijing 网站: www.poemy.cn 邮箱: liuyong@poemy.cn 电话: 400-1818-722

上海包美机械有限公司

No.6933, Oriental Beauty Valley Avenue, Fengxian District, Shanghai, China

地址:中国上海市奉贤区东方美谷大道6933号

Shanghai Branch Address: No. 6933, Oriental Beauty Valley Avenue,

Fengxian District, Shanghai, China

网站: https://www.poemypackaging.com/

邮箱: liuyong@poemy.cn 电话: 400-1818-722 PRODUCTS ALBUM

北京包美机械

Poemy Machinery

关于企业 ABOUT THE GROUP

北京包美机械 上海包美机械

Beijing Poemy Machinery Co., Ltd/Shanghai Poemy Machinery Co., Ltd

1. 经营范围:

全自动包装机械和以及包装机械解决方案类服务综合供应商;我们可以提供全自动面膜机,卡片式包装机,泡罩机,单剂量包装机(次抛类产品包装机),小袋包装机,杯装类产品包装机,卫生类产品包装机,装箱机,自动化单机或整线。

(1) Main products:

Comprehensive supplier of fully automatic packaging machinery and packaging machinery solutions.we can provide: full auto packaging equipment such as facial mask machine, easysnap packaging machine, blister packaging machine, unit dose packaging machine, sachet packaging machine, cup products packaging machine, sanitary napkin packaging machine, cartoning machine, Automated stand-alone machine or complete line, etc.

2. 技术实力:

公司技术团队原就职于日本知名包装机械公司,成立之初即确定以研发为主的创新型企业。

(2) Technical strength:

The company's technical team originally worked for a well-known Japanese packaging machinery company, and Poemy was determined to be an innovative enterprise focusing on research and development from the beginning.

3. 项目领域:

公司在食品、医药、化妆品、日化等行业拥有多年的包装机械制造经验和包装机械解决方案经验。

(3) Project area:

The company has many years' experience in packaging machinery manufacturing and packaging machinery solutions in the food, pharmaceutical, cosmetics, daily chemical and other industries.

4. 我们的荣誉:

国家高新技术企业,拥有多项实用性发明专利。

(4) Our Honor:

A high-tech enterprise nationally certified by our government; possesses a number of practical invention patents.

荣誉证书 CERTIFICATE OF HONOUR

















我们的客户 SOME OF OUR CUSTOMERS







































SH-120全自动小样灌装机 SH-12 Full automatic sample filling machine/unit dose packaging machine

包装物效果图

Packaging renderings



单面鼓双面鼓兼容的全自动小样灌装机

Single-sided convex and double-sided convex compatible fully automatic sample filling machine

薄膜冷压成型 自动灌装模切


The film is cold pressed to form the desired model Automatic filling and film cutting



双面成型小样灌装机是针对小样产品的生产而开发的专用设备。设备 使用铝塑膜为原料,可实现铝塑膜双面冲压成型成立体形状的容器, 并进行内溶物灌装。设备的生产工艺流程为多次冲压、封接、灌装、 封口、整版模切、产品取出等。根据不同的产品规格外形,可以进行 排版,一版可实现多个产品的生产。

The double-sided convex forming sample filling machine is special designed for the production of sample products. The equipment uses aluminum-plastic film as raw material and can realize double-sided stamping of aluminum-plastic film to form three-dimensional container, then filling the product into containers. The production process of the equipment is multiple stamping, sealing, filling, sealing, full-page film cutting, finished product removal, etc. Typesetting can be carried out according to different product specifications and shapes, and one version can realize the production of several products.



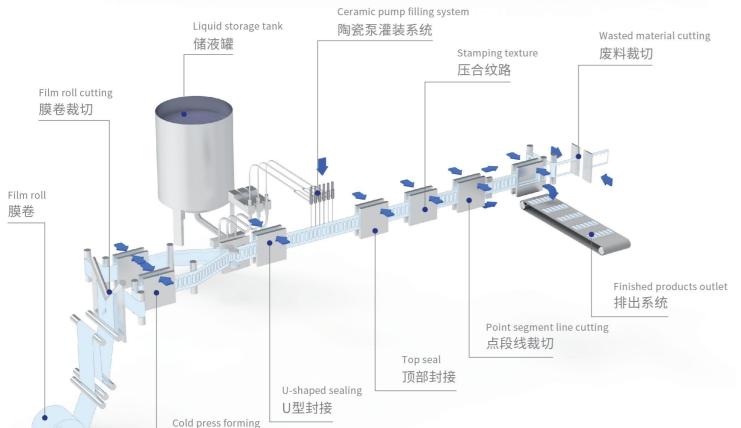

冷压成型

|技术参数 Technical parameters

■产品尺寸

常用板长 213.5mm; 产品最高 85mm

罐装头最小间距 22mm

Product size

Normal plate length 213.5mm; Maximum height 85mm The minimum distance between filling nozzles is 22mm

■成型部尺寸

宽度范围 8-35mm; 单层深度 3-6mm Forming product size Width 8-35mm; Depth of the single layer

■速度能力 Production speed 13版/min 13plates/min

■设备外形 Machine size L=4830mm;W=2880mm;H=1700mm L=4830mm;W=2880mm;H=1700mm

■设备功率 Power

3相5线 AC 380V 16kW 3-phase 5-wire AC 380V 16kW

■灌装方式 Filling method 伺服电机驱动陶瓷泵进行灌液,灌装精度±5‰

Servo motor drives ceramic pump to fill liquid, filling accuracy $\pm 5\%$






Packaging renderings

单手掰开卡片式产品包装机

One hand opening card type product packaging machine


软硬膜复合包装 硬膜切掰断线 轻松折开


Soft and hard film composite packaging cutting the opening line in the hard film easily opening



单手掰开产品是一种针对流体或半流体物料的新颖包装形式,可用于化妆品、食品等相关行业。其特点是可以实现产品单手掰开,物料方便挤出,且产品方便携带。ESP-330卡片式产品包装机是针对单手掰开产品的生产而开发的。设备的生产工艺流程为硬膜切线、软膜成型、灌装、封口、整版模切、产品取出等。根据不同的产品规格外形,可以进行排版。包装外观可以根据需求设计为各式异形。

One hand opening product is a novel packaging form for fluid or semi-fluid materials, which can be used in cosmetics, food and other related industries. Its characteristics are that the product can be open by one hand, the liquid or semi-liquid can be squeeze out easily, also the product is convenient to carry. The ESP-330 card type product packaging machine is designed for the single hand opening products. The production process of the equipment includes cutting opening line in the hard film, soft film forming, filling, sealing, full plate cutting, finished product removal, etc. Typesetting can be made according to the different products shape. The packaging appearance can be designed according to the requirements of various special shapes.



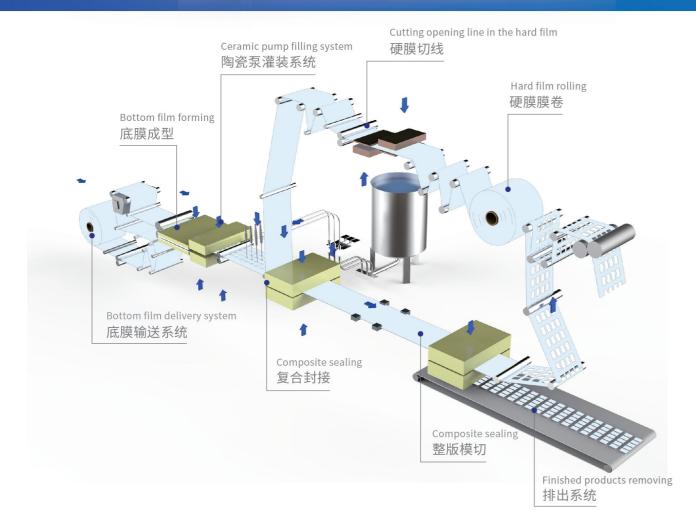

|技术参数 Technical parameters

■模具版型	宽度 260mm; 长度 150mm
Mold size	Width 260mm; Length 150mm

■单板排列	常规产品1-12片/版
Single plate arrangement	Conventional products 1-12 pieces/plate

■灌装范围	0.2-7.5mL
Filling range	0.2-7.5mL

■速度能力


■设备外形	L=5000mm; W=1600mm; H=2600mm
Fauipment size	L=5000mm: W=1600mm: H=2600mm


≤12版/min

Production speed	≤12 plates /min	
■ 设备功率 Power	3相5线 AC380V 16KW 3 phase 5 line AC380V 16KW	

■ 灌装方式 Filling method	具体精度随物料变化 Servo motor drives ceramic pump to fill liquid, filling accuracy ±5%
	Specific accuracy depends on materials


伺服电机驱动陶瓷泵进行灌液,灌装精度 ±5‰





BM-260 全自动泡罩包装机BM-260 Full automatic Live

BM-260 Full automatic blister packaging machine

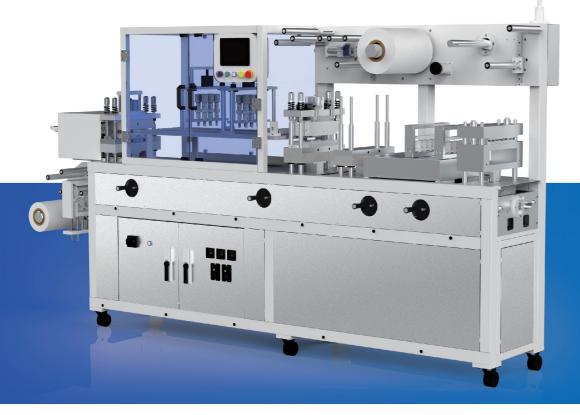

高速全自动泡罩包装机

High speed automatic blister packaging machine

可适用热灌装产品 兼容多种异形设计

Suitable for hot filling products compatible with a variety of special shape designs

包装物效果图 Packaging renderings

BM-260全自动泡罩包装机主要是针对流体或半流体物料进行泡罩包装的 设备,可用于化妆品、食品、药品等相关行业。设备的生产工艺流程为 底膜输送、底膜成型、灌装、顶膜封口、整版模切、产品取出等。根据 不同的产品规格外形,可以进行排版。包装外观可以根据需求设计为各 式异形。设备可以拓展兼容热灌装、双色标等形式的产品。

BM-260 automatic blister packaging machine is mainly designed equipment which can be used for packaging fluid or semi-fluid , apply to cosmetics, food, medicine and other related industries. The production process of the equipment includes bottom film conveying, bottom film forming, filling, top film sealing, full plate cutting, product removal etc. Typesetting can be made based on the different products' specifications and shape, the packaging shape can be designed according to the requirements of various special shapes. The equipment can be expanded to be compatible with hot filling, two-color codes and other forms the



|技术参数 Technical parameters

■模具版型 宽度 260mm; 长度 150mm Width 260mm; Length 150mm Mold size

■单板排列 常规产品1-12片/版 Single plate arrangement Conventional products 1-12 pieces/plate

■灌装范围 1-30mL 1-30mL Filling range

Finished products outlets

产品排出

■设备外形 L=3350mm; W=800mm; H=1800mm Equipment size L=3350mm; W=800mm; H=1800mm


■速度能力 17切/分 17 cuts/min Production speed

■设备功率 3相5线 AC 380V 6KW 3-phase 5-wire AC380V 6KW Power

伺服电机驱动陶瓷泵进行灌液,灌装精度 ±5‰ ■灌装方式 具体精度随物料变化 Filling method Servo motor drives ceramic pump for filling, filling accuracy $\pm 5\%$ Specific accuracy depends on materials

■附加功能 双色标 热灌装 Double color mark, hot filling Filling method



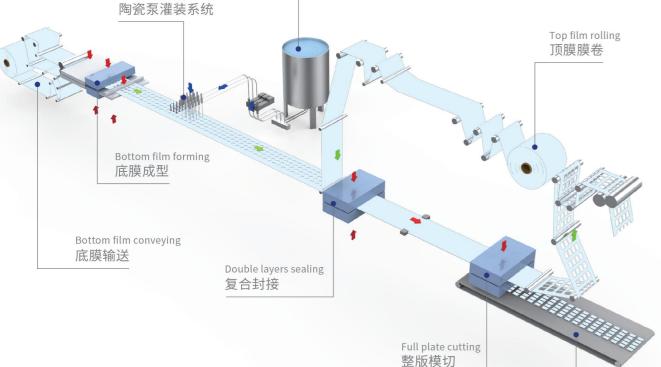





Packaging renderings



Film roll cutting 膜卷裁切

高速液体多联小袋包装机


High speed liquid multi-row connected bag packing machine

薄膜对折成型 自动灌装模切

Film folding from the middle and forming automatic filling and film cutting

小袋包装机是针对小袋装产品的生产而开发的专用设备。设备使用塑 料复合膜为原料,可实现薄膜在线制袋并进行内溶物灌装。设备的生 产工艺流程为薄膜对中分切、袋成型、灌装、封口、整版模切、产品 取出等。根据不同的产品规格外形,可以进行排版。小袋包装可以根 据需求设计为各式异形,产品外观平整美观。

Sachet packaging machine is special designed for the production of sachet products. The equipment uses plastic complex film as raw material, which can complete film online bag making and internal products filling. The production process of the equipment includes cutting the film in the middle, bag forming, filling, sealing, full plate cutting, finished products removing, etc. Typesetting can be made based on products specifications and shapes.sachet packaging can be designed according to the requirements of various special shapes, the product appearance is smooth and beautiful.





|技术参数 Technical parameters

■设备外形

■模具版型

Production speed

L=3200mm; W=2100mm H=2600mm Equipment shape

宽度 280mm

width 280mm

≤30plates/min

L=3200mm; W=2100mm; H=2600mm

H=2900mm L=3200mm; W=2100mm; H=2600mm

■产品高度 ≤150mm ≤210mm ≤210mm ≤150mm Product height

width 280mm Mold size ≤30版/min ■速度能力 ≤30版/min

■设备功率 3相5线 AC 380V 5KW 3相5线 AC 380V 5KW Power Three phase 5-wire AC 380V 5KW Three phase 5-wire AC 380V 5KW

气动或伺服电机驱动柱 气动或伺服电机驱动柱 塞泵进行灌液,灌装精度±0.2g ■灌装方式 塞泵进行灌液,灌装精度±0.2g The piston pump to fill the liquid the filling accuracy is ±0.2g Filling method

■单版排列 常规产品 1-6片/版 常规产品 1-6片/版 Single plate Common product 1-6pieces/plate Common product 1-6pieces/plate arrangement

The piston pump to fill the liquid the filling accuracy is ±0.2g


SP-30B

L=3200mm; W=2100mm

宽度 280mm

≤30plates/min



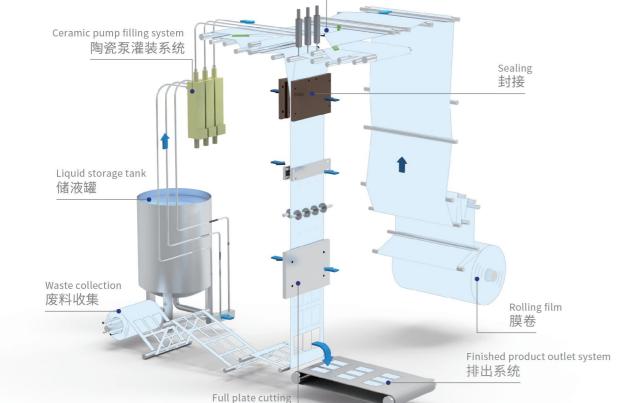

整版裁切

CF-80 全自动杯装产品包装机

CF-80 Full automatic cup type products packaging machine



Finished products outlet Ceramic pump filling system 产品排出 陶瓷泵灌装系统 Liquid storage tank 储液罐 Top film rolling Waste film rolling 顶膜膜卷 废料膜卷 ackaging container storage station 容器料仓 Mould tray 模具盘 Preheating station 预热工位 Sealing station 封接工位

杯装容器类产品灌装包装机

Cup type products filling machine

可适用热灌装产品 杯装铝塑盖自动封口

Suitable for hot filling products Cup type packaged aluminum plastic cap automatic sealing

CF-80全自动杯装产品包装机主要是针对流体或半流体物料进行杯状容器 灌装包装的设备,可用于化妆品、食品等相关行业。设备的生产工艺流 程为容器输送、物料灌装、膜片定位封口、产品取出等。根据不同的产 品规格外形,可以进行排版,一版可实现6-8个产品的生产。包装外观可 以根据需求设计为各式异形。设备可以拓展兼容热灌装等形式的产品。

CF-80 fully automatic cup product packaging machine is mainly used for filling and packaging cup-shaped containers for fluid or semi-fluid materials. can be applied to cosmetics, food and other related industries. The production process includes cup conveying, material filling, cap film positioning and sealing, and finished products removal. Typesetting can be made according to the different products' specifications and shapes, one plate can pack 6-8 cups. The packaging appearance can be designed according to the requirements of various special shapes. Equipment can be expanded to be compatible with hot filling and other forms of products.



Packaging renderings



|技术参数 Technical parameters

■设备外形 L=2100mm; W=2300mm; H=1800mm L=2100mm; W=2300mm; H=1800mm Equipment shape

■产品高度 20-50mm Product height 20-50mm ■ 模具版型 长度 300mm; 宽度 200mm Length 300mm; Width 200mm Mold size

≤85-90个/min ■速度能力 ≤85-90 PCS /min Speed capacity

■设备功率 3相5线 AC 380V 5KW Power 3 phase 5 line AC 380V 5KW

气动或伺服电机驱动柱塞泵进行灌液,灌装精度±0.2g ■灌装方式 Filling method filling accuracy ±0.2g

常规产品 6-8个/版 ■单版排列 Common products 6-8 cups/ plate Single plate arrangement





产品特点 **Product Features**

自动化程度高

High level of automation

实现面膜产品

从卷布到装盒的全自动化生产


Realizing fully automated production of beauty facial mask products from mask non-woven fabric rolling to mask cartoning.

极大节省人工成本

Greatly save the labor costs

整线需求人员3-4名

The entire production line requires 3-4 operators.









































Folding process III













Can be equipped with online visual inspection, empty bag inspection, etc

生产过程避免手工接触 不存在传统生产工艺中的质量风险

The production process avoids manual contact and does not have the quality risks of traditional production processes.



MS-120全自动面膜包装机

MS-120 fully automatic beauty facial mask packaging machine



从卷布到成品的全自动面膜机

Fully automatic beauty facial mask machine which can complete from non-woven fabric rolling to finished product

自动裁切折叠入袋 自动灌装封口


Automatic cutting ,folding,bagging,filling and sealing

MS-120全自动面膜包装机涵盖面膜生产过程中所有工序:面膜布裁切、面膜布折叠、面膜布装袋、精华液灌装和封口,可实现面膜的全自动化生产,有效节省劳动力并且提升生产效率。设备采用卷布为原材料,兼容一层或两层卷布。

设备采用滚切刀对膜布进行在线裁切,脸型输出的同时,对废料进行回收收集。设备采用多轴伺服同步控制驱动。可以配置视觉检测装置对膜布进行实时缺陷检测,及时排出问题产品。可以根据不同的面膜折叠方式,选择匹配的机型。灌装系统采用德国进口螺杆泵,物料兼容性广且灌装精度高。

MS-120 fully automatic facial mask packaging machine covers all processes in the beauty facial mask production: cutting non-woven fabric into mask shape, mask folding, mask bagging, essence filling and sealing, which can realize fully automated production of facial masks, effectively saving labor and improving production efficiency. The equipment uses rolled fabric as raw material and is compatible with one layer or two layers of rolled non-woven fabric.

The equipment uses a rolling cutter to cut the mask cloth online. While outputting the face shape masks, the waste materials are collected. The equipment adopts multi-axis servo synchronous control drive. Can be equipped with visual inspection device so as to detect defects and eliminate problematic products in time. You can choose suitable machines models according to different mask folding methods. The filling system uses a screw pump imported from Germany, which has wide material compatibility and high filling accuracy.

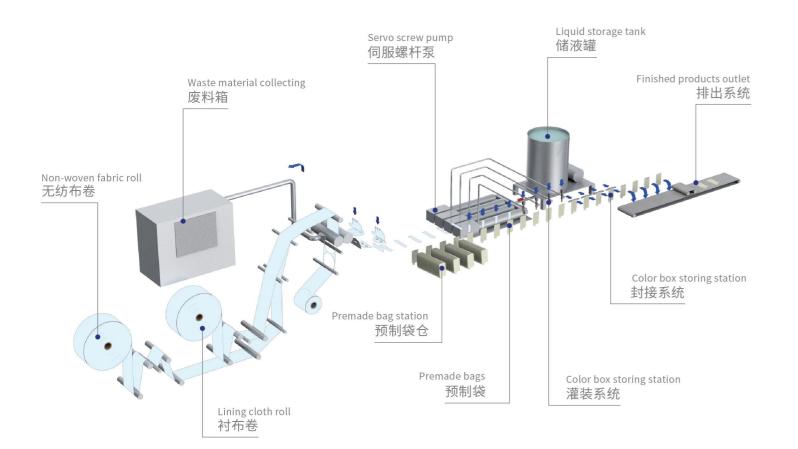

|技术参数 Technical parameters

■ 无		

Non-woven fabric as base material

膜卷最大直径1080mm; 幅宽260mm

Maximum roll diameter 1080mm; Maximum width 260mm

■铝箔袋尺寸

Aluminum foil bag size

L=150-180mm; W=100-180mm

L=150-180mm; W=100-180mm

■速度能力

Production speed

稳定生产速度95片/min

Stable production speed 95 pieces/min

■ 设备外形 Equipment size

_qaipiiiciic oi2

L=10950mm; W=4850mm; H=2360mm

L=10950mm; W=4850mm; H=2360mm

■设备功率

Equipment power

3相5线 AC 380V 26KW

3-phase 5-wire AC 380V 26KW

■灌装方式

Filling method

伺服电机驱动螺杆泵进行灌液灌装精度 ±0.2g


Servo motor drives screw pump for liquid filling, Accuracy ± 0.2 g

■卷布材质

Roll material

棉布,天丝,铜氨天丝,极细丝等常见材质,克重范围22-40g/㎡ Cotton, Tencel, cupro Tencel, ultra-fine silk and other common materials,

Cotton, Tencel, cupro Tencel, ultra-fine silk and other comr weight range 22-40g/m²

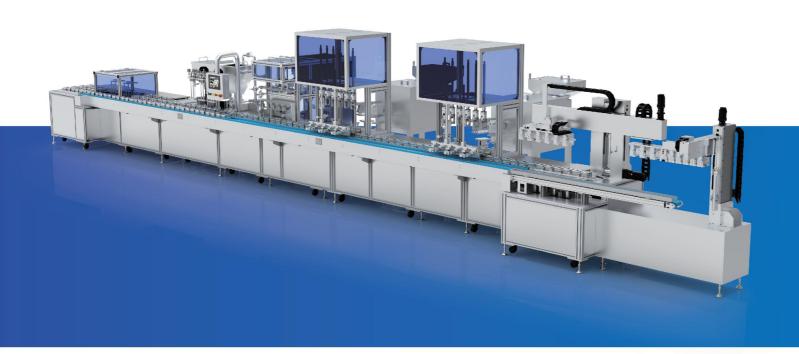

模块化、自动&手工兼容、泵头内塞兼容、自动吹洗 Modular, automatic & manual compatible,

pump head and inner plug compatible, automatic blowing and sucking function



MFB-600自动灌装机采用全伺服控制,模块化设计,设备充分考虑了自动生产和手工生产结合的方式。

设备包括:模具回流系统、自动吹洗装置、伺服灌装系统、自动压内塞系统、自动旋泵头系统、自动旋盖或压盖系统、产品取出系统8个模块配合完成护肤产品的自动生产。

设备预留了喷码机安装工位和不良产品检查流水线。 MFB-600适用于护肤类产品及其类似产品的自动生产。

MFB-600 automatic filling machine adopts full servo control and modular design. The equipment is fully considered the combination of automatic production and manual production.

Equipment includes: molds return system, automatic blowing and sucking purging device, servo filling system, automatic plug pressing system, automatic screwing pump head system, automatic cap screwing or cap pressing system, and the finished products removal system, eight modules cooperate to complete the automatic production of skin care products.

The equipment has reserved inkjet printer installation station and defective product inspection station.

MFB-600 is suitable for the automatic production of skin care products and similar products.



|技术参数 Technical parameters

■设备外形 L=12800mm; W=3000mm; H=2400mm L=12800mm; W=3000mm; H=2400mm


瓶身高: 50-150mm; Bottle height: 50-150mm; Bottle diameter: 25-60mm; Product size 瓶盖直径: 25-60mm; Bottle cap diameter: 25-60mm; Bottle cap height ≥20mm.

■速度能力 40-50瓶/min Speed capacity 40-50 bottles/min


■设备功率 AC 220V 23KW Power AC 220V 23KW

■瓶身 瓶盖材质 Bottle body and cap material

■设备重量 3000kg Equipment weight 3000kg

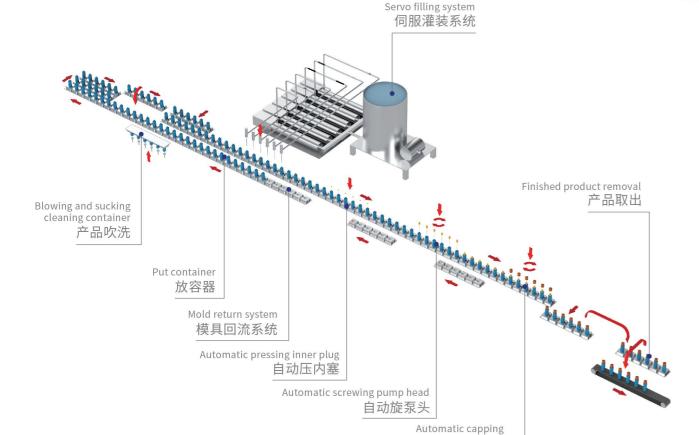

自动旋盖





MFB-600型灌装机

HC-600型装盒机带有内衬模块,对产品充分保护,可适用于矩形6面体产品。机械凸轮与电子凸轮共同应用,动作轻柔,方便高效,人性化的设计让机器代替了手工作业,降低人工成本的同时,大大提高了生产效率。

直线模块化设计,各模块组合灵活

Linear modular design,

flexible combination for each modules

POER POER POER POER



尺寸大小在线调节

Customized modular trays convey products, and the size can be adjusted online



生产流程 »» Production Process





HC-600 cartoning machine

also greatly improves production efficiency.




The HC-600 cartoning machine is equipped with a lining module, which fully protects the product and can be used for packing rectangular hexahedron products. Mechanical cam and electronic cam are used together, and the machine action gently, conveniently and efficiently, the humanized design allows machines to replace labor. While reducing labor costs, it











生产优势

01运行稳定 01 Stable operation

02噪音低 02 low noise

03操作方便 03 easy operation

04功能齐备 04 complete functions

05兼容多类产品 05 compatible with various types of products

实现灌装到装盒的全自动化生产

Complete **fully automated** production from filling to cartoning



HC-90全自动装盒机 HC-90 automatic packing machine



手工或自动内衬、兼容性强、彩盒无损、便于调整

Manual or automatic lining, strong compatibility, non-destructive color box, easy to adjust




Packaging renderings

HC-90系列全自动装盒机,涵盖了自动上料、自动折内衬、自动装盒三部分。分别完成产品的的自动上料、内衬的自动成型和自动折叠、产品和内衬自动装盒、自动封盒。

HC-90全自动装盒机自动化程度高,采用全伺服驱动结构,具有操作便捷、兼容性强的特点。广泛的应用在面膜、冷敷贴、暖宝宝、膏药等产品的自动装盒。


HC-90 series fully automatic cartoning machine includes three parts: automatic materials feeding, automatic lining folding, and automatic cartoning. It can respectively complete the automatic feeding materials, automatic forming and folding linings, automatic cartoning products and and linings, automatic sealing boxes.

The HC-90 fully automatic cartoning machine has a high level of automation and uses a fully servo-driven structure, which is characterized by easy operation and strong compatibility. Widely used in automatic cartoning for beauty facial masks, cold compress patch, body warmer patch, plasters and other products.




■ 设备外形 Machine size	L=6300mm; W=2000mm; H=1840mm L=6300mm; W=2000mm; H=1840mm
■产品尺寸 Product size	彩盒: 长 120-200mm; 宽 95-160mm 高 12-50mm Color box: length 120-200mm; Width 95-160mm; Height 12-50mm 内衬: 长 148-198mm; 宽 93-158mm
	高 15-48mm Lining: Length 148-198mm; Width 93-158mm; Height 15-48mm
■ 速度能力 Production speed	50-55盒/min 50-55 boxes/min
■设备功率	3相5线 AC 380V 16KW

■ 速度能力	50-55盒/min
Production speed	50-55 boxes/min
■ 设备功率	3相5线 AC 380V 16KW
Power	3-phase 5-wire AC 380V 16KW
■ 彩盒 内衬种类 Color box Lining type	彩盒:白卡、金卡、银卡纸; 内衬:白卡纸或2mm白色瓦楞纸 Color box: white cardstock paper, gold cardstock paper, silver cardstock paper; Lining: white cardstock paper or 2mm white corrugated pape
■ 设备重量	2000kg
Equipment weight	2000kg





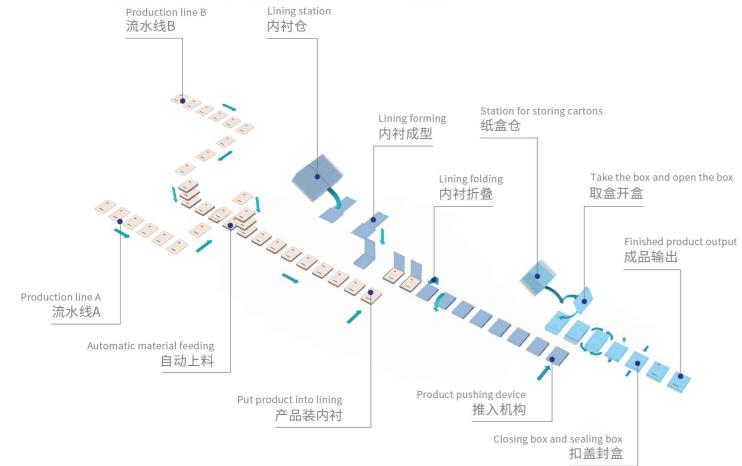



手工或自动内衬、兼容性强、彩盒无损、便于调整

Manual or automatic lining, strong compatibility, non-destructive color box, easy to adjust 包装物效果图

Packaging renderings


HC-600系列装盒机,涵盖了自动上料、自动折内衬、自动装盒三部分。 分别完成产品的自动上料、内衬的自动成型和自动折叠、产品和内衬自 动装盒、自动封盒。

HC-600装盒机自动化程度高,采用全伺服驱动,具有操作便捷、兼容性强的特点。广泛应用于药品及化妆品行业中多种产品的自动装盒。

The HC-600 series cartoning machine includes three parts: automatic materials feeding, automatic lining forming and folding, and automatic cartoning for product and lining automatic carton lid sealing.

and lining, automatic carton lid sealing.
It can respectively complete automatic products feeding, automatic forming and folding linings, automatic cartoning products and lining, as well as automatic box sealing.


The HC-600 cartoning machine has a high level of automation, adopts full servo drive, and is characterized by easy operation and strong compatibility. It is widely used in the automatic cartoning of various products in the pharmaceutical and cosmetics industries.



Automatic material feeding 自动上料 Lining folding 内衬折叠 彩盒折叠 Lining storing 内衬仓 Finished product output 成品输出 Push mechanism 推入机构

■设备外形	L=5500mm; W=1650mm; H=1750mm
Equipment shape	L=5500mm; W=1650mm; H=1750mm
产品尺寸	A=30-80mm B=30-80mm C=55-200mm
Product size	A=30-80mm B=30-80mm C=55-200mm
■ 速度能力	45-50盒/min
Speed capacity	45-50 boxes/min
■ <mark>设备功率</mark>	3相5线 AC 380V 16KW
Power	3-phase 5-wire AC 380V 16KW
■彩盒种类 Color box type	彩盒:白卡、金卡、银卡纸 Color boxes: white cardstock paper, gold cardstock paper, silver cardstock paper
■ 设备重量	2000kg
Equipment weight	2000kg







HC-610装盒机 HC-610 cartoning machine



Color box storing station 彩盒仓 Take the box and open the box 取盒开盒 Color box folding 彩盒折叠 Finished product output 成品输出 Product conveying 产品输送 Structure for Pushing product to box 推入机构

人工或自动上料、针对小尺寸产品设计的专用机型

Manual or automatic feeding material, special designed machine for small-size products




Packaging renderings

HC-610系列装盒机是针对小尺寸产品设计的专用机型,适用于口红、 唇釉、粉底、气垫等产品的自动装盒。可选自动上料或手工上料,完成 彩盒存储、自动取盒开盒、自动装盒、自动折盒的功能。 HC-610装盒机自动化程度高,采用全伺服驱动,具有操作便捷、兼容 性强的特点。

The HC-610 series cartoning machine is a special designed for small-sized products. It is suitable for automatic cartoning the lipstick, lip gloss, foundation, air cushion and other products. Optional automatic feeding or manual feeding to complete the functions of color box storage, automatic box taking and opening, automatic box feeding, and automatic box folding.

The HC-610 cartoning machine has a high level of automation, uses full servo drive, and is characterized by easy operation and strong compatibility.




|技术参数 Technical parameters

1000kg

■设备重量

L=2900mm; W=1600mm; H=1600mm L=2900mm; W=1600mm; H=1600mm
A=60-200mm;B=20-50mm;C=20-50mm A=60-200mm; B=20-50mm; C=20-50
50-55盒/min 50-55 boxes/min
3相5线 AC 380V 16KW 3-phase 5-wire AC 380V 16KW
彩盒:白卡、金卡、银卡纸 Color boxes: White cardstock paper、 Gold cardstock paper、Silver cardstock paper





ST-30自动条包机 ST-30 automatic strip packaging machine



选配压力罐、全304设计、侧三边封可选、易撕口

Optional pressure tank, full 304 design, optional three-side sealing, easy to tear



Packaging renderings

ST-30条包机适用于化妆品、药品、食品等产品的自动生产,采用全伺 服控制,卷膜生产,完成产品定型、膜卷成型、自动封接、自动灌装和 自动裁切功能。

粘稠物料可以选配压力罐装系统; 可选做侧面三边封产品;兼容定长模式和色标模式; 配置易撕口刀,可选形状。

The ST-30 automatic strip packing machine is suitable for the automatic production of cosmetics, pharmaceuticals, food and other products. It adopts full servo control, rolled type film production, complete product finalization, rolled type film forming, automatically align sealing, automatic filling and automatic cutting. Viscous materials can be equipped with an optional pressure canning system; Optional three-side sealing products; compatible with length-setting mode and color-coded mode:

Equipped with easy-tearing knife, shape of the easy tear is optional.



|技术参数 Technical parameters





■产品尺寸	长≤180mm; 宽≤60mm
Product size	Length ≤ 180mm; Width ≤ 60mm
■ 速度能力	35袋/min
Speed capacity	35 bags/min
■ 设备功率	AC 220V 5KW
Power	AC 220V 5KW

■膜卷 Rolled type film Film

■设备重量 500kg Equipment weight 500kg





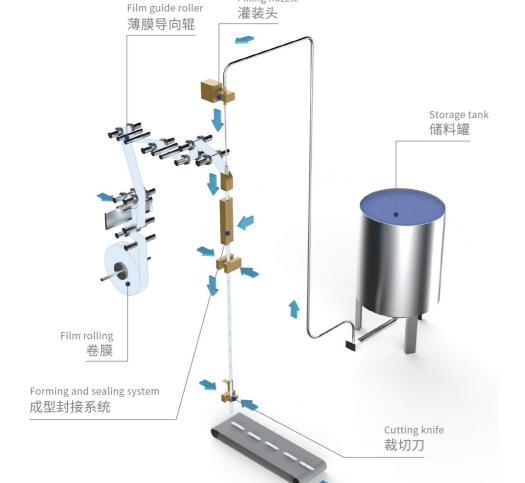

包装物效果图

Packaging renderings



小巧便捷、在线生产、扭矩控制、电动调节

Small and handy, online production, torque control, electric adjustment



SC-30拧盖机针对在线生产设计,小巧便捷,可以灵活转移,适用于多产品、多生产线的情况。

设备采用三轴伺服控制+2个自动尺寸调整的结构,旋盖扭矩精度高,操作简单。

适用于滴管、水乳、膏霜、洗护等产品的自动拧盖。可以生产泵头产品,根据需要可以对泵头进行定位生产。

The SC-30 capping machine is designed for online production. It is small and handy, can be flexibly moved, and is suitable for multiple products and multiple production lines.

The equipment adopts a three-axis servo control + 2 automatic size adjustment structure, with high capping torque accuracy and easy operation.

Suitable for automatic capping of droppers, lotions, creams, cleansers and other products. Pump head products can be produced and based on the requirements the pump heads can be positioning during production.



Finished products station 产品流水线 Pre-screw capping 预旋盖 Clamping belt 夹持腰带

|技术参数 Technical parameters

> 瓶身高: 50-150mm; 瓶身直径: 20-100mm; 瓶盖直径: 18-100mm; 瓶盖高≥10mm。

Bottle height: 50-150mm; Bottle diameter: 20-100mm; Bottle cap diameter18-100mm; Bottle cap height≥10mm.

■速度能力 40-50瓶/min Speed capacity 40-50 bottles/min

■产品尺寸

Product size

■ 设备功率 AC 220V 5KW Power AC 220V 5KW

■瓶身 瓶盖材质 Bottle and cap material

■设备重量 300kg Equipment weight 300kg





SNP-60 全自动套袋包装机 SNP-60 fully automatic bagging and packaging machine



在线制袋套袋封口包装机

Online bag making and sealing packaging machine

袋型可带插口 边线带压痕线 封口切边对齐

Bag can be gusseted The edge has an indentation line The sealing and cutting edges are aligned

Packaging renderings

包装物效果图

SNP-60全自动套袋包装机为全自动在线制袋套袋封口设备,设备采用筒 膜膜卷。设备的生产工艺流程为筒膜输送、定长裁切、封底制袋、产品 套袋、封口、成品排出。设备主要是用于纸巾、卫生巾、块状等形状规 则产品的包装。

SNP-60 fully automatic bagging and packaging machine is a fully automatic online bag making and sealing equipment. The equipment adopts rolled type film. The production process of the equipment is rolled typed film conveying, cutting fixed length, bag bottom sealing and bag making, product bagging, sealing, and finished product removal. The equipment is mainly used for packaging regular-shaped products such as paper towels, sanitary napkins, and blocks.



Bag making and cutting 纠偏 Bag making and cutting 制袋裁切 Bag opening and holding structure 撑袋机构 Servo pushing 伺服推入 Pre-screw capping 物料输送 Rolling film 卷膜 Sealing and cutting 封接裁切 Product lifting 产品升降

|技术参数 Technical parameters

■设备外形 L=5900mm; W=1700mm; H=2200mm L=5900mm; W=1700mm; H=2200mm Equipment shape

■产品尺寸 长度 80-150mm; 宽度 80-150mm; 高度 40-130mm Product size Length 80-150mm; Width 80-150mm; Height 40-130mm ≤55-60↑/min ■速度能力

Speed capacity ≤55-60 pieces/min ■设备功率 3相5线 AC 380V 9KW


3-phase 5-wire AC 380V 9KW

筒膜袋 厚度40-90µm OPP/CPP/PE ■膜卷 Tube film roller thickness 40-90µm OPP/CPP/PE Film

3500kg ■设备重量 Equipment weight

Power





H-5000 高速枕式包装机 H-5000 high speed pillow packaging machine



三边封枕式包装机

Three sides sealing pillow packaging machine

复合膜三边封 旋转&回转端封 自动接膜


Complex film three-side sealing Rotary type & reciprocating type end sealing Function to automatically align bottom and upper films


包装物效果图

Packaging renderings

H-5000系列枕式包装机系列涵盖上供膜机型、下供膜机型、旋转式端封、 回转式端封等多种机型。可根据不同行业的需求,做全防锈设计,符合 GMP要求,可适用药品行业的要求。可配置自动接膜平台,以及多种自动 上料装置。

The H-5000 series pillow packaging machine includes a variety of models such as upper film feeding machine, bottom film feeding machine, rotary type sealing, reciprocating type sealing, etc. Machine can be made with full rust-proof design based on the requirements of different industries, in line with GMP requirements, and can reach the requirements of the pharmaceutical industry. It can be configured with function to automatic aligning bottom and upper films and several automatic feeding devices.



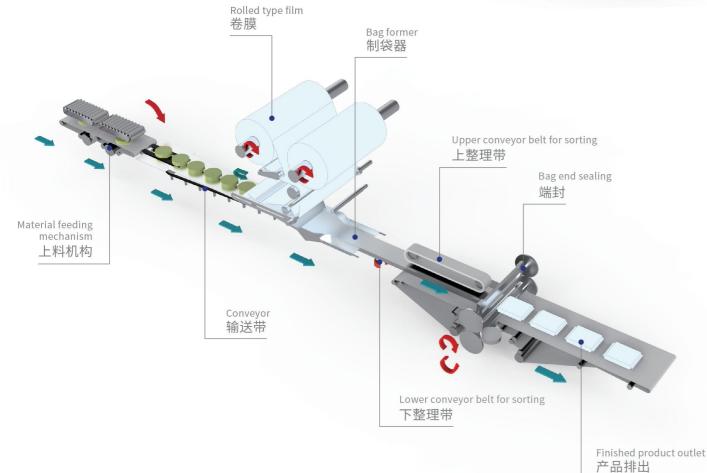

■ 设备外形	L=4000mm; W=1200mm; H=1600mm
Equipment shape	L=4000mm; W=1200mm; H=1600mm
■ 产品尺寸	宽度 <200mm ; 高度 <80mm
Product size	Width < 200mm; Height < 80mm
■ 速度能力	≤50m/min
Speed capacity	≤50m/min
■ 设备功率	3相5线 AC 380V 9KW
Power	3-phase 5-wire AC 380V 9KW
■ 膜卷	卷膜 最大幅宽650mm
Film	Maximum width 650mm
■ 设备重量	3500kg
Equipment weight	3500kg





H-5100 高速枕式包装机 H-5100 high speed pillow packaging machine



三边封枕式包装机

Three sides sealing pillow packaging machine

热缩膜三边封 旋转&回转端封 自动接膜

Heat shrinkable film three-side sealing Rotary type & reciprocating type end sealing Automatic alignment function of upper and lower films

包装物效果图 Packaging renderings

H-5100系列枕式包装机系列涵盖上供膜机型、下供膜机型、旋转式端封、 回转式端封等多种机型。可根据不同行业的需求,做全防锈设计。可配置自 动接膜平台,以及多种自动上料装置。可配置静电中封,用于多种形式产品 的热收缩膜包装。

The H-5100 series of pillow packaging machines covers a variety of models including top film feeding machines, bottom film feeding machines, rotary type end sealing, reciprocating type end sealing, etc. We can make it with full rust-proof design based on requirements of different industries. It can be equipped with automatic alignment function of upper and lower films and a variety of automatic feeding devices. configurable electrostatic seal, which can be used for various forms of products heat shrinkable film packaging.



卷膜 Bag former 制袋器 Upper finishing tape 上整理带 End sealing 端封 Material feeding mechanism 上料机构 Conveyor 输送带 Lower finishing belt 下整理带 Finished product outlet 产品排出

■设备外形	L=4000-6000mm; W=1350mm; H=1800mm
Equipment shape	L=4000-6000mm; W=1350mm; H=1800mm
产品尺寸	宽度 <280mm ; 高度 <120mm
Product size	Width < 280mm; Height < 120mm
■速度能力	≤50m/min
Speed capacity	≤50m/min
设备功率	3相5线 AC 380V 5KW +23KW
Power	3-phase 5-wire AC 380V 5KW +23KW
■ 包膜种类	卷膜 最大幅宽 600mm
Packaging film type	Roll film Maximum width 600mm
□ 设备重量	1200kg
Equipment weight	1200kg





面膜布裁切、面膜布折叠、面膜 布装袋、精华液灌装 和封口。

Facial mask non-woven fabric cutting, face shape mask folding, Folded masks bagging,essence filling and sealing bag.



全自动水乳产品灌装机

Fully automatic lotion product filling machine

模具回流系统、自动吹吸装置、 伺服灌装系统、自动压内塞系统、 自动旋泵头系统、自动 旋盖或 压盖系统、产品取出系统。

Mold return system, automatic blowing and suction cleaning device, servo filling system, automatic plug pressing system, automatic screwing pump head system, automatic capping or pressing capping systems and finished products



铝箔袋冷压成型, 单面鼓&双面鼓 全自动小样灌装设备

Aluminum foil bag cold pressed, single sides convex & Double Sides convex fully Automatic Sample filling equipment

铝箔袋冲压成型、U型封接、 灌装、封口、整版模切、 产品取出。

Aluminum foil bag stamping forming, U-shaped, sealing, filling, sealing, full plate cutting and finished product removal.



全自动袋装产品灌装机, 生产异形袋装类产品

Fully automatic bagged product filling machine which is used for producing special-shaped bagged products

薄膜对中分切、袋成型、灌装、 封口、整版模切、产品取出。

The film is cut in the middle and bag forming, filling, sealing, full plate cutting and finished product removal.



针对流体或半流体物料的卡片包 装形式,可以实现产品单手掰 开,物料方便挤出

For card packaging of fluid or semi-fluid materials, the product can be opened with one hand and the material can be easily extruded

硬膜切线、软膜成型、灌装、 封口、整版模切、产品取出。

工艺描述 工艺描述

述es

IP

一艺描

述

Hard film cutting opening line, soft film forming, filling, sealing,full plate cutting, finishing product removal.



针对流体或半流体物料进行泡罩 包装的设备,可用于化妆品、 食品、药品等相关行业

For fluid or semi-fluid materials blister packagingequipment,which is applied in cosmetics, food, medicine and other relatedindustry

底膜输送、底膜成型、灌装、 顶膜封口、整版模切、 产品取出。

Bottom film conveying, bottom film forming, filling, top film sealing, full pagecutting and finished product removal.



针对流体或半流体物料进行杯状 容器灌装包装的设备,可用于 化妆品、食品、药品等相关行业

Equipment for filling and packaging cup-shaped containers for fluid or semi-fluid materials, which can be used in cosmetics, food, pharmaceuticals and other related industries

容器输送、物料灌装、 膜片定位封口、产品取出 。


Cup conveying, material filling, The cup cap is positioned and sealed the finished product removal.



HC-90系列装盒机适用于 薄片类产品自动装盒, 可兼容带内衬的产品

HC-90 series cartoning machine is suitable for automatic packaging of thin slice products, also can pack the products with inner lining

Product sorting & counting, automaticmaterial feeding, lining folding, put productinto inner lining lining folding, automatic take box and fold the box, and put the product in box, automatic folding box's lids and closing lids, etc.




HC-600系列装盒机适用于水乳或 膏霜产品自动装盒,可兼容带内 补的产品

HC-600 series cartoning machine Used for automatic cartoning like lotions or cream products, Also can pack the products which is packed with lining packaging

产品整理、自动上料、内衬折叠、产品入内衬、内衬折叠、自动取盒折盒、产品入盒、自动折 盒扣盖等。

Product sorting and automatic feeding materials, lining folding, put products on the inner lining, inner lining folding, automatically box taking and folding, put products into the box, automatically folding the box lip



HC-610系列装盒机适用于彩妆等 小产品的自动装盒

HC-610 series cartoning machine is suitable for automatic cartoning of small makeup products

产品整理、自动上料、自动取盒 折盒、产品入盒、 自动折盒扣盖等。

Product sorting, automatic feeding materials, automatic box taking, folding and put product into box, automatically folding the box lip and closing it.



ST-30单列条包机适用于化 妆品、药品、食品等产品的条包 包装生产

ST-30 single-row strip packaging machine is suitable for strip packaging production of cosmetics, medicines, food and other products

薄膜定位、膜卷成型、自动灌装和 自动裁切; 可选做侧面三边封产 品; 配置易撕口刀,可选形状。

Film positioning, film forming, Automatic filling and automatic cutting;Optional production of three-side sealing products; Equipped with easy-tearing knife, optional shape.



小型在线旋盖机,配合半自动化 生产,节省人力

Small online capping machine, with semi-automated production, saving labor

容器输送、容器定位、旋盖轮夹 持、扭力控制旋紧、旋停释放。

Container conveying, bottle positioning,capping wheel clamping and torque control tighten, stopping when completing capping.



全自动在线制袋套袋封口设备, 采用筒膜为包材实现产品 自动包装

Fully automatic online bag making and sealingmachine, adopts tube film as packaging material to complete Automatic product packaging

筒膜输送、定长裁切、 封底制袋、产品套袋、封口、 成品排出。

Tube film conveying, fixed-length cutting, sealing bag bottom and forming bag, products bagging, sealing, finished product removal.




全自动三边封枕式包装机,可以 选择上供膜、下供膜以及不同的 端封形式

Fully automatic three-sided pillow packaging machine, you can choose top film supply or bottom film supply and different end sealing forms

产品整理、自动上料、传送带 送料、薄膜供膜、成型器成型、 中封、端封、成品排出。

Product sorting, automatic feeding, conveyor belt feeding, film supply, bag former, medium sealing, end sealing, and finished product outlet.



全自动三边封热收缩 枕式包装机, 可以选用静电中封形式

Fully automatic three-side sealing heat shrinkable pillow packaging machine, you can choose electrostatic medium seal form

产品整理、自动上料、传送带 送料、薄膜供膜、成型器成型、 中封、端封、成品排出。

Product sorting, automatic feeding, conveyor belt feeding, film supply, bag former, medium sealing, end sealing, and finished product outlet.

设备描述 设备描述

IP

一艺描述