




H71型美标/国标 升降式止回阀系列 H71 SERIES API / GB STANDARD LIFT TYPE CHECK VALVE SERIES



DN ≤ 80




DN ≤ 100

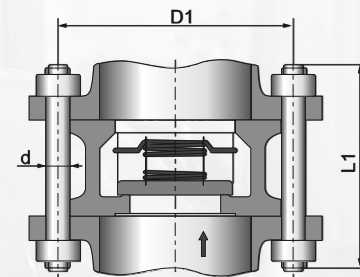


主要连接尺寸 Main Connection Dimension


压力级 Pressure level	口径 Size		尺寸 Dimensions(mm)					重量 Weight (kg)	配管法兰(供参考)Pipe flange(for reference)					
									螺栓孔中心圆直径D1 Bolt hole center Diameter D1		螺栓数量 Bolt Quantity	螺栓直径 d Screw diameter d		螺栓长度 L1 Bolt length L1
	DN	NPS	L	D	D2	D3	D4				in	mm	RF	RJ
Class 150 PN2.0MPa	15	1/2	25	46	14	25	25	0.28	60.5	4	1/2	M14	90	-
	20	3/4	31.5	56	18	30	30	0.42	70	4	1/2	M14	100	-
	25	1	35.5	65	23	36	36	0.56	79.5	4	1/2	M14	105	120
	32	1 1/4	40	74	30	43	43	0.75	89	4	1/2	M14	115	130
	40	1 1/2	45	84	38	52	52	1.3	98.5	4	1/2	M14	120	135
	50	2	56	103	47	62	62	2.1	120.5	4	5/8	M16	140	155
	65	2 1/2	63	122	61	75	75	2.8	139.5	4	5/8	M16	155	170
	80	3	71	135	75	90	90	3.6	152.5	4	5/8	M16	165	180
	100	4	80	173	94	112	112	4.8	190.5	8	5/8	M16	175	190
	125	5	110	195	110	125	132	12	216.0	8	3/4	M20	210	225
	150	6	125	220	127	150	158	17	241.5	8	3/4	M20	230	245
	200	8	160	277	165	200	208	29	298.5	8	3/4	M20	270	285

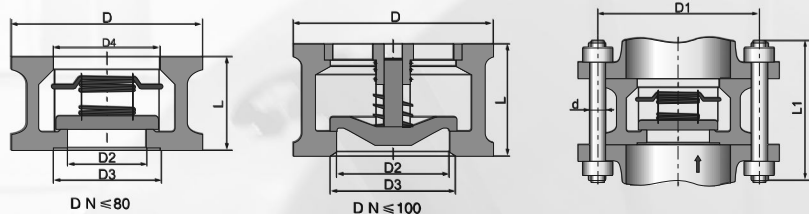
主要连接尺寸 Main Connection Dimension

压力级 Pressure level	口径 Size		尺寸 Dimensions(mm)					重量 Weight (kg)	配管法兰(供参考)Pipe flange(for reference)					
									螺栓孔中心圆直径D1 Bolt hole center Diameter D1		螺栓数量 Bolt Quantity	螺栓直径d Screw diameter d		螺栓长度 L1 Bolt length L1
	DN	NPS	L	D	D2	D3	D4				in	mm	RF	RJ
Class 300 PN5.0MPa	15	1/2	25	52	14	25	25	0.3	66.5	4	1/2	M14	95	105
	20	3/4	31.5	65	18	30	30	0.46	82.5	4	5/8	M16	110	125
	25	1	35.5	72	23	36	36	0.6	89	4	5/8	M16	115	130
	32	1 1/4	40	81	30	43	43	0.8	98.5	4	5/8	M16	125	140
	40	1 1/2	45	94	38	52	52	1.5	114.5	4	3/4	M16	140	155
	50	2	56	110	47	62	62	2.4	127.0	8	5/8	M20	145	170
	65	2 1/2	63	128	61	75	75	3.0	149.0	8	3/4	M20	170	190
	80	3	71	147	75	90	90	4.0	168.5	8	3/4	M20	185	205
	100	4	80	179	94	112	112	5.5	200.0	8	3/4	M20	200	220
	125	5	110	214	110	125	132	13	235.0	8	3/4	M20	235	255
Class 600 PN11.0MPa	150	6	125	249	127	150	158	22	270.0	12	3/4	M20	255	275
	200	8	160	305	165	200	208	36	330.0	12	7/8	M24	305	325
	15	1/2	25	52	14	25	25	0.4	66.5	4	1/2	M14	95	105
	20	3/4	31.5	65	18	30	30	0.8	82.5	4	5/8	M16	110	125
	25	1	35.5	72	23	36	36	1.0	89.0	4	5/8	M16	115	130
	32	1 1/4	40	81	30	43	43	1.3	98.5	4	5/8	M16	125	140
	40	1 1/2	45	94	38	52	52	1.8	114.5	4	3/4	M20	145	160
	50	2	56	110	47	62	62	2.8	127.0	8	5/8	M16	155	170
	65	2 1/2	63	128	61	75	75	4	149.0	8	3/4	M20	175	195
	80	3	71	147	75	90	90	6	168.5	8	3/4	M20	190	210
Class 900 PN15.0MPa	100	4	80	191	4	112	112	11	216.0	8	7/8	M24	220	240
	125	5	110	239	110	125	125	25	267.0	8	1	M27	265	285
	150	6	125	264	127	150	150	32	292.0	12	1	M27	290	310
	200	8	160	318	165	200	200	52	349.0	12	1 1/8	M30	345	365
	15	1/2	25	62	14	25	25	0.6	82.5	4	3/4	M20	125	140
	20	3/4	31.5	69	18	30	30	0.9	89.0	4	3/4	M20	135	150
	25	1	35.5	77	23	36	36	1.2	101.5	4	7/8	M24	155	170
	32	1 1/4	40	87	30	43	43	1.5	111.0	4	7/8	M24	160	175
	40	1 1/2	45	97	38	52	52	2.0	124.0	4	1	M27	175	190
	50	2	56	140	47	62	62	5.5	165.0	8	7/8	M24	195	210
Class 900 PN15.0MPa	65	2 1/2	63	162	61	75	75	7.5	190.5	8	1	M27	215	230
	80	3	71	165	75	90	90	8	190.5	8	7/8	M24	210	225
	100	4	80	204	94	112	112	14	235.0	8	1 1/8	M30	245	260
	125	5	110	245	110	125	125	27	279.5	8	1 1/4	M33	290	310
	150	6	125	286	127	150	150	41	317.5	12	1 1/8	M30	310	325
	200	8	160	356	165	200	200	76	393.5	12	1 3/8	M36	375	390

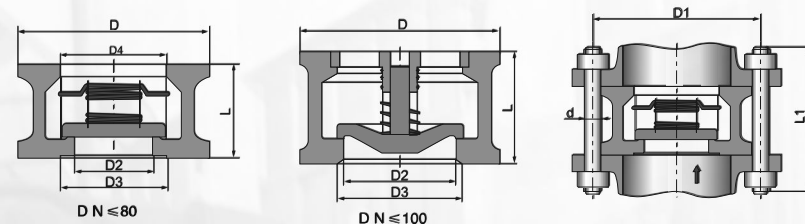

主要连接尺寸 Main Connection Dimension

公称压力 Nominal pressure (MPa)	公称通径 Nominal diameter (mm)	尺寸 Dimensions(mm)					配管法兰(供参考)Pipe flange(for reference)			
		L	D	D2	D3	D4	螺栓孔中心圆直径D1 Bolt hole center Diameter D1	螺栓数量 Bolt Quantity	螺栓直径d Screw diameter d	螺栓长度L1
PN1.0MPa PN1.6MPa (长系列 Long series)	15	25	52	14	25	25	65	4	M12	90
	20	31.5	62	18	30	30	75	4	M12	100
	25	35.5	72	23	36	36	85	4	M12	105
	32	40	83	30	43	43	100	4	M16	115
	40	45	93	38	52	52	110	4	M16	120
	50	56	108	47	62	62	125	4	M16	140
	65	63	128	61	75	75	145	4	M16	150
	80	71	142	75	90	90	160	8	M16	155
	100	80	162	94	112	112	180	8	M16	170
	125	110	192	110	125	132	210	8	M16	200
150	125	218	127	150	158	240	8	M20	225	
PN1.0MPa	200	160	273	165	200	208	295	8	M20	260
	250	200	328	220	250	266	350	12	M20	310
	300	250	378	260	300	310	400	12	M20	360
	350	280	438	305	350	355	460	16	M20	390
PN1.6MPa	200	160	273	165	200	208	295	12	M20	260
	250	200	329	220	250	266	355	12	M24	320
	300	250	384	260	300	310	410	12	M24	375
	350	280	444	305	350	355	470	16	M24	405
PN2.5 MPa (长系列 Long series)	15	25	52	14	25	25	65	4	M12	90
	20	31.5	62	18	30	30	75	4	M12	100
	25	35.5	72	23	36	36	85	4	M12	105
	32	40	83	30	43	43	100	4	M16	115
	40	45	93	38	52	52	110	4	M16	120
	50	56	108	47	62	62	125	4	M16	140
	65	63	128	61	75	75	145	8	M16	150
	80	71	142	75	90	90	160	8	M16	165
	100	80	168	94	112	112	190	8	M20	180
	125	110	194	110	125	132	220	8	M24	225
150	125	224	127	150	158	250	8	M24	245	
PN4.0 MPa (长系列 Long series)	200	160	284	165	200	208	310	12	M24	285
	250	200	341	220	250	266	370	12	M27	335
	300	250	401	260	300	310	430	16	M27	390
	350	280	458	305	350	355	490	16	M30	435
	15	25	52	14	25	25	65	4	M12	90
	20	31.5	62	18	30	30	75	4	M12	100
	25	35.5	72	23	36	36	85	4	M12	105
	32	40	83	30	43	43	100	4	M16	115
	40	45	93	38	52	52	110	4	M16	120
	50	56	108	47	62	62	125	4	M16	140
65	63	128	61	75	75	145	8	M16	150	
80	71	142	75	90	90	160	8	M16	165	
100	80	168	94	112	112	190	8	M20	180	
125	110	194	110	125	132	220	8	M24	225	
150	125	224	127	150	158	250	8	M24	245	
200	160	291	165	200	208	320	12	M27	295	
250	200	353	220	250	266	385	12	M30	355	
300	250	418	260	300	310	450	16	M30	415	
350	280	475	305	350	355	510	16	M33	455	

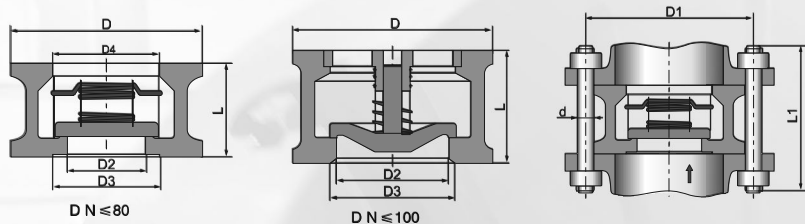

主要连接尺寸 Main Connection Dimension

公称压力 Nominal pressure (MPa)	公称通径 Nominal diameter (mm)	尺寸 Dimensions(mm)					重量 Weight (kg)	配管法兰(供参考)Pipe flange(for reference)			
		L	D	D2	D3	D4		螺栓孔中心圆直径D1 Bolt hole center Diameter D1	螺栓数量 Bolt Quantity	螺栓直径d Screw diameter d	螺栓长度 L1 Bolt length L1
PN6.3MPa	15	25	62	14	25	25	0.5	75	4	M12	100
	20	31.5	73	18	30	30	0.7	90	4	M16	115
	25	35.5	83	23	36	36	1.0	100	4	M16	130
	32	40	89	30	43	43	1.3	110	4	M20	140
	40	45	104	38	52	52	2.0	125	4	M20	150
	50	56	114	47	62	62	3.2	135	4	M20	160
	65	63	138	61	75	75	4.5	160	8	M20	170
	80	71	148	75	90	90	5	170	8	M20	180
	100	80	174	94	112	112	7	200	8	M24	200
	125	110	211	110	125	132	13	240	8	M27	245
	150	125	248	127	150	158	22	280	8	M30	270
PN10.0MPa	200	160	310	165	200	208	40	345	12	M33	325
	15	25	62	14	25	25	0.6	75	4	M12	100
	20	31.5	73	18	30	30	1.0	90	4	M16	115
	25	35.5	83	23	36	36	1.3	100	4	M16	130
	32	40	89	30	43	43	1.6	110	4	M20	140
	40	45	104	38	52	52	2.5	125	4	M20	150
	50	56	120	47	62	62	3.8	145	4	M24	175
	65	63	144	61	75	75	6	170	8	M24	185
	80	71	154	75	90	90	7	180	8	M24	195
	100	80	181	94	112	112	10	210	8	M27	220
	125	110	218	110	125	132	18	250	8	M30	265
PN16.0MPa (JB/T74-90)	150	125	258	127	150	158	30	290	12	M30	285
	200	160	324	165	200	208	56	360	12	M33	345
	15	15	58	14	25	25	0.6	75	4	M16	70
	20	20	69	18	30	30	0.9	90	4	M20	85
	25	25	79	23	36	36	1.3	100	4	M20	90
	32	32	92	30	43	43	1.7	115	4	M22	100
	40	40	100	38	52	52	2.2	125	4	M24	110
	50	50	142	47	62	62	5.6	165	8	M22	115
	65	65	162	61	75	75	7.5	190	8	M27	130
	80	80	176	75	90	90	9	205	8	M27	140
	100	100	208	94	112	112	14	240	8	M30	155
	125	125	247	110	125	132	27	285	8	M36	195
	150	150	280	127	150	158	38	318	12	M36	210
	200	200	356	165	200	208	76	400	12	M42	260

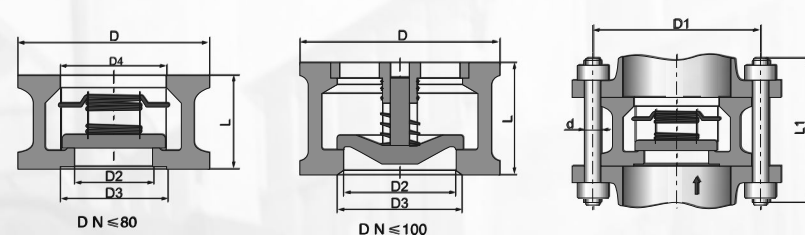

主要连接尺寸 Main Connection Dimension

公称压力 Nominal pressure (MPa)	公称通径 Nominal diameter (mm)	尺寸 Dimensions(mm)					重量 Weight (kg)	配管法兰(供参考)Pipe flange(for reference)			
		L	D	D2	D3	D4		螺栓孔中心圆直径D1 Bolt hole center Diameter D1	螺栓数量 Bolt Quantity	螺栓直径d Screw diameter d	螺栓长度 L1 Bolt length L1
PN16.0MPa (GB/T9112 -9124) (HG 20592 -20635)	15	25	62	14	25	25	0.6	75	4	M12	115
	20	31.5	73	18	30	30	1.0	90	4	M16	135
	25	35.5	83	23	36	36	1.3	100	4	M16	145
	32	40	89	30	43	43	1.6	110	4	M20	160
	40	45	104	38	52	52	2.5	125	4	M20	170
	50	56	120	47	62	62	3.8	145	4	M24	195
	65	63	144	61	75	75	6	170	8	M24	210
	80	71	154	75	90	90	7	180	8	M24	225
	100	80	181	94	112	112	10	210	8	M27	250
	125	110	218	110	125	132	18	250	8	M30	295
	150	125	258	127	150	158	30	290	12	M30	325
	200	160	325	165	200	208	58	360	12	M33	375