



Tree To Bar

从可可树到巧克力的旅程

从可可树到巧克力



可可荚提升切分机
Cocoa pod lifting cutter



果壳可可豆筛分机
Fruit shell cocoa bean
sieve machine



可可豆烘烤机
Cocoa beans roast machine



可可豆压碎风选机
Cocoa bean cracker &
winnow machine



巧克力包装机
chocolate
packaging machine



T30/60巧克力调温机
T30/60 chocolate
tempering machine



BWG75升保温罐
BWG75 chocolate
tempering tank



SMJ60石磨机
SMJ60 Chocolate stone grinder
machine melanger



可可果
Cocoa fruit

分离
Separate
筛选
Screen



可可豆
Cocoa beans

烘烤
Bake
压碎风选
Crushing
air selection




可可碎仁
Cocoa crushed kernels

研磨
Grind
保温调温
Thermal insulation
and constant temperature



可可液块
Cocoa mass

制成
Made

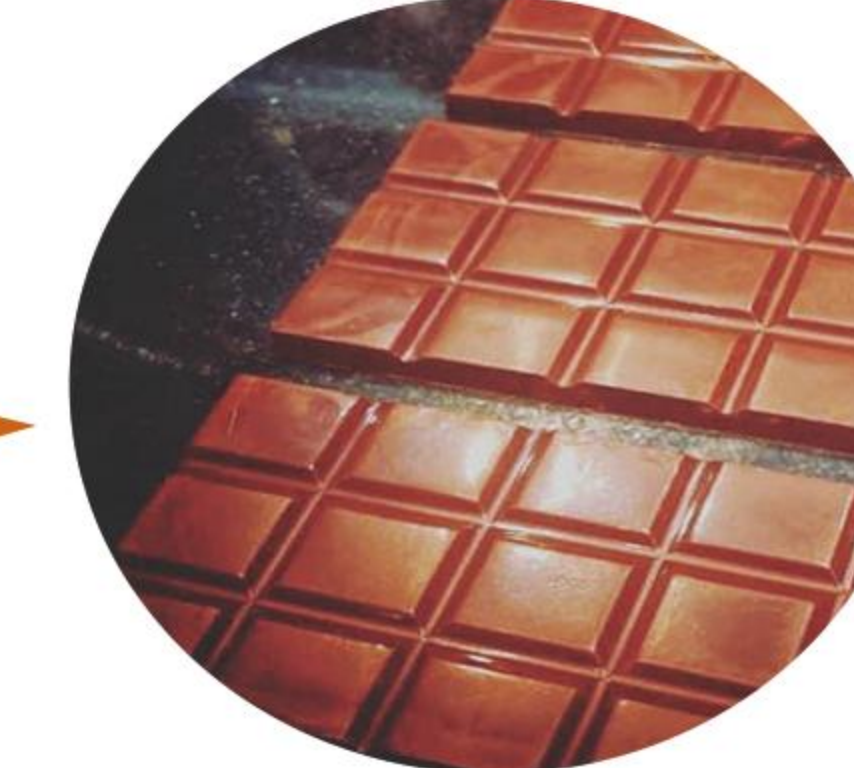

巧克力
Chocolate

包装
packing



成品
Finished product



Whatsapp: +8618616335728
Email: colin@sheurolink.com



企业微信



Whatsapp



微信

Tree To Bar

从可可树到巧克力的旅程



Tree To Bar



Bean to bar 可可豆到巧克力的旅程

Bean to bar 可可豆到巧克力的旅程



可可豆烘焙机
Cocoa beans roast machine



可可豆压碎风选机
Cocoa bean cracker & winnow machine




BWG75升保温罐
BWG75 chocolate tempering tank



SMJ60石磨机
SMJ60 Chocolate stone grinder machine melanger



T30/60巧克力调温机
T30/60 chocolate tempering machine

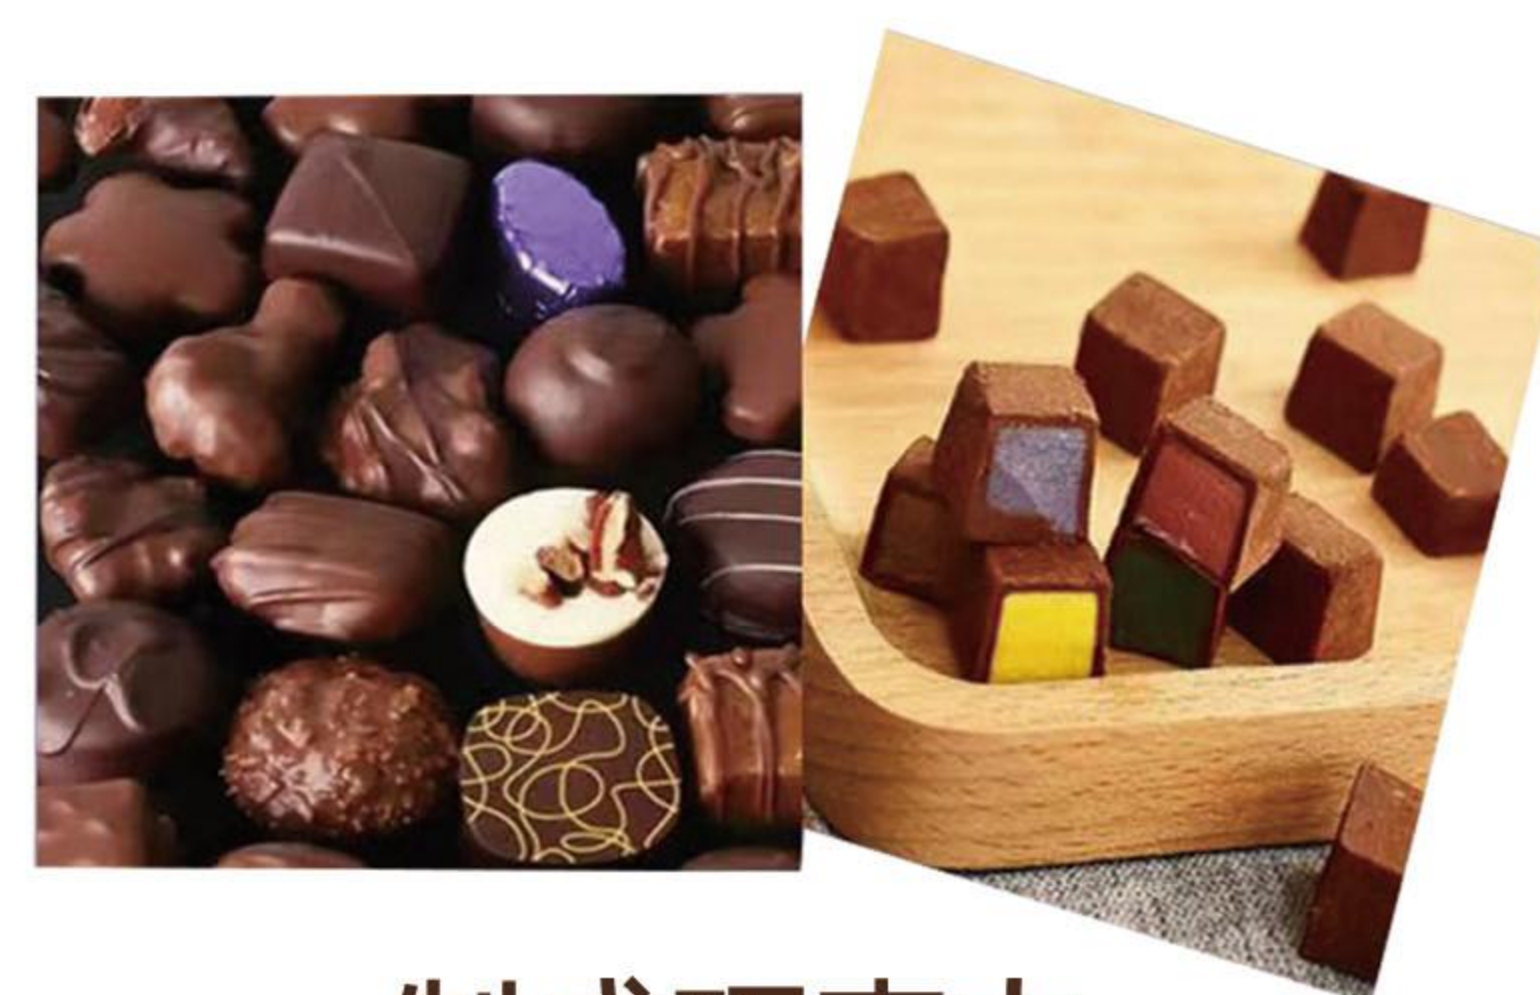

制成巧克力
Make chocolate



可可豆烘焙机
Cocoa beans roast machine



可可豆台式压碎机
TableTop cocoa beans crashing machine



可可豆台式风选机
TableTop Cocoa bean Winnow



SMJ07石磨机
SMJ07 Chocolate stone grinder machine Melanger



T6巧克力调温机
T6 chocolate tempering machine



Company Profile

SEMMCO 射阳欧联机械有限公司专业研发制造巧克力系列设备，主营巧克力调温机，巧克力石磨机，巧克力保温罐及冷却隧道等。公司秉承“顾客为上，锐意进取”的经营理念，坚持“顾客为先”的原则为客户提供优良的服务，客户遍布全国，产品远销东南亚，欧美等地区。

Semmco specializes in developing and manufacturing chocolate series equipment. mainly engaged in: chocolate tempering machine, chocolate tempering tank, Chocolate stone mill and chocolate cooling tunnel ,etc. The company adheres to the business philosophy of "customer first, forge ahead", and adheres to the principle of "customer first" to provide customers with excellent services. Customers are all over the country, and products are exported to Southeast Asia, Europe and America and other regions.

CONTENTS ◀ 产品目录

产品服务客户，质量塑造品牌
Products serve customers, quality builds brand

巧克力调温设备 Chocolate thermostat	01
巧克力保温融化设备 Chocolate heat preservation and melting equipment	03
巧克力涂层、浇注设备 Chocolate coating and pouring equipment	03
巧克力裹衣、抛光设备 Chocolate coating and polishing equipment	05
巧克力研磨设备 Chocolate grinding equipment	06
巧克力生产辅件 Chocolate production accessories	13
巧克力工业级设备 Chocolate industrial grade equipment	14

Chocolate thermostat
巧克力调温设备

T6/12 巧克力调温机（台面式）
T6/12 chocolate tempering
machine (TableTop)



T6/12主要技术参数/ Main technical parameters		
容量 Capacity	6L	12L
调温量 Temperature regulation	6L/批次 18L/h 6L/batch 18L/h	12L/批次 36L/h 12L/batch 36L/h
电压 Voltage	220V 单相 220V Single phase	220V 单相 220V Single phase
加热功率 Heating power	640w	720w
冷却功率 Cooling power	600w	600w
电机功率 Motor power	370W	370W*2
设备大小 Device size	L W H 610x545x730mm	L W H 610x580x750mm
重量 Weight	75kg	85kg
装备有全自动触屏调温装置 Equipped with touch screen full automatic tempering		

T30/60主要技术参数/ Main technical parameters		
容量 Capacity	30L	60L
调温量 Temperature regulation	30L/批次 90L/h 30L/batch 90L/h	60L/批次 180L/h 12L/batch 36L/h
电压 Voltage	220V 单相 220V Single phase	220V 单相 220V Single phase
加热功率 Heating power	1390w	1650w
冷却功率 Cooling power	700w	800w
混合电机 Motor power	370W*2+30W*1	370W*2+30W*1
设备大小 Device size	L W H 945x794x1330mm	L W H 945x845x1330mm
重量 Weight	100kg	115kg
装备有全自动触屏调温装置 Equipped with touch screen full automatic tempering		

T30/60 巧克力调温机
T30/60 chocolate tempering
machine



Chocolate thermostat
巧克力调温设备

MT30/60 巧克力调温机
MT30/60 chocolate tempering
machine



MT30/60主要技术参数/ Main technical parameters		
容量 Capacity	30L	60L
电压 Voltage	220V 单相 220V Single phase	220V 单相 220V Single phase
加热功率 Heating power	1650w	1650w
冷却功率 Cooling power	700w	800w
电机功率 Motor power	370W*2+30W*1	370W*2+30W*1
设备大小 Device size	L W H 945x760x1735mm	L W H 945x810x1735mm
重量 Weight	130kg	150kg
装备有全自动触屏调温装置 Equipped with touch screen full automatic tempering		

BWG75/150 巧克力保温罐
BWG75/150 chocolate insulation jar



BWG75主要技术参数/ Main technical parameters		
容量 Capacity	75L	150L
电压 Voltage	三相电源 380V three phase power supply	三相电源 380V three phase power supply
功率 Power	4.7KW	5KW
设备大小 Appearance dimension	W H 900x1400mm	W H 900x1500mm
全自动批量调温，强制水冷，刮壁式搅拌，增加进水控制接口以确保水使用的最大效率，基本上节水50%以上，清洁方便，全304不锈钢制，全封闭式保温，数字控温，水暖需求：（进料/出料）。 Full automatic batch temperature regulation, Forced water cooling, Wall scraping mixing, Add water inlet control interface to ensure the maximum efficiency of water use, Basically, it saves more than 50% water, Easy to clean, All 304 stainless steel, Fully enclosed insulation, Digital temperature control, Water heating demand: (feeding / discharging)		

Chocolate insulation melting/coating equipment
巧克力保温融化/涂层设备

Chocolate coating and pouring equipment
巧克力涂层、浇注设备



HT03/05 迷你巧克力融化炉
HT03/05 chocolate holding tank

HT03/HT05主要技术参数/Main technical parameters		
容量 Capacity	4L	7L
电压 Voltage	220V 单相 Single phase	220V 单相 Single phase
功率 Power	250W	300W
产品尺寸 Product size	L W H 330×380×210mm	L W H 460×320×180mm
配可移动锅和锅盖，适用于巧克力店铺，实验室，私房！		

涂层部件

Coated parts

根据需求可选择连接T30、T60、MT30、MT60、MM60等，根据工艺选择款式。
You can choose to connect T30, T60, MT30, MT60, MM60, etc. according to your needs, and choose the style according to the process.



款式1 单独乙型网涂层
Style 1 separate type B mesh coating

输送带宽：乙型网带宽300mm；无支架；材质：304
Transmission bandwidth: type B network bandwidth 300mm; No support; Material: 304

款式2 乙型网+PU带涂层
Style 2 type B net +pu with coating

输送带宽：乙型网带宽300mm；PU带宽300mm，意大利进口PU带可调节传送速度；带烘焙纸装置；带支架移动滚轮；材质：304
Transmission bandwidth: type B network bandwidth 300mm; PU belt width 300mm, imported from Italy; Adjustable transmission speed; With baking paper device; Mobile roller with bracket; Material: 304

款式3 圆带+PU带涂层
Style 3 round belt +pu belt coating

输送带宽：圆带Φ6mm，宽300mm；PU带宽300mm，长96cm，均为意大利进口输送带；可调节传送速度；带烘焙纸装置；带支架移动滚轮；材质：304
Conveying bandwidth: round belt Φ 6mm, 300mm wide; PU belt width is 300mm and length is 96cm, both of which are conveyor belts imported from Italy; Adjustable transmission speed; With baking paper device; Mobile roller with bracket; Material: 304



MM08/15 巧克力浇注机
MM08/15 chocolate moulding machine

MM08/15主要技术参数/ Main technical parameters				
容量 Capacity	8L			15L
电压 Voltage	220V 单相 Single phase			220V 单相 Single phase
功率 Power	600W			700W
设备大小 Device size	L	W	H	L W H
	450*550*550mm			560x600x590mm
变速齿轮；数字温控；全304不锈钢制 Variable speed gear;Digital temperature control; All 304 stainless steel				



MM08/15 巧克力浇注涂层机
MM08/15 with the enrober system



MM08/15主要技术参数/ Main technical parameters				
容量 Capacity	8L			15L
电压 Voltage	220V 单相 Single phase			220V 单相 Single phase
功率 Power	1000W			1250W
设备大小 Device size	L	W	H	L W H
	450x1550x550mm			560x1600x590mm
变速齿轮；数字温控；全304不锈钢制； 传送网带；可拆卸 Variable speed gear;Digital temperature control; All 304 stainless steel; Conveyor belt; removable				

Chocolate coating and pouring equipment
巧克力涂层、浇注设备

MM30/MM60 巧克力浇注机
MM30/MM60 chocolate
moulding machine



MM30/MM60主要技术参数/Main technical parameters

容量 Capacity	30L	60L
电压 Voltage	220V单相 Single phase	220V单相 Single phase
功率 Power	1KW	2KW
设备大小 Device size	L W H 920×650×1190mm	L W H 1220×780×1290mm

材质：304不锈钢；带桌面振动台，数字调温控制
Material:304 stainless steel; Vibration table with
table top;Digital temperature control

MM30 巧克力浇注机涂层机
MM30 chocolate enrobing
machine



MM30主要技术参数/Main technical parameters

容量 Capacity	30L
电压 Voltage	220V单相 Single phase
功率 Power	1.2KW
设备大小 Device size	L W H 920×650×1190mm

材质：304不锈钢；数字调温控制；传送带宽：180mm
Material:304 stainless steel; Digital temperature control;
Transmission bandwidth:180mm

Chocolate coating and pouring equipment
巧克力涂层、浇注设备

MM60 巧克力浇注涂层机
MM60 chocolate pouringcoating
machine



MM60主要技术参数/ Main technical parameters

容量/Capacity	60L
电压/Voltage	220V 单相/Single phase (三相电可选/three-phase electricity optional)
功率/Power	2KW
设备大小/Device size	L W H 1200mmx780mmx1590mm

数字调温控制；全304不锈钢制；整个流程只需一人即可
轻易完成从装载区、涂层区到产品传送出口的操作
Digital temperature control;all 304 stainless steel;The
whole process can be easily completed by one person
from the loading area, coating area to the product
delivery outlet

OSD275 巧克力夹心浇注机
OSD275 Chocolate one shot depositing machine

该机器适用于同时浇注壳体与夹心的情况，也可用于配制和实现各种固体/厚的产品的成型，该机器可通过state-of-the-art 软件的图形界面进行选择和设置工作选项，根据特定的食谱菜单，可以简单直观的操作使用。设备配有多组可拆卸式硅胶加热组件，易于拆下直接通过洗碗机进行清洁。机架的材质是氧化硬铝和不锈钢。



The machine is suitable for casting shell and sandwich at the same time, and can also be used to prepare and realize the molding of various solid / thick products. The machine can be selected and set working options through the graphical interface of the state of the art software. It can be operated simply and intuitively according to the specific recipe menu. The equipment is equipped with multiple sets of detachable silicone heating components, which are easy to remove and clean directly through the dishwasher. The frame is made of hard aluminum oxide and stainless steel.Material: AISI304 stainless steel.

主要技术参数/ Main technical parameters

材 质/Material	AISI304 不锈钢/stainless steel
储料斗容量/Storage hopper capacity	6L
产 能/Capacity	80L/h
功 率/Power	2.4 kw
电 压/Voltage	230 V - 50/60 Hz
尺 寸/Size	1170x720x1380h mm

Chocolate polishing、wrapping/ grinding equipment
巧克力抛光、裹衣/研磨设备

抛光锅/裹衣机
Polishing pot / Coating machine



主要技术参数/ Main technical parameters		
容量/Capacity	3L	30L
电压/Voltage	220V单相 50HZ 220V single phase 50Hz	220V单相 50HZ 220V single phase 50Hz
功率/Power	--	1800W
电机功率/Motor power	200W	750W
尺寸/Size	400*300*420mm	725*525*1500mm
重量/Weight	13.5kg	150kg
. PG-3抛光锅小巧便捷，操作简单，锅体可调节高度角度，根据食材大小及需求，调整抛光机倾斜角度，以达到更好的抛光效果 . PG-30抛光锅变频调速，温度可控，冷热空气交换工作，操作简单，适用于多种球形、颗粒状等食材的巧克力裹衣、抛光的生 . The PG-3 polishing pot is compact and convenient, easy to operate, with adjustable height and angle of the pot body. According to the size and needs of the ingredients, the tilt angle of the polishing machine can be adjusted to achieve better polishing effect . The PG-30 polishing pot has variable frequency speed regulation, temperature control, and cold and hot air exchange. It is easy to operate and suitable for the production of chocolate coating and polishing of various spherical, granular and other food ingredients.		

主要技术参数/ Main technical parameters	
尺寸 Size	1.5*0.8*1.37m
电机功率 Motor power	1.1KW
电加热功率 Electric heating powertion	18KW
煤气加热消耗 Gas heating consumption	3-6M³
电压 Voltage	380V 50Hz
温度 Temperature	常温 -300 °C 自动恒温设定 normal temperature -300 °C automatic constant temperature setting
每批次可装载30-50公斤 Each batch can load 30-50 kg	

RT50可可豆烘焙机
RT50 Cocoa beans roast machine



Chocolate grinding equipment
巧克力研磨设备



可可豆烘焙机
Cocoa beans roast machine

主要技术参数/ Main technical parameters	
尺寸 size	431*255*298mm
净重 Net weight	6.9KG
额定电压 Rated voltage	220V~50Hz/110V~50Hz
额定功率 Rated power	1600W



CW200 可可豆压碎风选机
CW200 Cocoa bean cracker & winnow machine



主要技术参数/ Main technical parameters	
产能 Capacity	80kg/h
电机功率 Motor power	0.37KW
风机功率 Fan power	0.5KW
电压 Voltage	220V
剥离功率 Stripping efficiency	> 80%
整体尺寸 Overall size	47*98*140cm
重量 Weight	150kg
材质 Material quality	Stainless steel body

Chocolate crushing and winnow equipment

巧克力压碎风选设备

可可豆台式压碎机
TableTop cocoa beans crashing machine



主要技术参数/ Main technical parameters	
尺寸/ Size	400mm*330mm*640mm
手摇粉碎可可豆，食品级不锈钢材质，可直接用水清洗，结实耐用，安全卫生。 <i>Hand-crushed cocoa beans, made of food-gradestainless steel, can be washed directly with water,durable, safe and sanitary.</i>	

可可豆台式风选机
TableTop Cocoa bean Winnow

主要技术参数/ Main technical parameters	
容量/ Capacity	20kg/h
剥离效率/ Stripping efficiency	>78%
外形尺寸/ External dimensions	30*30*140cm
重量/ Weight	15kg
材质/ Material quality	304不锈钢/ 304 stainless steel
外接鼓风机装置, 不锈钢机身 <i>External blower device, stainless steel body</i>	



Chocolate crushing and winnow equipment

巧克力压碎风选设备

可可豆台式压碎风选一体机
TableTop Cocoa bean Cracker and Winnow machine



主要技术参数/ Main technical parameters	
容量 <i>Capacity</i>	20kg/ 小时
剥离效率 <i>Stripping efficiency</i>	≥78%
外形尺寸 <i>External dimensions</i>	50*55*140cm
包装后尺寸 <i>Size after packaging</i>	70*75*160cm
重量 <i>Weight</i>	29kg
包装后重量 <i>Weight after packaging</i>	64kg
电机功率 <i>Motor power</i>	0.18kw
风机功率 <i>Fan power</i>	1.3kw
外接鼓风机配置, 不锈钢机身 <i>External blower device, stainless steel body</i>	

BT60 /180巧克力调温球磨机
BT60/180 Chocolate tempering & ball mill



主要技术参数/ Main technical parameters	
容量/ Capacity	60L
电压/ Voltage	220V
加热功率/ Heating power	1500W
冷却功率/ Cooling power	1200W
电机功率/ Motor power	1500W
尺寸/ Size	1100x900x1250mm
重量/ Weight	300kg
不锈钢钢珠/ Stainless steel ball	100kg
配有全自动触屏调温系统 <i>Equipped with automatic touch-screen temperature regulation system</i>	

使用调温功能时容量60L，使用球磨机功能时容量40L
60L when using temperature regulation function,40L when using ball mill function

Chocolate grinding equipment

巧克力研磨设备

SMJ07 巧克力石磨机
SMJ07 Chocolate stone grinder machine melanger



SMJ07 主要技术参数 / Main technical parameters	
锅体容量 Pot capacity	7L
装载能力 Loading capacity	5KG
设备尺寸 Equipment size	L W H 350*450*600mm
重量 Weight	约 80kg/About 80kg
电源 Power supply	220V 50HZ
功率 Power	370W
材质 Material	外壳为 304 不锈钢, 内置天然岩石制成的研磨滚轮 The shell is made of 304 stainless steel and is equipped with grinding rollers made of natural rocks
转速 Speed	0-80rpm, 可调 / 0-80rpm, Adjustable

SMJ30 主要技术参数 / Main technical parameters	
锅体容量 Pot capacity	30L
装载能力 Loading capacity	25KG
设备尺寸 Equipment size	L W H 800*900*1100mm
重量 Weight	约 180kg/ About 180kg
电源 Power supply	220V 50HZ
功率 Power	2KW
材质 Material	外壳为 304 不锈钢, 内置天然岩石制成的研磨滚轮 The shell is made of 304 stainless steel and is equipped with grinding rollers made of natural rocks
转速 Speed	0-80rpm, 可调 / 0-80rpm, Adjustable

SMJ30 巧克力石磨机
SMJ30 Chocolate stone grinder machine melanger



手轮装置, 可倾倒放料
Handwheel device, capable of dumping and discharging materials

Chocolate grinding equipment

巧克力研磨设备

SMJ60 巧克力石磨机
SMJ60 Chocolate stone grinder machine melanger



手轮装置, 可倾倒放料
Handwheel device, capable of dumping and discharging materials

SMJ60 主要技术参数 / Main technical parameters	
锅体容量 Pot capacity	60L
装载能力 Loading capacity	50KG
设备尺寸 Equipment size	L W H 1160*800*1290mm
重量 Weight	约 280kg/About 280kg
电源 Power supply	220V 50HZ
功率 Power	3KW
材质 Material	外壳为 304 不锈钢, 内置天然岩石制成的研磨滚轮 The shell is made of 304 stainless steel and is equipped with grinding rollers made of natural rocks
转速 Speed	0-80rpm, 可调 / 0-80rpm, Adjustable

B12 巧克力球磨机
B12 chocolate Ball mill system




BT12主要技术参数 / Main technical parameters	
容量 / Capacity	12L
电压 / Voltage	220V 单相 / Single phase
电机功率 / Motor power	750W
尺寸 / Size	700x610x750mm
重量 / Weight	60kg
不锈钢钢珠 / Stainless steel ball	20kg

强制水冷控温
Forced water cooling temperature control

Chocolate production accessories
巧克力生产辅件

ZDT02 巧克力振动台
ZDT02 vibrating table
Pneumatic chocolate pump
Truffle cutter cutting aera

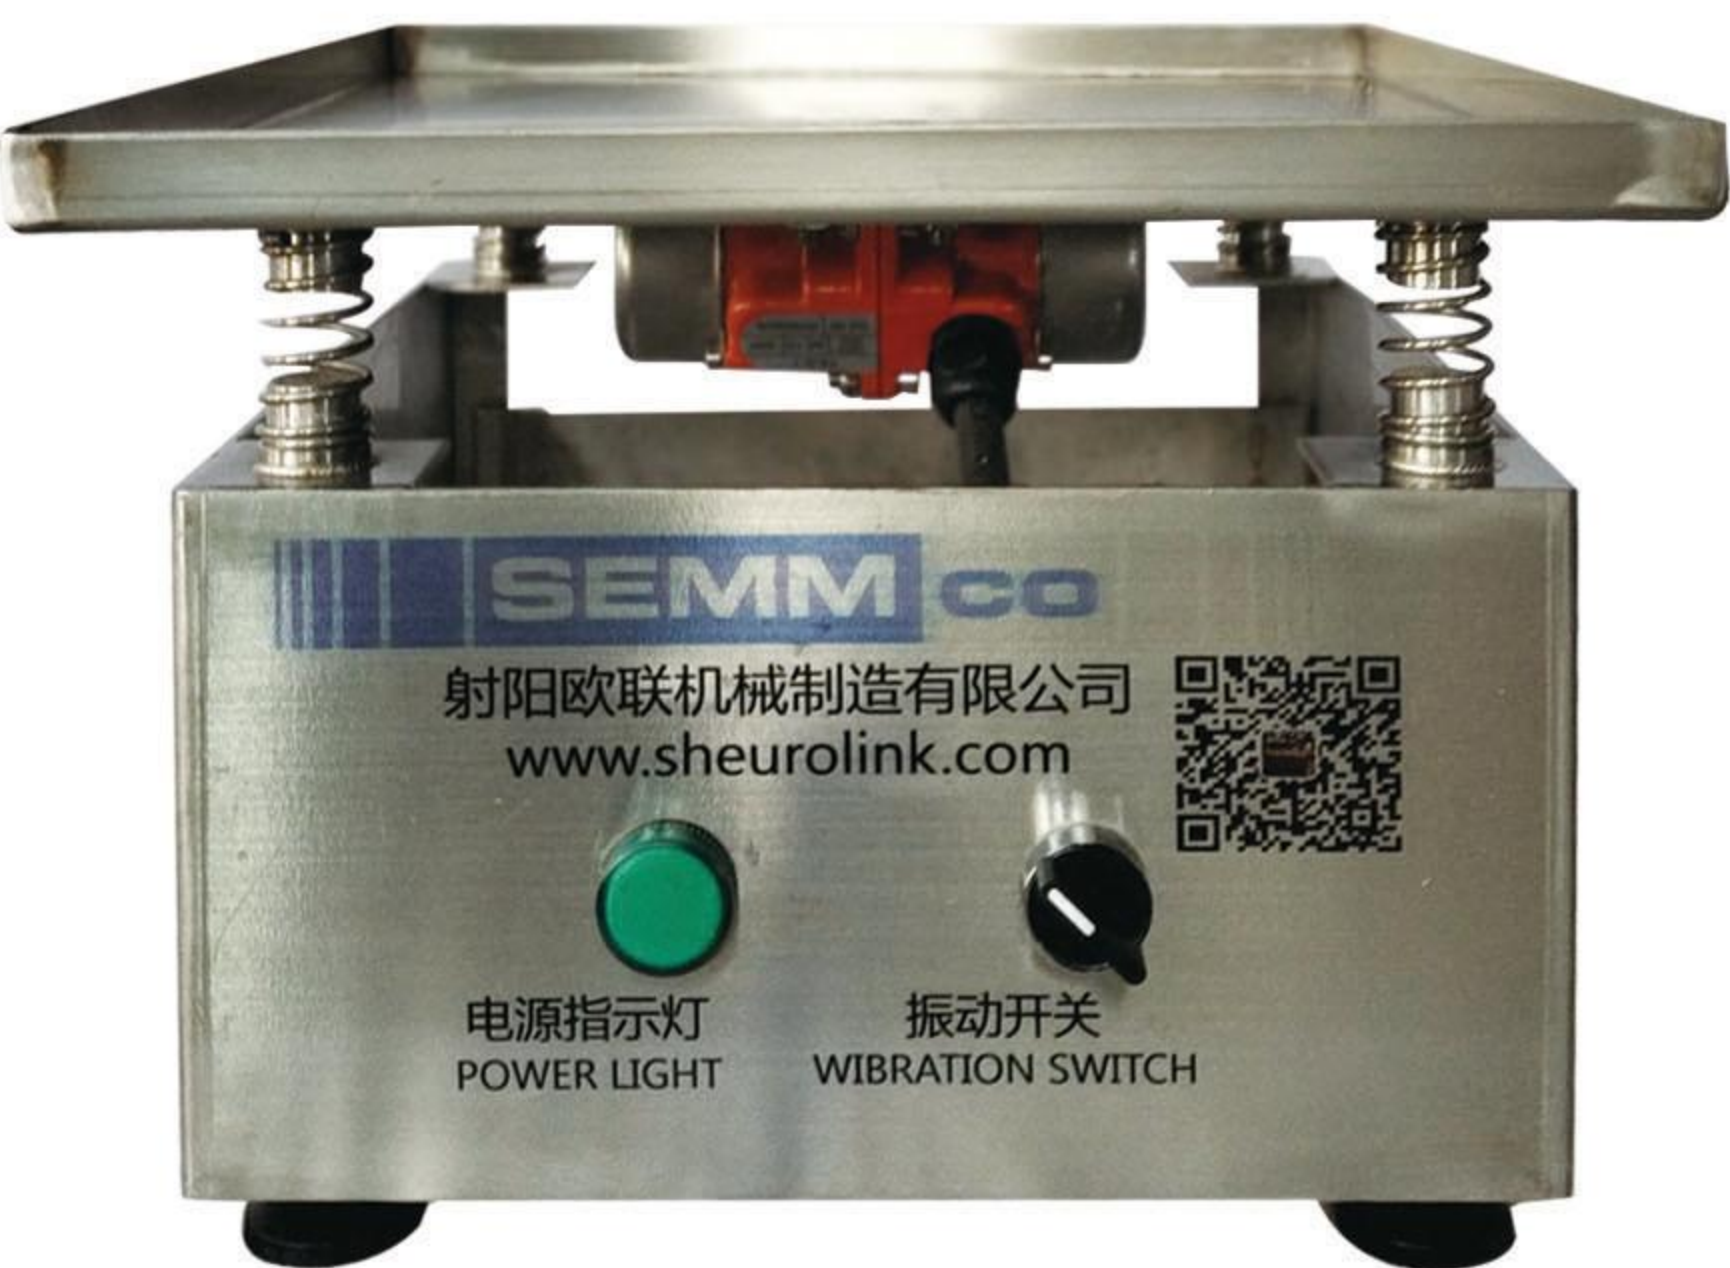

主要技术参数/ Main technical parameters	
功率/Power	45W
电压/Voltage	220V 单相/single phase
外观尺寸/Appearance dimension	L W H 385x355x255mm
坚固紧凑的独立设计小巧，移动方便,全不锈钢制。 Rugged and compact independent design, Compact and easy to move,All stainless steel.	

活塞式气动巧克力抽吸泵
Piston pneumatic chocolate suction pump



该设备可设置巧克力的量和时间，提高了巧克力制作效率
The device can set the amount and time of chocolate, which improves the chocolate making efficiency.

主要技术参数/ Main technical parameters		
网格间距 Grid spacing	单层切刀 Single layer cutter	双层GUITAR切刀 Double-layer guitar cutter
间距尺寸 Spacing size	20X20mm	15X15 15X22.5 15X30 22.5X22.5 22.5X30 30X30mm
切盘尺寸 Cutting size	300X300mm	360X360mm



CT300 Truffle
Ct300 truffle

CT360 guitar生巧切割器
Ct360 guitar Shengqiao cutte



Chocolate industrial grade equipment
巧克力工业级设备

XT80 巧克力连续调温机
XT80 Chocolate
continuous tempering machine



主要技术参数/ Main technical parameters	
产量 Output	80L/H
连接方式 Connection mode	快接装置 quick connect device
电压 Voltage	220V 单相 Single phase
加热功率 Heating power	500W
冷却功率 Cooling power	600W
电机功率 Motor power	370W
设备大小 Equipment size	L W H 750*550*580MM
重量 Weight	80KG
装备有全自动触屏调温装置 Equipped with touch screen full automatic tempering	

XT260主要技术参数/ Main technical parameters		
产量 Output	260L/H	520L/H
连接方式 Connection mode	快接装置 quick connect device	快接装置 quick connect device
电压 Voltage	220V 单相 Single phase	220V 单相 Single phase
加热功率 Heating power	600w	1000w
冷却功率 Cooling power	1500w	2000w
电机功率 Motor power	550W	750W
设备大小 Equipment size	L W H 730x800x1350mm	L W H 750x1000x1050mm
重量 Weight	150kg	200kg
装备有全自动触屏调温装置 Equipped with touch screen full automatic tempering		

XT260/ XT520连续调温机
XT260/XT520 Chocolate
continuous tempering machine



Chocolate industrial grade equipment
巧克力工业级设备

TE400 巧克力调温涂层机

TE400 chocolate temperature regulating coating machine



TE400主要技术参数/ Main technical parameters	
材质/Material	304 不锈钢/stainless steel
传送带宽/Transmission bandwidth	400mm
传送速度/Transmission speed	1-3m/min
设备尺寸/Equipment size	1340*1120*1610mm
可拆卸箱体/Removable box (easy to clean)	

主要技术参数/ Main technical parameters	
网筛以及传送带宽度 Width of screen and conveyor belt	600mm
网筛以及传送带速度 Screen and conveyor belt speed	1~3m/min
总功率 Total power	16.5KW
产品重量 Product weight	2300kg
外观尺寸 Appearance dimension	1750×950×1800mm

- 1.304不锈钢+PU传送带
- 2.可拆卸箱体(便于清理)。
- 3..顶部涂层或底部涂层以及上下两面涂层均可设置。

- 1.304 stainless steel +pu conveyor belt;
- 2.Removable box(easy to clean)
- 3.Top coating or bottom coating and upper and lower coatings can be set.



Chocolate industrial grade equipment
巧克力工业级设备

LD280-4.7巧克力冷却隧道

LD280-4.7 cooling tunnel



进口意大利PU传送带，外罩由采用不锈钢夹层结构，隔绝厚度达20毫米，并采用气密密封，高效节能。

Imported Italian Pu conveyor belt, The outer cover is made of stainless steel sandwich structure, with an insulation thickness of 20mm, and adopts air tight sealing, which is efficient and energy-saving.

可选宽度：400mm/900/1200/1500mm
Optional width: 400mm/900/1200/1500mm

主要技术参数/ Main technical parameters	
传送带宽 Transmission bandwidth	280mm
传送速度 Transmission speed	0.5-5m/min
冷却隧道总长 Total length of cooling tunne	4.7m
冷却装置 Cooling device	1台3P的压缩机 1 set of 3p compressor
冷却温度 Cooling temperature	5-10℃
外观尺寸 Appearance dimension	L W H 4700x635x1530mm
产品重量 Product weigh	400kg
材质 Materia	304 不锈钢制 304 stainless steel

1250mm巧克力冷却隧道

1250mm width chocolate cooling tunnel




进口意大利PU传送带，外罩由采用不锈钢夹层结构，隔绝厚度达20毫米，并采用气密密封，高效节能。

Imported Italian Pu conveyor belt;The outer cover is made of stainless steel sandwich structure, with an insulation thickness of 20mm, and adopts air tight sealing, which is efficient and energy-saving.

主要技术参数/ Main technical parameters	
传送带宽 Transmission bandwidth	1250mm
传送速度 Transmission speed	0.5-5m/min
冷却隧道总长 Total length of cooling tunne	35m
冷却装置 Cooling device	1台25P的压缩机，冷却站位于中央 1 set of 25p compressor, and the cooling station is located in the center
冷却温度 Cooling temperature	5-10℃
外观尺寸 Appearance dimension	L W H 40000x1500x2230mm
产品重量 Product weigh	2600kg
材质 Materia	304 不锈钢制 304 stainless steel

可可荚提升切分机
Cocoa pod lifting cutter

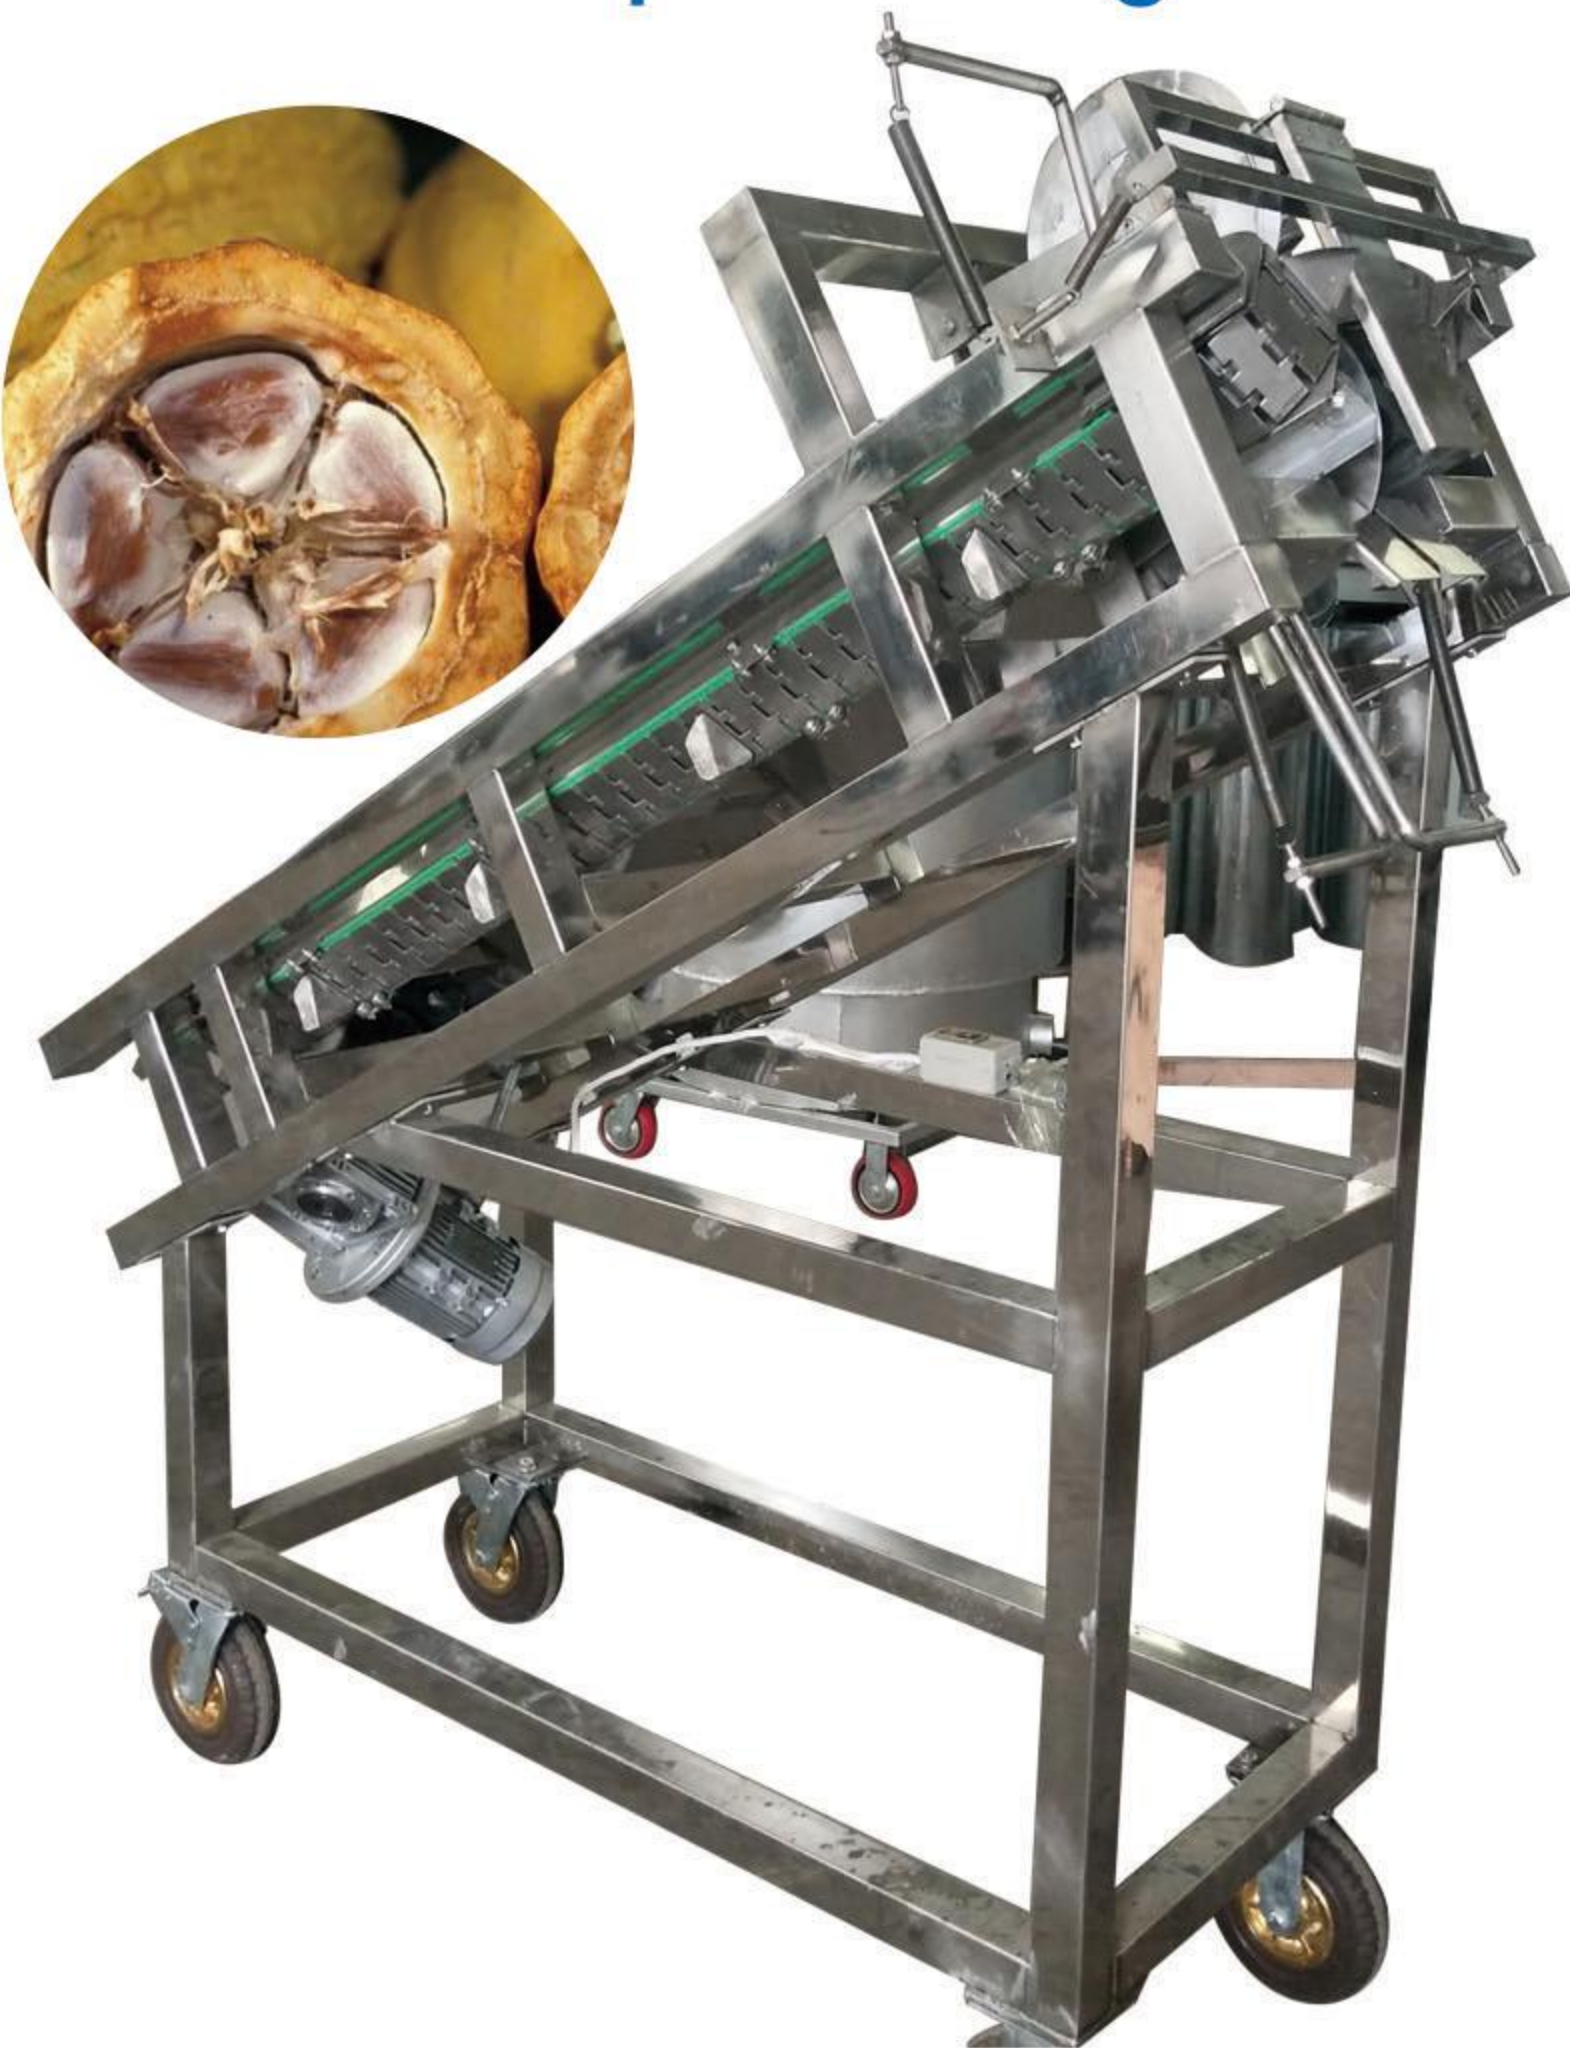

主要技术参数/ Main technical parameters	
功率/Power	0.75kw
电压/Voltage	380v 50hz
外形尺寸/Overall dimensions	1.6*0.6*1.9m
材料/Material	架体 带201不锈钢 传动件碳钢 frame body, with 201 stainless steel, transmission parts, carbon steel
重量/Weight	150kg
产量800kg/小时 The output is about 800kg /h	

果壳可可豆筛分机
Fruit shell cocoa bean sieve machine



主要技术参数 Main technical parameters	
功率 Power	1.1kw
电压 Voltage	380v 50hz
外形尺寸 Overall dimension	3 * 1.3 * 2m
材料 Material	架体、滚筒接触食品201不锈钢 传动件碳钢 Frame and drum contact food 201 stainless steel, transmission parts carbon steel
重量 Weight	230kg
产量800kg/小时 The output is about 800kg /h	

巧克力带式裹衣机/
巧克力带式裹衣机整机
Chocolate cabinet machine
Whole system of the chocolate cabinet machine



主要技术参数/ Main technical parameters	
网带宽度 Mesh belt width	1600mm
称重传感器品牌 Weighing sensor brand	METTLER TOLEDOPLC
电器设备 Electrical equipmen	Siemens, Omron及其他名牌 Siemens, Omron, and other famous brands
网带 Reticulum belt	SYNCHROFLEX
电机 Motor	SEW
73个喷嘴,5根喷管让巧克力能持续均匀的喷洒,巧克力加热软管可以加热和传送巧克力,可根据时间控制和空气压力调整进料速度。每批次可加料近250kg-300kg。 With 73 nozzles and 5 nozzles,the chocolate can bsprayed continuously and evenly. The chocolate heatinghose can heat and transfer the chocolate, and thefeeding speed can be adjusted according to time controland air pressure.Nearly 250kg-300kg can be added toeach batch.	



BWG2000 巧克力保温罐
2000L chocolate holding tank
excluding the top device



主要技术参数/ Main technical parameters	
容量/Capacity	2000L
材质/Material	高品质不锈钢制 High quality stainless steel
水暖需求/Water heating demand	(进料/出料) (feeding / discharging)
尺寸/Size	2146mmx946mmx1650mm
功率/Power	12.6KW

强制水冷；增加进水控制接口以确保水使用的最大效率；基本上节水50%以上；清洁方便；全封闭式保温；数字、可编程控制。
Forced water cooling;Add water inlet control interface to ensure the maximum efficiency of water use;Basically, it saves more than 50% water;Easy to clean;Fully enclosed insulation;Digital, programmable control.

HER-60 巧克力包装

HER-60 Chocolate
packing machinery



HER-60 主要技术参数 /Main technical parameters	
产能 Capacity	60 件 / 分钟 (取决于产品的尺寸和形状) 60pcs/min(depends on the dimension and shape of products)
电压 Voltage	380V/50HZ/3P
重量 Weight	500kg
功率 Power	2.75kw
设备尺寸 Equipment size	LW H 1920mm*1790mm*1370mm
功能 Function	折叠包装, 铝箔刷包装 Fold wrapping, foil brush packing
一机可包装多种形状的巧克力, 只需更换模具即可。这些机器都配备了先进的技术, 以处理各种包装要求, 同时保持产品质量。 onemachine can wrap several shapes of chocolatejust need to change the mould.These machines are equipped with advancedtechnologies to handle various packaging requirements while maintaining product quality.	

HER-80 巧克力包装

HER-80 Chocolate
packing machinery



HER-80 主要技术参数 /Main technical parameters	
产能 Capacity	60 件 / 分钟
电压 Voltage	380V/50HZ/3P
重量 Weight	1500kg
功率 Power	5kw
设备尺寸 Equipment size	LW H 2450mm*1250mm*1780mm
产品尺寸 Products size	包装材料的宽度应小于 125mm, 产品包括棒材的长度可达 150mm the width of wrapping material should be less than 125mm,the length of theproducts includes the rods can be up to 150mm
巧克力棒, 棒棒糖巧克力, 其他 3D 形状的巧克力。一机可包装多种形状的巧克力, 只需更换模具即可。这些机器都配备了先进的技术, 以处理各种包装要求, 同时保持产品质量。 Chocolate bars,lollipop chocolate,other 3D shapes of chocolate, onemachine can wrap several shapes of chocolatejust need to change the mould.These machines are equipped with advancedtechnologies to handle various packaging requirements while maintaining product quality.	

