



Thunder Max Series



ENGINE:HONGDA GX390(13HP)

HOSE SIZE
50M 5/16

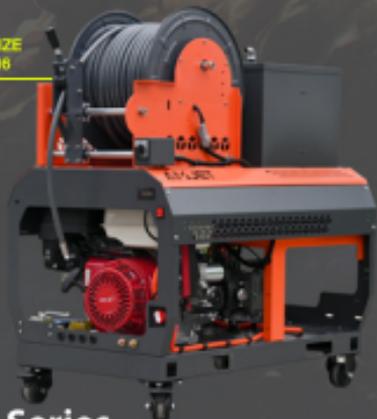

High pressure pump

Thunder Series

TS3016-MAX

Water tank: 60L
Weight: 154KG
Pressure/Flow (Europe):
300Bar 100gpm
Pressure/Flow (USA):
4200psi 4gpm
High pressure pump material:
stainless steel
Transmission:/
Engine:
HONDA 330
Injector hose size: 5/16 50 meters
Water injection hose size: 4 points
Wireless remote control:
RFID remote control OLED screen remote control
Wireless valve:
supports 200 meters
Fuel tank capacity: 2L



Bulletproof vest material hose

HOSE Size: 5/16

Applicable pipes



2-6
inch





made in
China

1
year
warranty



Single person
operation

TS3016-MAX




Nozzle Selection Guide



Root Cutting Nozzle
Treating tree roots and stubborn grease in residential building main pipes



Skid Nozzle
The rear spray angle is small, and because the amount of water sprayed is small, it has concentrated impact and strong penetrating power. It is suitable for commercial pipelines and can smoothly flush away debris and oil sludge.

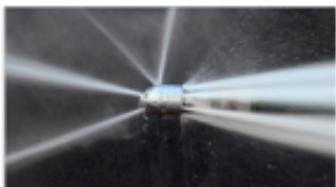

DIY Multi functional nozzle
You can install different cores yourself to change the spray mode. Unlock new spray modes through different DIY methods



Small puncture Nozzle
Mainly used for long-distance propulsion of hoses. Suitable for cleaning blocked residential sewers.



Thumb Nozzle
The exterior design is relatively rounded, allowing it to turn in smaller pipes. When turning, its rounded design prevents it from getting stuck in the pipe



Camera nozzle
Perfectly combined with sewer cameras for better long-distance pipeline inspection. Made of aluminum alloy.