


## 2.92mm, DC-42GHz, 5W

### Electrical Specifications

- ◇ **Nominal Impedance:** 50 Ω
- ◇ **Average Power:** 5W
- ◇ **Peak Power:** 0.1KW (1μs Pulse, 1% Duty Cycle)
- ◇ **Connector Type:** 2.92mm (Male/Female)
- ◇ **Operating Temperature:** -55℃ to +125℃
- ◇ **Dimension:** Φ26x41mm
- ◇ **Net Weight:** 35g
- ◇ **RoHS Compliant**

### Outline Drawing (mm)

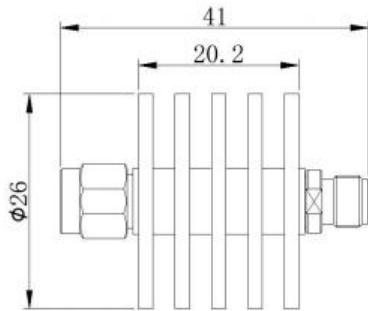

Part Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)				VSWR (Max.)
		1-9	10-19	20-30	40	
CA5-XX-2.92-26.5	DC-26.5	±0.8	±0.8	-0.8/+1.0	±1.0	1.30
CA5-XX-2.92-32	26.5-32	±0.8	±0.8	±1.0	±1.5	1.35
CA5-XX-2.92-40	32-42	±1.0	±1.0	-1.0/+1.5	-1.0/+2.0	1.40

\* xx refer to attenuator value in dB.

### Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.