先端を日常へ
SEKISUI
サプライズ積水化学

Technical
Data Sheet

Functional Foam Tape 5240JSB

Functional foam tape 5240JSB is a kind of double faced tape, which adopts a specific polyethylene form with micro and independent cell structure as the substrate. It is very thin and soft and has excellent impact absorption, waterproof, and dustproof property compared to nonwoven cloth.

Structure

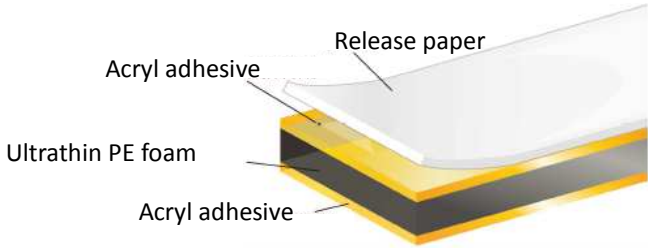

Tape thickness ： 400μm

Usage

Apply in uneven surface fixing, water proof, impact buffering and removability.

Merit

1) It has excellent impact absorption and achieves good adhesion properties despite its narrow width.
2) Excellent sealing property of water proof and dust proof.
3) With superior anti-peel off property, it keeps high reliable adhesive even applied in curved surface.
4) With solid adhesive property for a various substrates.
5) Can be applied in broad design compression area.

S. dimensions

Item	Unit	Standard Dimensions
		5240JSB
Tape Thickness	mm	0.4
Width	mm	980
Length	m	50

General

Item	Unit	Standard Dimensions
		5240JSB
90°Adhesive Force (PC Plate)	N/25mm	38.7
90°Adhesive Force (SUS Plate)	N/25mm	38.1
40℃ Holding Power (SUS Plate)	mm	0.0

Notice

1) Thoroughly clean dirt, dust, oil sludge and moisture from surface of the object before applying.
2) Avoid sticking twice, lay stuck object aside for hours after sticking.
3) Avoid sticking on uneven surface, rough surface, or human body.
4) Storage for tapes: Store in cool place and avoid direct sunlight or heat.
5) Expiration date: 6 months after shipment date.
6) Contact us directly for uncertain usages if needed.

※ Values recorded in this technical Data Sheet are all measured values, not guaranteed values.
※ Contact us if any other special applications are required.

No additional notice will be made for altering the standard and appearances. When applying this product, judge if it meets the requirement of your products before using and be sure to test in advance before applying.

Sekisui Chemical Co., Ltd
HIGH-PERFORMANCE PLASTICS COMPANY
INDUSTRIAL TAPE DIVISION
Toranomon 2-chome Tower, 2-3-17
Minato-ku, Tokyo, 105-8450, Japan
TEL : 03-5521-0921 FAX : 03-5521-0922